

VMware

Exam Questions 3V0-21.21

Advanced Design VMware vSphere 7.x



NEW QUESTION 1

A customer requests a review of its current vSphere platform design.

The following information is noted:

- There are three different workload profiles for the virtual machines:
- Tier-1 virtual machines operate resource-intensive applications and require dedicated allocations for CPU and RAM.
- Tier-2 virtual machines operate internet-facing applications and require access to externally facing networks.
- Tier-3 virtual machines operate platform management tools such as vCenter Server and have different lifecycle management requirements.
- Tier-1, Tier-2 and Tier-3 virtual machines are all hosted on a single large vSphere cluster.
- The Chief Information Security Officer (CISO) has raised concerns that hosting externally facing applications alongside management tools does not meet internal compliance standards.
- The Operations team has raised concerns about Tier-1 virtual machines negatively impacting the performance of vCenter Server.
- The Operations lead has stated that management changes have consistently been rejected by application teams.

As a result of the review, which recommendation should the architect make regarding the design of this platform?

- A. Separate Tier-1, Tier-2 and Tier-3 virtual machines using dedicated distributed virtual switches (DVS)
- B. Separate Tier-2 virtual machines onto a dedicated cluster
- C. Separate Tier-1, Tier-2 and Tier-3 virtual machines onto dedicated clusters
- D. Separate Tier-1, Tier-2 and Tier-3 virtual machines using resource pools and shares

Answer: C

NEW QUESTION 2

During a transformation project kick-off meeting, an architect highlights specific areas on which to focus while developing the new conceptual design.

Which two of the listed statements are business requirements? (Choose two.)

- A. The project should use the existing storage devices within the data center
- B. Sites must support a network latency of less than 12 ms round-trip time (RTT)
- C. The solution must allow data replication between sites
- D. There is no budget specifically assigned for disaster recovery
- E. There must not be a single point of failure for the virtual infrastructure

Answer: CE

NEW QUESTION 3

An architect is designing a new greenfield environment that will install ESXi on local disks. There is a requirement to streamline initial and future installations of ESXi hosts.

Which configuration option should the architect recommend for installing ESXi hosts to meet these requirements?

- A. Installation with kick start script
- B. Auto Deploy with stateless caching mode
- C. Manual installation using boot from SAN
- D. Auto Deploy with stateful install mode

Answer: D

NEW QUESTION 4

During a requirements gathering workshop, the customer provides the following requirement:

- A new vSphere platform must be designed securely and all interfaces must be protected against potential snooping.

How should this non-functional security requirement be documented?


- A. Interfaces must be audited.
- B. Encrypted channels must be used for all communications.
- C. Unauthorized access to interfaces must be reported within 15 minutes.
- D. Communications must be through Private VLANs (PVLAN).

Answer: A

NEW QUESTION 5

Refer to the exhibit.

During a requirements gathering workshop, a customer shares the following diagram regarding their availability service-level agreements (SLAs):

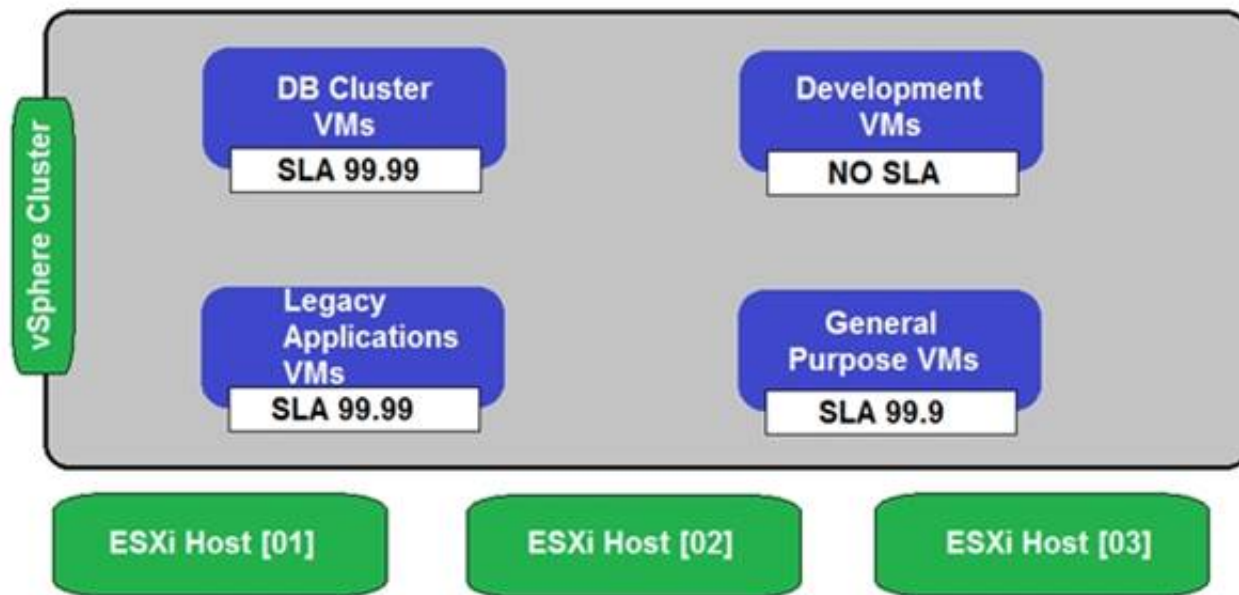

The customer states that there is no application level availability for legacy applications.

Which recommendation could the architect make to meet the customer's high availability requirements for the legacy applications virtual machines?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Disabled
- B. Enable Fault Tolerance
- C. Achieve application availability with snapshots
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest

Answer: D

NEW QUESTION 6

An architect is designing an environment for a retail customer. The design will use a single small vCenter Server Appliance and a cluster of eight ESXi hosts at a remote site. There is a single 10 GbE connected network at the remote site to support all management services. It is not possible to create additional management networks at the remote site. Virtual machine backups at the site will be dependent on the vCenter Server being available.

Which design decision should the architect make to maximize availability for backups?

- A. vCenter Server High Availability will be configured.
- B. The vCenter Server Appliance will be protected with vSphere Fault Tolerance.
- C. The cluster will be configured to use vSphere DRS in fully automated mode.
- D. The cluster will be configured with vSphere HA and set to restart virtual machines based on guest operating system heartbeat monitoring.

Answer: C

NEW QUESTION 7

In a meeting to discuss the minimum viable product (MVP) deployment of a new customer-facing application, the key stakeholder shares details of the application components and the application administrators share details of performance and integrity tests for the application.

The application will be made up of the following components:

- A web server
-Steps to confirm the web server is operating correctly will take 15 minutes after the application server is online.
- An application server
-Steps to confirm application server integrity will take 15 minutes after the database is online.
- A database server
-The database server will be managed by a database administrator, with an agreed service-level agreement (SLA) to restore and validate database services within one hour.

The existing VMware infrastructure offers a recovery point objective (RPO) of 5 minutes and recovery time objective (RTO) of 15 minutes through a combination of backups and replication.

In the event of an outage impacting all three application components, how long will it take for the application to recover and complete all checks?

- A. 15 minutes
- B. 60 minutes
- C. 105 minutes
- D. 90 minutes

Answer: C

Explanation:

15 restore VMs + 60 restore and test DB + 15 test app server + 15 test web server

NEW QUESTION 8

The Chief Operating Officer (COO) at an organization raises concerns that their virtual infrastructure environment is vulnerable. Recently, a security-related issue with a virtual machine caused all management services to become unavailable. No budget is available in the short term for additional platform investment. An architect is asked to review the current environment and make recommendations to mitigate concerns.

A virtualization administrator has provided the following details:

- There is a single four node cluster of ESXi servers
- There are two, Layer 2, physical network switches connecting resources
- The data center network is presented as a single /16 subnet

Given the information provided, which functional requirement should the architect include in the design to mitigate the COOs concerns?

- A. The virtual infrastructure environment must connect application virtual machines and management services to new physical network switches

- B. The virtual infrastructure environment must connect application virtual machines and management services to separate distributed virtual switches (DVS)
- C. The virtual infrastructure environment must connect application virtual machines and management services to separate VLANs
- D. The virtual infrastructure environment must connect management services to a vSphere standard switch (VSS)

Answer: D

NEW QUESTION 9

An architect is tasked with designing a greenfield VMware software-defined data center (SDDC) solution that will be used to deliver a private cloud service for a customer.

During the initial meeting with the service owner and business sponsor, the customer has provided the following information to help inform the design:

- The solution must initially support the concurrent running of 300 production and 600 development virtual machines.
- The production environment should be delivered across two geographically dispersed data centers. The development environment must be vSphere-based but does not have to be deployed on-premises.
- The two data centers are connected to each other through multiple diversely routed, high bandwidth and low latency links.
- The customer's server hardware standard document states that all virtual infrastructure hosts must be based on blade architecture only.
- The service owner has said that is important to ensure that neither the availability target of 99.5% nor the resource capacity is affected when the operations team completes maintenance activities, such as the monthly software patching and ad-hoc hardware break/fix.
- All virtual machine backups must be completed using the existing backup service. The recovery time objective (RTO) for the service is four hours.
- The recovery point objective (RPO) of the service is 24 hours.

Given the information from the customer, which two would be classified as assumptions within the design? (Choose two.)

- A. The backup service will store data in a secure facility
- B. The backup service has sufficient capacity for the new requirements
- C. The customer will update their hardware standard to support rack mount servers
- D. All virtual machines will be deployed with the same resource profile for production and development
- E. The clusters will have a minimum redundancy of N+1

Answer: BE

NEW QUESTION 10

An architect is considering placement of virtual machines within an existing VMware software-defined data center (SDDC).

During the discovery phase, the following information is documented:

Cluster One

- Six ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is enabled and set to automated
- Fully Automated vSphere DRS
- Transparent Page Sharing (TPS) is enabled

Cluster Two

- Eight ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is disabled
- Partially Automated vSphere DRS
- Transparent Page Sharing (TPS) is disabled

Cluster Three

- Three ESXi hosts
- vSphere HA with admission control is disabled
- Proactive HA is not supported
- Transparent Page Sharing (TPS) is disabled

Virtual Machine Resource Profile 1

- Memory sharing techniques should not be used
- Virtual machines should be automatically restarted in the event of host failure if resources are available
- Automated initial virtual machine placement

Virtual Machine Resource Profile 2

- Memory sharing techniques can be used
- Virtual machines should be protected from any host hardware failures
- Automated initial virtual machine placement

Which two recommendations should the architect make for placement of the virtual machines to meet resource profile requirements? (Choose two.)

- A. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster One.
- B. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster One.
- C. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Two.
- D. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster Two.
- E. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Three.

Answer: BD

NEW QUESTION 10

An architect is finalizing the design for a new vSphere platform based on the following information:

- All Windows virtual machines will be hosted on a dedicated cluster for licensing purposes.
- All Linux virtual machines will be hosted on a dedicated cluster for licensing purposes. All management virtual machines will be hosted on a dedicated cluster.
- A total of ten physical sites will be used to host virtual machines.
- In the event of one physical datacenter becoming unavailable, the manageability of the virtual infrastructure in the remaining data centers should not be impacted.
- Access to configure the management virtual machines via vCenter Server must be controlled through the management Active Directory domain.
- Access to configure the Windows and Linux virtual machines must be controlled through the resource Active Directory domain.
- The management and resource Active Directory domains are part of separate Active Directory forests and do not have any trusts between them.
- The design will use Active Directory with Integrated Windows Authentication.

How should the architect document the vCenter Server configuration for this design?

- A. Deploy a vCenter server for the management cluster. Deploy a vCenter Server for all remaining cluster
- B. Create a shared SSO domain for each physical site.
- C. Deploy a vCenter Server for the management cluster. Deploy a vCenter Server for all remaining cluster
- D. Create a shared SSO domain across all physical sites.
- E. Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain for each physical site.
- F. Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain into a single physical site.

Answer: B

NEW QUESTION 13

An architect is designing a VMware solution for a customer to meet the following requirements:

- The solution must use investments in existing storage array that supports both block and file storage.
- The solution must support the ability to migrate workloads between hosts within a cluster.
- The solution must support resource management priorities.
- The solution must support the ability to connect virtual machines directly to LUNs.
- The solution should use existing 32G fabric infrastructure.
- There is no budget for additional physical hardware.

Which design decision should the architect make to meet these requirements?

- A. The ESXi hosts will leverage Fibre Channel (FC).
- B. The ESXi hosts will leverage iSCSI.
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE).
- D. The ESXi hosts will leverage NFS.

Answer: A

NEW QUESTION 16

An architect is preparing a design for a company planning digital transformation. During the requirements gathering workshop, the following requirements (REQ) and constraints (CON) are identified:

- REQ01 The platform must host different types of workloads including applications that must be compliant with internal security standard.
- REQ02 The infrastructure must initially run 100 virtual machines.
- REQ03 Ten of the virtual machines must be compliant with internal security standard.
- CON01 The customer has already purchased the licenses as part of another project.
- CON02 The customer has five physical servers that must be reused.

Additionally, based on resource requirements, four physical servers will be enough to run all workloads. Which recommendation should the architect make to meet requirements while minimizing project costs?

- A. Use Network I/O Control to ensure the internal security zone has higher share value
- B. Purchase additional servers and plan separate, isolated clusters for workloads that must be compliant with internal security
- C. Use a single cluster and ensure that different security zones are separated at least with dedicated VLANs and firewall
- D. Use a single cluster and configure DRS anti-affinity rules to ensure internal security compliant virtual machines cannot migrate between ESXi hosts.

Answer: C

NEW QUESTION 20

An architect is designing a solution for an environment with two types of resource profiles that must be virtualized. The first type consists of Tier 1 virtual machines that are disk I/O intensive, but do NOT require high CPU or memory. The second type consists of Tier 2 virtual machines that require a lower CPU and memory allocation and have minimal disk I/O.

Which design recommendation should the architect make for distributing the resource profiles?

- A. Separate the two resource profiles into two cluster
- B. The Tier 1 cluster will have fast storage while the Tier 2 cluster will not.
- C. Run both resource profiles on the same cluster with the same host hardware platform.
- D. Separate the two resource profiles into two cluster
- E. The Tier 2 cluster will have faster CPU and more memory while the Tier 1 cluster will have slower CPU and less memory but more disk space.
- F. Run both resource profiles on the same cluster with host hardware that has fast CPU, large amounts of memory, and the fastest storage platform.

Answer: D

NEW QUESTION 24

The storage team at an organization is planning to migrate from an older Fibre Channel storage environment to a new environment using IP-based storage. Which two switch features or characteristics are appropriate for IP storage networks? (Choose two.)

- A. Fabric extending devices
- B. Spanning Tree Protocol (STP)
- C. 2:1 or greater bandwidth oversubscription for 10 GbE switches
- D. Non-blocking switch
- E. Deep or ultra buffered switches

Answer: DE

Explanation:

<https://www.arista.com/en/solutions/ip-storage-network-infrastructures>

NEW QUESTION 27

A architect is designing a new VMware software-designed data center (SDDC) using vSphere 7 to meet the following requirements:

- The SDDC must be deployed at two locations: primary and secondary.
- vSphere Replication must be used to replicate virtual machines between the two locations.
- Site Recovery Manager must be used to orchestrate disaster recovery (DR) activities.
- One single-sign on (SSO) domain must be used to authenticate access at both locations. Which design decision should the architect make to meet these requirements?

- A. A vCenter Server Appliance will be deployed to each sit
- B. Unique SSO domains will be created per site.
- C. A vCenter Server will be installed on Windows virtual machines deployed to both sites.
- D. A vCenter Server Appliance will be deployed to each site.
- E. A vCenter Server Appliance will be deployed to the primary site only.

Answer: D

NEW QUESTION 29

An architect is considering placement of virtual machines within an existing VMware software-defined data center (SDDC). During the discovery phase, the following information is documented: Cluster One

- Six ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is enabled and set to automated
- Fully Automated vSphere DRS
- Transparent Page Sharing (TPS) is enabled Cluster Two
- Eight ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is disabled
- Partially Automated vSphere DRS
- Transparent Page Sharing (TPS) is disabled Cluster Three
- Three ESXi hosts
- vSphere HA with admission control is disabled
- Proactive HA is not supported
- Transparent Page Sharing (TPS) is disabled Virtual Machine Resource Profile 1
- Memory sharing techniques should not be used
- Automated initial virtual machine placement

Virtual Machine Resource Profile 2

- Memory sharing techniques should not be used
- Virtual machines should be automatically restarted in the event of host failure regardless of available resources
- Automated initial virtual machine placement

Which two recommendations should the architect make for placement of the virtual machines to meet resource profile requirements? (Choose two.)

- A. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster One.
- B. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster One.
- C. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Two.
- D. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster Two.
- E. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Three.

Answer: DE

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.resmgmt.doc/GUID-FEAC3A43-C57E>

NEW QUESTION 30

An architect is designing a new VMware software-defined data center (SDDC) that will consist of 100 branch sites connected to a single VMware vCenter Server within the primary data center. To allow for the use of existing automation scripts, there is a requirement to replicate the names of the virtual distributed port groups across all sites. The procurement team purchases licensing and there is no further budget allocated. Which design decision should the architect make to meet this requirement?

- A. A new vCenter Server will be deployed for each branch site
- B. A new host and cluster folder will be created for each branch site
- C. The automation script will be updated to reflect unique naming for each site
- D. A new virtual data center will be created for each branch site

Answer: B

NEW QUESTION 34

An architect is designing a solution based on the following information:

- Each ESXi host has a single physical NIC with two 10 Gbps ports.
- There is a performance-based service-level agreement (SLA) that guarantees 15 Gbps bandwidth for production virtual machines at all times.
- There is no budget to purchase additional hardware.
- The hardware replacement SLA is based on a delivery agreement of two business days.

Which recommendation for the configuration of vSphere High Availability (HA) should the architect include in the design?

- A. Configure vSphere HAConfigure % based admission control Configure two isolation addresses Consider an OEM with NIC failure conditions in their Proactive HA plugin
- B. Configure vSphere HASet das.IgnoreRedundantNetWarning to trueConsider an OEM with NIC failure conditions in their Proactive HA plugin
- C. Configure vSphere HAConfigure two existing data stores for heartbeatConsider an OEM with NIC failure conditions in their Proactive HA plugin
- D. Configure Proactive HA Automation Level: Automated Remediation: Maintenance mode for all failuresConsider an OEM with NIC failure conditions in their Proactive HA plugin

Answer: A

NEW QUESTION 38

A customer has a database cluster with 40/60 read/write ratio and a high IOPs requirement with no contention on an all-flash vSAN cluster.

Which two storage settings should be configured for best performance? (Choose two.)

- A. IOPs limits enabled
- B. RAID 1
- C. Deduplication and Compression disabled
- D. RAID 5/6
- E. Deduplication and Compression enabled

Answer: AB

NEW QUESTION 42

An architect is creating a network design for a new vSphere environment.

Based on customer requirements, the environment must support the following types of traffic:

- Management
- vMotion
- vSAN
- Fault Tolerance
- Virtual machine traffic, which cannot be impacted by other types of traffic

Which design recommendation can the architect make for a resilient infrastructure with vSphere network service tiering?

- A. Use different logical networks to ensure traffic is isolated with separate VLANs
- B. Use Network I/O Control and ensure appropriate share value is defined for different types of traffic giving priority to the virtual machines traffic
- C. Use two dedicated virtual switches with a single adapter each, dedicating one virtual switch for Management, vMotion, vSAN and Fault Tolerance traffic, and the second one for virtual machine traffic
- D. Use a NIC teaming policy based on the physical NIC load

Answer: A

NEW QUESTION 43

An architect is preparing a design for a customer. Based on requirements, the architect recommends an HCI- based infrastructure with all-flash architecture.

During the assessment, it is confirmed that the network throughput generated by virtual machines does not exceed 150 Mb/s.

What is the minimum number and type of network adapters in each server that the architect can recommend to ensure requirements are met and there is no single point of failure?


- A. Two 1 GbE network adapters per server
- B. Four 1 GbE network adapters per server
- C. Four 10 GbE network adapters per server
- D. Two 10 GbE network adapters per server

Answer: C

NEW QUESTION 47

Refer to the exhibit.

During a requirements gathering workshop, the customer shares the following diagram regarding their availability service-level agreements (SLAs):

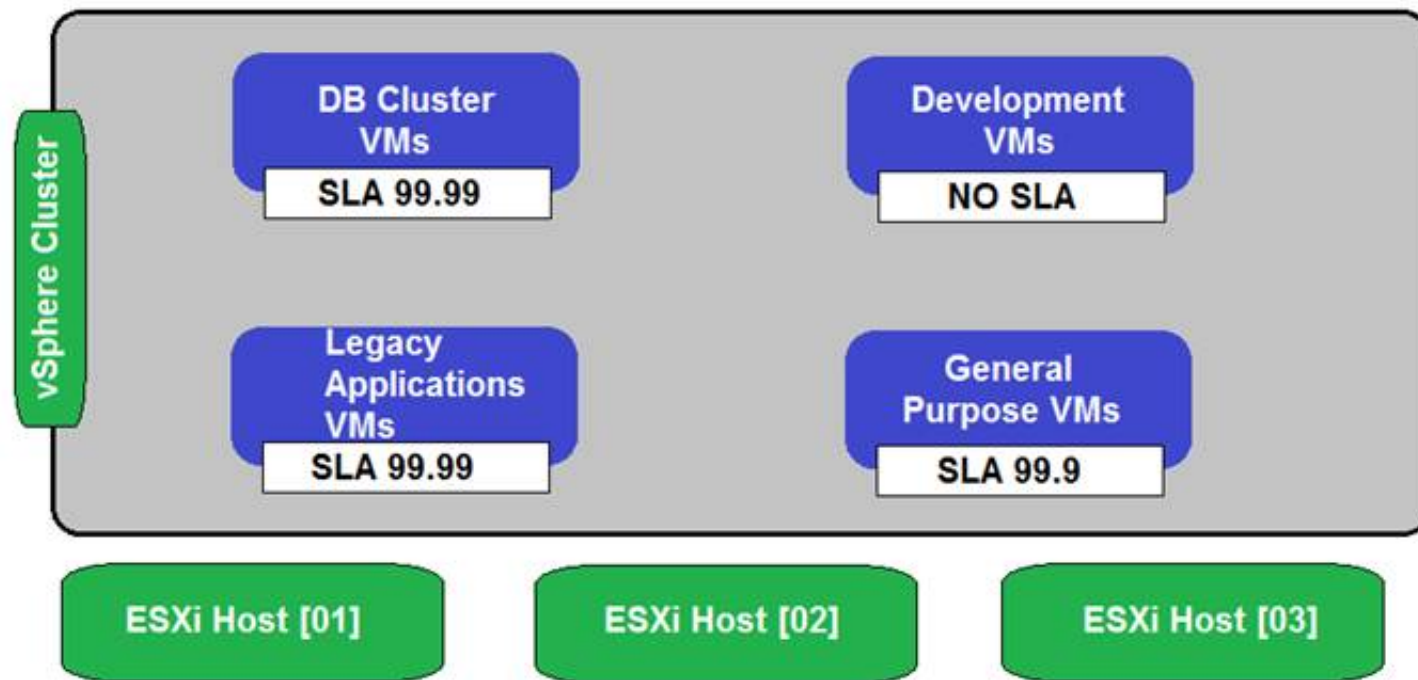

The customer wants database application level availability to always take precedence. What should the architect recommend to meet the customer's requirement?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Highest.
- B. Enable Fault Tolerance.
- C. Enable Sphere HA and maintain the default settings.
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest.

Answer: D

NEW QUESTION 48

An architect is tasked with reviewing the design of a VMware software-defined data center (SDDC) for a software development company. The platform is used to developing applications and services. It is important that the customer be able to accurately benchmark performance of developed applications. The platform has recently commissioned new hosts to update the development cluster. The development cluster host configuration is:

- > 4 ESXi hosts with 2 sockets × 16 cores
- > 512 GB RAM divided evenly between sockets
- > There is no resource contention

The benchmarking cluster host configuration is:

- > 8 ESXi hosts with 2 sockets × 8 cores
- > 256 GB RAM divided evenly between sockets
- > There is no resource contention

The customer is developing an application that includes a database virtual machine. The application developer states that the database virtual machine performs as required only when allocated 8 vCPUs 256 GB RAM. The database virtual machine performance meets the required levels when run from the development cluster. Performance benchmarking for the database virtual machine yields highly variable results when run from the benchmarking cluster. The application cannot be released without reliable performance benchmarking data.

What is a possible reason for the difference in performance test results between the development and benchmarking clusters?

- A. The database tier breaches a single NUMA node boundary for the benchmarking cluster
- B. The database tier breaches a single NUMA node boundary for the development cluster
- C. The development cluster can support a lower %Ready time per vCPU
- D. The development cluster has more available RAM per host

Answer: C

NEW QUESTION 53

An organization's data scientists are executing a plan to use machine learning (ML). They must have access to graphical processing unit (GPU) capabilities to execute their computational models when needed. The solutions architect needs to design a solution to ensure that GPUs can be shared by multiple virtual machines. Which two solutions should the architect recommend to meet these requirements? (Choose two.)

- A. NVIDIA vGPU
- B. AMD MxGPU
- C. vSphere DirectPath I/O
- D. vSGA
- E. vSphere Bitfusion

Answer: AE

Explanation:

<https://blogs.vmware.com/apps/2018/07/using-gpus-with-virtual-machines-on-vsphere-part-1-overview.html>

NEW QUESTION 57

Which two of the listed requirements would be classified as manageability non-functional requirements? (Choose two.)

- A. ESXi clusters must scale when compute resources are sustained above 70% for five business days
- B. vSphere Fault Tolerance must be supported to improve application uptime
- C. ESXi host updates must be installed within one week of release
- D. The vSphere environment must support administrator password rotation
- E. ESXi clusters must scale to 500 concurrent virtual machines

Answer: AC

NEW QUESTION 59

A customer requires the use of data encryption to ensure data is not accessible when a drive is removed from the primary storage platform. However, there is also a requirement to use deduplication and compression against all workloads in order to conserve space. Which solution meets the customer requirements?

- A. Data-in-transit encryption
- B. OS-level encryption
- C. Encrypted backups
- D. Array-based encryption

Answer: D

NEW QUESTION 64

A new vSphere platform is being created. The platform will host virtual machines that will run management services and line-of-business applications. What should the architect consider when designing the number and type of clusters required?

- A. Maximum tolerable downtime
- B. Predicted platform growth
- C. Auditing requirements for the virtual machines
- D. The level of isolation required between virtual machine classifications

Answer: D

NEW QUESTION 69

An architect is designing a VMware software-defined data center (SDDC) solution based on the following customer requirements:

- The solution must initially support 1,000 virtual machines
- The solution must scale to support the concurrent running of up to 5,000 virtual machines
- The production environment should be delivered across two data centers
- The solution should have a maximum tolerable downtime (MTD) of four hours
- The solution should have a monthly service availability target of 99.8%

Which two assumptions could the architect make based on the information from the customer to help size the solution? (Choose two.)

- A. The number of vSphere hosts in a cluster
- B. The average resource utilization of a virtual machine
- C. The size (CPU/RAM/storage) of the average virtual machine
- D. The guest operating system for each virtual machine
- E. The size (CPU/RAM/storage) of the vSphere hosts

Answer: AE

NEW QUESTION 74

An architect is designing a new vSphere environment with the following resources:

- 600 vCPU
- 5,760 GB RAM

Average resource usage is:

- 60 vCPU
- 1,152 GB RAM

The design must meet the following requirements:

- The environment has the ability to burst by 25%.
- Each host can schedule 36 vCPUs and has 512 GB RAM.
- Management overhead is 20%.

What is the minimum number of hosts required to meet the design requirements?

- A. Three
- B. Five
- C. Four
- D. Two

Answer: D

NEW QUESTION 78

An architect has 50 ESXi hosts to deploy and DHCP servers are not allowed on any network. Which automated host deployment method should the architect use?

- A. Stateless vSphere Auto Deploy
- B. Stateful vSphere Auto Deploy
- C. Scripted installation
- D. Interactive installation

Answer: C

NEW QUESTION 80

Which two statements are true about gathering functional business and application requirements? (Choose two.)

- A. It focuses on functional requirements with C-level stakeholders
- B. It leverages a single set of QUESTION NO:s for all stakeholders
- C. It might require multiple rounds of stakeholder interviews
- D. It builds stakeholder consensus
- E. It is a non-iterative process

Answer: AC

NEW QUESTION 82

As part of a requirements gathering workshop, the customer provides the following requirements for the design of a new greenfield virtual infrastructure:

- Some applications have a latency that must be less than 5 minutes.
- The solution must be able to support a workload growth rate of 10% per year. Which requirement classification is being gathered for the design documentation?

- A. Performance
- B. Manageability
- C. Recoverability
- D. Availability

Answer: A

NEW QUESTION 85

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

3V0-21.21 Practice Exam Features:

- * 3V0-21.21 Questions and Answers Updated Frequently
- * 3V0-21.21 Practice Questions Verified by Expert Senior Certified Staff
- * 3V0-21.21 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 3V0-21.21 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 3V0-21.21 Practice Test Here](#)