

Cisco

Exam Questions 300-430

Implementing Cisco Enterprise Wireless Networks (ENWLSI)



NEW QUESTION 1

Which feature on the Cisco Wireless LAN Controller must be present to support dynamic VLAN mapping?

- A. FlexConnect ACL
- B. VLAN name override
- C. CCKM/OKC
- D. AAA override

Answer: D

NEW QUESTION 2

An engineer must use Cisco AVC on a Cisco WLC to prioritize Cisco IP cameras that use the wireless network. Which element do you configure in a rule?

- A. permit-ACL
- B. WMM required
- C. mark
- D. rate-limit

Answer: C

NEW QUESTION 3

An engineer wants to configure WebEx to adjust the precedence and override the QoS profile on the WLAN. Which configuration is needed to complete this task?

- A. Change the WLAN reserved bandwidth for WebEx
- B. Create an AVC profile for WebEx
- C. Create an ACL for WebEx
- D. Change the AVC application WebEx-app-sharing to mark

Answer: B

NEW QUESTION 4

An engineer completed the basic installation for two Cisco CMX servers and is in the process of configuring high availability, but it fails. Which two statements about the root of the issue are true? (Choose two.)

- A. The Cisco CMX instances are installed in the same subnet.
- B. The types of the primary and secondary Cisco CMX installations differ.
- C. The delay between the primary and secondary instance is 200 ms.
- D. The sizes of the primary and secondary Cisco CMX installations differ.
- E. Both Cisco CMX installations are virtual.

Answer: BD

NEW QUESTION 5

An engineer must implement Cisco Identity-Based Networking Services at a remote site using ISE to dynamically assign groups of users to specific IP subnets. If the subnet assigned to a client is available at the remote site, then traffic must be offloaded locally, and subnets unavailable at the remote site must be tunneled back to the WLC. Which feature meets these requirements?

- A. learn client IP address
- B. FlexConnect local authentication
- C. VLAN-based central switching
- D. central DHCP processing

Answer: C

NEW QUESTION 6

An IT team is growing quickly and needs a solution for management device access. The solution must authenticate users from an external repository instead of the current local on the WLC, and it must also identify the user and determine what level of access users should have. Which protocol do you recommend to achieve these goals?

- A. network policy server
- B. RADIUS
- C. TACACS+
- D. LDAP

Answer: C

NEW QUESTION 7

Which two steps are needed to complete integration of the MSE to Cisco Prime Infrastructure and be able to track the location of clients/rogues on maps? (Choose two.)

- A. Synchronize access points with the MSE.
- B. Add the MSE to Cisco Prime Infrastructure using the CLI credentials.
- C. Add the MSE to Cisco Prime Infrastructure using the Cisco Prime Infrastructure communication credentials configured during set up.
- D. Apply a valid license for Wireless Intrusion Prevention System.
- E. Apply a valid license for location tracking.

Answer: DE

NEW QUESTION 8


An engineer is performing a Cisco Hyperlocation accuracy test and executes the `cmxloc start` command on Cisco CMX. Which two parameters are relevant? (Choose two.)

- A. X, Y real location
- B. client description
- C. AP name
- D. client MAC address
- E. WLC IP address

Answer: AD

NEW QUESTION 9

Refer to the exhibit. An engineer must connect a fork lift via a WGB to a wireless network and must authenticate the WGB certificate against the RADIUS server. Which three steps are required for this configuration? (Choose three.)

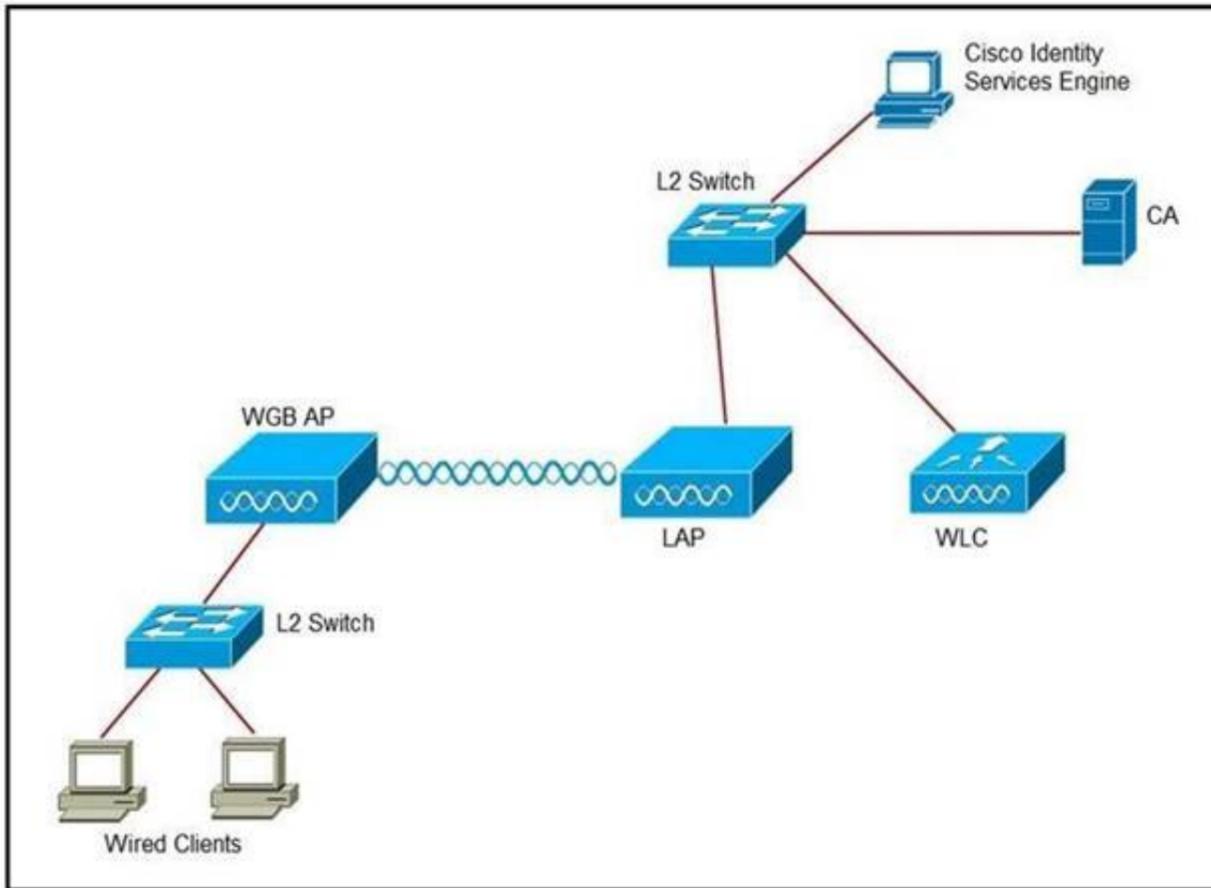

- A. Configure the certificate, WLAN, and radio interface on WGB.
- B. Configure the certificate on the WLC.
- C. Configure WLAN to authenticate using ISE.
- D. Configure the access point with the root certificate from ISE.
- E. Configure WGB as a network device in ISE.
- F. Configure a policy on ISE to allow devices to connect that validate the certificate.

Answer: ACF

NEW QUESTION 10

What is the maximum time range that can be viewed on the Cisco DNA Center issues and alarms page?

- A. 3 hours
- B. 24 hours
- C. 3 days
- D. 7 days

Answer: B

NEW QUESTION 10

An engineer is implementing Cisco Identity-Based Networking on a Cisco AireOS controller. The engineer has two ACLs on the controller. The first ACL, named `BASE_ACL`, is applied to the `corporate_clients` interface on the WLC, which is used for all corporate clients. The second ACL, named `HR_ACL`, is referenced by ISE in the Human Resources group policy. What is the resulting ACL when a Human Resources user connects?

- A. `HR_ACL` appended with `BASE_ACL`
- B. `HR_ACL` only
- C. `BASE_ACL` appended with `HR_ACL`
- D. `BASE_ACL` only

Answer: B

NEW QUESTION 12

A FlexConnect remote office deployment is using five 2702i APs indoors and two 1532i APs outdoors. When a code upgrade is performed and FlexConnect Smart AP Image Upgrade is leveraged, but no FlexConnect Master AP has been configured, how many image transfers between the WLC and APs will occur?

- A. 1
- B. 2
- C. 5
- D. 7

Answer: B

NEW QUESTION 14

An engineer must configure a Cisco WLC to support Cisco Aironet 600 Series OfficeExtend APs. Which two Layer 2 security options are supported in this environment? (Choose two.)

- A. Static WEP + 802.1X
- B. WPA+WPA2
- C. Static WEP
- D. CKIP
- E. 802.1X

Answer: BC

NEW QUESTION 17

An engineer configured a Cisco AireOS controller with two TACACS+ servers. The engineer notices that when the primary TACACS+ server fails, the WLC starts using the secondary server as expected, but the WLC does not use the primary server again until the secondary server fails or the controller is rebooted. Which cause of this issue is true?

- A. Fallback is enabled
- B. Fallback is disabled
- C. DNS query is disabled
- D. DNS query is enabled

Answer: B

NEW QUESTION 20

Refer to the exhibit. A network administrator deploys the DHCP profiler service in two ISE servers: 10.3.10.101 and 10.3.10.102. All BYOD devices connecting to WLAN on VLAN63 have been incorrectly profiled and are assigned as unknown profiled endpoints. Which action efficiently rectifies the issue according to Cisco recommendations?

```
(Cisco WLC) >show dhcp proxy
DHCP ProxyBehaviour: enabled
!
interface Vlan63
 ip address 10.10.63.252/22
 description Dot1x_BYOD
 no shutdown
!
```

- A. Nothing needed to be added on the Cisco WLC or VLAN interface
- B. The ISE configuration must be fixed.
- C. Disable DHCP proxy on the Cisco WLC.
- D. Disable DHCP proxy on the Cisco WLC and run the ip helper-address command under the VLAN interface to point to DHCP and the two ISE servers.
- E. Keep DHCP proxy enabled on the Cisco WLC and define helper-address under the VLAN interface to point to the two ISE servers.

Answer: C

NEW QUESTION 23

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-430 Practice Exam Features:

- * 300-430 Questions and Answers Updated Frequently
- * 300-430 Practice Questions Verified by Expert Senior Certified Staff
- * 300-430 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-430 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-430 Practice Test Here](#)