

VMware

Exam Questions 3V0-21.21

Advanced Design VMware vSphere 7.x



NEW QUESTION 1

An architect is designing a new vSphere platform for a customer to meet the following requirements:

- The platform must be deployed into five physically separate sites.
- The sites are spread across multiple regions.
- Some sites require more than one vCenter Server.
- The platform must provide an administrator with the ability to access virtual infrastructure components across all sites from a single management tool instance.

Which single sign-on (SSO) design recommendation will meet these requirements?

- A. Use an SSO domain across all vCenter Server instances
- B. Use an SSO domain per region
- C. Use an SSO domain per vCenter Server instance
- D. Use an SSO domain per site

Answer: C

NEW QUESTION 2

During a transformation project kick-off meeting, an architect highlights specific areas on which to focus while developing the new conceptual design. Which two of the listed statements are business requirements? (Choose two.)

- A. The project should use the existing storage devices within the data center
- B. Sites must support a network latency of less than 12 ms round-trip time (RTT)
- C. The solution must allow data replication between sites
- D. There is no budget specifically assigned for disaster recovery
- E. There must not be a single point of failure for the virtual infrastructure

Answer: CE

NEW QUESTION 3

A customer is deploying a new cluster and wants to be able to patch and update two hosts in parallel. The cluster must be able to maintain N+1 resiliency across the remaining hosts while patching activities are performed. The current expected utilization of the platform requires a minimum of two hosts to support all of the virtual machines.

What is the minimum number of hosts the customer will require in the cluster in order to meet the required resiliency level?

- A. Five
- B. Six
- C. Four
- D. Seven

Answer: A

NEW QUESTION 4

An architect is designing a new greenfield environment that will install ESXi on local disks. There is a requirement to streamline initial and future installations of ESXi hosts.

Which configuration option should the architect recommend for installing ESXi hosts to meet these requirements?

- A. Installation with kick start script
- B. Auto Deploy with stateless caching mode
- C. Manual installation using boot from SAN
- D. Auto Deploy with stateful install mode

Answer: D

NEW QUESTION 5

An architect makes the design decision to install ESXi on embedded and resilient 8 GB SD cards. What is the impact of this design decision?

- A. Host profiles must be used for this kind of installation
- B. Scratch partition would need to be created on the external storage
- C. The size of the SD cards is too small and the installation will fail
- D. The vSphere Auto Deploy feature must be enabled on vCenter Server

Answer: B

Explanation:

<https://kb.vmware.com/s/article/2074026> You can store coredumps on the SD boot media, but refrain from configuring the scratch partition here as the logs are write intensive and can cause the SD card to fail faster resulting in re-installation of ESXi

NEW QUESTION 6

An architect is designing a new vSphere platform to meet a list of requirements from the security team. Which two requirements would be classified as non-functional requirements? (Choose two.)

- A. Migration of virtual machines between hosts must be encrypted
- B. Log information must be verbose to support incident resolution
- C. Critical events generated within the platform must be logged to an external Syslog service
- D. Data integrity must be ensured

E. A common content library must be maintained across all data centers

Answer: CD

NEW QUESTION 7

Following a company merger, there are two data centers running vSphere environments. Both data centers are leveraging separate Layer 3 vMotion networks. Which requirement must be met in order to enable vMotion migration between these locations?

- A. The vMotion service must be configured on the Management VMkernel adapter
- B. A dedicated TCP/IP stack for vMotion with a dedicated gateway must be configured
- C. A stretched vMotion network must be configured between data centers
- D. Virtual machines must be powered off in order to migrate them between data centers

Answer: B

NEW QUESTION 8

An architect is designing a new backup solution for a vSphere platform that has been recently upgraded to vSphere 7. The architect wants the backup solution to perform the following:

- Full virtual machine image backup and restore
- Incremental virtual machine image backup and restore
- File level backup and restore within both Windows and Linux virtual machines
- LAN-free backup

Which functional requirement should the architect include in the design of the new backup solution?

- A. The backup solution must leverage the VMware Consolidated Backup (VCB) framework.
- B. The backup solution must leverage virtual machine snapshots.
- C. The backup solution must leverage VMware vSphere Storage APIs - Data Protection.
- D. The backup solution must leverage VMware vStorage APIs for Data Protection (VADP).

Answer: C

NEW QUESTION 9

An architect is designing a new greenfield environment with 600 ESXi hosts in an automated fashion. The engineering department already has a PXE Boot server, TFTP server, and DHCP server set up with an NFS mount for their current Linux servers. The architect must be able to demonstrate and meet a security requirement to have all infrastructure processes separated. Which recommendation should the architect make for the ESXi host deployment?

- A. Request an isolated network segment to use and dedicate it to Auto Deploy functions
- B. Ask the business to expand the engineering environment to service the virtual environment as well
- C. Request a common shared network with flexible security measures to accommodate different auto deployment options
- D. Deploy each ESXi host individually and document it to satisfy security requirements

Answer: A


Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.esxi.install.doc/GUID-8DAC6FEE-0441-4072>

NEW QUESTION 10

Refer to the exhibit.

During a requirements gathering workshop, a customer shares the following diagram regarding their availability service-level agreements (SLAs):

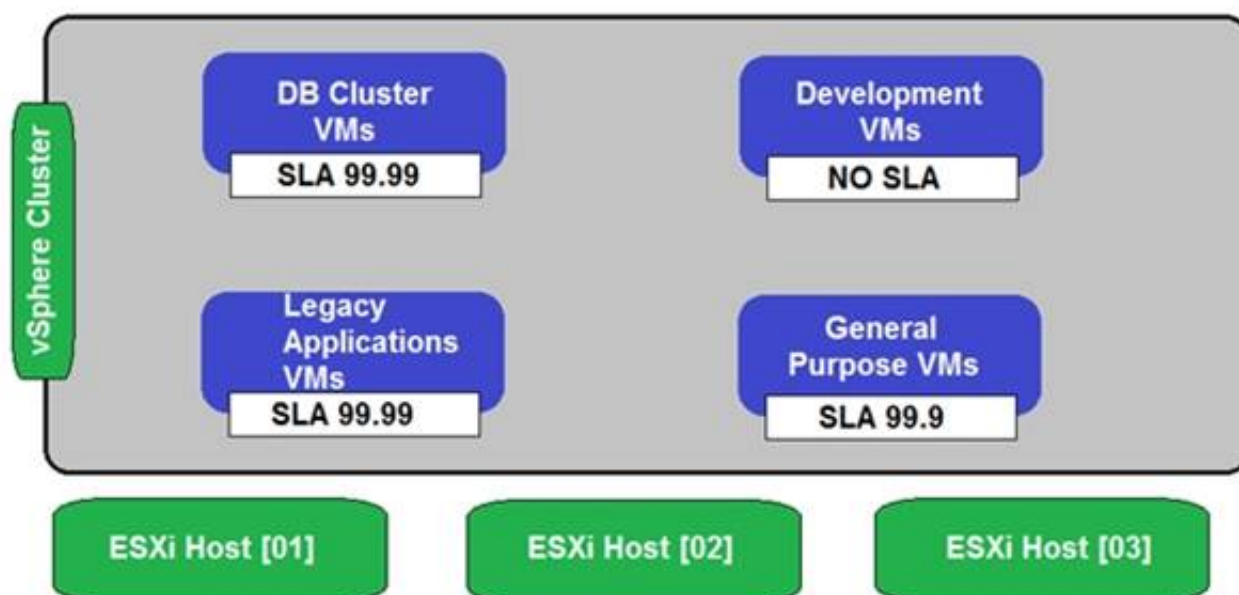

The customer states that there is no application level availability for legacy applications.

Which recommendation could the architect make to meet the customer's high availability requirements for the legacy applications virtual machines?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Disabled
- B. Enable Fault Tolerance
- C. Achieve application availability with snapshots
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest

Answer: D

NEW QUESTION 10

The Chief Operating Officer (COO) at an organization raises concerns that their virtual infrastructure environment is vulnerable. Recently, a security-related issue with a virtual machine caused all management services to become unavailable. No budget is available in the short term for additional platform investment. An architect is asked to review the current environment and make recommendations to mitigate concerns.

A virtualization administrator has provided the following details:

- There is a single four node cluster of ESXi servers
- There are two, Layer 2, physical network switches connecting resources
- The data center network is presented as a single /16 subnet

Given the information provided, which functional requirement should the architect include in the design to mitigate the COOs concerns?

- A. The virtual infrastructure environment must connect application virtual machines and management services to new physical network switches
- B. The virtual infrastructure environment must connect application virtual machines and management services to separate distributed virtual switches (DVS)
- C. The virtual infrastructure environment must connect application virtual machines and management services to separate VLANs
- D. The virtual infrastructure environment must connect management services to a vSphere standard switch (VSS)

Answer: D

NEW QUESTION 14

A Cloud Service Provider wants to introduce backup as a service for a customer's vSphere-based virtual machines.

The following information is noted:

- All top-of-rack (ToR) switches are 10 GbE and fully populated
- The backup traffic must not impact existing services

Which two recommendations should the architect make to help the customer incorporate the service? (Choose two.)

- A. Enable and tag traffic on the backup distributed port group
- B. Add a new two-port 10 GbE NIC per ESXi host
- C. Replace the existing NIC with a two-port 25 GbE NIC per ESXi host
- D. Match the Class of Service (CoS) and Differentiated Services Code Point (DSCP) values to the physical network
- E. Create a new virtual switch using the 1 GbE uplinks

Answer: AB

NEW QUESTION 17

What is a benefit of using a scale-out method for handling vSphere cluster growth?

- A. An increase in the recovery time objective (RTO) for the cluster
- B. Faster to reach the limit of virtual machines per host
- C. An overall reduction in the license costs for the cluster
- D. Less potential impact to virtual machines during a single host failure

Answer: B

NEW QUESTION 21

An architect is designing a VMware solution for a customer to meet the following requirements:

- The solution must use investments in existing storage array that supports both block and file storage.
- The solution must support the ability to migrate workloads between hosts within a cluster.
- The solution must support resource management priorities.
- The solution must support the ability to connect virtual machines directly to LUNs.
- The solution should use existing 32G fabric infrastructure.
- There is no budget for additional physical hardware.

Which design decision should the architect make to meet these requirements?

- A. The ESXi hosts will leverage Fibre Channel (FC).
- B. The ESXi hosts will leverage iSCSI.
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE).
- D. The ESXi hosts will leverage NFS.

Answer: A

NEW QUESTION 26

An architect is designing a solution for an environment with two types of resource profiles that must be virtualized. The first type consists of Tier 1 virtual machines that are disk I/O intensive, but do NOT require high CPU or memory. The second type consists of Tier 2 virtual machines that require a lower CPU and memory allocation and have minimal disk I/O.

Which design recommendation should the architect make for distributing the resource profiles?

- A. Separate the two resource profiles into two cluster
- B. The Tier 1 cluster will have fast storage while the Tier 2 cluster will not.
- C. Run both resource profiles on the same cluster with the same host hardware platform.
- D. Separate the two resource profiles into two cluster
- E. The Tier 2 cluster will have faster CPU and more memory while the Tier 1 cluster will have slower CPU and less memory but more disk space.
- F. Run both resource profiles on the same cluster with host hardware that has fast CPU, large amounts of memory, and the fastest storage platform.

Answer: D

NEW QUESTION 29

During a requirements gathering workshop, the customer provides the following information:

- Each host has 2 × 10 GbE NIC
- EtherChannel is not currently configured
- No changes can be made to the physical network
- Network throughput must be prioritized for defined critical services

Which two recommendations should the architect make with regard to virtual networking? (Choose two.)

- A. Use Route Based on Physical NIC Load.
- B. Use Network I/O Control with Shares.
- C. Use Network I/O Control with Reservation.
- D. Use Link Aggregation Control Protocol (LACP).
- E. Use Network I/O Control with Limits.

Answer: AD

NEW QUESTION 31

A customer provides the following list of requirements for their vSphere platform:

- REQ01 The solution should utilize dual network connections to eliminate single points of failure.
- REQ02 The solution should allow logs to be retained for a period of 30 days.
- REQ03 All user access to the platform should be recorded for audit purposes.
- REQ04 The solution should allow the management of multiple ESXi hosts.
- REQ05 The solution should allow users to view the remote console of virtual machines.

Which two of the listed requirements would be classified as non-functional requirements? (Choose two.)

- A. The solution should utilize dual network connections to eliminate single points of failure
- B. The solution should allow the management of multiple ESXi hosts
- C. The solution should allow users to view the remote console of virtual machines
- D. All user access to the platform should be recorded for audit purposes
- E. The solution should allow logs to be retained for a period of 30 days

Answer: AE

NEW QUESTION 34

A architect is designing a new VMware software-designed data center (SDDC) using vSphere 7 to meet the following requirements:

- The SDDC must be deployed at two locations: primary and secondary.
- vSphere Replication must be used to replicate virtual machines between the two locations.
- Site Recovery Manager must be used to orchestrate disaster recovery (DR) activities.
- One single-sign on (SSO) domain must be used to authenticate access at both locations. Which design decision should the architect make to meet these requirements?

- A. A vCenter Server Appliance will be deployed to each sit
- B. Unique SSO domains will be created per site.
- C. A vCenter Server will be installed on Windows virtual machines deployed to both sites.
- D. A vCenter Server Appliance will be deployed to each site.
- E. A vCenter Server Appliance will be deployed to the primary site only.

Answer: D

NEW QUESTION 37

An architect is considering placement of virtual machines within an existing VMware software-defined data center (SDDC).

During the discovery phase, the following information is documented: Cluster One

- Six ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is enabled and set to automated
- Fully Automated vSphere DRS
- Transparent Page Sharing (TPS) is enabled Cluster Two
- Eight ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is disabled
- Partially Automated vSphere DRS
- Transparent Page Sharing (TPS) is disabled Cluster Three
- Three ESXi hosts
- vSphere HA with admission control is disabled
- Proactive HA is not supported
- Transparent Page Sharing (TPS) is disabled Virtual Machine Resource Profile 1
- Memory sharing techniques should not be used
- Automated initial virtual machine placement

Virtual Machine Resource Profile 2

- Memory sharing techniques should not be used

- Virtual machines should be automatically restarted in the event of host failure regardless of available resources
- Automated initial virtual machine placement

Which two recommendations should the architect make for placement of the virtual machines to meet resource profile requirements? (Choose two.)

- A. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster One.
- B. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster One.
- C. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Two.
- D. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster Two.
- E. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Three.

Answer: DE

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.resmgmt.doc/GUID-FEAC3A43-C57E>

NEW QUESTION 38

An architect is designing a new VMware software-defined data center (SDDC) that will consist of 100 branch sites connected to a single VMware vCenter Server within the primary data center. To allow for the use of existing automation scripts, there is a requirement to replicate the names of the virtual distributed port groups across all sites. The procurement team purchases licensing and there is no further budget allocated.

Which design decision should the architect make to meet this requirement?

- A. A new vCenter Server will be deployed for each branch site
- B. A new host and cluster folder will be created for each branch site
- C. The automation script will be updated to reflect unique naming for each site
- D. A new virtual data center will be created for each branch site

Answer: B

NEW QUESTION 41

An architect is designing a solution based on the following information:

- Each ESXi host has a single physical NIC with two 10 Gbps ports.
- There is a performance-based service-level agreement (SLA) that guarantees 15 Gbps bandwidth for production virtual machines at all times.
- There is no budget to purchase additional hardware.
- The hardware replacement SLA is based on a delivery agreement of two business days.

Which recommendation for the configuration of vSphere High Availability (HA) should the architect include in the design?

- A. Configure vSphere HAConfigure % based admission control Configure two isolation addresses Consider an OEM with NIC failure conditions in their Proactive HA plugin
- B. Configure vSphere HASet das.IgnoreRedundantNetWarning to trueConsider an OEM with NIC failure conditions in their Proactive HA plugin
- C. Configure vSphere HAConfigure two existing data stores for heartbeatConsider an OEM with NIC failure conditions in their Proactive HA plugin
- D. Configure Proactive HA Automation Level: Automated Remediation: Maintenance mode for all failuresConsider an OEM with NIC failure conditions in their Proactive HA plugin

Answer: A

NEW QUESTION 44

Which requirement would be classified as a functional requirement within the application design documentation?

- A. The application must be hosted with redundancy levels of N+1 or better.
- B. Penetration testing must be executed quarterly with a pass rate of 80% or higher.
- C. The application must be capable of handling 200 transactions per second.
- D. Administrators must monitor the network traffic of the desired systems.

Answer: C

NEW QUESTION 49

The architect for a large enterprise is tasked with reviewing a proposed design created by a service partner.

Which design elements are expected to be detailed within the physical design section of the documentation?

- A. A design diagram illustrating the configuration and specific attributes, such as IP addresses
- B. A list of requirements, constraints, and risks
- C. A solution architecture diagram with the components and data flow
- D. An entity relationship diagram describing upstream and downstream dependencies for specific service components

Answer: B

NEW QUESTION 53

An architect is designing a new VMware solution for a customer that has a number of different resource profiles.

The following are the business requirements for the design:

The solution must support virtual machines with the following storage profiles:

-Write-intensive

-Backup

-Write-Once-Read-Many (WORM) archive

- The solution must support migration of virtual machine disks between storage profiles.

- The WORM archive data must be located at an isolated secure site.
- The backup storage array must only be connected to a backup media server.
- All data should be recoverable from backup.

Which design decision should the architect make to meet the business requirements?


- A. The solution will leverage a single storage array for the WORM archive and write-intensive storage profiles
- B. The solution will leverage the same array for the backup and write-intensive storage profiles
- C. The solution will leverage a different array for each storage profile
- D. The solution will leverage a single storage array for all storage profiles

Answer: C

NEW QUESTION 57

Refer to the exhibit.

During a requirements gathering workshop, the customer shares the following diagram regarding their availability service-level agreements (SLAs):

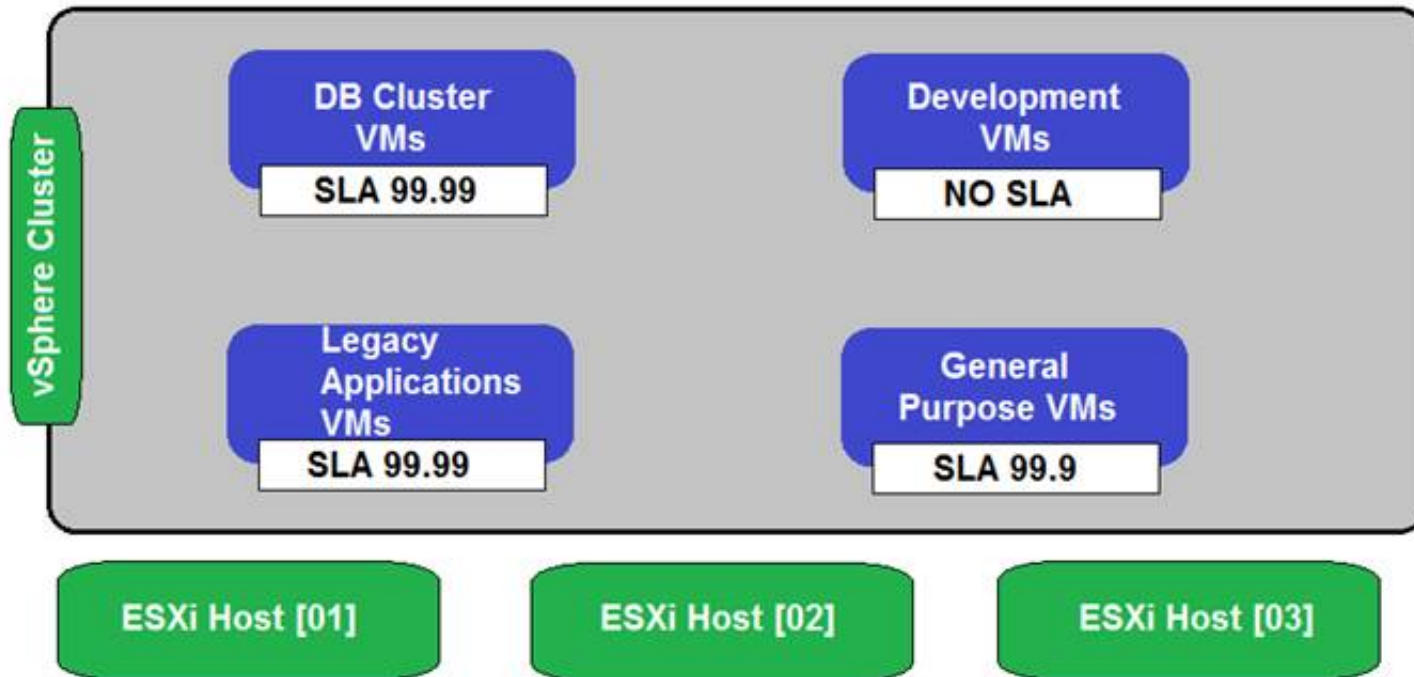

The customer wants database application level availability to always take precedence. What should the architect recommend to meet the customer's requirement?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Highest.
- B. Enable Fault Tolerance.
- C. Enable Sphere HA and maintain the default settings.
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest.

Answer: D

NEW QUESTION 58

An organization's data scientists are executing a plan to use machine learning (ML). They must have access to graphical processing unit (GPU) capabilities to execute their computational models when needed. The solutions architect needs to design a solution to ensure that GPUs can be shared by multiple virtual machines. Which two solutions should the architect recommend to meet these requirements? (Choose two.)

- A. NVIDIA vGPU
- B. AMD MxGPU
- C. vSphere DirectPath I/O
- D. vSGA
- E. vSphere Bitfusion

Answer: AE

Explanation:

<https://blogs.vmware.com/apps/2018/07/using-gpus-with-virtual-machines-on-vsphere-part-1-overview.html>

NEW QUESTION 60

A new real-time financial service application is being developed by the engineering team at a financial firm and will be released as a public Software-as-a-Service (SaaS) offering. The solutions architect has designed and deployed a new vSphere environment and the supporting network infrastructure for hosting all public services. ESXi hosts are configured to use Precision Time Protocol (PTP) and a local stratum-1 network time server. Application provisioning and scaling will be managed by VMware vRealize Automation and can be run on Microsoft Windows or multiple distributions of Linux. Which three recommendations should the architect include in the design to ensure that the service maintain timekeeping within an accuracy of one second? (Choose three.)

- A. Use Microsoft Windows Server as the guest operating system.
- B. Configure the chrony time-sync agent on each virtual machine guest operating system.
- C. Set the virtual hardware device to use Host System Time (NTP) for each virtual machine running the application.
- D. Add a precision clock virtual device to each virtual machine running the application.
- E. Use a Linux distribution as the guest operating system.
- F. Add a virtual watchdog timer (VWDT) device to each virtual machine running the application.

Answer: ABC

NEW QUESTION 62

An architect decides to separate virtual desktops and application servers into separate vSphere clusters to meet security and management requirements. What are two implications of this design decision? (Choose two.)

- A. There will be an increase in management overhead.
- B. Identical hardware must be procured for all hosts.
- C. There will be a reduction in performance.
- D. The patching cycles will affect both clusters at the same time.
- E. There will be additional licensing and cost requirements for both clusters.

Answer: DE

NEW QUESTION 67

An architect is tasked with designing a new VMware software-defined data center (SDDC) solution for an online retail customer who has a primary and secondary data center as well as 10 distribution hubs.

The customer has provided the following business requirements to help inform the design:

- The solution must support the running of up to 1,000 concurrent virtual machines across the primary and secondary data center.
- The solution must support the running of up to 20 concurrent virtual machines in each distribution hub.
- The solution must support the separation of management and lines-of-business application virtual machines.
- All management components (including directory services, backup, automation, operations and logging) must be deployed to the primary data center.
- All virtual infrastructure components must have redundancy of N+1.
- The solution should support a monthly uptime target of 99.9%.
- The recovery time objective (RTO) for the solution must be four hours.
- The recovery point objective (RPO) for the solution must be 24 hours.

Given the information from the customer, which assumption should the architect include in the design?

- A. All business application virtual machines can be deployed into a single cluster within the primary data center.
- B. Each distribution hub should be configured with a backup device.
- C. The wide area network has sufficient bandwidth to support centralized management.
- D. Each cluster will have a minimum of four hosts.

Answer: B

NEW QUESTION 72

An architect is designing a series of new vSphere environments for an organization. The environments will be deployed in their US-East and US-West region data centers. Each data center may have one or more dedicated vSphere environments. Only the vSphere environments within a data center will be configured with Enhanced Linked Mode. The Chief Technology Officer (CTO) has authorized the use of VMware vRealize Automation Cloud for automation. The build team creates standardized virtual machine images for various operating systems in Open Virtualization Format (OVF) and publishes the latest version on an as-needed basis to an internal HTTPS-accessible repository.

The architect must design a content library topology that meets the following requirements:

- A localized content library must be available in each data center.
- Each content library must be updated when an image is updated and released by the build team.
- It must leverage the existing build team processes.

What should the architect recommend to meet the requirements?

- A. Work with the build team to create a local content library for each vSphere environment. Import the OVF images when new image are published to the repository.
- B. Create a local content library for the primary vSphere environment in each data center. Create a subscribed content library for each additional vSphere environment in each data center.
- C. Configure the content library to download content automatically.
- D. Work with the build team to automate a JSON-based manifest to the repository when changes occur in the repository. Create a subscribed content library for each vSphere environment.
- E. Configure the content library to download content when needed.
- F. Work with the build team to automate a JSON-based manifest to the repository when changes occur in the repository. Create a subscribed content library for each vSphere environment.
- G. Configure the content library to download content automatically.

Answer: B

NEW QUESTION 77

A customer requires the use of data encryption to ensure data is not accessible when a drive is removed from the primary storage platform. However, there is also a requirement to use deduplication and compression against all workloads in order to conserve space.

Which solution meets the customer requirements?

- A. Data-in-transit encryption
- B. OS-level encryption
- C. Encrypted backups
- D. Array-based encryption

Answer: D

NEW QUESTION 82

Application owners require support of a Microsoft Windows Server Failover Cluster (WSFC).

Their current environment consists of the following components:

- vSphere 7.0 and vSAN 7.0

- External array supporting NFS 3.0/4.1, Server Message Block (SMB) 2.1
- 10 GbE storage connectivity for all devices

The solution architect is tasked with coming up with a solution to meet this requirement while utilizing their existing investments. Which two recommendations could the architect make? (Choose two.)

- A. Use vSAN native support for WSFC
- B. Use NFS 4.1 shares for quorum and shared disk
- C. Use raw device mapping (RDM)
- D. Use the SMB 2.1 protocol for sharing disks
- E. Run WSFC on vSAN iSCSI Target Service

Answer: AE

Explanation:

<https://blogs.vmware.com/virtualblocks/2018/04/18/vsan-6-7-introducing-wsfc-support-vsan>

NEW QUESTION 84

An architect is designing a new vSphere environment with the following resources:

- 600 vCPU
- 5,760 GB RAM

Average resource usage is:

- 60 vCPU
- 1,152 GB RAM

The design must meet the following requirements:

- The environment has the ability to burst by 25%.
- Each host can schedule 36 vCPUs and has 512 GB RAM.
- Management overhead is 20%.

What is the minimum number of hosts required to meet the design requirements?

- A. Three
- B. Five
- C. Four
- D. Two

Answer: D

NEW QUESTION 86

An architect has 50 ESXi hosts to deploy and DHCP servers are not allowed on any network. Which automated host deployment method should the architect use?

- A. Stateless vSphere Auto Deploy
- B. Stateful vSphere Auto Deploy
- C. Scripted installation
- D. Interactive installation

Answer: C

NEW QUESTION 87

Which two statements are true about gathering functional business and application requirements? (Choose two.)

- A. It focuses on functional requirements with C-level stakeholders
- B. It leverages a single set of QUESTION NO:s for all stakeholders
- C. It might require multiple rounds of stakeholder interviews
- D. It builds stakeholder consensus
- E. It is a non-iterative process

Answer: AC

NEW QUESTION 89

A VMware Service Provider is tasked with delivering a solution for continuous availability for a subset of Tier 1 virtual machines (VMs) and vApps running in their vSAN environment. The VMs make up a mission-critical application and there can be no data loss in the event of an outage at their primary data center. In the event of a regional outage, they have established a 10-minute recovery point objective (RPO). Failover/failback to the third site must be automated.

They have the following in place:

- Two local data centers (primary and secondary) connected with 100 Gb dedicated fiber
- 2ms round-trip time (RTT) latency between the sites A third data center located on another power grid
- 70ms latency between the primary and secondary data centers
- Matching storage arrays at all locations

Which two solutions could be used to meet the requirements? (Choose two.)

- A. Site Recovery Manager
- B. Snapshots
- C. vSAN Metro Cluster
- D. vSphere Data Protection
- E. vStorage APIs for Array Integration (VAAI)

Answer: BC

NEW QUESTION 93

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

3V0-21.21 Practice Exam Features:

- * 3V0-21.21 Questions and Answers Updated Frequently
- * 3V0-21.21 Practice Questions Verified by Expert Senior Certified Staff
- * 3V0-21.21 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 3V0-21.21 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 3V0-21.21 Practice Test Here](#)