

Exam Questions 300-620

Implementing Cisco Application Centric Infrastructure (DCACI)

<https://www.2passeasy.com/dumps/300-620/>




NEW QUESTION 1

DRAG DROP

An engineer is configuring a VRF for a tenant named Cisco. Drag and drop the child objects on the left onto the correct containers on the right for this configuration.

- Application profile
- Bridge domain
- EPG
- VRF

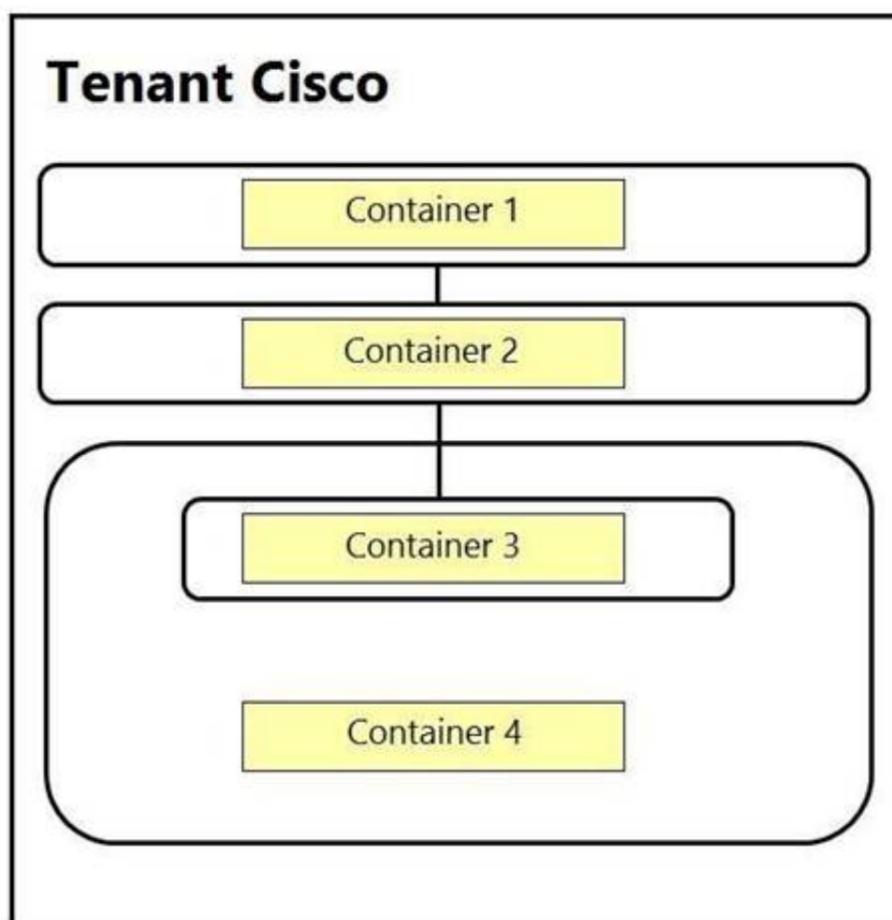


- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

- Application profile
- Bridge domain
- EPG
- VRF

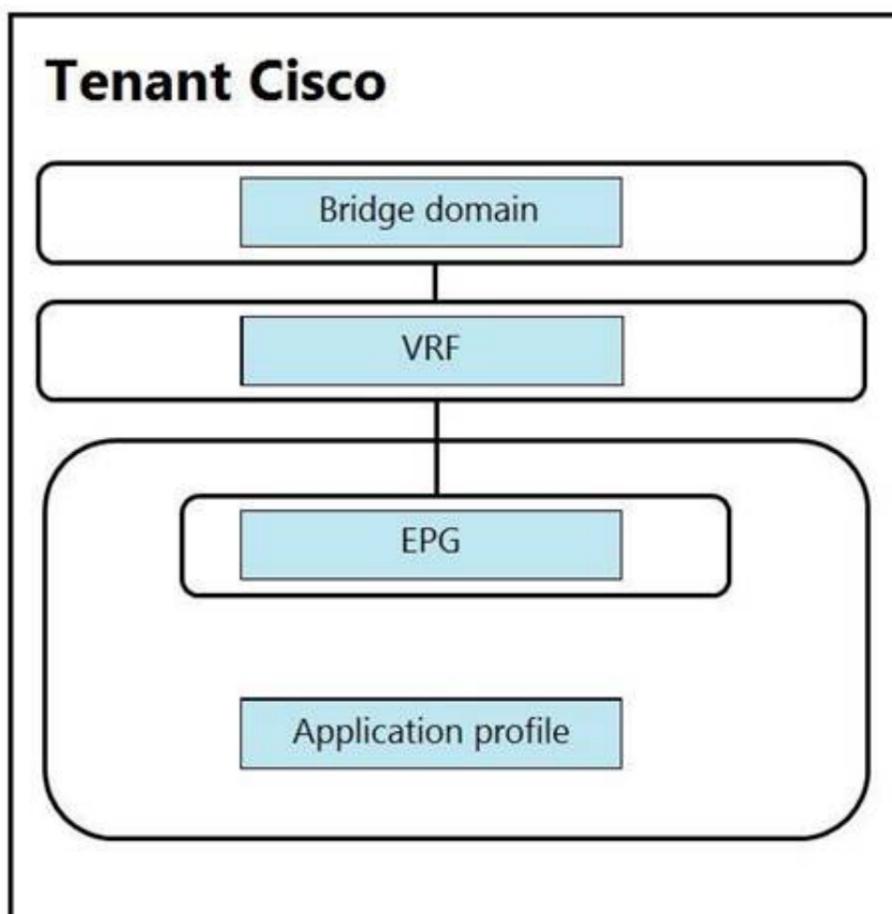

NEW QUESTION 2

Which feature dynamically assigns or modifies the EPG association of virtual machines based on their attributes?

- A. vzAny contracts
- B. standard contracts
- C. application EPGs
- D. uSeg EPGs

Answer: D

NEW QUESTION 3

Which feature allows firewall ACLs to be configured automatically when new endpoints are attached to an EPG?

- A. ARP gleaning
- B. dynamic endpoint attach
- C. hardware proxy
- D. network-stitching

Answer: B

NEW QUESTION 4

An engineer is implementing Cisco ACI at a large platform-as-a-service provider using APIC controllers, 9396PX leaf switches, and 9336PQ spine switches. The leaf switch ports are configured as IEEE 802.1p ports. Where does the traffic exit from the EPG in IEEE 802.1p mode in this configuration?

- A. from leaf ports tagged as VLAN 0
- B. from leaf ports untagged
- C. from leaf ports tagged as VLAN 4094
- D. from leaf ports tagged as VLAN 1

Answer: A

NEW QUESTION 5

DRAG DROP

Drag and drop the Cisco ACI filter entry options from the left onto the correct categories on the right indicating what are required or optional parameters.

Name	Optional Parameters	
ARP Flag		
Ether Type		
IP Protocol		
Source Port From	Required Parameters	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating_ACI/guide/b_Cisco_Operating_ACI/b_Cisco_Operating_ACI_chapter_01000.html

NEW QUESTION 6

What does a bridge domain represent?

- A. Layer 3 cloud
- B. Layer 2 forwarding construct
- C. tenant
- D. physical domain

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 7

Which endpoint learning operation is completed on the egress leaf switch when traffic is received from an L3Out?

- A. The source MAC and IP address of the traffic is learned as a local endpoint.

- B. The source MAC address of the traffic is learned as a remote endpoint.
- C. No source MAC or IP address of the traffic is learned as a remote endpoint.
- D. The source IP address of the traffic is learned as a remote endpoint.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 8

Refer to the exhibit.

```
<fvTenant name="ACILab">
  <fvCtx name="pvn1"/>
  <fvBD name="bd1">
    <fvRsCtx tnFvCtxName="pvn1"/>
    <fvSubnet ip="10.1.100.1/24"/>
  </fvBD>
</fvTenant>
```

Which two objects are created as a result of the configuration? (Choose two.)

- A. application profile
- B. attachable AEP
- C. bridge domain
- D. endpoint group
- E. VRF

Answer: CE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/rest_cfg/2_1_x/b_Cisco_APIC_REST_API_Configuration_Guide/b_Cisco_APIC_REST_API_Configuration_Guide_chapter_01110.html

NEW QUESTION 9

Which action sets Layer 2 loop migration in an ACI Fabric with a Layer 2 Out configured?

- A. Enable MCP on the ACI fabric.
- B. Disable STP in the external network.
- C. Disable STP on the ACI fabric.
- D. Enable STP on the ACI fabric.

Answer: A

NEW QUESTION 10

When Cisco ACI connects to an outside Layers 2 network, where does the ACI fabric flood the STP BPDU frame?

- A. within the bridge domain
- B. within the APIC
- C. within the access encap VLAN
- D. between all the spine and leaf switches

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c07-732033.html#_Toc395143571

NEW QUESTION 10

On which two interface types should a user configure storm control to protect against broadcast traffic? (Choose two.)

- A. APIC facing interfaces
- B. port channel on a single leaf switch
- C. all interfaces on the leaf switches in the fabric
- D. endpoint-facing trunk interface
- E. fabric uplink interfaces on the leaf switches

Answer: BD

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_01010.html

NEW QUESTION 12

What must be configured to redistribute externally learned OSPF routes within the ACI fabric?

- A. Route Control Profile
- B. BGP Route Reflector
- C. BGP Inter-leak Route Map
- D. PIM Sparse Mode


Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_010010.html

NEW QUESTION 15

Refer to the exhibit.

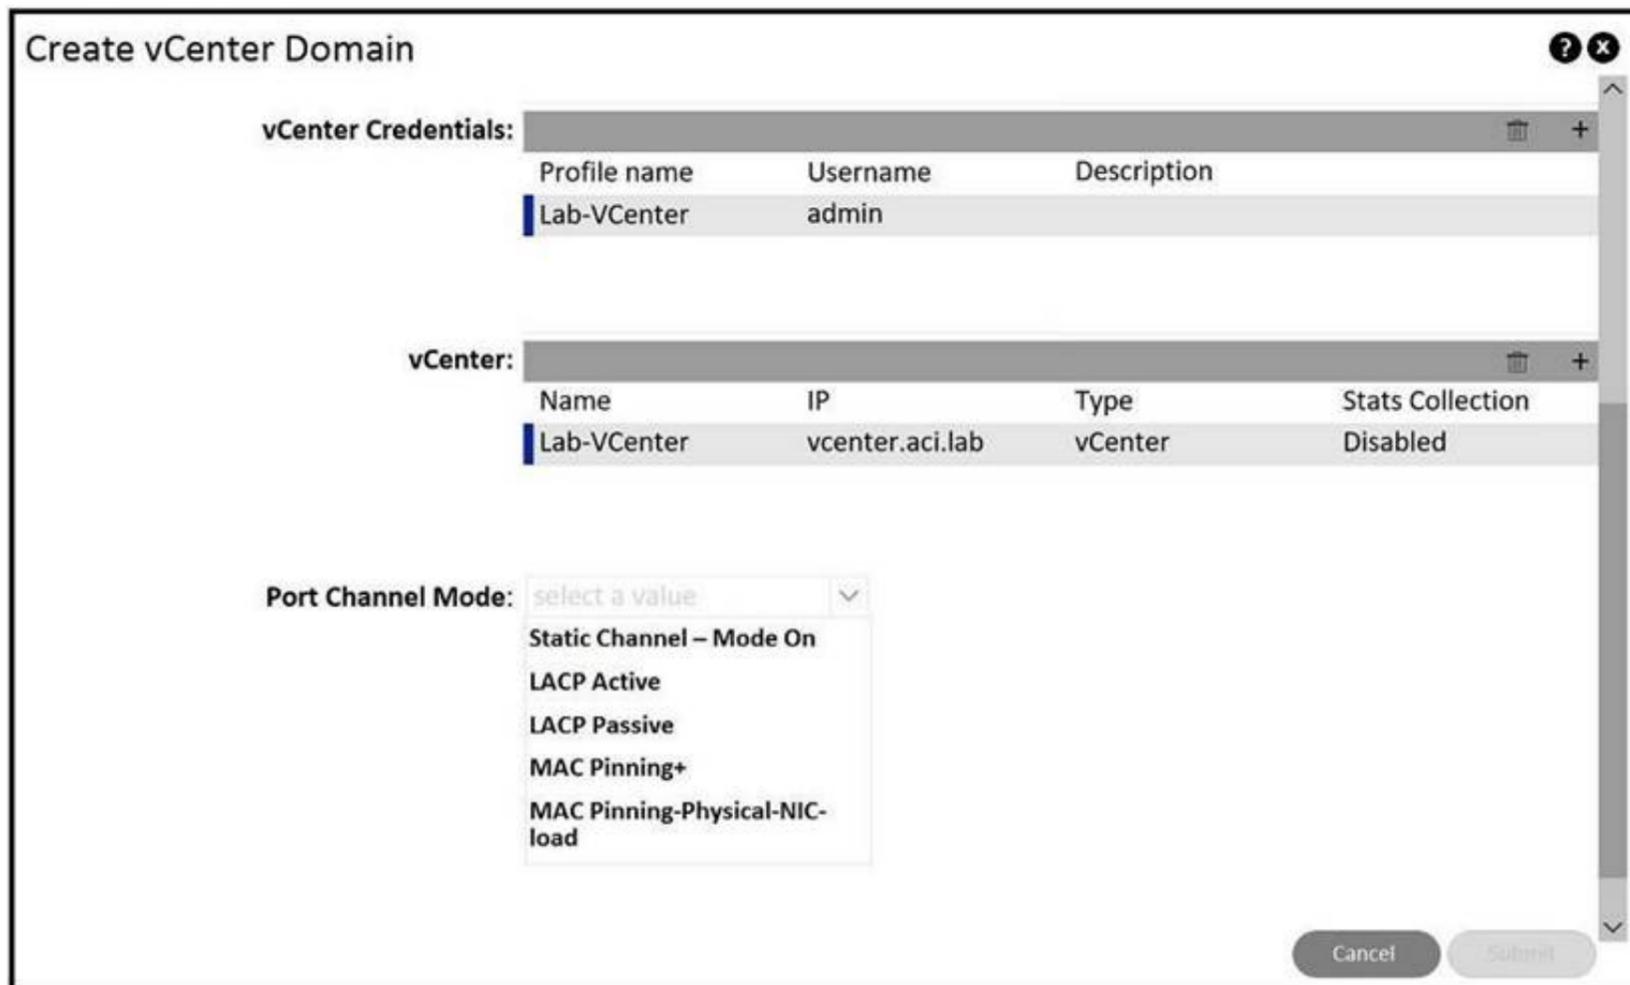

An engineer is implementing Cisco ACI – VMware vCenter integration for a blade server that lacks support of bonding. Which port channel mode results in “route based on originating virtual port” on the VMware VDS?

- A. Static Channel – Mode On
- B. MAC Pinning-Physical-NIC-load
- C. LACP Passive
- D. MAC Pinning+
- E. LACP Active

Answer: D

NEW QUESTION 20

Which tenant is used when configuring in-band management IP addresses for Cisco APICs, leaf nodes, and spine nodes?

- A. default
- B. infra
- C. common
- D. mgmt

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Configuring_Static_Management_Access.html#concept_CFF63FEBE947424291B0F10E6F23DA7D

NEW QUESTION 21

What represents the unique identifier of an ACI object?

- A. universal resource identifier (URI)
- B. application programming interface
- C. management information tree
- D. distinguished name

Answer: D

Explanation:

Reference: <https://www.slideshare.net/CiscoDevNet/introduction-to-aci-apis>

NEW QUESTION 22

What must be configured to allow SNMP traffic on the APIC controller?

- A. out-of-band management interface
- B. contract under tenant mgmt
- C. SNMP relay policy
- D. out-of-band bridge domain

Answer: B

NEW QUESTION 24

Refer to the exhibit.

Edit Stats Threshold

transmit B2B credit cumulative

Normal Value: 300

Threshold Direction: Both Rising Falling

Rising Thresholds to Config:

- Critical
- Major
- Minor
- Warning

Rising

	Set	Reset
Critical	500	
Major		
Minor		
Warning	400	300

A client reports that the ACI domain connectivity to the fiber channel storage is experiencing a B2B credit oversubscription. The environment has a SYSLOG server for state collection messages. Which value should be chosen to clear the critical fault?

- A. 300
- B. 410
- C. 350
- D. 510

Answer: B

NEW QUESTION 29

Which statement regarding ACI Multi-Pod and TEP pool is true?

- A. The IP addresses used in the IPN network can overlap TEP pool of the APIC.
- B. A different TEP pool must be assigned to each Pod.
- C. The Pod1 TEP pool must be split and a portion of the TEP pool allocated to each Pod.
- D. The same TEP pool is used in all Pods.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739714.html>

NEW QUESTION 34

What are two requirements for the IPN network when implementing a Multi-Pod ACI fabric? (Choose two.)

- A. EIGRP routing

- B. PIM ASM multicast routing
- C. BGP routing
- D. VLAN ID 4
- E. OSPF routing

Answer: AE

NEW QUESTION 39

A Solutions Architect is asked to design two data centers based on Cisco ACI technology that can extend L2/L3, VXLAN, and network policy across locations. ACI Multi-Pod has been selected. Which two requirements must be considered in this design? (Choose two.)

- A. ACI underlay protocols, i.
- B. COOP, IS-IS and MP-BGP, spans across pod
- C. Create QoS policies to make sure those protocols have higher priority.
- D. A single APIC Cluster is required in a Multi-Pod desig
- E. It is important to place the APIC Controllers in different locations in order to maximize redundancy and reliability.
- F. ACI Multi-Pod requires an IP Network supporting PIM-Bidir.
- G. ACI Multi-Pod does not support Firewall Clusters across Pod
- H. Firewall Clusters should always be local.
- I. Multi-Pod requires multiple APIC Controller Clusters, one per po
- J. Make sure those clusters can communicate to each other through a highly available connection.

Answer: AE

NEW QUESTION 41

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 300-620 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 300-620 Product From:

<https://www.2passeasy.com/dumps/300-620/>

Money Back Guarantee

300-620 Practice Exam Features:

- * 300-620 Questions and Answers Updated Frequently
- * 300-620 Practice Questions Verified by Expert Senior Certified Staff
- * 300-620 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-620 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year