

ISC2

Exam Questions SSCP

System Security Certified Practitioner (SSCP)



NEW QUESTION 1

- (Topic 1)

Which is the last line of defense in a physical security sense?

- A. people
- B. interior barriers
- C. exterior barriers
- D. perimeter barriers

Answer: A

Explanation:

"Ultimately, people are the last line of defense for your company's assets" (Pastore & Dulaney, 2006, p. 529).
Pastore, M. and Dulaney, E. (2006). CompTIA Security+ study guide: Exam SY0-101. Indianapolis, IN: Sybex.

NEW QUESTION 2

- (Topic 1)

Smart cards are an example of which type of control?

- A. Detective control
- B. Administrative control
- C. Technical control
- D. Physical control

Answer: C

Explanation:

Logical or technical controls involve the restriction of access to systems and the protection of information. Smart cards and encryption are examples of these types of control.

Controls are put into place to reduce the risk an organization faces, and they come in three main flavors: administrative, technical, and physical. Administrative controls are commonly referred to as "soft controls" because they are more management-oriented. Examples of administrative controls are security documentation, risk management, personnel security, and training. Technical controls (also called logical controls) are software or hardware components, as in firewalls, IDS, encryption, identification and authentication mechanisms. And physical controls are items put into place to protect facility, personnel, and resources. Examples of physical controls are security guards, locks, fencing, and lighting.

Many types of technical controls enable a user to access a system and the resources within that system. A technical control may be a username and password combination, a Kerberos implementation, biometrics, public key infrastructure (PKI), RADIUS, TACACS +, or authentication using a smart card through a reader connected to a system. These technologies verify the user is who he says he is by using different types of authentication methods. Once a user is properly authenticated, he can be authorized and allowed access to network resources.

Reference(s) used for this question:

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (p. 245). McGraw- Hill. Kindle Edition.

and

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 32).

NEW QUESTION 3

- (Topic 1)

Physical security is accomplished through proper facility construction, fire and water

protection, anti-theft mechanisms, intrusion detection systems, and security procedures that are adhered to and enforced. Which of the following is not a component that achieves this type of security?

- A. Administrative control mechanisms
- B. Integrity control mechanisms
- C. Technical control mechanisms
- D. Physical control mechanisms

Answer: B

Explanation:

Integrity Controls Mechanisms are not part of physical security. All of the other detractors were correct this one was the wrong one that does not belong to Physical Security. Below you have more details extracted from the SearchSecurity web site: Information security depends on the security and management of the physical space in which computer systems operate. Domain 9 of the CISSP exam's Common Body of Knowledge addresses the challenges of securing the physical space, its systems and the people who work within it by use of administrative, technical and physical controls. The following QUESTION NO: s are covered:

Facilities management: The administrative processes that govern the maintenance and protection of the physical operations space, from site selection through emergency response.

Risks, issues and protection strategies: Risk identification and the selection of security protection components.

Perimeter security: Typical physical protection controls.

Facilities management

Facilities management is a complex component of corporate security that ranges from the planning of a secure physical site to the management of the physical information system environment. Facilities management responsibilities include site selection and physical security planning (i.e. facility construction, design and layout, fire and water damage protection, antitheft mechanisms, intrusion detection and security procedures.) Protections must extend to both people and assets. The necessary level of protection depends on the value of the assets and data. CISSP® candidates must learn the concept of critical-path analysis as a means of determining a component's business function criticality relative to the cost of operation and replacement. Furthermore, students need to gain an understanding of the optimal location and physical attributes of a secure facility. Among the QUESTION NO: s covered in this domain are site inspection, location, accessibility and obscurity, considering the area crime rate, and the likelihood of natural hazards such as floods or earthquakes.

This domain also covers the quality of construction material, such as its protective qualities and load capabilities, as well as how to lay out the structure to minimize risk of forcible entry and accidental damage. Regulatory compliance is also touched on, as is preferred proximity to civil protection services, such as fire and police stations. Attention is given to computer and equipment rooms, including their location, configuration (entrance/egress requirements) and their proximity to wiring distribution centers at the site.

Physical risks, issues and protection strategies

An overview of physical security risks includes risk of theft, service interruption, physical damage, compromised system integrity and unauthorized disclosure of information. Interruptions to business can manifest due to loss of power, services, telecommunications connectivity and water supply. These can also seriously compromise electronic security monitoring alarm/response devices. Backup options are also covered in this domain, as is a strategy for quantifying the risk exposure by simple formula.

Investment in preventive security can be costly. Appropriate redundancy of people skills, systems and infrastructure must be based on the criticality of the data and assets to be preserved. Therefore a strategy is presented that helps determine the selection of cost appropriate controls. Among the QUESTION NO: s covered in this domain are regulatory and legal requirements, common standard security protections such as locks and fences, and the importance of establishing service level agreements for maintenance and disaster support. Rounding out the optimization approach are simple calculations for determining mean time between failure and mean time to repair (used to estimate average equipment life expectancy) — essential for estimating the cost/benefit of purchasing and maintaining redundant equipment.

As the lifeblood of computer systems, special attention is placed on adequacy, quality and protection of power supplies. CISSP candidates need to understand power supply concepts and terminology, including those for quality (i.e. transient noise vs. clean power); types of interference (EMI and RFI); and types of interruptions such as power excess by spikes and surges, power loss by fault or blackout, and power degradation from sags and brownouts. A simple formula is presented for determining the total cost per hour for backup power. Proving power reliability through testing is recommended and the advantages of three power protection approaches are discussed (standby UPS, power line conditioners and backup sources) including minimum requirements for primary and alternate power provided.

Environmental controls are explored in this domain, including the value of positive pressure water drains and climate monitoring devices used to control temperature, humidity and reduce static electricity. Optimal temperatures and humidity settings are provided.

Recommendations include strict procedures during emergencies, preventing typical risks (such as blocked fans), and the use of antistatic armbands and hygrometers. Positive pressurization for proper ventilation and monitoring for air born contaminants is stressed.

The pros and cons of several detection response systems are deeply explored in this domain. The concept of combustion, the classes of fire and fire extinguisher ratings are detailed. Mechanisms behind smoke-activated, heat-activated and flame-activated devices and Automatic Dial-up alarms are covered, along with their advantages, costs and shortcomings. Types of fire sources are distinguished and the effectiveness of fire suppression methods for each is included. For instance, Halon and its approved replacements are covered, as are the advantages and the inherent risks to equipment of the use of water sprinklers.

Administrative controls

The physical security domain also deals with administrative controls applied to physical sites and assets. The need for skilled personnel, knowledge sharing between them, separation of duties, and appropriate oversight in the care and maintenance of equipment and environments is stressed. A list of management duties including hiring checks, employee maintenance activities and recommended termination procedures is offered. Emergency measures include accountability for evacuation and system shutdown procedures, integration with disaster and business continuity plans, assuring documented procedures are easily available during different types of emergencies, the scheduling of periodic equipment testing, administrative reviews of documentation, procedures and recovery plans, responsibilities delegation, and personnel training and drills.

Perimeter security

Domain nine also covers the devices and techniques used to control access to a space. These include access control devices, surveillance monitoring, intrusion detection and corrective actions. Specifications are provided for optimal external boundary protection, including fence heights and placement, and lighting placement and types. Selection of door types and lock characteristics are covered. Surveillance methods and intrusion-detection methods are explained, including the use of video monitoring, guards, dogs, proximity detection systems, photoelectric/photometric systems, wave pattern devices, passive infrared systems, and sound and motion detectors, and current flow sensitivity devices that specifically address computer theft. Room lock types — both preset and cipher locks (and their variations) -- device locks, such as portable laptop locks, lockable server bays, switch control locks and slot locks, port controls, peripheral switch controls and cable trap locks are also covered. Personal access control methods used to identify authorized users for site entry are covered at length, noting social engineering risks such as piggybacking. Wireless proximity devices, both user access and system sensing readers are covered (i.e. transponder based, passive devices and field powered devices) in this domain.

Now that you've been introduced to the key concepts of Domain 9, watch the Domain 9, Physical Security video

Return to the CISSP Essentials Security School main page

See all SearchSecurity.com's resources on CISSP certification training Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2001, Page 280.

NEW QUESTION 4

- (Topic 1)

What is the main concern with single sign-on?

- A. Maximum unauthorized access would be possible if a password is disclosed.
- B. The security administrator's workload would increase.
- C. The users' password would be too hard to remember.
- D. User access rights would be increased.

Answer: A

Explanation:

A major concern with Single Sign-On (SSO) is that if a user's ID and password are compromised, the intruder would have access to all the systems that the user was authorized for.

The following answers are incorrect:

The security administrator's workload would increase. Is incorrect because the security administrator's workload would decrease and not increase. The admin would not be responsible for maintaining multiple user accounts just the one.

The users' password would be too hard to remember. Is incorrect because the users would have less passwords to remember.

User access rights would be increased. Is incorrect because the user access rights would not be any different than if they had to log into systems manually.

NEW QUESTION 5

- (Topic 1)

Which of the following is implemented through scripts or smart agents that replays the users multiple log-ins against authentication servers to verify a user's identity which permit access to system services?

- A. Single Sign-On
- B. Dynamic Sign-On
- C. Smart cards
- D. Kerberos

Answer: A

Explanation:

SSO can be implemented by using scripts that replay the users multiple log- ins against authentication servers to verify a user's identity and to permit access to

system services.

Single Sign on was the best answer in this case because it would include Kerberos. When you have two good answers within the 4 choices presented you must select the

BEST one. The high level choice is always the best. When one choice would include the other one that would be the best as well.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 40.

NEW QUESTION 6

- (Topic 1)

Crime Prevention Through Environmental Design (CPTED) is a discipline that:

- A. Outlines how the proper design of a physical environment can reduce crime by directly affecting human behavior.
- B. Outlines how the proper design of the logical environment can reduce crime by directly affecting human behavior.
- C. Outlines how the proper design of the detective control environment can reduce crime by directly affecting human behavior.
- D. Outlines how the proper design of the administrative control environment can reduce crime by directly affecting human behavior.

Answer: A

Explanation:

Crime Prevention Through Environmental Design (CPTED) is a discipline that outlines how the proper design of a physical environment can reduce crime by directly affecting human behavior. It provides guidance about lost and crime prevention through proper facility construction and environmental components and procedures.

CPTED concepts were developed in the 1960s. They have been expanded upon and have matured as our environments and crime types have evolved. CPTED has been used not just to develop corporate physical security programs, but also for large-scale activities such as development of neighborhoods, towns, and cities. It addresses landscaping, entrances, facility and neighborhood layouts, lighting, road placement, and traffic circulation patterns. It looks at microenvironments, such as offices and rest-rooms, and macroenvironments, like campuses and cities.

Reference(s) used for this question:

Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 435). McGraw- Hill. Kindle Edition.

and

CPTED Guide Book

NEW QUESTION 7

- (Topic 1)

To control access by a subject (an active entity such as individual or process) to an object (a passive entity such as a file) involves setting up:

- A. Access Rules
- B. Access Matrix
- C. Identification controls
- D. Access terminal

Answer: A

Explanation:

Controlling access by a subject (an active entity such as individual or process) to an object (a passive entity such as a file) involves setting up access rules.

These rules can be classified into three access control models: Mandatory, Discretionary, and Non-Discretionary.

An access matrix is one of the means used to implement access control.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 8

- (Topic 1)

Which of the following would be used to implement Mandatory Access Control (MAC)?

- A. Clark-Wilson Access Control
- B. Role-based access control
- C. Lattice-based access control
- D. User dictated access control

Answer: C

Explanation:

The lattice is a mechanism use to implement Mandatory Access Control (MAC)

Under Mandatory Access Control (MAC) you have: Mandatory Access Control

Under Non Discretionary Access Control (NDAC) you have: Rule-Based Access Control

Role-Based Access Control

Under Discretionary Access Control (DAC) you have: Discretionary Access Control

The Lattice Based Access Control is a type of access control used to implement other access control method. A lattice is an ordered list of elements that has a least upper bound and a most lower bound. The lattice can be used for MAC, DAC, Integrity level, File Permission, and more

For example in the case of MAC, if we look at common government classifications, we have the following:

TOP SECRET

SECRET -----I am the user at secret CONFIDENTIAL

SENSITIVE BUT UNCLASSIFIED UNCLASSIFIED

If you look at the diagram above where I am a user at SECRET it means that I can access document at lower classification but not document at TOP SECRET.

The lattice is a list of ORDERED ELEMENT, in this case the ordered elements are classification levels. My least upper bound is SECRET and my most lower bound is UNCLASSIFIED.

However the lattice could also be used for Integrity Levels such as: VERY HIGH

HIGH

MEDIUM -----I am a user, process, application at the medium level LOW

VERY LOW

In the case of of Integrity levels you have to think about TRUST. Of course if I take for example the the VISTA operating system which is based on Biba then

Integrity Levels would be used. As a user having access to the system I cannot tell a process running with administrative privilege what to do. Else any users on the system could take control of the system by getting highly privilege process to do things on their behalf. So no read down would be allowed in this case and this is an example of the Biba model.

Last but not least the lattice could be use for file permissions: RWX

RW -----User at this level

R

If I am a user with READ and WRITE (RW) access privilege then I cannot execute the file because I do not have execute permission which is the X under linux and UNIX.

Many people confuse the Lattice Model and many books says MAC = LATTICE, however the lattice can be use for other purposes.

There is also Role Based Access Control (RBAC) that exists out there. It COULD be used to simulate MAC but it is not MAC as it does not make use of Label on objects indicating sensitivity and categories. MAC also require a clearance that dominates the object.

You can get more info about RBAC at:<http://csrc.nist.gov/groups/SNS/rbac/faq.html#03> Also note that many book uses the same acronym for Role Based Access Control and Rule

Based Access Control which is RBAC, this can be confusing.

The proper way of writing the acronym for Rule Based Access Control is RuBAC, unfortunately it is not commonly used.

References:

There is a great article on technet that talks about the lattice in VISTA: <http://blogs.technet.com/b/steriley/archive/2006/07/21/442870.aspx>

also see:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 33).

and

http://www.microsoft-watch.com/content/vista/gaging_vistas_integrity.html

NEW QUESTION 9

- (Topic 1)

Which of the following is a trusted, third party authentication protocol that was developed under Project Athena at MIT?

- A. Kerberos
- B. SESAME
- C. KryptoKnight
- D. NetSP

Answer: A

Explanation:

Kerberos is a trusted, third party authentication protocol that was developed under Project Athena at MIT.

Kerberos is a network authentication protocol. It is designed to provide strong authentication for client/server applications by using secret-key cryptography. A free implementation of this protocol is available from the Massachusetts Institute of Technology. Kerberos is available in many commercial products as well.

The Internet is an insecure place. Many of the protocols used in the Internet do not provide any security. Tools to "sniff" passwords off of the network are in common use by systems crackers. Thus, applications which send an unencrypted password over the network are extremely vulnerable. Worse yet, other client/server applications rely on the client program to be "honest" about the identity of the user who is using it. Other applications rely on the client to restrict its activities to those which it is allowed to do, with no other enforcement by the server.

Some sites attempt to use firewalls to solve their network security problems. Unfortunately, firewalls assume that "the bad guys" are on the outside, which is often a very bad

assumption. Most of the really damaging incidents of computer crime are carried out by insiders. Firewalls also have a significant disadvantage in that they restrict how your users can use the Internet. (After all, firewalls are simply a less extreme example of the dictum that there is nothing more secure than a computer which is not connected to the network --- and powered off!) In many places, these restrictions are simply unrealistic and unacceptable.

Kerberos was created by MIT as a solution to these network security problems. The Kerberos protocol uses strong cryptography so that a client can prove its identity to a server (and vice versa) across an insecure network connection. After a client and server have used Kerberos to prove their identity, they can also encrypt all of their communications to assure privacy and data integrity as they go about their business.

Kerberos is freely available from MIT, under a copyright permission notice very similar to the one used for the BSD operating and X11 Windowing system. MIT provides Kerberos in source form, so that anyone who wishes to use it may look over the code for themselves and assure themselves that the code is trustworthy.

In addition, for those who prefer to rely on a professional supported product, Kerberos is available as a product from many different vendors.

In summary, Kerberos is a solution to your network security problems. It provides the tools of authentication and strong cryptography over the network to help you secure your information systems across your entire enterprise. We hope you find Kerberos as useful as it has been to us. At MIT, Kerberos has been invaluable to our Information/Technology architecture.

KryptoKnight is a Peer to Peer authentication protocol incorporated into the NetSP product from IBM.

SESAME is an authentication and access control protocol, that also supports communication confidentiality and integrity. It provides public key based authentication along with the Kerberos style authentication, that uses symmetric key cryptography. Sesame supports the Kerberos protocol and adds some security extensions like public key based authentication and an ECMA-style Privilege Attribute Service. The complete Sesame protocol is a two step process. In the first step, the client successfully authenticates itself to the Authentication Server and obtains a ticket that can be presented to the Privilege Attribute Server. In the second step, the initiator obtains proof of his access rights in the form of Privilege Attributes Certificate (PAC). The PAC is a specific form of Access Control Certificate as defined in the ECMA-219 document. This document describes the extensions to Kerberos for public key based authentication as adopted in Sesame. SESAME, KryptoKnight, and NetSP never took off and the protocols are no longer commonly used.

References:

<http://www.cmf.nrl.navy.mil/CCS/people/kenh/kerberos-faq.html#whatis> and

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 40.

NEW QUESTION 10

- (Topic 1)

Which of the following questions is less likely to help in assessing identification and authentication controls?

- A. Is a current list maintained and approved of authorized users and their access?
- B. Are passwords changed at least every ninety days or earlier if needed?
- C. Are inactive user identifications disabled after a specified period of time?
- D. Is there a process for reporting incidents?

Answer: D

Explanation:

Identification and authentication is a technical measure that prevents unauthorized people (or unauthorized processes) from entering an IT system. Access control

usually requires that the system be able to identify and differentiate among users. Reporting incidents is more related to incident response capability (operational control) than to identification and authentication (technical control).

Source: SWANSON, Marianne, NIST Special Publication 800-26, Security Self- Assessment Guide for Information Technology Systems, November 2001 (Pages A-30 to A-32).

NEW QUESTION 10

- (Topic 1)

In biometrics, the "one-to-one" search used to verify claim to an identity made by a person is considered:

- A. Authentication
- B. Identification
- C. Auditing
- D. Authorization

Answer: A

Explanation:

Biometric devices can be use for either IDENTIFICATION or AUTHENTICATION

ONE TO ONE is for AUTHENTICATION

This means that you as a user would provide some biometric credential such as your fingerprint. Then they will compare the template that you have provided with the one stored in the Database. If the two are exactly the same that prove that you are who you pretend to be.

ONE TO MANY is for IDENTIFICATION

A good example of this would be within airport. Many airports today have facial recognition cameras, as you walk through the airport it will take a picture of your face and then compare the template (your face) with a database full of templates and see if there is a match between your template and the ones stored in the Database. This is for IDENTIFICATION of a person.

Some additional clarification or comments that might be helpful are: Biometrics establish authentication using specific information and comparing results to expected data. It does not perform well for identification purposes such as scanning for a person's face in a moving crowd for example.

Identification methods could include: username, user ID, account number, PIN, certificate, token, smart card, biometric device or badge.

Auditing is a process of logging or tracking what was done after the identity and authentication process is completed.

Authorization is the rights the subject is given and is performed after the identity is established.

Reference OIG (2007) p148, 167

Authentication in biometrics is a "one-to-one" search to verify claim to an identity made by a person.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

NEW QUESTION 11

- (Topic 1)

The number of violations that will be accepted or forgiven before a violation record is produced is called which of the following?

- A. clipping level
- B. acceptance level
- C. forgiveness level
- D. logging level

Answer: A

Explanation:

The correct answer is "clipping level". This is the point at which a system decides to take some sort of action when an action repeats a preset number of times. That action may be to log the activity, lock a user account, temporarily close a port, etc.

Example: The most classic example of a clipping level is failed login attempts. If you have a system configured to lock a user's account after three failed login attempts, that is the "clipping level".

The other answers are not correct because:

Acceptance level, forgiveness level, and logging level are nonsensical terms that do not exist (to my knowledge) within network security.

Reference:

Official ISC2 Guide - The term "clipping level" is not in the glossary or index of that book. I cannot find it in the text either. However, I'm quite certain that it would be considered part of the CBK, despite its exclusion from the Official Guide.

All in One Third Edition page: 136 - 137

NEW QUESTION 13

- (Topic 1)

Controls to keep password sniffing attacks from compromising computer systems include which of the following?

- A. static and recurring passwords.
- B. encryption and recurring passwords.
- C. one-time passwords and encryption.
- D. static and one-time passwords.

Answer: C

Explanation:

To minimize the chance of passwords being captured one-time passwords would prevent a password sniffing attack because once used it is no longer valid.

Encryption will also minimize these types of attacks.

The following answers are correct:

static and recurring passwords. This is incorrect because if there is no encryption then someone password sniffing would be able to capture the password much easier if it never changed.

encryption and recurring passwords. This is incorrect because while encryption helps, recurring passwords do nothing to minimize the risk of passwords being captured.

static and one-time passwords. This is incorrect because while one-time passwords will prevent these types of attacks, static passwords do nothing to minimize the risk of passwords being captured.

NEW QUESTION 14

- (Topic 1)

Which of the following is NOT a type of motion detector?

- A. Photoelectric sensor
- B. Passive infrared sensors
- C. Microwave Sensor.
- D. Ultrasonic Sensor.

Answer: A

Explanation:

A photoelectric sensor does not "directly" sense motion there is a narrow beam that won't set off the sensor unless the beam is broken. Photoelectric sensors, along with dry contact switches, are a type of perimeter intrusion detector.

All of the other answers are valid types of motion detectors types.

The content below on the different types of sensors is from Wikipedia: Indoor Sensors

These types of sensors are designed for indoor use. Outdoor use would not be advised due to false alarm vulnerability and weather durability. Passive infrared detectors



C:\Users\MCS\Desktop\1.jpg Passive Infrared Sensor

The passive infrared detector (PIR) is one of the most common detectors found in household and small business environments because it offers affordable and reliable functionality. The term passive means the detector is able to function without the need to generate and radiate its own energy (unlike ultrasonic and microwave volumetric intrusion detectors that are "active" in operation). PIRs are able to distinguish if an infrared emitting object is present by first learning the ambient temperature of the monitored space and then detecting a change in the temperature caused by the presence of an object. Using the principle of differentiation, which is a check of presence or nonpresence, PIRs verify if an intruder or object is actually there. Creating individual zones of detection where each zone comprises one or more layers can achieve differentiation. Between the zones there are areas of no sensitivity (dead zones) that are used by the sensor for comparison.

Ultrasonic detectors

Using frequencies between 15 kHz and 75 kHz, these active detectors transmit ultrasonic sound waves that are inaudible to humans. The Doppler shift principle is the underlying method of operation, in which a change in frequency is detected due to object motion. This is caused when a moving object changes the frequency of sound waves around it. Two conditions must occur to successfully detect a Doppler shift event:

There must be motion of an object either towards or away from the receiver.

The motion of the object must cause a change in the ultrasonic frequency to the receiver relative to the transmitting frequency.

The ultrasonic detector operates by the transmitter emitting an ultrasonic signal into the area to be protected. The sound waves are reflected by solid objects (such as the surrounding floor, walls and ceiling) and then detected by the receiver. Because ultrasonic waves are transmitted through air, then hard-surfaced objects tend to reflect most of the ultrasonic energy, while soft surfaces tend to absorb most energy.

When the surfaces are stationary, the frequency of the waves detected by the receiver will be equal to the transmitted frequency. However, a change in frequency will occur as a result of the Doppler principle, when a person or object is moving towards or away from the detector. Such an event initiates an alarm signal. This technology is considered obsolete by many alarm professionals, and is not actively installed.

Microwave detectors

This device emits microwaves from a transmitter and detects any reflected microwaves or reduction in beam intensity using a receiver. The transmitter and receiver are usually combined inside a single housing (monostatic) for indoor applications, and separate housings (bistatic) for outdoor applications. To reduce false alarms this type of detector is usually combined with a passive infrared detector or "Dualtec" alarm.

Microwave detectors respond to a Doppler shift in the frequency of the reflected energy, by a phase shift, or by a sudden reduction of the level of received energy. Any of these effects may indicate motion of an intruder.

Photo-electric beams

Photoelectric beam systems detect the presence of an intruder by transmitting visible or infrared light beams across an area, where these beams may be obstructed. To improve the detection surface area, the beams are often employed in stacks of two or more. However, if an intruder is aware of the technology's presence, it can be avoided. The technology can be an effective long-range detection system, if installed in stacks of three or more where the transmitters and receivers are staggered to create a fence-like barrier. Systems are available for both internal and external applications. To prevent a clandestine attack using a secondary light source being used to hold the detector in a 'sealed' condition whilst an intruder passes through, most systems use and detect a modulated light source.

Glass break detectors

The glass break detector may be used for internal perimeter building protection. When glass breaks it generates sound in a wide band of frequencies. These can range from infrasonic, which is below 20 hertz (Hz) and can not be heard by the human ear, through the audio band from 20 Hz to 20 kHz which humans can hear, right up to ultrasonic, which is above 20 kHz and again cannot be heard. Glass break acoustic detectors are mounted in close proximity to the glass panes and listen for sound frequencies associated with glass breaking. Seismic glass break detectors are different in that they are installed on the glass pane. When glass breaks it produces specific shock frequencies which travel through the glass and often through the window frame and the surrounding walls and ceiling. Typically, the most intense frequencies generated are between 3 and 5 kHz, depending on the type of glass and the presence of a plastic interlayer. Seismic glass break detectors "feel" these shock frequencies and in turn generate an alarm condition.

The more primitive detection method involves gluing a thin strip of conducting foil on the inside of the glass and putting low-power electrical current through it.

Breaking the glass is practically guaranteed to tear the foil and break the circuit.

Smoke, heat, and carbon monoxide detectors



C:\Users\MCS\Desktop\1.jpg Heat Detection System

Most systems may also be equipped with smoke, heat, and/or carbon monoxide detectors. These are also known as 24 hour zones (which are on at all times). Smoke detectors and heat detectors protect from the risk of fire and carbon monoxide detectors protect from the risk of carbon monoxide. Although an intruder alarm panel may also have these detectors connected, it may not meet all the local fire code requirements of a fire alarm system.

Other types of volumetric sensors could be:

Active Infrared

Passive Infrared/Microwave combined Radar

Acoustical Sensor/Audio Vibration Sensor (seismic) Air Turbulence

NEW QUESTION 15

- (Topic 1)

Which of the following is NOT a system-sensing wireless proximity card?

- A. magnetically striped card
- B. passive device
- C. field-powered device
- D. transponder

Answer: A

Explanation:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, page 342.

NEW QUESTION 19

- (Topic 1)

Which integrity model defines a constrained data item, an integrity verification procedure and a transformation procedure?

- A. The Take-Grant model
- B. The Biba integrity model
- C. The Clark Wilson integrity model
- D. The Bell-LaPadula integrity model

Answer: C

Explanation:

The Clark Wilson integrity model addresses the three following integrity goals: 1) data is protected from modification by unauthorized users; 2) data is protected from unauthorized modification by authorized users; and 3) data is internally and externally consistent. It also defines a Constrained Data Item (CDI), an Integrity Verification Procedure (IVP), a Transformation Procedure (TP) and an Unconstrained Data item. The Bell-LaPadula and Take-Grant models are not integrity models.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architecture and Models (page 205).

NEW QUESTION 24

- (Topic 1)

Which one of the following authentication mechanisms creates a problem for mobile users?

- A. Mechanisms based on IP addresses
- B. Mechanism with reusable passwords
- C. one-time password mechanism.
- D. challenge response mechanism.

Answer: A

Explanation:

Anything based on a fixed IP address would be a problem for mobile users because their location and its associated IP address can change from one time to the next. Many providers will assign a new IP every time the device would be restarted. For example an insurance adjuster using a laptop to file claims online. He goes to a different client each time and the address changes every time he connects to the ISP.

NOTE FROM CLEMENT:

The term MOBILE in this case is synonymous with Road Warriors where a user is constantly traveling and changing location. With smartphone today that may not be an issue but it would be an issue for laptops or WIFI tablets. Within a carrier network the IP will tend to be the same and would change rarely. So this question is more applicable to devices that are not cellular devices but in some cases this issue could affect cellular devices as well.

The following answers are incorrect:

mechanism with reusable password. This is incorrect because reusable password mechanism would not present a problem for mobile users. They are the least

secure and change only at specific interval.
one-time password mechanism. This is incorrect because a one-time password mechanism would not present a problem for mobile users. Many are based on a clock and not on the IP address of the user.
challenge response mechanism. This is incorrect because challenge response mechanism would not present a problem for mobile users.

NEW QUESTION 28

- (Topic 1)

Logical or technical controls involve the restriction of access to systems and the protection of information. Which of the following statements pertaining to these types of controls is correct?

- A. Examples of these types of controls include policies and procedures, security awareness training, background checks, work habit checks but do not include a review of vacation history, and also do not include increased supervision.
- B. Examples of these types of controls do not include encryption, smart cards, access lists, and transmission protocols.
- C. Examples of these types of controls are encryption, smart cards, access lists, and transmission protocols.
- D. Examples of these types of controls include policies and procedures, security awareness training, background checks, work habit checks, a review of vacation history, and increased supervision.

Answer: C

Explanation:

Logical or technical controls involve the restriction of access to systems and the protection of information. Examples of these types of controls are encryption, smart cards, access lists, and transmission protocols.
Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 32

- (Topic 1)

Which of the following can best eliminate dial-up access through a Remote Access Server as a hacking vector?

- A. Using a TACACS+ server.
- B. Installing the Remote Access Server outside the firewall and forcing legitimate users to authenticate to the firewall.
- C. Setting modem ring count to at least 5.
- D. Only attaching modems to non-networked hosts.

Answer: B

Explanation:

Containing the dial-up problem is conceptually easy: by installing the Remote Access Server outside the firewall and forcing legitimate users to authenticate to the firewall, any access to internal resources through the RAS can be filtered as would any other connection coming from the Internet.
The use of a TACACS+ Server by itself cannot eliminate hacking.
Setting a modem ring count to 5 may help in defeating war-dialing hackers who look for modem by dialing long series of numbers.
Attaching modems only to non-networked hosts is not practical and would not prevent these hosts from being hacked.
Source: STREBE, Matthew and PERKINS, Charles, Firewalls 24seven, Sybex 2000, Chapter 2: Hackers.

NEW QUESTION 33

- (Topic 1)

Which access control model provides upper and lower bounds of access capabilities for a subject?

- A. Role-based access control
- B. Lattice-based access control
- C. Biba access control
- D. Content-dependent access control

Answer: B

Explanation:

In the lattice model, users are assigned security clearances and the data is classified. Access decisions are made based on the clearance of the user and the classification of the object. Lattice-based access control is an essential ingredient of formal security models such as Bell-LaPadula, Biba, Chinese Wall, etc.
The bounds concept comes from the formal definition of a lattice as a "partially ordered set for which every pair of elements has a greatest lower bound and a least upper bound." To see the application, consider a file classified as "SECRET" and a user Joe with a security clearance of "TOP SECRET." Under Bell-LaPadula, Joe's "least upper bound" access to the file is "READ" and his least lower bound is "NO WRITE" (star property).
Role-based access control is incorrect. Under RBAC, the access is controlled by the permissions assigned to a role and the specific role assigned to the user.
Biba access control is incorrect. The Biba integrity model is based on a lattice structure but the context of the question disqualifies it as the best answer.
Content-dependent access control is incorrect. In content dependent access control, the actual content of the information determines access as enforced by the arbiter.
References:
CBK, pp. 324-325.
AIO3, pp. 291-293. See particularly Figure 5-19 on p. 293 for an illustration of bounds in action.

NEW QUESTION 35

- (Topic 1)

Which of the following protocol was used by the INITIAL version of the Terminal Access Controller Access Control System TACACS for communication between clients and servers?

- A. TCP
- B. SSL
- C. UDP
- D. SSH

Answer: C

Explanation:

The original TACACS, developed in the early ARPANet days, had very limited functionality and used the UDP transport. In the early 1990s, the protocol was extended to include additional functionality and the transport changed to TCP.

TACACS is defined in RFC 1492, and uses (either TCP or UDP) port 49 by default. TACACS allows a client to accept a username and password and send a query to a TACACS authentication server, sometimes called a TACACS daemon or simply TACACSD. TACACSD uses TCP and usually runs on port 49. It would determine whether to accept or deny the authentication request and send a response back.

TACACS+

TACACS+ and RADIUS have generally replaced TACACS and XTACACS in more recently built or updated networks. TACACS+ is an entirely new protocol and is not compatible with TACACS or XTACACS. TACACS+ uses the Transmission Control Protocol (TCP) and RADIUS uses the User Datagram Protocol (UDP).

Since TCP is connection oriented

protocol, TACACS+ does not have to implement transmission control. RADIUS, however, does have to detect and correct transmission errors like packet loss, timeout etc. since it rides on UDP which is connectionless.

RADIUS encrypts only the users' password as it travels from the RADIUS client to RADIUS server. All other information such as the username, authorization, accounting are transmitted in clear text. Therefore it is vulnerable to different types of attacks. TACACS+ encrypts all the information mentioned above and therefore does not have the vulnerabilities present in the RADIUS protocol.

RADIUS and TACACS + are client/ server protocols, which means the server portion cannot send unsolicited commands to the client portion. The server portion can only speak when spoken to. Diameter is a peer-based protocol that allows either end to initiate communication. This functionality allows the Diameter server to send a message to the access server to request the user to provide another authentication credential if she is attempting to access a secure resource.

Reference(s) used for this question: <http://en.wikipedia.org/wiki/TACACS>

and

Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 239). McGraw- Hill. Kindle Edition.

NEW QUESTION 37

- (Topic 1)

Which of the following is most relevant to determining the maximum effective cost of access control?

- A. the value of information that is protected
- B. management's perceptions regarding data importance
- C. budget planning related to base versus incremental spending.
- D. the cost to replace lost data

Answer: A

Explanation:

The cost of access control must be commensurate with the value of the information that is being protected.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 49.

NEW QUESTION 40

- (Topic 1)

Which access control type has a central authority that determine to what objects the subjects have access to and it is based on role or on the organizational security policy?

- A. Mandatory Access Control
- B. Discretionary Access Control
- C. Non-Discretionary Access Control
- D. Rule-based Access control

Answer: C

Explanation:

Non Discretionary Access Control include Role Based Access Control (RBAC) and Rule Based Access Control (RBAC or RuBAC). RABC being a subset of NDAC, it was easy to eliminate RBAC as it was covered under NDAC already.

Some people think that RBAC is synonymous with NDAC but RuBAC would also fall into this category.

Discretionary Access control is for environment with very low level of security. There is no control on the dissemination of the information. A user who has access to a file can copy the file or further share it with other users.

Rule Based Access Control is when you have ONE set of rules applied uniformly to all users. A good example would be a firewall at the edge of your network. A single rule based is applied against any packets received from the internet.

Mandatory Access Control is a very rigid type of access control. The subject must dominate the object and the subject must have a Need To Know to access the information. Objects have labels that indicate the sensitivity (classification) and there is also categories to enforce the Need To Know (NTK).

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 41

- (Topic 1)

Single Sign-on (SSO) is characterized by which of the following advantages?

- A. Convenience
- B. Convenience and centralized administration
- C. Convenience and centralized data administration
- D. Convenience and centralized network administration

Answer: B

Explanation:

Convenience -Using single sign-on users have to type their passwords only once when they first log in to access all the network resources; and Centralized Administration as some single sign-on systems are built around a unified server administration system. This allows a single administrator to add and delete accounts across the entire network from one user interface.

The following answers are incorrect:

Convenience - alone this is not the correct answer.

Centralized Data or Network Administration - these are thrown in to mislead the student. Neither are a benefit to SSO, as these specifically should not be allowed

with just an SSO.

References: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, page 35.
TIPTON, Harold F. & HENRY, Kevin, Official (ISC)2 Guide to the CISSP CBK, 2007, page 180.

NEW QUESTION 44

- (Topic 1)

Which of the following is used by RADIUS for communication between clients and servers?

- A. TCP
- B. SSL
- C. UDP
- D. SSH

Answer: C

Explanation:

Source: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 2, 2001, CRC Press, NY, Page 33.

NEW QUESTION 48

- (Topic 1)

Which access control model enables the OWNER of the resource to specify what subjects can access specific resources based on their identity?

- A. Discretionary Access Control
- B. Mandatory Access Control
- C. Sensitive Access Control
- D. Role-based Access Control

Answer: A

Explanation:

Data owners decide who has access to resources based only on the identity of the person accessing the resource.

The following answers are incorrect :

Mandatory Access Control : users and data owners do not have as much freedom to determine who can access files. The operating system makes the final decision and can override the users' wishes and access decisions are based on security labels.

Sensitive Access Control : There is no such access control in the context of the above question.

Role-based Access Control : uses a centrally administered set of controls to determine how subjects and objects interact , also called as non discretionary access control.

In a mandatory access control (MAC) model, users and data owners do not have as much freedom to determine who can access files. The operating system makes the final decision and can override the users' wishes. This model is much more structured and strict and is based on a security label system. Users are given a security clearance (secret, top secret, confidential, and so on), and data is classified in the same way. The clearance and classification data is stored in the security labels, which are bound to the specific subjects and objects. When the system makes a decision about fulfilling a request to access an object, it is based on the clearance of the subject, the classification of the object, and the security policy of the system. The rules for how subjects access objects are made by the security officer, configured by the administrator, enforced by the operating system, and supported by security technologies

Reference : Shon Harris , AIO v3 , Chapter-4 : Access Control , Page : 163-165

NEW QUESTION 50

- (Topic 1)

What is called a password that is the same for each log-on session?

- A. "one-time password"
- B. "two-time password"
- C. static password
- D. dynamic password

Answer: C

Explanation:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

NEW QUESTION 53

- (Topic 1)

Which security model is based on the military classification of data and people with clearances?

- A. Brewer-Nash model
- B. Clark-Wilson model
- C. Bell-LaPadula model
- D. Biba model

Answer: C

Explanation:

The Bell-LaPadula model is a confidentiality model for information security based on the military classification of data, on people with clearances and data with a classification or sensitivity model. The Biba, Clark-Wilson and Brewer-Nash models are concerned with integrity.

Source: HARE, Chris, Security Architecture and Models, Area 6 CISSP Open Study Guide, January 2002.

NEW QUESTION 56

- (Topic 1)

Which of the following is the most reliable authentication method for remote access?

- A. Variable callback system
- B. Synchronous token
- C. Fixed callback system
- D. Combination of callback and caller ID

Answer: B

Explanation:

A Synchronous token generates a one-time password that is only valid for a short period of time. Once the password is used it is no longer valid, and it expires if not entered in the acceptable time frame.

The following answers are incorrect:

Variable callback system. Although variable callback systems are more flexible than fixed callback systems, the system assumes the identity of the individual unless two-factor authentication is also implemented. By itself, this method might allow an attacker access as a trusted user.

Fixed callback system. Authentication provides assurance that someone or something is who or what he/it is supposed to be. Callback systems authenticate a person, but anyone can pretend to be that person. They are tied to a specific place and phone number, which can be spoofed by implementing call-forwarding.

Combination of callback and Caller ID. The caller ID and callback functionality provides greater confidence and auditability of the caller's identity. By disconnecting and calling back only authorized phone numbers, the system has a greater confidence in the location of the call. However, unless combined with strong authentication, any individual at the location could obtain access.

The following reference(s) were/was used to create this question: Shon Harris AIO v3 p. 140, 548

ISC2 OIG 2007 p. 152-153, 126-127

NEW QUESTION 60

- (Topic 1)

Which of the following would constitute the best example of a password to use for access to a system by a network administrator?

- A. holiday
- B. Christmas12
- C. Jenny
- D. GyN19Za!

Answer: D

Explanation:

GyN19Za! would be the the best answer because it contains a mixture of upper and lower case characters, alphabetic and numeric characters, and a special character making it less vulnerable to password attacks.

All of the other answers are incorrect because they are vulnerable to brute force or dictionary attacks. Passwords should not be common words or names. The addition of a number to the end of a common word only marginally strengthens it because a common password attack would also check combinations of words: Christmas23 Christmas123 etc...

NEW QUESTION 65

- (Topic 1)

Which of the following is not a physical control for physical security?

- A. lighting
- B. fences
- C. training
- D. facility construction materials

Answer: C

Explanation:

Some physical controls include fences, lights, locks, and facility construction materials. Some administrative controls include facility selection and construction, facility management, personnel controls, training, and emergency response and procedures.

From: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 3rd. Ed., Chapter 6, page 403.

NEW QUESTION 66

- (Topic 1)

Pin, Password, Passphrases, Tokens, smart cards, and biometric devices are all items that can be used for Authentication. When one of these item listed above in conjunction with a second factor to validate authentication, it provides robust authentication of the individual by practicing which of the following?

- A. Multi-party authentication
- B. Two-factor authentication
- C. Mandatory authentication
- D. Discretionary authentication

Answer: B

Explanation:

Once an identity is established it must be authenticated. There exist numerous technologies and implementation of authentication methods however they almost all fall under three major areas.

There are three fundamental types of authentication: Authentication by knowledge—something a person knows

Authentication by possession—something a person has

Authentication by characteristic—something a person is Logical controls related to these types are called “factors.”

Something you know can be a password or PIN, something you have can be a token fob or smart card, and something you are is usually some form of biometrics.

Single-factor authentication is the employment of one of these factors, two-factor authentication is using two of the three factors, and three-factor authentication is the combination of all three factors.

The general term for the use of more than one factor during authentication is multifactor authentication or strong authentication.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 2367-2379). Auerbach Publications. Kindle Edition.

NEW QUESTION 69

- (Topic 1)

The end result of implementing the principle of least privilege means which of the following?

- A. Users would get access to only the info for which they have a need to know
- B. Users can access all systems.
- C. Users get new privileges added when they change positions.
- D. Authorization creep.

Answer: A

Explanation:

The principle of least privilege refers to allowing users to have only the access they need and not anything more. Thus, certain users may have no need to access any of the files on specific systems.

The following answers are incorrect:

Users can access all systems. Although the principle of least privilege limits what access and systems users have authorization to, not all users would have a need to know to access all of the systems. The best answer is still Users would get access to only the info for which they have a need to know as some of the users may not have a need to access a system.

Users get new privileges when they change positions. Although true that a user may indeed require new privileges, this is not a given fact and in actuality a user may require less privileges for a new position. The principle of least privilege would require that the rights required for the position be closely evaluated and where possible rights revoked.

Authorization creep. Authorization creep occurs when users are given additional rights with new positions and responsibilities. The principle of least privilege should actually prevent authorization creep.

The following reference(s) were/was used to create this question: ISC2 OIG 2007 p.101,123

Shon Harris AIO v3 p148, 902-903

NEW QUESTION 74

- (Topic 1)

RADIUS incorporates which of the following services?

- A. Authentication server and PIN codes.
- B. Authentication of clients and static passwords generation.
- C. Authentication of clients and dynamic passwords generation.
- D. Authentication server as well as support for Static and Dynamic passwords.

Answer: D

Explanation:

A Network Access Server (NAS) operates as a client of RADIUS. The client is responsible for passing user information to designated RADIUS servers, and then acting on the response which is returned.

RADIUS servers are responsible for receiving user connection requests, authenticating the user, and then returning all configuration information necessary for the client to deliver service to the user.

RADIUS authentication is based on provisions of simple username/password credentials.

These credentials are encrypted

by the client using a shared secret between the client and the RADIUS server. OIG 2007, Page 513

RADIUS incorporates an authentication server and can make use of both dynamic and static passwords.

Since it uses the PAP and CHAP protocols, it also includes static passwords.

RADIUS is an Internet protocol. RADIUS carries authentication, authorization, and configuration information between a Network Access Server and a shared Authentication Server. RADIUS features and functions are described primarily in the IETF (International Engineering Task Force) document RFC2138.

The term "RADIUS" is an acronym which stands for Remote Authentication Dial In User Service.

The main advantage to using a RADIUS approach to authentication is that it can provide a stronger form of authentication. RADIUS is capable of using a strong, two-factor form of authentication, in which users need to possess both a user ID and a hardware or software token to gain access.

Token-based schemes use dynamic passwords. Every minute or so, the token generates a unique 4-, 6- or 8-digit access number that is synchronized with the security server. To gain entry into the system, the user must generate both this one-time number and provide his or her user ID and password.

Although protocols such as RADIUS cannot protect against theft of an authenticated session via some realtime attacks, such as wiretapping, using unique, unpredictable authentication requests can protect against a wide range of active attacks.

RADIUS: Key Features and Benefits Features Benefits

RADIUS supports dynamic passwords and challenge/response passwords. Improved system security due to the fact that passwords are not static.

It is much more difficult for a bogus host to spoof users into giving up their passwords or password-generation algorithms.

RADIUS allows the user to have a single user ID and password for all computers in a network.

Improved usability due to the fact that the user has to remember only one login combination.

RADIUS is able to:

Prevent RADIUS users from logging in via login (or ftp). Require them to log in via login (or ftp)

Require them to login to a specific network access server (NAS); Control access by time of day.

Provides very granular control over the types of logins allowed, on a per-user basis. The time-out interval for failing over from an unresponsive primary RADIUS server to a

backup RADIUS server is site-configurable.

RADIUS gives System Administrator more flexibility in managing which users can login from which hosts or devices.

Stratus Technology Product Brief <http://www.stratus.com/products/vos/openvos/radius.htm>

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Pages 43, 44.

Also check: MILLER, Lawrence & GREGORY, Peter, CISSP for Dummies, 2002, Wiley Publishing, Inc., pages 45-46.

NEW QUESTION 75

- (Topic 1)

Which of the following statements relating to the Bell-LaPadula security model is FALSE (assuming the Strong Star property is not being used) ?

- A. A subject is not allowed to read up.
- B. The property restriction can be escaped by temporarily downgrading a high level subject.
- C. A subject is not allowed to read down.

D. It is restricted to confidentiality.

Answer: C

Explanation:

It is not a property of Bell LaPadula model. The other answers are incorrect because:
A subject is not allowed to read up is a property of the 'simple security rule' of Bell LaPadula model.
The property restriction can be escaped by temporarily downgrading a high level subject can be escaped by temporarily downgrading a high level subject or by identifying a set of trusted objects which are permitted to violate the property as long as it is not in the middle of an operation.
It is restricted to confidentiality as it is a state machine model that enforces the confidentiality aspects of access control.
Reference: Shon Harris AIO v3 , Chapter-5 : Security Models and Architecture , Page:279-282

NEW QUESTION 77

- (Topic 1)

Guards are appropriate whenever the function required by the security program involves which of the following?

- A. The use of discriminating judgment
- B. The use of physical force
- C. The operation of access control devices
- D. The need to detect unauthorized access

Answer: A

Explanation:

The Answer The use of discriminating judgment, a guard can make the determinations that hardware or other automated security devices cannot make due to its ability to adjust to rapidly changing conditions, to learn and alter recognizable patterns, and to respond to various conditions in the environment. Guards are better at making value decisions at times of incidents. They are appropriate whenever immediate, discriminating judgment is required by the security entity.
The following answers are incorrect:
The use of physical force This is not the best answer. A guard provides discriminating judgment, and the ability to discern the need for physical force.
The operation of access control devices A guard is often uninvolved in the operations of an automated access control device such as a biometric reader, a smart lock, mantrap, etc. The need to detect unauthorized access The primary function of a guard is not to detect unauthorized access, but to prevent unauthorized physical access attempts and may deter social engineering attempts.
The following reference(s) were/was used to create this question:
Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 10: Physical security (page 339).
Source: ISC2 Official Guide to the CBK page 288-289.

NEW QUESTION 81

- (Topic 1)

In regards to information classification what is the main responsibility of information (data) owner?

- A. determining the data sensitivity or classification level
- B. running regular data backups
- C. audit the data users
- D. periodically check the validity and accuracy of the data

Answer: A

Explanation:

Making the determination to decide what level of classification the information requires is the main responsibility of the data owner.
The data owner within classification is a person from Management who has been entrusted with a data set that belong to the company. It could be for example the Chief Financial Officer (CFO) who has been entrusted with all financial date or it could be the Human Resource Director who has been entrusted with all Human Resource data. The information owner will decide what classification will be applied to the data based on Confidentiality, Integrity, Availability, Criticality, and Sensitivity of the data.
The Custodian is the technical person who will implement the proper classification on objects in accordance with the Data Owner. The custodian DOES NOT decide what classification to apply, it is the Data Owner who will dictate to the Custodian what is the classification to apply.
NOTE:
The term Data Owner is also used within Discretionary Access Control (DAC). Within DAC it means the person who has created an object. For example, if I create a file on my system then I am the owner of the file and I can decide who else could get access to the file. It is left to my discretion. Within DAC access is granted based solely on the Identity of the subject, this is why sometimes DAC is referred to as Identity Based Access Control.
The other choices were not the best answer
Running regular backups is the responsibility of custodian. Audit the data users is the responsibility of the auditors
Periodically check the validity and accuracy of the data is not one of the data owner responsibility
Reference(s) used for this question:
KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Page 14, Chapter 1: Security Management Practices.

NEW QUESTION 84

- (Topic 1)

What is called the verification that the user's claimed identity is valid and is usually implemented through a user password at log-on time?

- A. Authentication
- B. Identification
- C. Integrity
- D. Confidentiality

Answer: A

Explanation:

Authentication is verification that the user's claimed identity is valid and is usually implemented through a user password at log-on time.
Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

NEW QUESTION 88

- (Topic 1)

When submitting a passphrase for authentication, the passphrase is converted into ...

- A. a virtual password by the system
- B. a new passphrase by the system
- C. a new passphrase by the encryption technology
- D. a real password by the system which can be used forever

Answer: A

Explanation:

Passwords can be compromised and must be protected. In the ideal case, a password should only be used once. The changing of passwords can also fall between these two extremes.

Passwords can be required to change monthly, quarterly, or at other intervals, depending on the criticality of the information needing protection and the password's frequency of use.

Obviously, the more times a password is used, the more chance there is of it being compromised.

It is recommended to use a passphrase instead of a password. A passphrase is more resistant to attacks. The passphrase is converted into a virtual password by the system. Often time the passphrase will exceed the maximum length supported by the system and it must be truncated into a Virtual Password.

Reference(s) used for this question: <http://www.itl.nist.gov/fipspubs/fip112.htm>

and

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36 & 37.

NEW QUESTION 90

- (Topic 1)

Which of the following is not a security goal for remote access?

- A. Reliable authentication of users and systems
- B. Protection of confidential data
- C. Easy to manage access control to systems and network resources
- D. Automated login for remote users

Answer: D

Explanation:

An automated login function for remote users would imply a weak authentication, thus certainly not a security goal.

Source: TIPTON, Harold F. & KRAUSE, Micki, Information Security Management Handbook, 4th edition, volume 2, 2001, CRC Press, Chapter 5: An Introduction to Secure Remote Access (page 100).

NEW QUESTION 94

- (Topic 1)

What is called the use of technologies such as fingerprint, retina, and iris scans to authenticate the individuals requesting access to resources?

- A. Micrometrics
- B. Macrometrics
- C. Biometrics
- D. MicroBiometrics

Answer: C

Explanation:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 35.

NEW QUESTION 96

- (Topic 1)

In biometric identification systems, at the beginning, it was soon apparent that truly positive identification could only be based on physical attributes of a person. This raised the necessity of answering 2 questions :

- A. what was the sex of a person and his age
- B. what part of body to be used and how to accomplish identification that is viable
- C. what was the age of a person and his income level
- D. what was the tone of the voice of a person and his habits

Answer: B

Explanation:

Today implementation of fast, accurate reliable and user-acceptable biometric identification systems is already taking place. Unique physical attributes or behavior of a person are used for that purpose.

From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Page 7.

NEW QUESTION 97

- (Topic 1)

Which of the following attacks could capture network user passwords?

- A. Data diddling

- B. Sniffing
- C. IP Spoofing
- D. Smurfing

Answer: B

Explanation:

A network sniffer captures a copy every packet that traverses the network segment the sniffer is connect to.

Sniffers are typically devices that can collect information from a communication medium, such as a network. These devices can range from specialized equipment to basic workstations with customized software.

A sniffer can collect information about most, if not all, attributes of the communication. The most common method of sniffing is to plug a sniffer into an existing network device like a hub or switch. A hub (which is designed to relay all traffic passing through it to all of its ports) will automatically begin sending all the traffic on that network segment to the sniffing device. On the other hand, a switch (which is designed to limit what traffic gets sent to which port) will have to be specially configured to send all traffic to the port where the sniffer is plugged in.

Another method for sniffing is to use a network tap—a device that literally splits a network transmission into two identical streams; one going to the original network destination and the other going to the sniffing device. Each of these methods has its advantages and disadvantages, including cost, feasibility, and the desire to maintain the secrecy of the sniffing activity.

The packets captured by sniffer are decoded and then displayed by the sniffer. Therefore, if the username/password are contained in a packet or packets traversing the segment the sniffer is connected to, it will capture and display that information (and any other information on that segment it can see).

Of course, if the information is encrypted via a VPN, SSL, TLS, or similar technology, the information is still captured and displayed, but it is in an unreadable format.

The following answers are incorrect:

Data diddling involves changing data before, as it is entered into a computer, or after it is extracted.

Spoofing is forging an address and inserting it into a packet to disguise the origin of the communication - or causing a system to respond to the wrong address.

Smurfing would refer to the smurf attack, where an attacker sends spoofed packets to the broadcast address on a gateway in order to cause a denial of service.

The following reference(s) were/was used to create this question: CISA Review manual 2014 Page number 321

Official ISC2 Guide to the CISSP 3rd edition Page Number 153

NEW QUESTION 100

- (Topic 1)

How would nonrepudiation be best classified as?

- A. A preventive control
- B. A logical control
- C. A corrective control
- D. A compensating control

Answer: A

Explanation:

Systems accountability depends on the ability to ensure that senders cannot deny sending information and that receivers cannot deny receiving it. Because the mechanisms implemented in nonrepudiation prevent the ability to successfully repudiate an action, it can be considered as a preventive control.

Source: STONEBURNER, Gary, NIST Special Publication 800-33: Underlying Technical Models for Information Technology Security, National Institute of Standards and Technology, December 2001, page 7.

NEW QUESTION 102

- (Topic 1)

Which of the following floors would be most appropriate to locate information processing facilities in a 6-stories building?

- A. Basement
- B. Ground floor
- C. Third floor
- D. Sixth floor

Answer: C

Explanation:

Your data center should be located in the middle of the facility or the core of a building to provide protection from natural disasters or bombs and provide easier access to emergency crewmembers if necessary. By being at the core of the facility the external wall would act as a secondary layer of protection as well.

Information processing facilities should not be located on the top floors of buildings in case of a fire or flooding coming from the roof. Many crimes and theft have also been conducted by simply cutting a large hole on the roof.

They should not be in the basement because of flooding where water has a natural tendency to flow down :-). Even a little amount of water would affect your operation

considering the quantity of electrical cabling sitting directly on the cement floor under your raise floor.

The data center should not be located on the first floor due to the presence of the main entrance where people are coming in and out. You have a lot of high traffic areas such as the elevators, the loading docks, cafeteria, coffee shop, etc.. Really a bad location for a data center.

So it was easy to come up with the answer by using the process of elimination where the top, the bottom, and the basement are all bad choices. That left you with only one possible answer which is the third floor.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, 5th Edition, Page 425.

NEW QUESTION 106

- (Topic 1)

Access control is the collection of mechanisms that permits managers of a system to exercise a directing or restraining influence over the behavior, use, and content of a system. It does not permit management to:

- A. specify what users can do
- B. specify which resources they can access
- C. specify how to restrain hackers
- D. specify what operations they can perform on a system.

Answer: C

Explanation:

Access control is the collection of mechanisms that permits managers of a system to exercise a directing or restraining influence over the behavior, use, and content of a system. It permits management to specify what users can do, which resources they can access, and what operations they can perform on a system. Specifying HOW to restrain hackers is not directly linked to access control.

Source: DUPUIS, Clement, Access Control Systems and Methodology, Version 1, May 2002, CISSP Open Study Group Study Guide for Domain 1, Page 12.

NEW QUESTION 108

- (Topic 1)

What is the primary role of smartcards in a PKI?

- A. Transparent renewal of user keys
- B. Easy distribution of the certificates between the users
- C. Fast hardware encryption of the raw data
- D. Tamper resistant, mobile storage and application of private keys of the users

Answer: D

Explanation:

Reference: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, 2001, McGraw- Hill/Osborne, page 139;

SNYDER, J., What is a SMART CARD?.

Wikipedia has a nice definition at: http://en.wikipedia.org/wiki/Tamper_resistance_Security

Tamper-resistant microprocessors are used to store and process private or sensitive information, such as private keys or electronic money credit. To prevent an attacker from

retrieving or modifying the information, the chips are designed so that the information is not accessible through external means and can be accessed only by the embedded software, which should contain the appropriate security measures.

Examples of tamper-resistant chips include all secure cryptoprocessors, such as the IBM 4758 and chips used in smartcards, as well as the Clipper chip.

It has been argued that it is very difficult to make simple electronic devices secure against tampering, because numerous attacks are possible, including:

physical attack of various forms (microprobing, drills, files, solvents, etc.) freezing the device

applying out-of-spec voltages or power surges applying unusual clock signals

inducing software errors using radiation

measuring the precise time and power requirements of certain operations (see power analysis)

Tamper-resistant chips may be designed to zeroise their sensitive data (especially cryptographic keys) if they detect penetration of their security encapsulation or out-of-specification environmental parameters. A chip may even be rated for "cold zeroisation", the ability to zeroise itself even after its power supply has been crippled.

Nevertheless, the fact that an attacker may have the device in his possession for as long as he likes, and perhaps obtain numerous other samples for testing and practice, means that it is practically impossible to totally eliminate tampering by a sufficiently motivated opponent. Because of this, one of the most important elements in protecting a system is overall system design. In particular, tamper-resistant systems should "fail gracefully" by ensuring that compromise of one device does not compromise the entire system. In this manner, the attacker can be practically restricted to attacks that cost less than the expected return from compromising a single device (plus, perhaps, a little more for kudos). Since the most sophisticated attacks have been estimated to cost several hundred thousand dollars to carry out, carefully designed systems may be invulnerable in practice.

NEW QUESTION 111

- (Topic 1)

Who developed one of the first mathematical models of a multilevel-security computer system?

- A. Diffie and Hellman.
- B. Clark and Wilson.
- C. Bell and LaPadula.
- D. Gasser and Lipner.

Answer: C

Explanation:

In 1973 Bell and LaPadula created the first mathematical model of a multi-level security system.

The following answers are incorrect:

Diffie and Hellman. This is incorrect because Diffie and Hellman was involved with cryptography.

Clark and Wilson. This is incorrect because Bell and LaPadula was the first model. The Clark-Wilson model came later, 1987.

Gasser and Lipner. This is incorrect, it is a distractor. Bell and LaPadula was the first model.

NEW QUESTION 113

- (Topic 1)

Which of the following is an example of discretionary access control?

- A. Identity-based access control
- B. Task-based access control
- C. Role-based access control
- D. Rule-based access control

Answer: A

Explanation:

An identity-based access control is an example of discretionary access control that is based on an individual's identity. Identity-based access control (IBAC) is access control based on the identity of the user (typically relayed as a characteristic of the process acting on behalf of that user) where access authorizations to specific objects are assigned based on user identity.

Rule Based Access Control (RuBAC) and Role Based Access Control (RBAC) are examples of non-discretionary access controls.

Rule-based access control is a type of non-discretionary access control because this access is determined by rules and the subject does not decide what those rules will be, the rules are uniformly applied to ALL of the users or subjects.

In general, all access control policies other than DAC are grouped in the category of non-discretionary access control (NDAC). As the name implies, policies in this category have rules that are not established at the discretion of the user. Non-discretionary policies establish controls that cannot be changed by users, but only through administrative action.

Both Role Based Access Control (RBAC) and Rule Based Access Control (RuBAC) fall within Non Discretionary Access Control (NDAC). If it is not DAC or MAC then it is most likely NDAC.

BELOW YOU HAVE A DESCRIPTION OF THE DIFFERENT CATEGORIES:

MAC = Mandatory Access Control

Under a mandatory access control environment, the system or security administrator will define what permissions subjects have on objects. The administrator does not dictate user's access but simply configure the proper level of access as dictated by the Data Owner.

The MAC system will look at the Security Clearance of the subject and compare it with the object sensitivity level or classification level. This is what is called the dominance relationship.

The subject must DOMINATE the object sensitivity level. Which means that the subject must have a security clearance equal or higher than the object he is attempting to access.

MAC also introduce the concept of labels. Every objects will have a label attached to them indicating the classification of the object as well as categories that are used to impose the need to know (NTK) principle. Even thou a user has a security clearance of Secret it does not mean he would be able to access any Secret documents within the system. He would be allowed to access only Secret document for which he has a Need To Know, formal approval, and object where the user belong to one of the categories attached to the object.

If there is no clearance and no labels then IT IS NOT Mandatory Access Control.

Many of the other models can mimic MAC but none of them have labels and a dominance relationship so they are NOT in the MAC category.

DAC = Discretionary Access Control

DAC is also known as: Identity Based access control system.

The owner of an object is define as the person who created the object. As such the owner has the discretion to grant access to other users on the network. Access will be granted based solely on the identity of those users.

Such system is good for low level of security. One of the major problem is the fact that a user who has access to someone's else file can further share the file with other users without the knowledge or permission of the owner of the file. Very quickly this could become the wild wild west as there is no control on the dissimination of the information.

RBAC = Role Based Access Control

RBAC is a form of Non-Discretionary access control.

Role Based access control usually maps directly with the different types of jobs performed by employees within a company.

For example there might be 5 security administrator within your company. Instead of creating each of their profile one by one, you would simply create a role and assign the administrators to the role. Once an administrator has been assigned to a role, he will IMPLICITLY inherit the permissions of that role.

RBAC is great tool for environment where there is a a large rotation of employees on a daily basis such as a very large help desk for example.

RBAC or RuBAC = Rule Based Access Control RuBAC is a form of Non-Discretionary access control.

A good example of a Rule Based access control device would be a Firewall. A single set of rules is imposed to all users attempting to connect through the firewall.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the

Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33. and

NISTIR-7316 at <http://csrc.nist.gov/publications/nistir/7316/NISTIR-7316.pdf> and

http://itlaw.wikia.com/wiki/Identity-based_access_control

NEW QUESTION 116

- (Topic 1)

Which of the following biometric parameters are better suited for authentication use over a long period of time?

- A. Iris pattern
- B. Voice pattern
- C. Signature dynamics
- D. Retina pattern

Answer: A

Explanation:

The iris pattern is considered lifelong. Unique features of the iris are: freckles, rings, rifts, pits, striations, fibers, filaments, furrows, vasculature and coronas. Voice, signature and retina patterns are more likely to change over time, thus are not as suitable for authentication over a long period of time without needing re-enrollment. Source: FERREL, Robert G, Questions and Answers for the CISSP Exam, domain 1 (derived from the Information Security Management Handbook, 4th Ed., by Tipton & Krause).

NEW QUESTION 117

- (Topic 1)

Who first described the DoD multilevel military security policy in abstract, formal terms?

- A. David Bell and Leonard LaPadula
- B. Rivest, Shamir and Adleman
- C. Whitfield Diffie and Martin Hellman
- D. David Clark and David Wilson

Answer: A

Explanation:

It was David Bell and Leonard LaPadula who, in 1973, first described the DoD multilevel military security policy in abstract, formal terms. The Bell-LaPadula is a Mandatory Access Control (MAC) model concerned with confidentiality. Rivest, Shamir and Adleman (RSA) developed the RSA encryption algorithm. Whitfield Diffie and Martin Hellman published the Diffie-Hellman key agreement algorithm in 1976. David Clark and David Wilson developed the Clark-Wilson integrity model, more appropriate for security in commercial activities.

Source: RUSSEL, Deborah & GANGEMI, G.T. Sr., Computer Security Basics, O'Reilly, July 1992 (pages 78,109).

NEW QUESTION 118

- (Topic 1)

Which of the following remote access authentication systems is the most robust?

- A. TACACS+

- B. RADIUS
- C. PAP
- D. TACACS

Answer: A

Explanation:

TACACS+ is a proprietary Cisco enhancement to TACACS and is more robust than RADIUS. PAP is not a remote access authentication system but a remote node security protocol.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 3: Telecommunications and Network Security (page 122).

NEW QUESTION 121

- (Topic 1)

What is called the percentage at which the False Rejection Rate equals the False Acceptance Rate?

- A. False Rejection Rate (FRR) or Type I Error
- B. False Acceptance Rate (FAR) or Type II Error
- C. Crossover Error Rate (CER)
- D. Failure to enroll rate (FTE or FER)

Answer: C

Explanation:

The percentage at which the False Rejection Rate equals the False Acceptance Rate is called the Crossover Error Rate (CER). Another name for the CER is the Equal Error Rate (EER), any of the two terms could be used.

Equal error rate or crossover error rate (EER or CER)

It is the rate at which both accept and reject errors are equal. The EER is a quick way to compare the accuracy of devices with different ROC curves. In general, the device with the lowest EER is most accurate.

The other choices were all wrong answers:

The following are used as performance metrics for biometric systems:

false accept rate or false match rate (FAR or FMR): the probability that the system incorrectly matches the input pattern to a non-matching template in the database. It measures the percent of invalid inputs which are incorrectly accepted. This is when an impostor would be accepted by the system.

False reject rate or false non-match rate (FRR or FNMR): the probability that the system fails to detect a match between the input pattern and a matching template in the database. It measures the percent of valid inputs which are incorrectly rejected. This is when a valid company employee would be rejected by the system.

Failure to enroll rate (FTE or FER): the rate at which attempts to create a template from an input is unsuccessful. This is most commonly caused by low quality inputs.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

and <https://en.wikipedia.org/wiki/Biometrics>

NEW QUESTION 125

- (Topic 1)

In an organization where there are frequent personnel changes, non-discretionary access control using Role Based Access Control (RBAC) is useful because:

- A. people need not use discretion
- B. the access controls are based on the individual's role or title within the organization.
- C. the access controls are not based on the individual's role or title within the organization
- D. the access controls are often based on the individual's role or title within the organization

Answer: B

Explanation:

In an organization where there are frequent personnel changes, non-discretionary access control (also called Role Based Access Control) is useful because the access controls are based on the individual's role or title within the organization. You can easily configure a new employee access by assigning the user to a role that has been predefined. The user will implicitly inherit the permissions of the role by being a member of that role.

These access permissions defined within the role do not need to be changed whenever a new person takes over the role.

Another type of non-discretionary access control model is the Rule Based Access Control (RBAC or RuBAC) where a global set of rule is uniformly applied to all subjects accessing the resources. A good example of RuBAC would be a firewall.

This question is a sneaky one, one of the choice has only one added word to it which is often. Reading questions and their choices very carefully is a must for the real exam. Reading it twice if needed is recommended.

Shon Harris in her book list the following ways of managing RBAC: Role-based access control can be managed in the following ways:

Non-RBAC Users are mapped directly to applications and no roles are used. (No roles being used)

Limited RBAC Users are mapped to multiple roles and mapped directly to other types of applications that do not have role-based access functionality. (A mix of roles for applications that supports roles and explicit access control would be used for applications that do not support roles)

Hybrid RBAC Users are mapped to multiapplication roles with only selected rights assigned to those roles.

Full RBAC Users are mapped to enterprise roles. (Roles are used for all access being granted)

NIST defines RBAC as:

Security administration can be costly and prone to error because administrators usually specify access control lists for each user on the system individually. With RBAC, security is managed at a level that corresponds closely to the organization's structure. Each user is assigned one or more roles, and each role is assigned one or more privileges that are permitted to users in that role. Security administration with RBAC consists of determining the operations that must be executed by persons in particular jobs, and assigning employees to the proper roles. Complexities introduced by mutually exclusive roles or role hierarchies are handled by the RBAC software, making security administration easier.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 32.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition McGraw-Hill. and

<http://csrc.nist.gov/groups/SNS/rbac/>

NEW QUESTION 129

- (Topic 1)

Which security model ensures that actions that take place at a higher security level do not affect actions that take place at a lower level?

- A. The Bell-LaPadula model
- B. The information flow model
- C. The noninterference model
- D. The Clark-Wilson model

Answer: C

Explanation:

The goal of a noninterference model is to strictly separate differing security levels to assure that higher-level actions do not determine what lower-level users can see. This is in contrast to other security models that control information flows between differing levels of users. By maintaining strict separation of security levels, a noninterference model minimizes leakages that might happen through a covert channel.

The model ensures that any actions that take place at a higher security level do not affect, or interfere with, actions that take place at a lower level.

It is not concerned with the flow of data, but rather with what a subject knows about the state of the system. So if an entity at a higher security level performs an action, it can not change the state for the entity at the lower level.

The model also addresses the inference attack that occurs when some one has access to some type of information and can infer(guess) something that he does not have the clearance level or authority to know.

The following are incorrect answers:

The Bell-LaPadula model is incorrect. The Bell-LaPadula model is concerned only with confidentiality and bases access control decisions on the classification of objects and the clearances of subjects.

The information flow model is incorrect. The information flow models have a similar framework to the Bell-LaPadula model and control how information may flow between objects based on security classes. Information will be allowed to flow only in accordance with the security policy.

The Clark-Wilson model is incorrect. The Clark-Wilson model is concerned with change control and assuring that all modifications to objects preserve integrity by means of well- formed transactions and usage of an access triple (subject - interface - object).

References:

CBK, pp 325 - 326

AIO3, pp. 290 - 291

AIOv4 Security Architecture and Design (page 345)

AIOv5 Security Architecture and Design (pages 347 - 348)

https://en.wikibooks.org/wiki/Security_Architecture_and_Design/Security_Models#Noninterference_Models

NEW QUESTION 132

- (Topic 1)

Why should batch files and scripts be stored in a protected area?

- A. Because of the least privilege concept.
- B. Because they cannot be accessed by operators.
- C. Because they may contain credentials.
- D. Because of the need-to-know concept.

Answer: C

Explanation:

Because scripts contain credentials, they must be stored in a protected area and the transmission of the scripts must be dealt with carefully. Operators might need access to batch files and scripts. The least privilege concept requires that each subject in a system be granted the most restrictive set of privileges needed for the performance of authorized tasks. The need-to-know principle requires a user having necessity for access to, knowledge of, or possession of specific information required to perform official tasks or services.

Source: WALLHOFF, John, CISSP Summary 2002, April 2002, CBK#1 Access Control System & Methodology (page 3)

NEW QUESTION 137

- (Topic 1)

Kerberos can prevent which one of the following attacks?

- A. tunneling attack.
- B. playback (replay) attack.
- C. destructive attack.
- D. process attack.

Answer: B

Explanation:

Each ticket in Kerberos has a timestamp and are subject to time expiration to

help prevent these types of attacks. The following answers are incorrect:

tunneling attack. This is incorrect because a tunneling attack is an attempt to bypass security and access low-level systems. Kerberos cannot totally prevent these types of attacks.

destructive attack. This is incorrect because depending on the type of destructive attack, Kerberos cannot prevent someone from physically destroying a server.

process attack. This is incorrect because with Kerberos cannot prevent an authorized individuals from running processes.

NEW QUESTION 140

- (Topic 1)

What is called a sequence of characters that is usually longer than the allotted number for a password?

- A. passphrase
- B. cognitive phrase
- C. anticipated phrase
- D. Real phrase

Answer: A

Explanation:

A passphrase is a sequence of characters that is usually longer than the allotted number for a password.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, page 37.

NEW QUESTION 143

- (Topic 1)

Which of the following is not a logical control when implementing logical access security?

- A. access profiles.
- B. userids.
- C. employee badges.
- D. passwords.

Answer: C

Explanation:

Employee badges are considered Physical so would not be a logical control. The following answers are incorrect: userids. Is incorrect because userids are a type of logical control.

access profiles. Is incorrect because access profiles are a type of logical control. passwords. Is incorrect because passwords are a type of logical control.

NEW QUESTION 146

- (Topic 1)

Which access control model was proposed for enforcing access control in government and military applications?

- A. Bell-LaPadula model
- B. Biba model
- C. Sutherland model
- D. Brewer-Nash model

Answer: A

Explanation:

The Bell-LaPadula model, mostly concerned with confidentiality, was proposed for enforcing access control in government and military applications. It supports mandatory access control by determining the access rights from the security levels associated with subjects and objects. It also supports discretionary access control by checking access rights from an access matrix. The Biba model, introduced in 1977, the Sutherland model, published in 1986, and the Brewer-Nash model, published in 1989, are concerned with integrity.

Source: ANDRESS, Mandy, Exam Cram CISSP, Coriolis, 2001, Chapter 2: Access Control Systems and Methodology (page 11).

NEW QUESTION 151

- (Topic 1)

This is a common security issue that is extremely hard to control in large environments. It occurs when a user has more computer rights, permissions, and access than what is required for the tasks the user needs to fulfill. What best describes this scenario?

- A. Excessive Rights
- B. Excessive Access
- C. Excessive Permissions
- D. Excessive Privileges

Answer: D

Explanation:

Even thou all 4 terms are very close to each other, the best choice is Excessive Privileges which would include the other three choices presented.

Reference(s) used for this question:

HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2001, Page 645.

and

NEW QUESTION 154

- (Topic 1)

The controls that usually require a human to evaluate the input from sensors or cameras to determine if a real threat exists are associated with:

- A. Preventive/physical
- B. Detective/technical
- C. Detective/physical
- D. Detective/administrative

Answer: C

Explanation:

Detective/physical controls usually require a human to evaluate the input from sensors or cameras to determine if a real threat exists.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

NEW QUESTION 155

- (Topic 1)

The National Institute of Standards and Technology (NIST) standard pertaining to perimeter protection states that critical areas should be illuminated up to?

- A. Illuminated at nine feet high with at least three foot-candles
- B. Illuminated at eight feet high with at least three foot-candles
- C. Illuminated at eight feet high with at least two foot-candles
- D. Illuminated at nine feet high with at least two foot-candles

Answer: B

Explanation:

The National Institute of Standards and Technology (NIST) standard pertaining to perimeter protection states that critical areas should be illuminated eight feet high with at least two foot-candles.

It can also be referred to as illuminating to a height of eight feet, with a BRIGHTNESS of two foot-candles.

One footcandle 10.764 lux. The footcandle (or lumen per square foot) is a non-SI unit of illuminance. Like the BTU, it is obsolete but it is still in fairly common use in the United States, particularly in construction-related engineering and in building codes. Because lux and footcandles are different units of the same quantity, it is perfectly valid to convert footcandles to lux and vice versa.

The name "footcandle" conveys "the illuminance cast on a surface by a one-candela source one foot away." As natural as this sounds, this style of name is now frowned upon, because the dimensional formula for the unit is not foot • candela, but lumens per square foot.

Some sources do however note that the "lux" can be thought of as a "metre-candle" (i.e. the illuminance cast on a surface by a one-candela source one meter away). A source that is farther away casts less illumination than one that is close, so one lux is less illuminance than one footcandle. Since illuminance follows the inverse-square law, and since one foot = 0.3048 m, one lux = 0.30482 footcandle 1/10.764 footcandle.

TIPS FROM CLEMENT:

Illuminance (light level) – The amount of light, measured in foot-candles (US unit), that falls on a surface, either horizontal or vertical.

Parking lots lighting needs to be an average of 2 foot candles; uniformity of not more than 3:1, no area less than 1 fc.

All illuminance measurements are to be made on the horizontal plane with a certified light meter calibrated to NIST standards using traceable light sources.

The CISSP Exam Cram 2 from Michael Gregg says: Lighting is a commonly used form of perimeter protection.

Some studies have found that up to 80% of criminal acts at businesses and shopping centers happen in adjacent parking lots. Therefore, it's easy to see why lighting can be such an important concern.

Outside lighting discourages prowlers and thieves.

The National Institute of Standards and Technologies (NIST) states that, for effective perimeter control, buildings should be illuminated 8 feet high, with 2-foot candle power.

Reference used for this question:

HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2001, Page 325.

and

Shon's AIO v5 pg 459 and

<http://en.wikipedia.org/wiki/Foot-candle>

NEW QUESTION 156

- (Topic 1)

When a biometric system is used, which error type deals with the possibility of GRANTING access to impostors who should be REJECTED?

- A. Type I error
- B. Type II error
- C. Type III error
- D. Crossover error

Answer: B

Explanation:

When the biometric system accepts impostors who should have been rejected, it is called a Type II error or False Acceptance Rate or False Accept Rate.

Biometrics verifies an individual's identity by analyzing a unique personal attribute or behavior, which is one of the most effective and accurate methods of verifying identification.

Biometrics is a very sophisticated technology; thus, it is much more expensive and complex than the other types of identity verification processes. A biometric system can make authentication decisions based on an individual's behavior, as in signature dynamics, but these can change over time and possibly be forged. Biometric systems that base authentication decisions on physical attributes (iris, retina, fingerprint) provide more accuracy, because physical attributes typically don't change much, absent some disfiguring injury, and are harder to impersonate.

When a biometric system rejects an authorized individual, it is called a Type I error (False Rejection Rate (FRR) or False Reject Rate (FRR)).

When the system accepts impostors who should be rejected, it is called a Type II error (False Acceptance Rate (FAR) or False Accept Rate (FAR)). Type II errors are the most dangerous and thus the most important to avoid.


The goal is to obtain low numbers for each type of error, but When comparing different biometric systems, many different variables are used, but one of the most important metrics is the crossover error rate (CER).

The accuracy of any biometric method is measured in terms of Failed Acceptance Rate (FAR) and Failed Rejection Rate (FRR). Both are expressed as percentages. The FAR is the rate at which attempts by unauthorized users are incorrectly accepted as valid. The FRR is just the opposite. It measures the rate at which authorized users are denied access.

The relationship between FRR (Type I) and FAR (Type II) is depicted in the graphic below. As one rate increases, the other decreases. The Cross-over Error Rate (CER) is sometimes considered a good indicator of the overall accuracy of a biometric system. This

is the point at which the FRR and the FAR have the same value. Solutions with a lower CER are typically more accurate.

See graphic below from Biometria showing this relationship. The Cross-over Error Rate (CER) is also called the Equal Error Rate (EER), the two are synonymous.

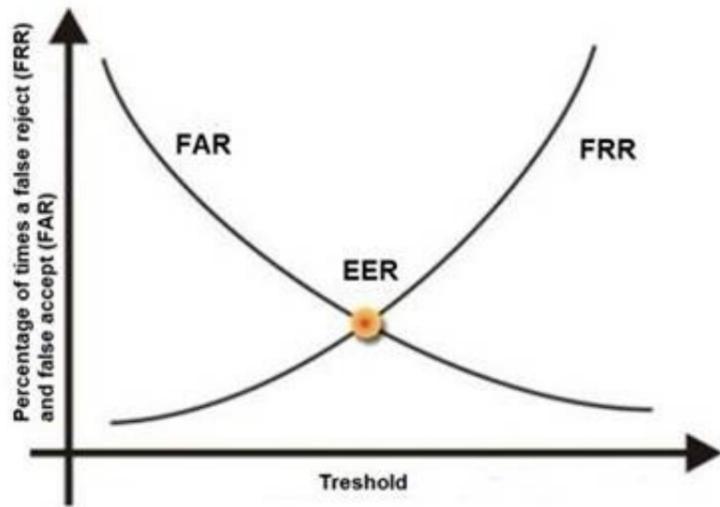

C:\Users\MCS\Desktop\1.jpg Cross Over Error Rate

The other answers are incorrect:

Type I error is also called as False Rejection Rate where a valid user is rejected by the system.

Type III error : there is no such error type in biometric system.

Crossover error rate stated in percentage , represents the point at which false rejection equals the false acceptance rate.

Reference(s) used for this question: <http://www.biometria.sk/en/principles-of-biometrics.html>

and

Shon Harris, CISSP All In One (AIO), 6th Edition , Chapter 3, Access Control, Page 188- 189

and

Tech Republic, Reduce Multi_Factor Authentication Cost

NEW QUESTION 161

- (Topic 1)

Kerberos is vulnerable to replay in which of the following circumstances?

- A. When a private key is compromised within an allotted time window.
- B. When a public key is compromised within an allotted time window.
- C. When a ticket is compromised within an allotted time window.
- D. When the KSD is compromised within an allotted time window.

Answer: C

Explanation:

Replay can be accomplished on Kerberos if the compromised tickets are used within an allotted time window.

The security depends on careful implementation:enforcing limited lifetimes for authentication credentials minimizes the threat of of replayed credentials, the KDC must be physically secured, and it should be hardened, not permitting any non-kerberos activities.

Reference:

Official ISC2 Guide to the CISSP, 2007 Edition, page 184 also see:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 42.

NEW QUESTION 162

- (Topic 1)

What is called the percentage of valid subjects that are falsely rejected by a Biometric Authentication system?

- A. False Rejection Rate (FRR) or Type I Error
- B. False Acceptance Rate (FAR) or Type II Error
- C. Crossover Error Rate (CER)
- D. True Rejection Rate (TRR) or Type III Error

Answer: A

Explanation:

The percentage of valid subjects that are falsely rejected is called the False Rejection Rate (FRR) or Type I Error.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

NEW QUESTION 164

- (Topic 1)

Which of the following protection devices is used for spot protection within a few inches of the object, rather than for overall room security monitoring?

- A. Wave pattern motion detectors
- B. Capacitance detectors
- C. Field-powered devices
- D. Audio detectors

Answer: B

Explanation:

Capacitance detectors monitor an electrical field surrounding the object being monitored. They are used for spot protection within a few inches of the object, rather than for overall room security monitoring used by wave detectors. Penetration of this field changes the electrical capacitance of the field enough to generate and alarm. Wave pattern motion detectors generate a frequency wave pattern and send an alarm if the pattern is disturbed as it is reflected back to its receiver. Field-powered devices are a type of personnel access control devices. Audio detectors simply monitor a room for any abnormal sound wave generation and trigger an alarm.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 10: Physical security (page 344).

NEW QUESTION 167

- (Topic 1)

Access Control techniques do not include which of the following?

- A. Rule-Based Access Controls
- B. Role-Based Access Control
- C. Mandatory Access Control
- D. Random Number Based Access Control

Answer: D

Explanation:

Access Control Techniques Discretionary Access Control

Mandatory Access Control Lattice Based Access Control Rule-Based Access Control Role-Based Access Control

Source: DUPUIS, Clement, Access Control Systems and Methodology, Version 1, May 2002, CISSP Open Study Group Study Guide for Domain 1, Page 13.

NEW QUESTION 172

- (Topic 1)

Which of the following biometric devices offers the LOWEST CER?

- A. Keystroke dynamics
- B. Voice verification
- C. Iris scan
- D. Fingerprint

Answer: C

Explanation:

From most effective (lowest CER) to least effective (highest CER) are: Iris scan, fingerprint, voice verification, keystroke dynamics.

Reference : Shon Harris Aio v3 , Chapter-4 : Access Control , Page : 131

Also see: http://www.sans.org/reading_room/whitepapers/authentication/biometric-selection-body-parts-online_139

NEW QUESTION 177

- (Topic 1)

Which of the following is not a preventive login control?

- A. Last login message
- B. Password aging
- C. Minimum password length
- D. Account expiration

Answer: A

Explanation:

The last login message displays the last login date and time, allowing a user to discover if their account was used by someone else. Hence, this is rather a detective control.

Source: RUSSEL, Deborah & GANGEMI, G.T. Sr., Computer Security Basics, O'Reilly, July 1992 (page 63).

NEW QUESTION 180

- (Topic 1)

In non-discretionary access control using Role Based Access Control (RBAC), a central authority determines what subjects can have access to certain objects based on the organizational security policy. The access controls may be based on:

- A. The societies role in the organization
- B. The individual's role in the organization
- C. The group-dynamics as they relate to the individual's role in the organization
- D. The group-dynamics as they relate to the master-slave role in the organization

Answer: B

Explanation:

In Non-Discretionary Access Control, when Role Based Access Control is being used, a central authority determines what subjects can have access to certain objects based on the organizational security policy. The access controls may be based on the individual's role in the organization.

Reference(S) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 181

- (Topic 1)

Controls provide accountability for individuals who are accessing sensitive information. This accountability is accomplished:

- A. through access control mechanisms that require identification and authentication and through the audit function.
- B. through logical or technical controls involving the restriction of access to systems and the protection of information.
- C. through logical or technical controls but not involving the restriction of access to systems and the protection of information.
- D. through access control mechanisms that do not require identification and authentication and do not operate through the audit function.

Answer: A

Explanation:

Controls provide accountability for individuals who are accessing sensitive information. This accountability is accomplished through access control mechanisms that require identification and authentication and through the audit function. These controls must be in accordance with and accurately represent the organization's security policy. Assurance procedures ensure that the control mechanisms correctly implement the security policy for the entire life cycle of an information system. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 183

- (Topic 1)

Examples of types of physical access controls include all EXCEPT which of the following?

- A. badges
- B. locks
- C. guards
- D. passwords

Answer: D

Explanation:

Passwords are considered a Preventive/Technical (logical) control. The following answers are incorrect:
badges Badges are a physical control used to identify an individual. A badge can include a smart device which can be used for authentication and thus a Technical control, but the actual badge itself is primarily a physical control.
locks Locks are a Preventative Physical control and has no Technical association. guards Guards are a Preventative Physical control and has no Technical association.

The following reference(s) were/was used to create this question:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 35).

NEW QUESTION 188

- (Topic 1)

What Orange Book security rating is reserved for systems that have been evaluated but fail to meet the criteria and requirements of the higher divisions?

- A. A
- B. D
- C. E
- D. F

Answer: B

Explanation:

D or "minimal protection" is reserved for systems that were evaluated under the TCSEC but did not meet the requirements for a higher trust level. A is incorrect. A or "Verified Protection" is the highest trust level under the TCSEC. E is incorrect. The trust levels are A - D so "E" is not a valid trust level. F is incorrect. The trust levels are A - D so "F" is not a valid trust level.
CBK, pp. 329 - 330
AIO3, pp. 302 - 306

NEW QUESTION 192

- (Topic 1)

What is Kerberos?

- A. A three-headed dog from the Egyptian mythology.
- B. A trusted third-party authentication protocol.
- C. A security model.
- D. A remote authentication dial in user server.

Answer: B

Explanation:

Is correct because that is exactly what Kerberos is. The following answers are incorrect:
A three-headed dog from Egyptian mythology. Is incorrect because we are dealing with Information Security and not the Egyptian mythology but the Greek Mythology.
A security model. Is incorrect because Kerberos is an authentication protocol and not just a security model.
A remote authentication dial in user server. Is incorrect because Kerberos is not a remote authentication dial in user server that would be called RADIUS.

NEW QUESTION 193

- (Topic 1)

Controls like guards and general steps to maintain building security, securing of server rooms or laptops, the protection of cables, and usage of magnetic switches on doors and windows are some of the examples of:

- A. Administrative controls
- B. Logical controls
- C. Technical controls
- D. Physical controls

Answer: D

Explanation:

Controls like guards and general steps to maintain building security, securing of server rooms or laptops, the protection of cables, and usage of magnetic switches on doors and windows are all examples of Physical Security.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 196

- (Topic 1)

Which of the following is most appropriate to notify an internal user that session monitoring is being conducted?

- A. Logon Banners
- B. Wall poster
- C. Employee Handbook
- D. Written agreement

Answer: D

Explanation:

This is a tricky question, the keyword in the question is Internal users.

There are two possible answers based on how the question is presented, this question could either apply to internal users or ANY anonymous/external users.

Internal users should always have a written agreement first, then logon banners serve as a constant reminder.

Banners at the log-on time should be used to notify external users of any monitoring that is being conducted. A good banner will give you a better legal stand and also makes it obvious the user was warned about who should access the system, who is authorized and unauthorized, and if it is an unauthorized user then he is fully aware of trespassing. Anonymous/External users, such as those logging into a web site, ftp server or even a mail server; their only notification system is the use of a logon banner.

References used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 50.

and

Shon Harris, CISSP All-in-one, 5th edition, pg 873

NEW QUESTION 198

- (Topic 1)

What does the simple security (ss) property mean in the Bell-LaPadula model?

- A. No read up
- B. No write down
- C. No read down
- D. No write up

Answer: A

Explanation:

The ss (simple security) property of the Bell-LaPadula access control model states that reading of information by a subject at a lower sensitivity level from an object at a higher sensitivity level is not permitted (no read up).

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architectures and Models (page 202).

NEW QUESTION 203

- (Topic 1)

Technical controls such as encryption and access control can be built into the operating system, be software applications, or can be supplemental hardware/software units. Such controls, also known as logical controls, represent which pairing?

- A. Preventive/Administrative Pairing
- B. Preventive/Technical Pairing
- C. Preventive/Physical Pairing
- D. Detective/Technical Pairing

Answer: B

Explanation:

Preventive/Technical controls are also known as logical controls and can be built into the operating system, be software applications, or can be supplemental hardware/software units.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 34.

NEW QUESTION 208

- (Topic 1)

Which one of the following factors is NOT one on which Authentication is based?

- A. Type 1. Something you know, such as a PIN or password
- B. Type 2. Something you have, such as an ATM card or smart card
- C. Type 3. Something you are (based upon one or more intrinsic physical or behavioral traits), such as a fingerprint or retina scan
- D. Type 4. Something you are, such as a system administrator or security administrator

Answer: D

Explanation:

Authentication is based on the following three factor types:

Type 1. Something you know, such as a PIN or password

Type 2. Something you have, such as an ATM card or smart card

Type 3. Something you are (Unique physical characteristic), such as a fingerprint or retina scan

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.
Also: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2002, chapter 4: Access Control (pages 132-133).

NEW QUESTION 213

- (Topic 1)

The "vulnerability of a facility" to damage or attack may be assessed by all of the following except:

- A. Inspection
- B. History of losses
- C. Security controls
- D. security budget

Answer: D

Explanation:

Source: The CISSP Examination Textbook- Volume 2: Practice by S. Rao Vallabhaneni.

NEW QUESTION 217

- (Topic 1)

Which of the following best ensures accountability of users for the actions taken within a system or domain?

- A. Identification
- B. Authentication
- C. Authorization
- D. Credentials

Answer: B

Explanation:

Details:
The only way to ensure accountability is if the subject is uniquely identified and authenticated. Identification alone does not provide proof the user is who they claim to be. After showing proper credentials, a user is authorized access to resources.

References:

HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2002, Chapter 4: Access Control (page 126).

NEW QUESTION 218

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

SSCP Practice Exam Features:

- * SSCP Questions and Answers Updated Frequently
- * SSCP Practice Questions Verified by Expert Senior Certified Staff
- * SSCP Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * SSCP Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The SSCP Practice Test Here](#)