

Exam Questions 300-810

Implementing Cisco Collaboration Applications (CLICA)

<https://www.2passeasy.com/dumps/300-810/>



NEW QUESTION 1

Which authentication method allows a user to log in to an SSO-enabled Cisco Unified Communications application by utilizing a Microsoft Windows login, thereby not requiring any credentials to be entered?

- A. Smart Card
- B. OAuth
- C. form-based
- D. Kerberos

Answer: B

Explanation:

Reference: <https://developer.cisco.com/docs/cisco-unified-communications-single-sign-on-tutorial/#!cisco-unified-communications-single-sign-on-tutorial/learning-more-about-ssso>

NEW QUESTION 2

When Cisco IM and Presence is configured to use automatic fallback, how long does the Server Recovery Manager service wait for a failed service/server to remain active before an automatic fallback is initiated?

- A. 10 minutes
- B. 20 minutes
- C. 30 minutes
- D. 1 hour


Answer: C

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unified-communications-manager-im-presence-service/200958-IM-and-Presence-Server-High-Availability.html>

NEW QUESTION 3

Refer to the exhibit.

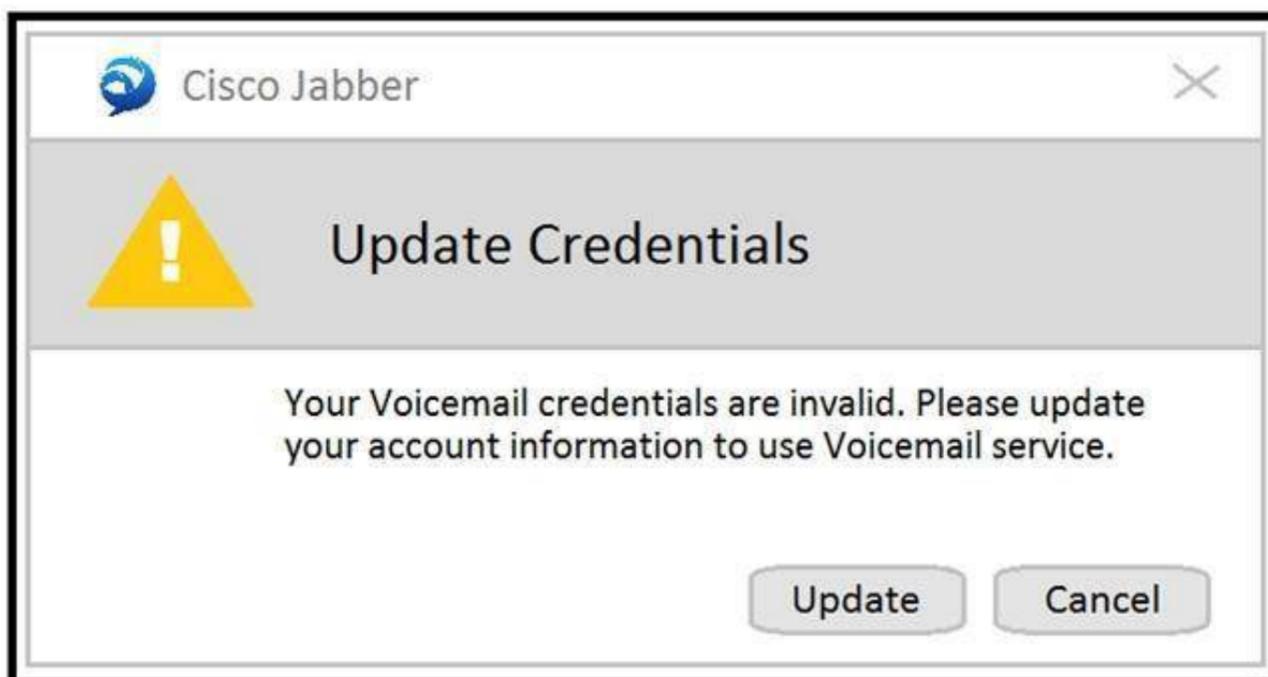

Which action allows a remote Cisco Jabber user utilizing Mobile and Remote Access to automatically log in to a Cisco Unity Connection voicemail box via OAuth?

- A. Add CUCM under System Settings > Authz Servers in Cisco Expressway-E.
- B. Add CUCM under System Settings > Authz Servers in Cisco Expressway-C.
- C. Add CUCM under System Settings > Authz Servers in Cisco Unity.
- D. Add CUCM under System Settings > Authz Servers in Cisco Unity Connection.

Answer: D

Explanation:

Reference: <https://community.cisco.com/t5/unified-communications/jabber-mra-unity-voice-mail-integration-issue/td-p/3195653>

NEW QUESTION 4

Refer to the exhibit.

The screenshot shows two configuration sections:

- Voice Mail Port Information:**
 - Voice Mail Pilot Number: 4000 (input field)
 - Calling Search Space: < None > (dropdown menu)
 - Description: Default (input field)
 - Make this the default Voice Mail Pilot for the system
- Hunt Pilot Configuration:**
 - Status:** Status: Ready (with info icon)
 - Pattern Definition:**
 - Hunt Pilot*: 4000
 - Route Partition: INTERNAL_PT
 - Description: Hunt pilot for CUC
 - Call Forward and Call Pickup Settings:**

	Voice Mail	Destination	Calling Search Space
Calling Search Space Activation Policy			Use System Default
Forward All	<input checked="" type="checkbox"/>	4000	< None >

Cisco Unity Connection and Cisco Unified Communications Manager are integrated by using SCCP. The Voice Mail Ports are registered. Users report that calls fail when forwarded to voicemail. Which is a cause of the issue?

- A. The call forward and call pickup settings do not have a CSS on Forward All.
- B. The Voice Mail Port partition on the CSS of the phone is missing.
- C. The Voice Mail Pilot is not configured with a CSS that contains the INTERNAL_PT.
- D. The CSS on the Voice Mail Pilot is missing partitions for user phones.

Answer: D

NEW QUESTION 5

Which Cisco IM and Presence service must be activated and running for IM Presence to successfully integrate with Cisco Unified Communications Manager?

- A. Cisco DHCP Monitor Service
- B. Cisco AXL Web Service
- C. Self-Provisioning IVR
- D. Cisco XCP Authentication Service

Answer: A

NEW QUESTION 6

Which two methods does Cisco Jabber use for contact searching in an on-premises deployment model? (Choose two.)

- A. HTTP
- B. XMPP
- C. UDS
- D. LDAP
- E. SIP

Answer: CD

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/srnd/collab11/collab11/presence.html

NEW QUESTION 7

SAML SSO is enabled in Cisco Unified Communications Manager. What happens when a browser-based client attempts to access a protected resource on a service provider?

- A. The browser follows the redirect and issues an HTTPS GET request to the IdP.
- B. The IdP checks for a valid browser session.
- C. The service provider generates a SAML authentication request.
- D. The SAML request is maintained as a query parameter in the GET request.

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/SAML_SSO_deployment_guide/12_5_1/cucm_b_saml-ss0-deployment-guide-12_5/cucm_b_saml-ss0-deployment-guide-12_5_chapter_01.html

NEW QUESTION 8

Refer to the exhibit.

```
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - About to verify the certificate.
[csf.cert.win32] [csf::cert::Win32CertVerifier:loadCertificateChain] - Certificate Chain status 0x20
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifySslPolicy] - Ignoring errors due to Invalid CN
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - SSL Policy status 0x2148204809
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - Basic Constraints Policy status 0x0
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyCertificate] - Certificate validation response is 'invalid'
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - Result of platform cert verification: [UNTRUSTED_ROOT]
[csf.cert.] [csf::cert::BaseCertVerifier:checkIdentity] - About to check for an Identity Match.
[csf.cert.xmpp] [csf::cert::XmppCertVerifier:checkIdentifier] - Verifying XMPP Identity 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verifyXmpp] - Xmpp match was not found for: 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verify] - Match for 'example.com' found in dnsNames index: 1
[csf.cert.] [csf::cert::BaseCertVerifier::checkIdentifiers] - Verification of identity succeeded. Matched identifier : 'example.com'
[csf.diagnostics] [CSFDiagnostics::DiagnosticsImpl::AddRecord] - Add record task enqueued: example.com
[csf.common.PolicySet] [csf::common:PolicySet::getPolicy] - Successfully found Policy with nature IGNORE_INVALID_CERT_CONDITION
[IGNORE_REVOCATION_INFO_UNAVAILABLE_ERRORS]
[csf.cert.] [csf::cert::BaseCertVerifier::applyIgnoreInvalidCertConditionPolicy] - About to enforce ignore invalid cert condition policy.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy::removeIgnoredStatuses] - No statuses have been removed from the verification status.
[csf.cert] [csf::cert::IgnoreInvalidCertConditionPolicy::enforce] - Policy enforced
[csf.cert.] [csf::cert::BaseCertVerifier::verifyCertificateAsync] - Certificate initially verified, result: FAILURE
[csf.cert] [csf::cert::CertificateDataImpl::parseSubjectCNField] - size of Subject CN field : 16
[csf.cert] [csf::cert::CertificateDataImpl::parseSubjectCNField] - Subject CN field : impa.example.com
[csf.common.PolicySet] [csf::common:PolicySet::getPolicy] - Successfully found Policy with nature INVALID_CERT_MANAGEMENT [PROMPT_USER]
```

Users report that they are prompted to accept server certificates when they initially run Cisco Jabber. An engineer removes these prompts to prevent confusion. Which statement about this scenario is true?

- A. Presentation of the certificates can be disabled by setting up Cisco IM&P servers into nonsecure mode.
- B. Nothing can be done to resolve this issue because certificates must be accepted by each Jabber user, per Cisco policy.
- C. These certificates are self-signed certificates, so they must be added manually to the user OS certificate stores.
- D. The behavior is a security breach because certificates are considered untrusted and as not coming from Cisco Collaboration servers.

Answer: C

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/jabber-windows/116637-trouble-jabber-00.html>

NEW QUESTION 9

Which two protocols does the Cisco IM Presence service use to federate with external domains? (Choose two.)

- A. XMPP
- B. SNMP
- C. SIP
- D. SCCP
- E. SMPP

Answer: AC

Explanation:

Reference: https://www.cisco.com/c/dam/en/us/td/docs/voice_ip_comm/cucm/im_presence/interdomain_federation/11_5_1/cup0_b_interdomain-federation-guide-imp-115.pdf

NEW QUESTION 10

Which service must be activated on Cisco Unity Connection to utilize LDAP synchronization?

- A. Cisco Tomcat
- B. Cisco Sync Agent
- C. Cisco DirSync
- D. Cisco RIS Data Collector

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/administration/guide/10xcucsagx/10xcucsag120.html

NEW QUESTION 10

In the integration of Cisco Unity Connection using SIP, which SIP trunk security profile option is required for MWI to work correctly?

- A. Accept out-of-dialog refer
- B. Accept replaces header
- C. Accept unsolicited notification
- D. Accept presence subscription

Answer: A

NEW QUESTION 14

Which SAML component specifies the mapping of SAML assertion protocol message exchanges with standard messaging formats or communication protocols such as SOAP exchanges?

- A. SAML binding
- B. SAML assertion
- C. SAML profiles
- D. SAML protocol

Answer: A

Explanation:

Reference: https://en.wikipedia.org/wiki/Security_Assertion_Markup_Language

NEW QUESTION 15

DRAG DROP

Drag and drop the events for an on-premises Jabber SAML SSO flow from the left into the correct order on the right.

Service Provider Authorization request	Step 1
SSO Mode Discovery	Step 2
IDP Authentication	Step 3
Service Provider Authentication	Step 4

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

SSO Mode Discovery
IDP Authentication
Service Provider Authentication
Service Provider Authorization request

NEW QUESTION 18

To redirect calls from the phone extension for user A to the voicemail greeting, which call routing rule should be used in Cisco Unity Connection?

- A. Attempt Forward forwarded routing rule
- B. Opening Greeting direct routing rule
- C. Attempt Sign-In direct routing rule
- D. Opening Greeting forwarded routing rule

Answer: A

Explanation:

Reference: <https://community.cisco.com/t5/collaboration-voice-and-video/unity-connection-call-routing-logic/ta-p/3162560>

NEW QUESTION 20

Refer to the exhibit.

```

ccn subsystem sip
 gateway address "172.16.1.254"
 mwi sip unsolicited
end subsystem
!
interface Integrated-Service-Engine1/0
 ip unnumbered Vlan2
 service-module ip address 172.16.1.253.255.255.255.0
 no shut
!
Interface Vlan2
 description "Voice VLAN"
 ip address 172.16.1.254.255.255.0
 no shut
!
sip-ua
 mwi-server ipv4:172.16.1.253 expires 3600 port 5060 transport udp
!
    
```

A collaboration engineer has integrated Cisco Unity Express with Cisco Unified Communications Manager Express and is experimenting with the MWI feature. With the current configuration, no MWI change occurs when leaving new messages or after playing new messages. Which two changes are needed to correct the configuration? (Choose two.)

- A. ccn subsystem sip mwi sip outcall
- B. ccn subsystem sip mwi envelop-info
- C. sip-ua no mwi- servermwi-server ipv4:172.16.1.254 expires 3600 port 5060 transport udp
- D. ccn subsystem sip mwi sub-notify
- E. sip-ua no mwi-servermwi-server ipv4:172.16.1.253 expires 3600 port 5060 transport tcp notify
- F. sip- ua no mwi-server mwi-server ipv4:172.16.1.253 expires 3600 port 5060 transport udp unsolicited

Answer: AF

NEW QUESTION 24

Refer to the exhibit.

Direct Routing Rules in Descending Order of Precedence					
<input type="button" value="Delete Selected"/> <input type="button" value="Add New"/> <input type="button" value="Change Order"/>					
<input type="checkbox"/>	Display Name	Status	Dialed Number	Calling Number	Phone System
<input type="checkbox"/>	NewYork_AA	Active	11112222		
<input type="checkbox"/>	Attempt Sign In	Active			
<input type="checkbox"/>	Chicago_AA	Active	22221111		
<input type="checkbox"/>	Opening Greeting	Active			
<input type="button" value="Delete Selected"/> <input type="button" value="Add New"/> <input type="button" value="Change Order"/>					
Forwarded Routing Rules in Descending Order of Precedence					
<input type="button" value="Delete Selected"/> <input type="button" value="Add New"/> <input type="button" value="Change Order"/>					
<input type="checkbox"/>	Display Name	Status	Dialed Number	Calling Number	Forwarding Station
<input type="checkbox"/>	Attempt Forward	Active			
<input type="checkbox"/>	Dallas_AA	Active	2222		
<input type="checkbox"/>	Arizona_AA	Active	11112222		
<input type="checkbox"/>	Opening Greeting	Active			
<input type="button" value="Delete Selected"/> <input type="button" value="Add New"/> <input type="button" value="Change Order"/>					

Calls that are not answered by the user are for the location. If the user at extension 11112222 does not have a voice mailbox, which rule is utilized when Cisco Unity Communication receives the forwarded call?

- A. NewYork_AA

- B. Attempt Sign In
- C. Arizona_AA
- D. Opening_Greeting

Answer: C

NEW QUESTION 26

An engineer is configuring SAML SSO for a Cisco Unified Communications Manager. After completing all required steps, the engineer wants to verify the status. Which CLI command provides the status of SAML SSO?

- A. utils sso status
- B. show sso status
- C. show saml status
- D. utils saml status


Answer: A

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/unified-communications/unified-communications-manager-callmanager/213293-troubleshoot-sso-in-cucm.html>

NEW QUESTION 27

Refer to the exhibit.

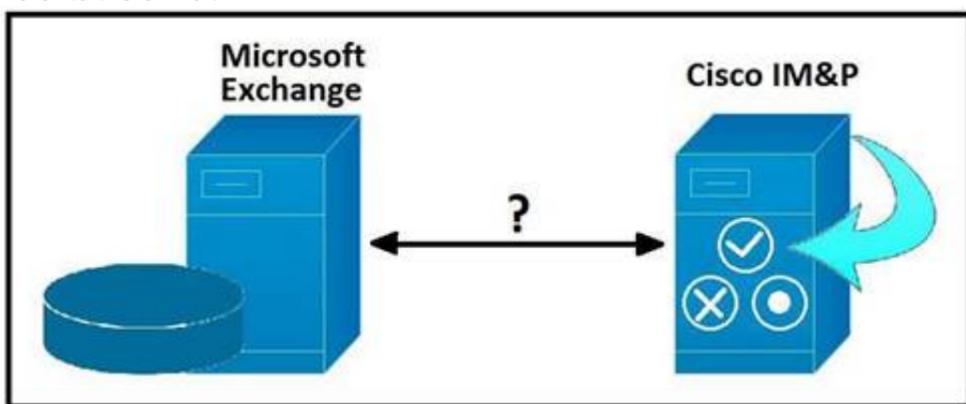

Which protocol is used for communication between Cisco IM and Presence and Microsoft Exchange Server?

- A. POP3
- B. IMAP
- C. EWS
- D. XMPP

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/srnd/collab11/collab11/presence.html

NEW QUESTION 29

Refer to the exhibit.

High Availability			
<input checked="" type="checkbox"/> Enable High Availability			
Monitored Server	Assigned Users	Active Users	Server State
IMPPub.CiscoLiveUS.net	4	0	Failed Over
IMPSub.CiscoLiveUS.net	0	0	Running in Backup Mode

A customer reports that after a network failure, all of the Cisco Jabber clients are not switched back to their home nodes. An engineer determines that the primary Cisco IM&P server is in Failed Over state. Which two actions should be performed to bring the system back to operational state and to prevent future occurrences? (Choose two.)

- A. Advise all users to re-login to their Jabber clients.
- B. Confirm that both IM&P servers are configured in the Presence Redundancy Group configuration pane.
- C. Perform a restart of the IM&P primary server to force fallback.
- D. Click the Fallback button in the Server Action pane.
- E. Set the Automatic Failover parameter in the Server Recovery Manager Service Parameters to the value True.

Answer: BD

NEW QUESTION 31

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 300-810 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 300-810 Product From:

<https://www.2passeasy.com/dumps/300-810/>

Money Back Guarantee

300-810 Practice Exam Features:

- * 300-810 Questions and Answers Updated Frequently
- * 300-810 Practice Questions Verified by Expert Senior Certified Staff
- * 300-810 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 300-810 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year