

Exam Questions 3V0-21.21

Advanced Design VMware vSphere 7.x

<https://www.2passeasy.com/dumps/3V0-21.21/>



NEW QUESTION 1

Which requirement would be classified as a functional requirement within the design documentation?

- A. The system must perform virtual machine backups through an API.
- B. Virtual machines must be patched within one month of the patch release date.
- C. Virtual machines must be restarted within 30 minutes of a host failure.
- D. The system must be able to scale to support 500 concurrent virtual machines.

Answer: C

NEW QUESTION 2

An architect is reviewing a physical storage design. The customer has specified that storage DRS will be used for ease of operational management for capacity and performance.

Which recommendation should the architect include in the design?

- A. Create smaller datastores to balance space with Storage DRS
- B. Use a larger number of storage profiles (varied disk speeds and RAID levels) to improve performance
- C. Create larger datastores to balance space with Storage DRS
- D. Create more datastores within each Storage DRS cluster to balance space and performance

Answer: D

NEW QUESTION 3

An organization's existing vSphere environments are configured for Enhanced Linked Mode. The DevOps team automates the creation of hardened virtual machine images for various operating systems. Their continuous integration/continuous delivery (CI/CD) pipeline runs a task at the end of a successful build, which uploads the Open Virtualization Format (OVF) image to a sandbox content library, deploys a virtual machine from the image, and then destroys these objects after quality checks are complete.

The following requirements have been noted:

- All content libraries and images must be centrally created and managed.
- All images must be capable of being updated.
- All images must be refreshed and available to subscribed libraries within 24 hours.
- All images must provide details of the image contents and versions.
- All images must be capable of being reverted to a previous version.
- All images must be capable of having the hardware and guest operating system customized during deployment.

Which three recommendations should the architect make to design a content library solution that will meet these requirements? (Choose three.)

- A. Create a local content library in the primary vSphere environment and enable publishing.
- B. Create and publish a new subscription to a new subscriber library for each target vSphere environment.
- C. Deploy the OVF images to vSphere and clone as an OVF template to a local content library.
- D. Deploy the OVF images to vSphere and clone as a VM template to a local content library.
- E. Edit the Auto Sync Refresh Interval advanced setting for each subscribed library.
- F. Add a new subscriber library from each vSphere environment.

Answer: ACF

NEW QUESTION 4

An architect is designing a new vSphere platform for a customer to meet the following requirements:

- The platform must be deployed into five physically separate sites.
- The sites are spread across multiple regions.
- Some sites require more than one vCenter Server.
- The platform must provide an administrator with the ability to access virtual infrastructure components across all sites from a single management tool instance.

Which single sign-on (SSO) design recommendation will meet these requirements?

- A. Use an SSO domain across all vCenter Server instances
- B. Use an SSO domain per region
- C. Use an SSO domain per vCenter Server instance
- D. Use an SSO domain per site

Answer: C

NEW QUESTION 5

During a transformation project kick-off meeting, an architect highlights specific areas on which to focus while developing the new conceptual design.

Which two of the listed statements are business requirements? (Choose two.)

- A. The project should use the existing storage devices within the data center
- B. Sites must support a network latency of less than 12 ms round-trip time (RTT)
- C. The solution must allow data replication between sites
- D. There is no budget specifically assigned for disaster recovery
- E. There must not be a single point of failure for the virtual infrastructure

Answer: CE

NEW QUESTION 6

An architect is designing the expansion of an existing vSphere 7 environment. The customer is requesting a design for a new cluster to support the anticipated future business growth. The requirements specified for the existing environment design must be considered when designing the new cluster.

The existing design has the following requirements:

- REQ01 The environment has an availability target of 99.5% for all infrastructure.
- REQ02 The recovery time objective (RTO) for Tier 1 virtual machines is one hour.
- REQ03 Windows and Linux virtual machines must reside on separate clusters.
- REQ04 Access to the management cluster within the environment must be controlled. Which of the listed requirements would be classified as a functional requirement?

- A. The environment has an availability target of 99.5% for all infrastructure
- B. The recovery time objective (RTO) for Tier 1 virtual machines is one hour
- C. Access to the management cluster within the environment must be controlled
- D. Windows and Linux virtual machines must reside on separate clusters

Answer: D

NEW QUESTION 7

An architect will be taking over control of a former Linux server fleet and repurposing the hardware into a new vSphere cluster. The current environment is already connected to the network but the hosts do not have any local disks. Since the fleet hardware is uniform, the architect can use a single ESXi image. All hosts within the cluster have the same CPU and memory capacity.

Which ESXi deployment method should the architect use?

- A. Stateless cached vSphere Auto Deploy
- B. Stateless vSphere Auto Deploy
- C. Manual install of each ESXi host with an image from USB
- D. Stateful vSphere Auto Deploy

Answer: B

NEW QUESTION 8

An architect is designing a new greenfield environment that will install ESXi on local disks. There is a requirement to streamline initial and future installations of ESXi hosts.

Which configuration option should the architect recommend for installing ESXi hosts to meet these requirements?

- A. Installation with kick start script
- B. Auto Deploy with stateless caching mode
- C. Manual installation using boot from SAN
- D. Auto Deploy with stateful install mode

Answer: D

NEW QUESTION 9

An architect makes the design decision to install ESXi on embedded and resilient 8 GB SD cards. What is the impact of this design decision?

- A. Host profiles must be used for this kind of installation
- B. Scratch partition would need to be created on the external storage
- C. The size of the SD cards is too small and the installation will fail
- D. The vSphere Auto Deploy feature must be enabled on vCenter Server

Answer: B

Explanation:

<https://kb.vmware.com/s/article/2074026> You can store coredumps on the SD boot media, but refrain from configuring the scratch partition here as the logs are write intensive and can cause the SD card to fail faster resulting in re-installation of ESXi

NEW QUESTION 10

Following a company merger, there are two data centers running vSphere environments. Both data centers are leveraging separate Layer 3 vMotion networks. Which requirement must be met in order to enable vMotion migration between these locations?

- A. The vMotion service must be configured on the Management VMkernel adapter
- B. A dedicated TCP/IP stack for vMotion with a dedicated gateway must be configured
- C. A stretched vMotion network must be configured between data centers
- D. Virtual machines must be powered off in order to migrate them between data centers

Answer: B

NEW QUESTION 10

During a requirements gathering workshop, the customer provides the following requirement:

- A new vSphere platform must be designed securely and all interfaces must be protected against potential snooping.

How should this non-functional security requirement be documented?

- A. Interfaces must be audited.
- B. Encrypted channels must be used for all communications.
- C. Unauthorized access to interfaces must be reported within 15 minutes.
- D. Communications must be through Private VLANs (PVLAN).

Answer: A

NEW QUESTION 12

Which design decision must be included in a design to allow for the deployment of a minimum supported configuration of vCenter High Availability (HA)?

- A. A new subnet will be provisioned for vCenter HA services
- B. A vSphere cluster will consist of more than three nodes
- C. The deployed vCenter Server will be Tiny
- D. The vCenter HA network will support a latency of less than 50 ms

Answer: A

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.avail.doc/GUID-8FD87389-8CC9-429>

NEW QUESTION 15

An architect is tasked with designing a greenfield VMware software-defined data center (SDDC) solution that will be used to deliver a private cloud service for a customer.

During the initial meeting with the service owner and business sponsor, the customer has provided the following information to help inform the design:

- The solution must support the concurrent running of 1,000 virtual machines
- The production environment must be delivered across two geographically dispersed data centers All virtual machines must be capable of running in either data center.
- The two data centers are currently connected to each other through a single but diversely routed, high bandwidth and low latency link.
- The link between the two data centers is capable of supporting a round-trip time (RTT) of 150 ms The existing server hardware standard document states that all virtual infrastructure hosts must be deployed using vSAN ReadyNodes
- The service owner has stated that it is critical to ensure the availability target of 99.9% All virtual machine backups must be completed using the existing backup service
- The recovery time objective (RTO) for the service is five minutes
- The recovery point objective (RPO) of the service is four hours

Which two elements represent risks to the successful delivery of this solution? (Choose two.)

- A. The use of only two data centers
- B. The network connectivity between data center sites
- C. The use of vSAN ReadyNodes
- D. The RTT on the link between the two data centers
- E. The use of the existing backup service

Answer: DE

NEW QUESTION 17

An architect is designing a new greenfield environment with 600 ESXi hosts in an automated fashion. The engineering department already has a PXE Boot server, TFTP server, and DHCP server set up with an NFS mount for their current Linux servers.

The architect must be able to demonstrate and meet a security requirement to have all infrastructure processes separated.

Which recommendation should the architect make for the ESXi host deployment?

- A. Request an isolated network segment to use and dedicate it to Auto Deploy functions
- B. Ask the business to expand the engineering environment to service the virtual environment as well
- C. Request a common shared network with flexible security measures to accommodate different auto deployment options
- D. Deploy each ESXi host individually and document it to satisfy security requirements

Answer: A

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.esxi.install.doc/GUID-8DAC6FEE-0441-4072>

NEW QUESTION 21

The Chief Operating Officer (COO) at an organization raises concerns that their virtual infrastructure environment is vulnerable. Recently, a security-related issue with a virtual machine caused all management services to become unavailable. No budget is available in the short term for additional platform investment. An architect is asked to review the current environment and make recommendations to mitigate concerns.

A virtualization administrator has provided the following details:

- There is a single four node cluster of ESXi servers
- There are two, Layer 2, physical network switches connecting resources
- The data center network is presented as a single /16 subnet

Given the information provided, which functional requirement should the architect include in the design to mitigate the COOs concerns?

- A. The virtual infrastructure environment must connect application virtual machines and management services to new physical network switches
- B. The virtual infrastructure environment must connect application virtual machines and management services to separate distributed virtual switches (DVS)
- C. The virtual infrastructure environment must connect application virtual machines and management services to separate VLANs
- D. The virtual infrastructure environment must connect management services to a vSphere standard switch (VSS)

Answer: D

NEW QUESTION 25

A Cloud Service Provider wants to introduce backup as a service for a customer's vSphere-based virtual machines.

The following information is noted:

- All top-of-rack (ToR) switches are 10 GbE and fully populated
- The backup traffic must not impact existing services

Which two recommendations should the architect make to help the customer incorporate the service? (Choose two.)

- A. Enable and tag traffic on the backup distributed port group
- B. Add a new two-port 10 GbE NIC per ESXi host
- C. Replace the existing NIC with a two-port 25 GbE NIC per ESXi host
- D. Match the Class of Service (CoS) and Differentiated Services Code Point (DSCP) values to the physical network
- E. Create a new virtual switch using the 1 GbE uplinks

Answer: AB

NEW QUESTION 29

An architect is tasked with designing a greenfield VMware software-defined data center (SDDC) solution that will be used to deliver a private cloud service for a customer.

During the initial meeting with the service owner and business sponsor, the customer has provided the following information to help inform the design:

- The solution must initially support the concurrent running of 300 production and 600 development virtual machines.
- The production environment should be delivered across two geographically dispersed data centers. The development environment must be vSphere-based but does not have to be deployed on-premises.
- The two data centers are connected to each other through multiple diversely routed, high bandwidth and low latency links.
- The customer's server hardware standard document states that all virtual infrastructure hosts must be based on blade architecture only.
- The service owner has said that is important to ensure that neither the availability target of 99.5% nor the resource capacity is affected when the operations team completes maintenance activities, such as the monthly software patching and ad-hoc hardware break/fix.
- All virtual machine backups must be completed using the existing backup service. The recovery time objective (RTO) for the service is four hours.
- The recovery point objective (RPO) of the service is 24 hours.

Given the information from the customer, which two would be classified as assumptions within the design? (Choose two.)

- A. The backup service will store data in a secure facility
- B. The backup service has sufficient capacity for the new requirements
- C. The customer will update their hardware standard to support rack mount servers
- D. All virtual machines will be deployed with the same resource profile for production and development
- E. The clusters will have a minimum redundancy of N+1

Answer: BE

NEW QUESTION 32

What is a benefit of using a scale-out method for handling vSphere cluster growth?

- A. An increase in the recovery time objective (RTO) for the cluster
- B. Faster to reach the limit of virtual machines per host
- C. An overall reduction in the license costs for the cluster
- D. Less potential impact to virtual machines during a single host failure

Answer: B

NEW QUESTION 37

An architect is finalizing the design for a new vSphere platform based on the following information:

- All Windows virtual machines will be hosted on a dedicated cluster for licensing purposes.
- All Linux virtual machines will be hosted on a dedicated cluster for licensing purposes. All management virtual machines will be hosted on a dedicated cluster.
- A total of ten physical sites will be used to host virtual machines.
- In the event of one physical datacenter becoming unavailable, the manageability of the virtual infrastructure in the remaining data centers should not be impacted.
- Access to configure the management virtual machines via vCenter Server must be controlled through the management Active Directory domain.
- Access to configure the Windows and Linux virtual machines must be controlled through the resource Active Directory domain.
- The management and resource Active Directory domains are part of separate Active Directory forests and do not have any trusts between them.
- The design will use Active Directory with Integrated Windows Authentication.

How should the architect document the vCenter Server configuration for this design?

- A. Deploy a vCenter server for the management cluster. Deploy a vCenter Server for all remaining cluster
- B. Create a shared SSO domain for each physical site.
- C. Deploy a vCenter Server for the management cluster. Deploy a vCenter Server for all remaining cluster
- D. Create a shared SSO domain across all physical sites.
- E. Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain for each physical site.
- F. Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain into a single physical site.

Answer: B

NEW QUESTION 38

An architect is designing a VMware solution for a customer to meet the following requirements:

- The solution must use investments in existing storage array that supports both block and file storage.

- The solution must support the ability to migrate workloads between hosts within a cluster.
- The solution must support resource management priorities.
- The solution must support the ability to connect virtual machines directly to LUNs.
- The solution should use existing 32G fabric infrastructure.
- There is no budget for additional physical hardware.

Which design decision should the architect make to meet these requirements?

- A. The ESXi hosts will leverage Fibre Channel (FC).
- B. The ESXi hosts will leverage iSCSI.
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE).
- D. The ESXi hosts will leverage NFS.

Answer: A

NEW QUESTION 41

A customer provides the following list of requirements for their vSphere platform:

- REQ01 The solution should utilize dual network connections to eliminate single points of failure.
- REQ02 The solution should allow logs to be retained for a period of 30 days.
- REQ03 All user access to the platform should be recorded for audit purposes.
- REQ04 The solution should allow the management of multiple ESXi hosts.
- REQ05 The solution should allow users to view the remote console of virtual machines.

Which two of the listed requirements would be classified as non-functional requirements? (Choose two.)

- A. The solution should utilize dual network connections to eliminate single points of failure
- B. The solution should allow the management of multiple ESXi hosts
- C. The solution should allow users to view the remote console of virtual machines
- D. All user access to the platform should be recorded for audit purposes
- E. The solution should allow logs to be retained for a period of 30 days

Answer: AE

NEW QUESTION 45

The storage team at an organization is planning to migrate from an older Fibre Channel storage environment to a new environment using IP-based storage.

Which two switch features or characteristics are appropriate for IP storage networks? (Choose two.)

- A. Fabric extending devices
- B. Spanning Tree Protocol (STP)
- C. 2:1 or greater bandwidth oversubscription for 10 GbE switches
- D. Non-blocking switch
- E. Deep or ultra buffered switches

Answer: DE

Explanation:

<https://www.arista.com/en/solutions/ip-storage-network-infrastructures>

NEW QUESTION 46

A architect is designing a new VMware software-designed data center (SDDC) using vSphere 7 to meet the following requirements:

- The SDDC must be deployed at two locations: primary and secondary.
- vSphere Replication must be used to replicate virtual machines between the two locations.
- Site Recovery Manager must be used to orchestrate disaster recovery (DR) activities.
- One single-sign on (SSO) domain must be used to authenticate access at both locations. Which design decision should the architect make to meet these requirements?

- A. A vCenter Server Appliance will be deployed to each sit
- B. Unique SSO domains will be created per site.
- C. A vCenter Server will be installed on Windows virtual machines deployed to both sites.
- D. A vCenter Server Appliance will be deployed to each site.
- E. A vCenter Server Appliance will be deployed to the primary site only.

Answer: D

NEW QUESTION 49

An architect is considering placement of virtual machines within an existing VMware software-defined data center (SDDC).

During the discovery phase, the following information is documented: Cluster One

- Six ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is enabled and set to automated
- Fully Automated vSphere DRS
- Transparent Page Sharing (TPS) is enabled Cluster Two
- Eight ESXi hosts
- vSphere HA with host failures cluster tolerates = 1

- Proactive HA is disabled
- Partially Automated vSphere DRS
- Transparent Page Sharing (TPS) is disabled Cluster Three
- Three ESXi hosts
- vSphere HA with admission control is disabled
- Proactive HA is not supported
- Transparent Page Sharing (TPS) is disabled Virtual Machine Resource Profile 1
- Memory sharing techniques should not be used
- Automated initial virtual machine placement

Virtual Machine Resource Profile 2

- Memory sharing techniques should not be used
- Virtual machines should be automatically restarted in the event of host failure regardless of available resources
- Automated initial virtual machine placement

Which two recommendations should the architect make for placement of the virtual machines to meet resource profile requirements? (Choose two.)

- A. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster One.
- B. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster One.
- C. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Two.
- D. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster Two.
- E. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Three.

Answer: DE

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.resmgmt.doc/GUID-FEAC3A43-C57E>

NEW QUESTION 53

An architect is designing a new VMware software-defined data center (SDDC) that will consist of 100 branch sites connected to a single VMware vCenter Server within the primary data center. To allow for the use of existing automation scripts, there is a requirement to replicate the names of the virtual distributed port groups across all sites. The procurement team purchases licensing and there is no further budget allocated.

Which design decision should the architect make to meet this requirement?

- A. A new vCenter Server will be deployed for each branch site
- B. A new host and cluster folder will be created for each branch site
- C. The automation script will be updated to reflect unique naming for each site
- D. A new virtual data center will be created for each branch site

Answer: B

NEW QUESTION 56

An architect is designing a new VMware solution for a customer that has a number of different resource profiles.

The following are the business requirements for the design:

The solution must support virtual machines with the following storage profiles:

-Write-intensive

-Backup

-Write-Once-Read-Many (WORM) archive

- The solution must support migration of virtual machine disks between storage profiles.
- The WORM archive data must be located at an isolated secure site.
- The backup storage array must only be connected to a backup media server.
- All data should be recoverable from backup.

Which design decision should the architect make to meet the business requirements?

- A. The solution will leverage a single storage array for the WORM archive and write-intensive storage profiles
- B. The solution will leverage the same array for the backup and write-intensive storage profiles
- C. The solution will leverage a different array for each storage profile
- D. The solution will leverage a single storage array for all storage profiles

Answer: C

NEW QUESTION 57

An architect is preparing a design for a customer. Based on requirements, the architect recommends an HCI- based infrastructure with all-flash architecture.

During the assessment, it is confirmed that the network throughput generated by virtual machines does not exceed 150 Mb/s.

What is the minimum number and type of network adapters in each server that the architect can recommend to ensure requirements are met and there is no single point of failure?


- A. Two 1 GbE network adapters per server
- B. Four 1 GbE network adapters per server
- C. Four 10 GbE network adapters per server
- D. Two 10 GbE network adapters per server

Answer: C

NEW QUESTION 61

Refer to the exhibit.

During a requirements gathering workshop, the customer shares the following diagram regarding their availability service-level agreements (SLAs):

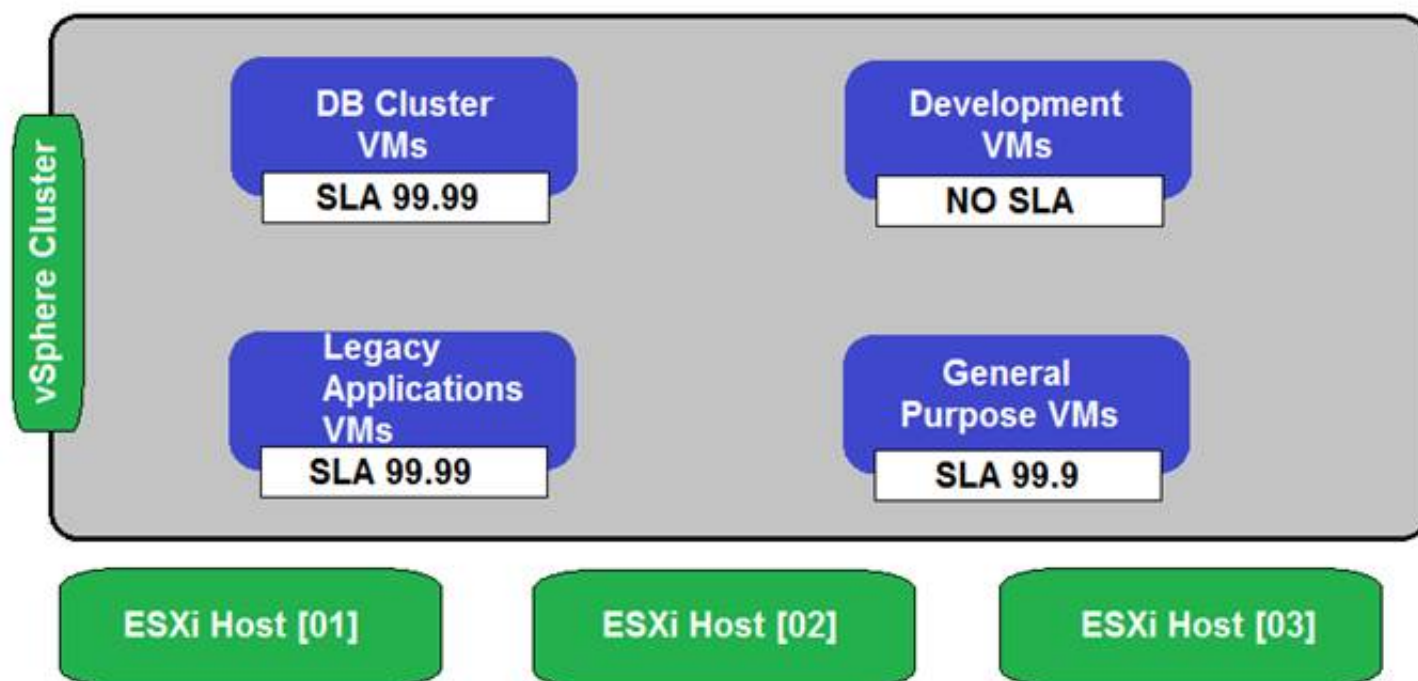

The customer wants database application level availability to always take precedence. What should the architect recommend to meet the customer's requirement?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Highest.
- B. Enable Fault Tolerance.
- C. Enable Sphere HA and maintain the default settings.
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest.

Answer: D

NEW QUESTION 66

An architect is designing a new vSphere cluster. The requirement is to provide a total of 96 CPU cores and 1.5 TB RAM across all hosts.

The following information has been provided:

Two different physical hardware profiles are available for the ESXi hosts in the cluster.

-Profile 1: 16 CPU cores and 256 GB RAM

-Profile 2: 32 CPU cores and 512 GB RAM

Profile 2 is twice as expensive to purchase as Profile 1.

Which two aspects should the architect consider when selecting the hardware profile? (Choose two.)

- A. The manufacturer and model of the CPUs in the hosts
- B. The amount of capacity available for failover of virtual machines within the cluster
- C. The downtime allowed for virtual machines that will be running within the cluster
- D. The cost to procure and maintain the hardware
- E. The number of virtual machines that will be running within the cluster

Answer: BE

NEW QUESTION 71

An organization's data scientists are executing a plan to use machine learning (ML). They must have access to graphical processing unit (GPU) capabilities to execute their computational models when needed. The solutions architect needs to design a solution to ensure that GPUs can be shared by multiple virtual machines. Which two solutions should the architect recommend to meet these requirements? (Choose two.)

- A. NVIDIA vGPU
- B. AMD MxGPU
- C. vSphere DirectPath I/O
- D. vSGA
- E. vSphere Bitfusion

Answer: AE

Explanation:

<https://blogs.vmware.com/apps/2018/07/using-gpus-with-virtual-machines-on-vsphere-part-1-overview.html>

NEW QUESTION 76

As part of a new hybrid cloud initiative for a large financial company, the customer technical team is presenting an overview of the current state of the infrastructure and their vision for a new solution.

The project team captures notes during the presentation and adds them to the discovery documentation. Which of the listed statements is a design constraint?

- A. The applications are created in-house with in-guest recovery protection
- B. The maximum tolerable data loss is 10 minutes
- C. The two data center locations have a network latency of 8 ms round-trip time (RTT)
- D. The existing storage is out of maintenance

Answer: D

NEW QUESTION 77

During a requirements gathering workshop, the customer provides the following requirement (REQ) and constraints (CON):

- REQ01: The customer is looking for a way to limit database virtual machine (VM) placement to save on CPU licensing costs.
- CON01: There is a single cluster with no budget to scale.
- CON02: All virtual machines must run on the consolidated cluster.

Which two design decisions should the architect make to meet the customer requirement? (Choose two.)

- A. The solution must use VM-VM anti-affinity rules
- B. The solution must use vSphere DRS in manual mode
- C. The solution must use a vRealize Orchestrator workflow for VM placement
- D. The solution must use VM-Host affinity rules
- E. The solution must use vSphere VM and host DRS groups

Answer: DE

NEW QUESTION 81

An architect is tasked with expanding an existing VMware software-defined data center (SDDC) solution so that it can be used to deliver a virtual desktop infrastructure (VDI) service off-shore development activities.

The production environment is currently delivered across two geographically dispersed data centers. The two data centers are currently connected to each other through multiple diversely routed, high bandwidth and low latency links. The current operations management components are deployed to a dedicated management cluster that is configured with N+1 redundancy. The current VMware software-defined data center (SDDC) has a monthly availability target of 99.5%, which includes all management components.

The customer requires that the new solution scale to support the concurrent running of 500 persistent virtual desktops. The virtual desktops must not share the same virtual infrastructure as existing virtual machines, but can be managed using the same VMware operations management components. Any new VDI service management components must be installed into the management cluster. There is no requirement to back up the virtual desktops because all relevant user data is stored centrally. The VDI service is providing business critical services and must have an availability target of 99.9%.

Given the information from the customer, which two assumptions would the architect include in the design? (Choose two.)

- A. The existing virtual infrastructure has sufficient capacity to host the new VDI workloads
- B. The existing operations monitoring tools have sufficient capacity to monitor the new VDI services
- C. The existing management cluster has enough available capacity to host any VDI service management component
- D. The management cluster has N+1 redundancy
- E. The VDI service has a higher service-level agreement (SLA) than the operations management SLA

Answer: BD

NEW QUESTION 83

An architect is reviewing a physical storage design. The customer has specified that a new active-passive based storage array will be used to provide storage for the vSphere clusters.

Which configuration should for the architect recommended?

- A. VMW_SATP_LOCAL
- B. VMW_PSP_MRU
- C. VMW_SATP_DEFAULT_AA
- D. VMW_PSP_FIXED

Answer: B

NEW QUESTION 84


Which of the listed requirements would be classified as a recoverability non-functional requirement?

- A. The platform must be integrated with existing change control policies.
- B. The platform must be able to support a maximum tolerable downtime (MTD) of 30 minutes.
- C. Maintenance windows must be scheduled to take place monthly during an established overnight period.
- D. The platform must be available 24 hours a day, 7 days a week with the exception of scheduled downtime.

Answer: A

NEW QUESTION 89

Refer to the exhibit.

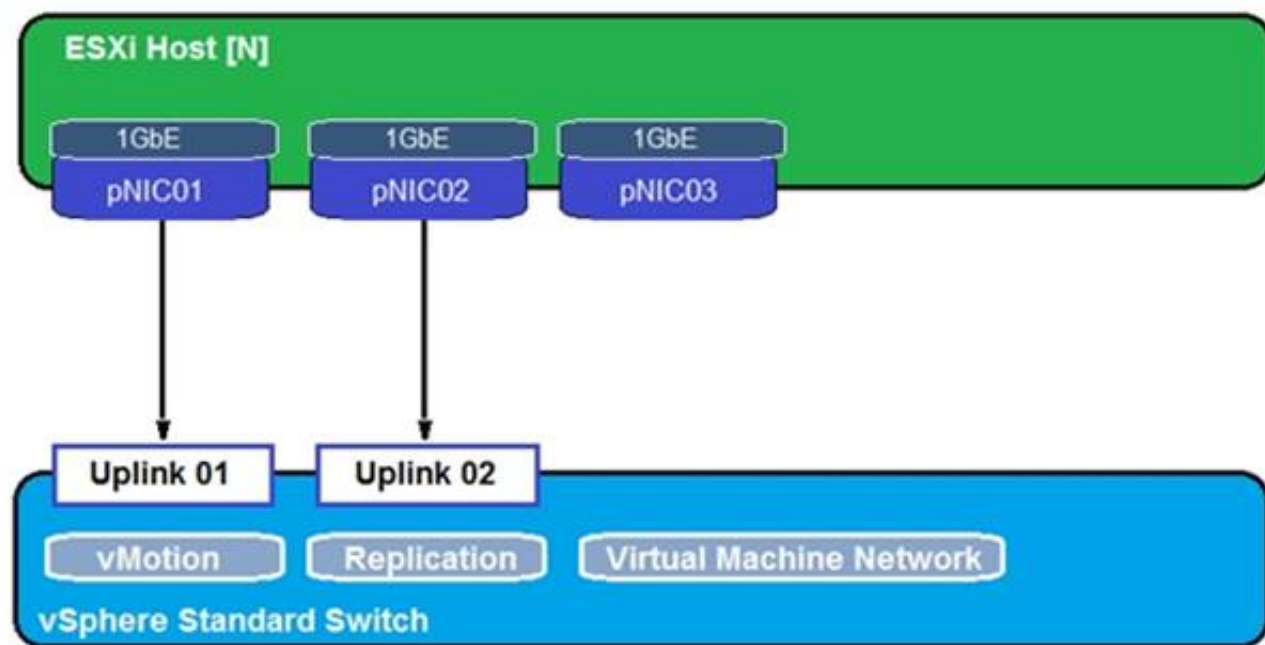

During a requirements gathering workshop, the customer shares the following about their existing ESXi host virtual networking infrastructure:
 The customer confirms that:

- Each ESXi host has approximately 200 virtual machines.
- They want to maximize the number of concurrent virtual machine migrations.
- When placing a host in maintenance mode, it takes a long time to evacuate the virtual machines. Which two recommendations should the architect make in order to help the customer overcome their challenge? (Choose two.)

- A. Configure the network to use MTU for the VMotion VMKernel to 1,600 bytes
- B. Configure the network to use MTU for the VMotion VMKernel to 9,000 bytes
- C. Create an additional standard switch with pNIC3 to use for vMotion
- D. Use the 3 pNICs and bundle them in a link aggregation group (LAG) configuration
- E. Use 10 GbE NICs instead of 1 GbE

Answer: CE

NEW QUESTION 93

Application owners require support of a Microsoft Windows Server Failover Cluster (WSFC).
 Their current environment consists of the following components:

- vSphere 7.0 and vSAN 7.0
- External array supporting NFS 3.0/4.1, Server Message Block (SMB) 2.1
- 10 GbE storage connectivity for all devices

The solution architect is tasked with coming up with a solution to meet this requirement while utilizing their existing investments.
 Which two recommendations could the architect make? (Choose two.)

- A. Use vSAN native support for WSFC
- B. Use NFS 4.1 shares for quorum and shared disk
- C. Use raw device mapping (RDM)
- D. Use the SMB 2.1 protocol for sharing disks
- E. Run WSFC on vSAN iSCSI Target Service

Answer: AE

Explanation:

<https://blogs.vmware.com/virtualblocks/2018/04/18/vsan-6-7-introducing-wsfc-support-vsan>

NEW QUESTION 97

An architect is designing a new vSphere environment with the following resources:

- 600 vCPU
- 5,760 GB RAM

Average resource usage is:

- 60 vCPU
- 1,152 GB RAM

The design must meet the following requirements:

- The environment has the ability to burst by 25%.
- Each host can schedule 36 vCPUs and has 512 GB RAM.
- Management overhead is 20%.

What is the minimum number of hosts required to meet the design requirements?

- A. Three
- B. Five
- C. Four
- D. Two

Answer: D

NEW QUESTION 101

Which two statements are true about gathering functional business and application requirements? (Choose two.)

- A. It focuses on functional requirements with C-level stakeholders
- B. It leverages a single set of QUESTION NO:s for all stakeholders
- C. It might require multiple rounds of stakeholder interviews
- D. It builds stakeholder consensus
- E. It is a non-iterative process

Answer: AC

NEW QUESTION 102

An architect is planning the physical server configuration for a vSAN-based infrastructure.

Which operations mode should a RAID controller support to minimize potential server downtime during physical disk failures?

- A. RAID controller with Passthru mode
- B. RAID controller with RAID 5 mode
- C. RAID controller with RAID 10 mode
- D. RAID controller with RAID 6 mode

Answer: D

NEW QUESTION 104

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 3V0-21.21 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 3V0-21.21 Product From:

<https://www.2passeasy.com/dumps/3V0-21.21/>

Money Back Guarantee

3V0-21.21 Practice Exam Features:

- * 3V0-21.21 Questions and Answers Updated Frequently
- * 3V0-21.21 Practice Questions Verified by Expert Senior Certified Staff
- * 3V0-21.21 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 3V0-21.21 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year