



VMware

Exam Questions 3V0-21.23

VMware vSphere 8.x Advanced Design

About ExamBible

[Your Partner of IT Exam](#)

Found in 1998

ExamBible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, ExamBible has its unique advantages that other companies could not achieve.

Our Advances

* 99.9% Uptime

All examinations will be up to date.

* 24/7 Quality Support

We will provide service round the clock.

* 100% Pass Rate

Our guarantee that you will pass the exam.

* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

NEW QUESTION 1

An architect is reviewing a physical storage design. The customer has specified that storage DRS will be used for ease of operational management for capacity and performance.

Which recommendation should the architect include in the design?

- A. Create smaller datastores to balance space with Storage DRS
- B. Use a larger number of storage profiles (varied disk speeds and RAID levels) to improve performance
- C. Create larger datastores to balance space with Storage DRS
- D. Create more datastores within each Storage DRS cluster to balance space and performance

Answer: D

NEW QUESTION 2

An architect is designing a VMware solution for a customer based on the following information:

- The solution must support the ability to migrate workloads between hosts within a cluster.
- The solution must support resource management priorities.
- The solution must support the ability to connect virtual machines directly to LUNs.
- The solution should use existing IPv4 based network infrastructure.
- There is no budget for additional physical hardware.

Which two design decisions could the architect make to meet these requirements? (Choose two.)

- A. The ESXi hosts will leverage Fibre Channel (FC)
- B. The ESXi hosts will leverage NFS 3
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE)
- D. The ESXi hosts will leverage iSCSI
- E. The ESXi hosts will leverage NFS 4.1

Answer: BD

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-8A929FE4-1207-4C> Starting from vSphere 7.0, VMware no longer supports software FCoE in production environments.

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-6B49866F-7005-40>

NEW QUESTION 3

An architect is designing a new vSphere platform for a customer to meet the following requirements:

- The platform must be deployed into five physically separate sites.
- The sites are spread across multiple regions.
- Some sites require more than one vCenter Server.
- The platform must provide an administrator with the ability to access virtual infrastructure components across all sites from a single management tool instance.

Which single sign-on (SSO) design recommendation will meet these requirements?

- A. Use an SSO domain across all vCenter Server instances
- B. Use an SSO domain per region
- C. Use an SSO domain per vCenter Server instance
- D. Use an SSO domain per site

Answer: C

NEW QUESTION 4

An architect is designing the expansion of an existing vSphere 7 environment. The customer is requesting a design for a new cluster to support the anticipated future business growth. The requirements specified for the existing environment design must be considered when designing the new cluster.

The existing design has the following requirements:

- REQ01 The environment has an availability target of 99.5% for all infrastructure.
- REQ02 The recovery time objective (RTO) for Tier 1 virtual machines is one hour.
- REQ03 Windows and Linux virtual machines must reside on separate clusters.
- REQ04 Access to the management cluster within the environment must be controlled. Which of the listed requirements would be classified as a functional requirement?

- A. The environment has an availability target of 99.5% for all infrastructure
- B. The recovery time objective (RTO) for Tier 1 virtual machines is one hour
- C. Access to the management cluster within the environment must be controlled
- D. Windows and Linux virtual machines must reside on separate clusters

Answer: D

NEW QUESTION 5

An architect will be taking over control of a former Linux server fleet and repurposing the hardware into a new vSphere cluster. The current environment is already connected to the network but the hosts do not have any local disks. Since the fleet hardware is uniform, the architect can use a single ESXi image. All hosts within the cluster have the same CPU and memory capacity.

Which ESXi deployment method should the architect use?

- A. Stateless cached vSphere Auto Deploy
- B. Stateless vSphere Auto Deploy
- C. Manual install of each ESXi host with an image from USB
- D. Stateful vSphere Auto Deploy

Answer: B

NEW QUESTION 6

A customer is deploying a new cluster and wants to be able to patch and update two hosts in parallel. The cluster must be able to maintain N+1 resiliency across the remaining hosts while patching activities are performed. The current expected utilization of the platform requires a minimum of two hosts to support all of the virtual machines.

What is the minimum number of hosts the customer will require in the cluster in order to meet the required resiliency level?

- A. Five
- B. Six
- C. Four
- D. Seven

Answer: A

NEW QUESTION 7

An architect is designing a new greenfield environment that will install ESXi on local disks. There is a requirement to streamline initial and future installations of ESXi hosts.

Which configuration option should the architect recommend for installing ESXi hosts to meet these requirements?

- A. Installation with kick start script
- B. Auto Deploy with stateless caching mode
- C. Manual installation using boot from SAN
- D. Auto Deploy with stateful install mode

Answer: D

NEW QUESTION 8

Following a recent acquisition, the architect learns that both companies use vSphere on-premise and will need to combine the data centers into one. The acquired company's licenses will not be renewed for cost-savings related to the acquisition. All consumed vSphere licenses must have active support to support line-of-business operations. The merged environment must maintain 25% spare capacity. The architect has a small budget remaining unallocated for hardware. The architect has calculated that the current vSphere environment can absorb the acquired company's virtual machines but the cluster will run at 90% memory utilization and at 50% CPU utilization.

Which design decision can the architect make to incorporate the new company's virtual machines into the combined vSphere environment?

- A. Migrate the acquired company's virtual machines into the vSphere environment as it will currently fit.
- B. Use the current budget to add memory to the cluster to increase each ESXi host's capacity and add the new virtual machines.
- C. Purchase extra hosts to add to the cluster in anticipation of adding the acquired company's virtual machines.
- D. Purchase new licenses for some of the acquired company's ESXi hosts and add them to the cluster to hold the acquired company's virtual machines.

Answer: B

NEW QUESTION 9

An architect makes the design decision to install ESXi on embedded and resilient 8 GB SD cards. What is the impact of this design decision?

- A. Host profiles must be used for this kind of installation
- B. Scratch partition would need to be created on the external storage
- C. The size of the SD cards is too small and the installation will fail
- D. The vSphere Auto Deploy feature must be enabled on vCenter Server

Answer: B


Explanation:

<https://kb.vmware.com/s/article/2074026> You can store coredumps on the SD boot media, but refrain from configuring the scratch partition here as the logs are write intensive and can cause the SD card to fail faster resulting in re-installation of ESXi

NEW QUESTION 10

Refer to the exhibit.

During a requirements gathering workshop, the architect shares the following diagram:

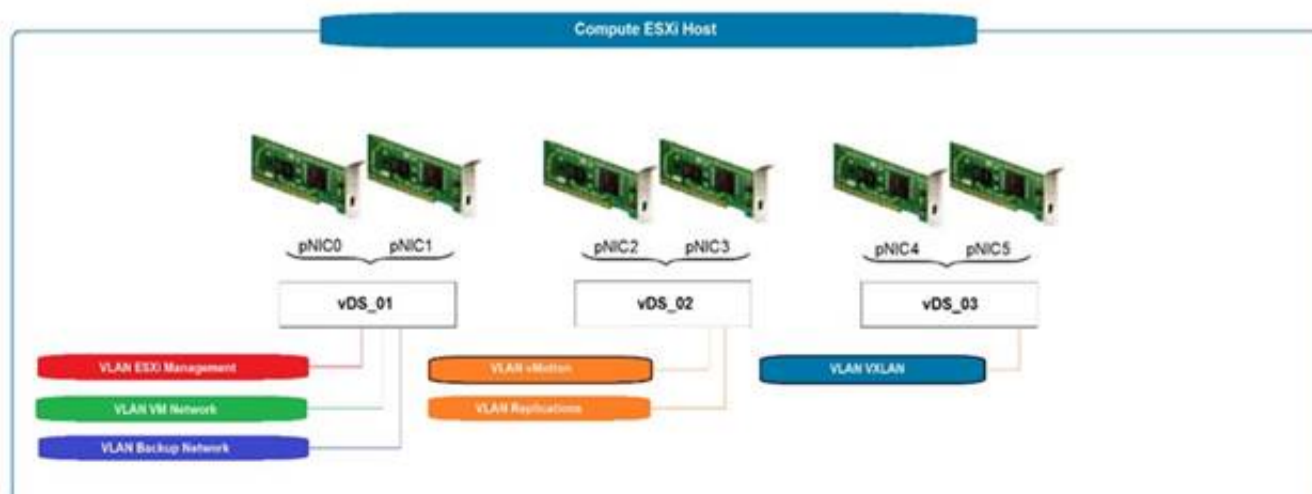

What should the architect recommend for guaranteed throughput for each service?

- A. Use explicit failover order with pNIC0 as Active for ESXi Management and VM Network Use explicit failover order with pNIC1 as Active for backup networkUse

explicit failover order with pNIC2 as Active for vMotion Use explicit failover order with pNIC3 as Active for replication
B. Use the Route Based on IP Hash for ESXi management and VM network Use the Route Based on IP Hash for backup network Use the Route Based on the Originating Virtual Port for vMotion Use failover with pNIC3 as Active for replication
C. Create a link aggregation group (LAG) for vDS_01 Use the Route Based on Physical NIC Load for vMotion Use the Route Based on Physical NIC Load for replication
D. Use the Route Based on IP Hash for ESXi management and VM network Use failover with pNIC1 as Active for backup network Create a link aggregation group (LAG) for vDS_02

Answer: A

NEW QUESTION 10

Following a company merger, there are two data centers running vSphere environments. Both data centers are leveraging separate Layer 3 vMotion networks. Which requirement must be met in order to enable vMotion migration between these locations?

- A. The vMotion service must be configured on the Management VMkernel adapter
- B. A dedicated TCP/IP stack for vMotion with a dedicated gateway must be configured
- C. A stretched vMotion network must be configured between data centers
- D. Virtual machines must be powered off in order to migrate them between data centers

Answer: B

NEW QUESTION 13

An architect is designing a new backup solution for a vSphere platform that has been recently upgraded to vSphere 7. The architect wants the backup solution to perform the following:

- > Full virtual machine image backup and restore
- > Incremental virtual machine image backup and restore
- > File level backup and restore within both Windows and Linux virtual machines
- > LAN-free backup

Which functional requirement should the architect include in the design of the new backup solution?

- A. The backup solution must leverage the VMware Consolidated Backup (VCB) framework.
- B. The backup solution must leverage virtual machine snapshots.
- C. The backup solution must leverage VMware vSphere Storage APIs - Data Protection.
- D. The backup solution must leverage VMware vStorage APIs for Data Protection (VADP).

Answer: C

NEW QUESTION 15

An architect is designing a new greenfield environment with 600 ESXi hosts in an automated fashion. The engineering department already has a PXE Boot server, TFTP server, and DHCP server set up with an NFS mount for their current Linux servers.

The architect must be able to demonstrate and meet a security requirement to have all infrastructure processes separated.

Which recommendation should the architect make for the ESXi host deployment?

- A. Request an isolated network segment to use and dedicate it to Auto Deploy functions
- B. Ask the business to expand the engineering environment to service the virtual environment as well
- C. Request a common shared network with flexible security measures to accommodate different auto deployment options
- D. Deploy each ESXi host individually and document it to satisfy security requirements

Answer: A

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.esxi.install.doc/GUID-8DAC6FEE-0441-4072>

NEW QUESTION 18

An architect is designing an environment for a retail customer. The design will use a single small vCenter Server Appliance and a cluster of eight ESXi hosts at a remote site. There is a single 10 GbE connected network at the remote site to support all management services. It is not possible to create additional management networks at the remote site. Virtual machine backups at the site will be dependent on the vCenter Server being available.

Which design decision should the architect make to maximize availability for backups?

- A. vCenter Server High Availability will be configured.
- B. The vCenter Server Appliance will be protected with vSphere Fault Tolerance.
- C. The cluster will be configured to use vSphere DRS in fully automated mode.
- D. The cluster will be configured with vSphere HA and set to restart virtual machines based on guest operating system heartbeat monitoring.

Answer: C

NEW QUESTION 22

What is a benefit of using a scale-out method for handling vSphere cluster growth?

- A. An increase in the recovery time objective (RTO) for the cluster
- B. Faster to reach the limit of virtual machines per host
- C. An overall reduction in the license costs for the cluster
- D. Less potential impact to virtual machines during a single host failure

Answer: B

NEW QUESTION 27

An architect is considering placement of virtual machines within an existing VMware software-defined data center (SDDC). During the discovery phase, the following information is documented:

Cluster One

- Six ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is enabled and set to automated
- Fully Automated vSphere DRS
- Transparent Page Sharing (TPS) is enabled

Cluster Two

- Eight ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is disabled
- Partially Automated vSphere DRS
- Transparent Page Sharing (TPS) is disabled

Cluster Three

- Three ESXi hosts
- vSphere HA with admission control is disabled
- Proactive HA is not supported
- Transparent Page Sharing (TPS) is disabled

Virtual Machine Resource Profile 1

- Memory sharing techniques should not be used
- Virtual machines should be automatically restarted in the event of host failure if resources are available
- Automated initial virtual machine placement

Virtual Machine Resource Profile 2

- Memory sharing techniques can be used
- Virtual machines should be protected from any host hardware failures
- Automated initial virtual machine placement

Which two recommendations should the architect make for placement of the virtual machines to meet resource profile requirements? (Choose two.)

- A. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster One.
- B. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster One.
- C. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Two.
- D. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster Two.
- E. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Three.

Answer: BD

NEW QUESTION 29

An architect is finalizing the design for a new vSphere platform based on the following information:

- All Windows virtual machines will be hosted on a dedicated cluster for licensing purposes.
- All Linux virtual machines will be hosted on a dedicated cluster for licensing purposes. All management virtual machines will be hosted on a dedicated cluster.
- A total of ten physical sites will be used to host virtual machines.
- In the event of one physical datacenter becoming unavailable, the manageability of the virtual infrastructure in the remaining data centers should not be impacted.
- Access to configure the management virtual machines via vCenter Server must be controlled through the management Active Directory domain.
- Access to configure the Windows and Linux virtual machines must be controlled through the resource Active Directory domain.
- The management and resource Active Directory domains are part of separate Active Directory forests and do not have any trusts between them.
- The design will use Active Directory with Integrated Windows Authentication.

How should the architect document the vCenter Server configuration for this design?

- A. Deploy a vCenter server for the management cluster. Deploy a vCenter Server for all remaining cluster
- B. Create a shared SSO domain for each physical site.
- C. Deploy a vCenter Server for the management cluster. Deploy a vCenter Server for all remaining cluster
- D. Create a shared SSO domain across all physical sites.
- E. Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain for each physical site.
- F. Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain into a single physical site.

Answer: B

NEW QUESTION 30

During a requirements gathering workshop, the customer provides the following information:

- Each host has 2 × 10 GbE NIC
- EtherChannel is not currently configured
- No changes can be made to the physical network
- Network throughput must be prioritized for defined critical services

Which two recommendations should the architect make with regard to virtual networking? (Choose two.)

- A. Use Route Based on Physical NIC Load.
- B. Use Network I/O Control with Shares.
- C. Use Network I/O Control with Reservation.
- D. Use Link Aggregation Control Protocol (LACP).
- E. Use Network I/O Control with Limits.

Answer: AD

NEW QUESTION 34

An architect is tasked with planning the design of a new vSphere environment. When commissioned, this environment will be used to migrate an existing set of virtual machines.

An inventory of the existing infrastructure, including configured vCPU, RAM and storage sizes has been provided.

In order for each virtual machine to be migrated, which two data sources with peak and average utilization data are required for sizing? (Choose two.)

- A. %Ready
- B. Disk Write latency
- C. CPU
- D. Ballooned memory
- E. IOPS

Answer: BE

NEW QUESTION 39

A architect is designing a new VMware software-designed data center (SDDC) using vSphere 7 to meet the following requirements:

- The SDDC must be deployed at two locations: primary and secondary.
- vSphere Replication must be used to replicate virtual machines between the two locations.
- Site Recovery Manager must be used to orchestrate disaster recovery (DR) activities.
- One single-sign on (SSO) domain must be used to authenticate access at both locations. Which design decision should the architect make to meet these requirements?

- A. A vCenter Server Appliance will be deployed to each sit
- B. Unique SSO domains will be created per site.
- C. A vCenter Server will be installed on Windows virtual machines deployed to both sites.
- D. A vCenter Server Appliance will be deployed to each site.
- E. A vCenter Server Appliance will be deployed to the primary site only.

Answer: D

NEW QUESTION 43

Which requirement would be classified as a functional requirement within the application design documentation?

- A. The application must be hosted with redundancy levels of N+1 or better.
- B. Penetration testing must be executed quarterly with a pass rate of 80% or higher.
- C. The application must be capable of handling 200 transactions per second.
- D. Administrators must monitor the network traffic of the desired systems.

Answer: C

NEW QUESTION 45

A customer has a database cluster with 40/60 read/write ratio and a high IOPs requirement with no contention on an all-flash vSAN cluster.

Which two storage settings should be configured for best performance? (Choose two.)

- A. IOPs limits enabled
- B. RAID 1
- C. Deduplication and Compression disabled
- D. RAID 5/6
- E. Deduplication and Compression enabled

Answer: AB

NEW QUESTION 47

There is a request for approved virtual machine applications through a new vSphere platform's integrated automation portal. The platform was built following all provided company security guidelines and has been assessed against Sarbanes-Oxley Act of 2002 (SOX) regulations.

The platform has the following characteristics:

- vRealize Operations is being used to monitor all clusters.
- There is a dedicated ESXi cluster, supporting all management services.
- All network traffic is via distributed virtual switches (DVS). There is a dedicated ESXi cluster for all line-of-business applications.
- Network traffic is serviced by NSX-T.

There is a dedicated ESXi cluster for virtual desktop infrastructure (VDI).

- Network traffic is serviced by NSX-T.

The application owner is requesting approval to install a new service that must be protected as per the Payment Card Industry (PCI) Data Security Standard.

Which additional non-functional requirement should the architect include in the design to support the new service?

- A. The vSphere hosting platform and all PCI application virtual machines must be assessed against Payment Card Industry (PCI) Data Security Standard compliance.
- B. The vSphere hosting platform and all PCI application virtual machines must be assessed for SOX compliance.
- C. The vSphere hosting platform and all PCI application virtual machine network traffic must be routed via NSX-T.
- D. The vSphere hosting platform and all PCI application virtual machines must be monitored using the vRealize Operations Compliance Pack for Payment Card Industry.

Answer: A

NEW QUESTION 52

The architect for a large enterprise is tasked with reviewing a proposed design created by a service partner.

Which design elements are expected to be detailed within the physical design section of the documentation?

- A. A design diagram illustrating the configuration and specific attributes, such as IP addresses
- B. A list of requirements, constraints, and risks
- C. A solution architecture diagram with the components and data flow
- D. An entity relationship diagram describing upstream and downstream dependencies for specific service components

Answer: B

NEW QUESTION 57

During a requirements gathering workshop to design a physical to virtual migration, the customer provides the following information:

- There is no physical firewall in the data center with no anticipated plans for a future network refresh.
- Leveraging the virtual infrastructure to mitigate the lack of network security must be addressed in the design.
- All physical servers to be migrated exist on the same VLAN.

Which recommendation should the architect make to address the customer requirement with regard to virtual networking?

- A. Split the virtual machines into several VLANs Use tag actions
- B. Create port groups with different names and same VLAN IDs Enable traffic shaping for ingress and egress traffic
- C. Enable traffic filtering and marking Use allow or drop actions
- D. Disable traffic filtering and marking Use tag actions

Answer: A

NEW QUESTION 59

Which two of the listed requirements would be classified as manageability non-functional requirements? (Choose two.)

- A. ESXi clusters must scale when compute resources are sustained above 70% for five business days
- B. vSphere Fault Tolerance must be supported to improve application uptime
- C. ESXi host updates must be installed within one week of release
- D. The vSphere environment must support administrator password rotation
- E. ESXi clusters must scale to 500 concurrent virtual machines

Answer: AC

NEW QUESTION 61

As part of a new hybrid cloud initiative for a large financial company, the customer technical team is presenting an overview of the current state of the infrastructure and their vision for a new solution.

The project team captures notes during the presentation and adds them to the discovery documentation. Which of the listed statements is a design constraint?

- A. The applications are created in-house with in-guest recovery protection
- B. The maximum tolerable data loss is 10 minutes
- C. The two data center locations have a network latency of 8 ms round-trip time (RTT)
- D. The existing storage is out of maintenance

Answer: D

NEW QUESTION 66

An architect decides to separate virtual desktops and application servers into separate vSphere clusters to meet security and management requirements.

What are two implications of this design decision? (Choose two.)

- A. There will be an increase in management overhead.
- B. Identical hardware must be procured for all hosts.
- C. There will be a reduction in performance.
- D. The patching cycles will affect both clusters at the same time.
- E. There will be additional licensing and cost requirements for both clusters.

Answer: DE

NEW QUESTION 68

During a requirements gathering workshop, the customer provides the following requirement (REQ) and constraints (CON):

- REQ01: The customer is looking for a way to limit database virtual machine (VM) placement to save on CPU licensing costs.
- CON01: There is a single cluster with no budget to scale.
- CON02: All virtual machines must run on the consolidated cluster.

Which two design decisions should the architect make to meet the customer requirement? (Choose two.)

- A. The solution must use VM-VM anti-affinity rules
- B. The solution must use vSphere DRS in manual mode
- C. The solution must use a vRealize Orchestrator workflow for VM placement
- D. The solution must use VM-Host affinity rules
- E. The solution must use vSphere VM and host DRS groups

Answer: DE

NEW QUESTION 69

An architect is tasked with expanding an existing VMware software-defined data center (SDDC) solution so that it can be used to deliver a virtual desktop infrastructure (VDI) service off-shore development activities.

The production environment is currently delivered across two geographically dispersed data centers. The two data centers are currently connected to each other through multiple diversely routed, high bandwidth and low latency links. The current operations management components are deployed to a dedicated

management cluster that is configured with N+1 redundancy. The current VMware software-defined data center (SDDC) has a monthly availability target of 99.5%, which includes all management components.

The customer requires that the new solution scale to support the concurrent running of 500 persistent virtual desktops. The virtual desktops must not share the same virtual infrastructure as existing virtual machines, but can be managed using the same VMware operations management components. Any new VDI service management components must be installed into the management cluster. There is no requirement to back up the virtual desktops because all relevant user data is stored centrally. The VDI service is providing business critical services and must have an availability target of 99.9%.

Given the information from the customer, which two assumptions would the architect include in the design? (Choose two.)

- A. The existing virtual infrastructure has sufficient capacity to host the new VDI workloads
- B. The existing operations monitoring tools have sufficient capacity to monitor the new VDI services
- C. The existing management cluster has enough available capacity to host any VDI service management component
- D. The management cluster has N+1 redundancy
- E. The VDI service has a higher service-level agreement (SLA) than the operations management SLA

Answer: BD

NEW QUESTION 71

An architect is reviewing a physical storage design. The customer has specified that a new active-passive based storage array will be used to provide storage for the vSphere clusters.

Which configuration should for the architect recommended?

- A. VMW_SATP_LOCAL
- B. VMW_PSP_MRU
- C. VMW_SATP_DEFAULT_AA
- D. VMW_PSP_FIXED

Answer: B

NEW QUESTION 74

Which of the listed requirements would be classified as a recoverability non-functional requirement?

- A. The platform must be integrated with existing change control policies.
- B. The platform must be able to support a maximum tolerable downtime (MTD) of 30 minutes.
- C. Maintenance windows must be scheduled to take place monthly during an established overnight period.
- D. The platform must be available 24 hours a day, 7 days a week with the exception of scheduled downtime.

Answer: A

NEW QUESTION 76

A customer has six hosts available in a cluster. When running at full capacity, all virtual machines can be run on two hosts.

How many hosts can the customer place into maintenance mode at the same time while still providing N+2 resiliency to the cluster?

- A. Two
- B. Three
- C. One
- D. None

Answer: A

NEW QUESTION 78

A customer requires the use of data encryption to ensure data is not accessible when a drive is removed from the primary storage platform. However, there is also a requirement to use deduplication and compression against all workloads in order to conserve space.

Which solution meets the customer requirements?

- A. Data-in-transit encryption
- B. OS-level encryption
- C. Encrypted backups
- D. Array-based encryption

Answer: D

NEW QUESTION 82

A new vSphere platform is being created. The platform will host virtual machines that will run management services and line-of-business applications.


What should the architect consider when designing the number and type of clusters required?

- A. Maximum tolerable downtime
- B. Predicted platform growth
- C. Auditing requirements for the virtual machines
- D. The level of isolation required between virtual machine classifications

Answer: D

NEW QUESTION 86

Refer to the exhibit.

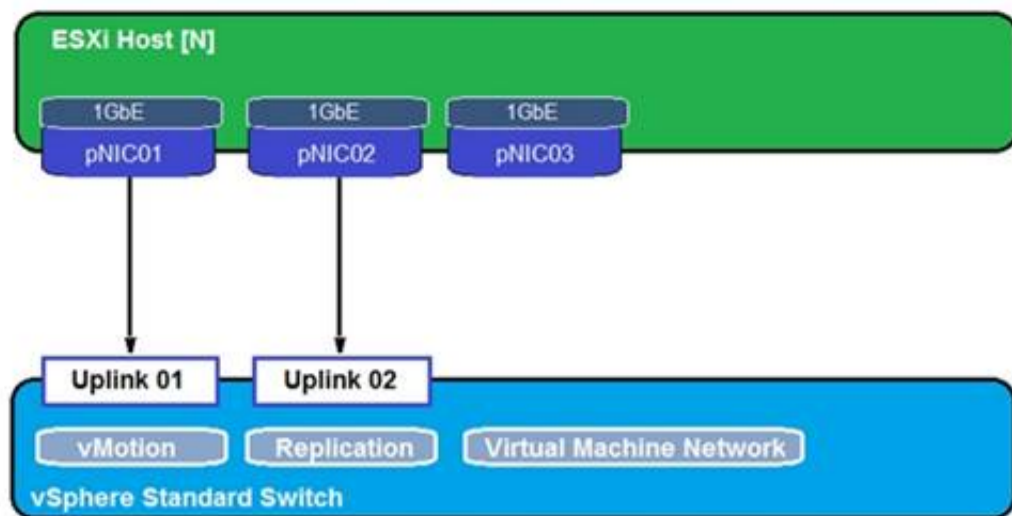

During a requirements gathering workshop, the customer shares the following about their existing ESXi host virtual networking infrastructure:

The customer confirms that:

- > Each ESXi host has approximately 200 virtual machines.
- > They want to maximize the number of concurrent virtual machine migrations.
- > When placing a host in maintenance mode, it takes a long time to evacuate the virtual machines. Which two recommendations should the architect make in order to help the customer overcome their challenge? (Choose two.)

- A. Configure the network to use MTU for the VMotion VMKernel to 1,600 bytes
- B. Configure the network to use MTU for the VMotion VMKernel to 9,000 bytes
- C. Create an additional standard switch with pNIC3 to use for vMotion
- D. Use the 3 pNICs and bundle them in a link aggregation group (LAG) configuration
- E. Use 10 GbE NICs instead of 1 GbE

Answer: CE

NEW QUESTION 90

An architect is designing a new vSphere environment with the following resources:

- > 600 vCPU
- > 5,760 GB RAM

Average resource usage is:

- > 60 vCPU
- > 1,152 GB RAM

The design must meet the following requirements:

- > The environment has the ability to burst by 25%.
- > Each host can schedule 36 vCPUs and has 512 GB RAM.
- > Management overhead is 20%.

What is the minimum number of hosts required to meet the design requirements?

- A. Three
- B. Five
- C. Four
- D. Two

Answer: D

NEW QUESTION 94

An architect is tasked with designing a new VMware software-defined data center (SDDC) using VMware vSAN. The architect uses a storage assessment tool to determine the storage requirements for the new vSAN cluster. The new SDDC is going to be deployed into the existing data center and must be connected to a shared core network switch.

The architect decides to use vSAN ReadyNodes with the following configuration:

- > Two disk groups with:
- > Write Intensive NVMe 800 GB drive for cache
- > Four 3.84 TB Mixed Use NVMe for capacity
- > Four 10 GbE ports

Which element represents a risk that should be included in this design?

- A. The number of 10 GbE capable ports in the vSAN ReadyNode
- B. The use of vSAN ReadyNodes
- C. The existing network is 10 GbE capable
- D. The use of NVMe drives for cache and capacity

Answer: C

NEW QUESTION 98

An architect has 50 ESXi hosts to deploy and DHCP servers are not allowed on any network. Which automated host deployment method should the architect use?

- A. Stateless vSphere Auto Deploy
- B. Stateful vSphere Auto Deploy
- C. Scripted installation
- D. Interactive installation

Answer: C

NEW QUESTION 100

An architect is planning the physical server configuration for a vSAN-based infrastructure.

Which operations mode should a RAID controller support to minimize potential server downtime during physical disk failures?

- A. RAID controller with Passthru mode
- B. RAID controller with RAID 5 mode
- C. RAID controller with RAID 10 mode
- D. RAID controller with RAID 6 mode

Answer: D

NEW QUESTION 105

As part of a requirements gathering workshop, the customer provides the following requirements for the design of a new greenfield virtual infrastructure:

- Some applications have a latency that must be less than 5 minutes.
- The solution must be able to support a workload growth rate of 10% per year. Which requirement classification is being gathered for the design documentation?

- A. Performance
- B. Manageability
- C. Recoverability
- D. Availability

Answer: A

NEW QUESTION 109

.....

Relate Links

100% Pass Your 3V0-21.23 Exam with Examible Prep Materials

<https://www.exambible.com/3V0-21.23-exam/>

Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>