

NSE4_FGT-7.2 Dumps

Fortinet NSE 4 - FortiOS 7.2

https://www.certleader.com/NSE4_FGT-7.2-dumps.html



NEW QUESTION 1

Which two protocols are used to enable administrator access of a FortiGate device? (Choose two.)

- A. FTM
- B. SSH
- C. HTTPS
- D. FortiTelemetry

Answer: BC

NEW QUESTION 2

Refer to the exhibit.

```
# diagnose test application ipsmonitor

1: Display IPS engine information
2: Toggle IPS engine enable/disable status
3: Display restart log
4: Clear restart log
5: Toggle bypass status
6: Submit attack characteristics now
10: IPS queue length
11: Clear IPS queue length
12: IPS L7 socket statistics
13: IPS session list
14: IPS NTurbo statistics
15: IPSA statistics
...
97: Start all IPS engines
98: Stop all IPS engines
99: Restart all IPS engines and monitor
```

Examine the intrusion prevention system (IPS) diagnostic command shown in the exhibit. If option 5 is used with the IPS diagnostic command and the outcome is a decrease in the CPU usage, what is the correct conclusion?

- A. The IPS engine is unable to prevent an intrusion attack.
- B. The IPS engine is inspecting a high volume of traffic.
- C. The IPS engine will continue to run in a normal state.
- D. The IPS engine is blocking all traffic.

Answer: B

NEW QUESTION 3

Refer to the exhibits.

Exhibit A shows a network diagram. Exhibit B shows the firewall policy configuration and a VIP object configuration.

The WAN (port1) interface has the IP address 10.200.1.1/24.

The LAN (port3) interface has the IP address 10.0.1.254/24.

Exhibit A **Exhibit B**

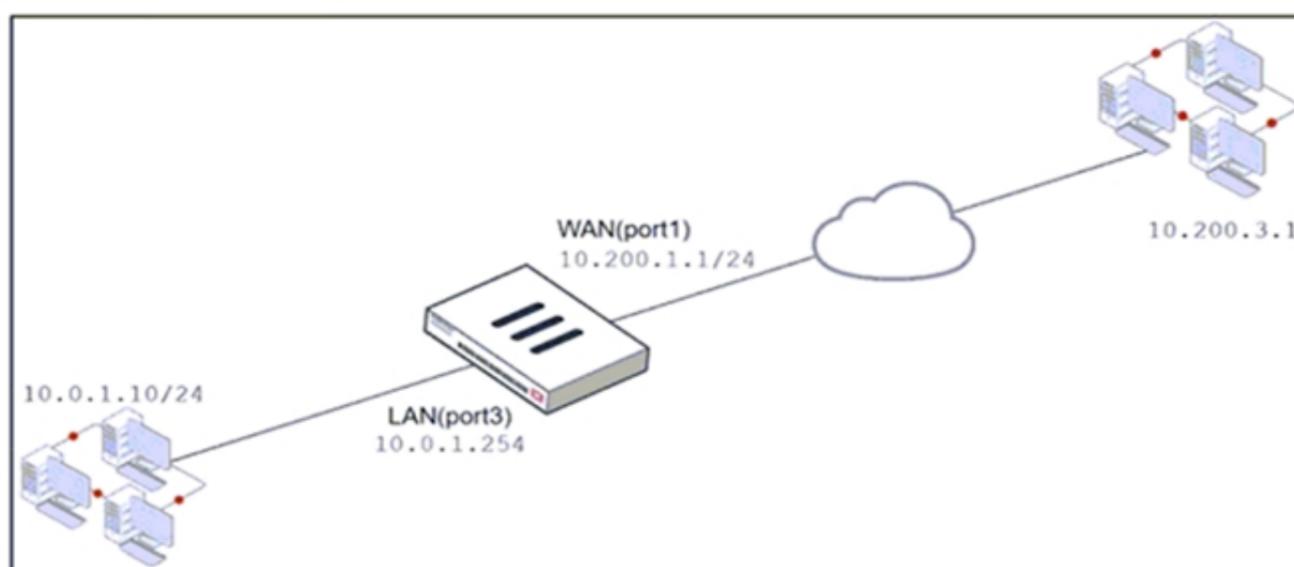


Exhibit A Exhibit B

| Name | From | To | Source | Destination | Schedule | Service | Action | NAT |
|-----------|-------------|-------------|--------|-------------|----------|---------|--------|---------|
| WebServer | WAN (port1) | LAN (port3) | all | VIP | always | ALL | ACCEPT | Enabled |

Edit Virtual IP

VIP type: IPv4
 Name: VIP
 Comments: Write a comment... 0/255
 Color: Change

Network

Interface: WAN (port1)

Type: Static NAT

External IP address/range: 10.200.1.10

Map to

IPv4 address/range: 10.0.1.10

Optional Filters

Port Forwarding

Protocol: TCP UDP SCTP ICMP

Port Mapping Type: One to one Many to many

External service port: 10443

Map to IPv4 port: 443

If the host 10.200.3.1 sends a TCP SYN packet on port 10443 to 10.200.1.10, what will the source address, destination address, and destination port of the packet be, after FortiGate forwards the packet to the destination?

- A. 10.0.1.254, 10.0.1.10, and 443, respectively
- B. 10.0.1.254, 10.0.1.10, and 10443, respectively
- C. 10.200.3.1, 10.0.1.10, and 443, respectively

Answer: C

NEW QUESTION 4

Which two attributes are required on a certificate so it can be used as a CA certificate on SSL inspection? (Choose two.)

- A. The keyUsage extension must be set to keyCertSign.
- B. The CA extension must be set to TRUE.
- C. The issuer must be a public CA.
- D. The common name on the subject field must use a wildcard name.

Answer: AB

NEW QUESTION 5

Which timeout setting can be responsible for deleting SSL VPN associated sessions?

- A. SSL VPN idle-timeout
- B. SSL VPN http-request-body-timeout
- C. SSL VPN login-timeout
- D. SSL VPN dtls-hello-timeout

Answer: A

NEW QUESTION 6

Which three statements explain a flow-based antivirus profile? (Choose three.)

- A. Flow-based inspection uses a hybrid of the scanning modes available in proxy-based inspection.
- B. If a virus is detected, the last packet is delivered to the client.
- C. The IPS engine handles the process as a standalone.
- D. FortiGate buffers the whole file but transmits to the client at the same time.
- E. Flow-based inspection optimizes performance compared to proxy-based inspection.

Answer: ADE

NEW QUESTION 7

Which two statements are true about the FGCP protocol? (Choose two.)

- A. FGCP elects the primary FortiGate device.
- B. FGCP is not used when FortiGate is in transparent mode.
- C. FGCP runs only over the heartbeat links.
- D. FGCP is used to discover FortiGate devices in different HA groups.

Answer: AD

NEW QUESTION 8

Refer to the exhibits.

The exhibits contain a network diagram, and virtual IP, IP pool, and firewall policies configuration information.

The WAN (port1) interface has the IP address 10.200.1.1/24.

The LAN (port3) interface has the IP address 10.0.1.254/24.

The first firewall policy has NAT enabled using IP pool.

The second firewall policy is configured with a VIP as the destination address.

Exhibit A Exhibit B

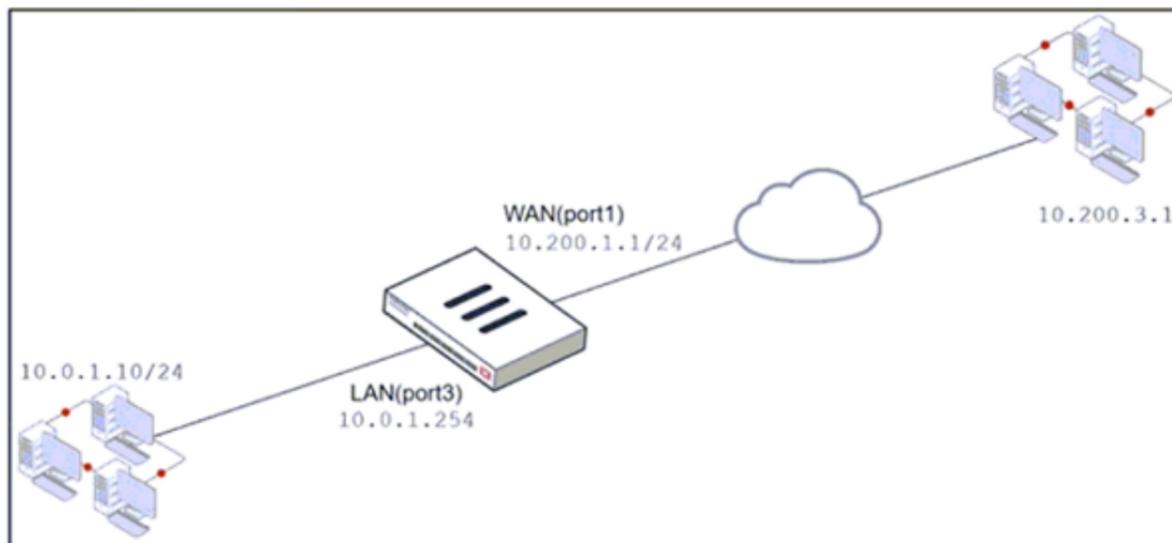


Exhibit A Exhibit B

| Name | From | To | Source | Destination | Schedule | Service | Action | NAT |
|-------------|-------------|-------------|--------|-------------|----------|---------|--------|----------|
| Full_Access | LAN (port3) | WAN (port1) | all | all | always | ALL | ACCEPT | IP Pool |
| WebServer | WAN (port1) | LAN (port3) | all | VIP | always | ALL | ACCEPT | Disabled |

Edit Virtual IP

VIP type: IPv4
Name: VIP
Comments: Write a comment...
Color: Change

Network

Interface: port1
Type: Static NAT
External IP address/range: 10.200.1.10
Map to: IPv4 address/range: 10.0.1.10

Optional Filters:

Port Forwarding:

Protocol: TCP | UDP | SCTP | ICMP
Port Mapping Type: One to one | Many to many
External service port: 443
Map to IPv4 port: 443

Edit Dynamic IP Pool

Name: IP Pool
Comments: Write a comment...
Type: Overload | One-to-One | Fixed Port Range | Port Block Allocation
External IP address/range: 10.200.1.100-10.200.1.100
NAT64:
ARP Reply:

Which IP address will be used to source NAT (SNAT) the internet traffic coming from a workstation with the IP address 10.0.1.10?

- A. 10.200.1.1
- B. 10.0.1.254
- C. 10.200.1.10
- D. 10.200.1.100

Answer: D

NEW QUESTION 9

Which statement correctly describes the use of reliable logging on FortiGate?

- A. Reliable logging is enabled by default in all configuration scenarios.
- B. Reliable logging is required to encrypt the transmission of logs.
- C. Reliable logging can be configured only using the CLI.

D. Reliable logging prevents the loss of logs when the local disk is full.

Answer: D

NEW QUESTION 10

Which two settings are required for SSL VPN to function between two FortiGate devices? (Choose two.)

- A. The client FortiGate requires a manually added route to remote subnets.
- B. The client FortiGate requires a client certificate signed by the CA on the server FortiGate.
- C. The server FortiGate requires a CA certificate to verify the client FortiGate certificate.
- D. The client FortiGate requires the SSL VPN tunnel interface type to connect SSL VPN.

Answer: BC

NEW QUESTION 10

Refer to the exhibits.

Exhibit A shows system performance output. Exhibit B shows a FortiGate configured with the default configuration of high memory usage thresholds.

Exhibit A Exhibit B

```
# get system performance status
CPU states: 0% user 0% system 0% nice 100% idle 0% iowait 0% irq 0% softirq
CPU0 states: 0% user 0% system 0% nice 100% idle 0% iowait 0% irq 0% softirq
Memory: 2061108k total, 1854997k used (90%), 106111k free (5.1%), 100000k freeable (4.8%)
Average network usage: 83 / 0 kbps in 1 minute, 81 / 0 kbps in 10 minutes, 81 / 0 kbps in 30
minutes
Average sessions: 5 sessions in 1 minute, 3 sessions in 10 minutes, 3 sessions in 30 minutes
Average session setup rate: 0 sessions per second in last 1 minute, 0 sessions per second in last
10 minutes, 0 sessions per second in last 30 minutes
Virus caught: 0 total in 1 minute
IPS attacks blocked: 0 total in 1 minute
Uptime: 10 days, 3 hours, 28 minutes
```

Exhibit A Exhibit B

```
config system global
    set memory-use-threshold-red 88
    set memory-use-threshold-extreme 95
    set memory-use-threshold-green 82
end
```

Based on the system performance output, which two results are correct? (Choose two.)

- A. FortiGate will start sending all files to FortiSandbox for inspection.
- B. FortiGate has entered conserve mode.
- C. Administrators cannot change the configuration.
- D. Administrators can access FortiGate only through the console port.

Answer: BD

NEW QUESTION 12

Refer to the exhibits.

The exhibits show the SSL and authentication policy (Exhibit A) and the security policy (Exhibit B) for Facebook. Users are given access to the Facebook web application. They can play video content hosted on Facebook, but they are unable to leave reactions on videos or other types of posts.

Exhibit A Exhibit B

Edit Policy

Name **Facebook SSL Inspection**

Incoming Interface **port2**

Outgoing Interface **port1**

Source **all**

Destination **all**

Service **ALL**

Firewall / Network Options

Central NAT is enabled so NAT settings from matching [Central SNAT policies](#) will be applied.

Security Profiles

SSL Inspection **certificate-inspection**

Exhibit A Exhibit B

Edit Policy

Name **Facebook Access**

Policy Mode **Standard** Learn Mode

Incoming Interface **port2**

Outgoing Interface **port1**

Source **all**

Destination **all**

Schedule **always**

Service **App Default** Specify

Application **Facebook**
Facebook_Like.Button
Facebook_Video.Play

URL Category **+**

Action **ACCEPT** DENY

Firewall/Network Options

Protocol Options **default**

Which part of the policy configuration must you change to resolve the issue?

- A. Force access to Facebook using the HTTP service.
- B. Make the SSL inspection a deep content inspection.
- C. Add Facebook in the URL category in the security policy.
- D. Get the additional application signatures required to add to the security policy.

Answer: B

NEW QUESTION 17

An administrator has configured the following settings:

```
config system settings
set ses-denied-traffic enable
end
config system global
set block-session-timer 30
end
```

What are the two results of this configuration? (Choose two.)

- A. Device detection on all interfaces is enforced for 30 minutes.
- B. Denied users are blocked for 30 minutes.
- C. The number of logs generated by denied traffic is reduced.
- D. A session for denied traffic is created.

Answer: AC

NEW QUESTION 21

Refer to the exhibit.

```
session info: proto=6 proto_state=02 duration=6 expire=6 timeout=3600 flags=0000
0000 socktype=0 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=may_dirty
statistic(bytes/packets/allow_err): org=180/3/1 reply=264/3/1 tuples=2
tx speed(Bps/kbps): 26/0 rx speed(Bps/kbps): 39/0
origin->sink: org pre->post, reply pre->post dev=3->5/5->3 gwy=10.0.1.11/0.0.0.0
hook=pre dir=org act=dnat 10.200.3.1:38024->10.200.1.11:80(10.0.1.11:80)
hook=post dir=reply act=snat 10.0.1.11:80->10.200.3.1:38024(10.200.1.11:80)
pos/(before,after) 0/(0,0), 0/(0,0)
misc=0 policy_id=8 auth_info=0 chk_client_info=0 vd=0
serial=0001fb06 tos=ff/ff app_list=0 app=0 url_cat=0
rpdb_link_id= 00000000 rpdb_svc_id=0 ngfwid=n/a
npu_state=0x040000
```

Which contains a session diagnostic output. Which statement is true about the session diagnostic output?

- A. The session is in SYN_SENT state.
- B. The session is in FIN_ACK state.
- C. The session is in FTN_WAIT state.
- D. The session is in ESTABLISHED state.

Answer: A

Explanation:

Indicates TCP (proto=6) session in SYN_SENT state (proto=state=2) <https://kb.fortinet.com/kb/viewContent.do?externalId=FD30042>

NEW QUESTION 24

Which two statements are correct about NGFW Policy-based mode? (Choose two.)

- A. NGFW policy-based mode does not require the use of central source NAT policy
- B. NGFW policy-based mode can only be applied globally and not on individual VDOMs
- C. NGFW policy-based mode supports creating applications and web filtering categories directly in afirewall policy
- D. NGFW policy-based mode policies support only flow inspection

Answer: CD

NEW QUESTION 27

Which two configuration settings are synchronized when FortiGate devices are in an active-active HA cluster? (Choose two.)

- A. FortiGuard web filter cache
- B. FortiGate hostname
- C. NTP
- D. DNS

Answer: CD

NEW QUESTION 32

Which of the following statements is true regarding SSL VPN settings for an SSL VPN portal?

- A. By default, FortiGate uses WINS servers to resolve names.

- B. By default, the SSL VPN portal requires the installation of a client's certificate.
- C. By default, split tunneling is enabled.
- D. By default, the admin GUI and SSL VPN portal use the same HTTPS port.

Answer: D

NEW QUESTION 33

Which statement correctly describes NetAPI polling mode for the FSSO collector agent?

- A. The collector agent uses a Windows API to query DCs for user logins.
- B. NetAPI polling can increase bandwidth usage in large networks.
- C. The collector agent must search security event logs.
- D. The NetSession Enum function is used to track user logouts.

Answer: D

Explanation:

FortiGate_Infrastructure_7.0 page 270: "NetAPI: polls temporary sessions created on the DC when a user logs in or logs out and calls the NetSessionEnum function in Windows."

NEW QUESTION 38

Refer to the web filter raw logs.

```
date=2020-07-09 time=12:51:51 logid="0316013057" type="utm"
subtype="webfilter" eventtype="ftgd_blk" level="warning"
vd="root" eventtime=1594313511250173744 tz="-0400" policyid=1
sessionid=5526 srcip=10.0.1.10 srcport=48660 srcintf="port2"
srcintfrole="undefined" dstip=104.244.42.193 dstport=443
dstintf="port1" dstintfrole="undefined" proto=6 service="HTTPS"
hostname="twitter.com" profile="all_users_web" action="blocked"
reqtype="direct" url="https://twitter.com/" sentbyte=517
rcvbyte=0 direction="outgoing" msg="URL belongs to a category
with warnings enabled" method="domain" cat=37 catdesc="Social
Networking"

date=2020-07-09 time=12:52:16 logid="0316013057" type="utm"
subtype="webfilter" eventtype="ftgd_blk" level="warning"
vd="root" eventtime=1594313537024536428 tz="-0400" policyid=1
sessionid=5552 srcip=10.0.1.10 srcport=48698 srcintf="port2"
srcintfrole="undefined" dstip=104.244.42.193 dstport=443
dstintf="port1" dstintfrole="undefined" proto=6 service="HTTPS"
hostname="twitter.com" profile="all_users_web"
action="passthrough" reqtype="direct" url="https://twitter.com/"
sentbyte=369 rcvbyte=0 direction="outgoing" msg="URL belongs to
a category with warnings enabled" method="domain" cat=37
catdesc="Social Networking"
```

Based on the raw logs shown in the exhibit, which statement is correct?

- A. Social networking web filter category is configured with the action set to authenticate.
- B. The action on firewall policy ID 1 is set to warning.
- C. Access to the social networking web filter category was explicitly blocked to all users.
- D. The name of the firewall policy is all_users_web.

Answer: A

NEW QUESTION 39

Examine this PAC file configuration.

Which of the following statements are true? (Choose two.)

- A. Browsers can be configured to retrieve this PAC file from the FortiGate.
- B. Any web request to the 172.25. 120.0/24 subnet is allowed to bypass the proxy.
- C. All requests not made to Fortinet.com or the 172.25. 120.0/24 subnet, have to go through altproxy.corp.com: 8060.
- D. Any web request fortinet.com is allowed to bypass the proxy.

Answer: AD

NEW QUESTION 42

Which three security features require the intrusion prevention system (IPS) engine to function? (Choose three.)

- A. Web filter in flow-based inspection
- B. Antivirus in flow-based inspection
- C. DNS filter
- D. Web application firewall
- E. Application control

Answer: ABE

Explanation:

<https://docs.fortinet.com/document/fortigate/7.0.0/new-features/739623/dns-filter-handled-by-ips-engine-in-flow>

NEW QUESTION 46

What is the limitation of using a URL list and application control on the same firewall policy, in NGFW policy-based mode?

- A. It limits the scanning of application traffic to the DNS protocol only.
- B. It limits the scanning of application traffic to use parent signatures only.
- C. It limits the scanning of application traffic to the browser-based technology category only.
- D. It limits the scanning of application traffic to the application category only.

Answer: C

Explanation:

<https://docs.fortinet.com/document/fortigate/5.6.0/cookbook/38324/ngfw-policy-based-mode>

NEW QUESTION 51

A FortiGate is operating in NAT mode and configured with two virtual LAN (VLAN) sub interfaces added to the physical interface. Which statements about the VLAN sub interfaces can have the same VLAN ID, only if they have IP addresses in different subnets.

- A. The two VLAN sub interfaces can have the same VLAN ID, only if they have IP addresses in different subnets.
- B. The two VLAN sub interfaces must have different VLAN IDs.
- C. The two VLAN sub interfaces can have the same VLAN ID, only if they belong to different VDOMs.
- D. The two VLAN sub interfaces can have the same VLAN ID, only if they have IP addresses in the same subnet.

Answer: B

Explanation:

FortiGate_Infrastructure_6.0_Study_Guide_v2-Online.pdf > page 147

"Multiple VLANs can coexist in the same physical interface, provide they have different VLAN ID"

NEW QUESTION 52

Which two statements explain antivirus scanning modes? (Choose two.)

- A. In proxy-based inspection mode, files bigger than the buffer size are scanned.
- B. In flow-based inspection mode, FortiGate buffers the file, but also simultaneously transmits it to the client.
- C. In proxy-based inspection mode, antivirus scanning buffers the whole file for scanning, before sending it to the client.
- D. In flow-based inspection mode, files bigger than the buffer size are scanned.

Answer: BC

Explanation:

An antivirus profile in full scan mode buffers up to your specified file size limit. The default is 10 MB. That is large enough for most files, except video files. If your FortiGate model has more RAM, you may be able to increase this threshold. Without a limit, very large files could exhaust the scan memory. So, this threshold balances risk and performance. Is this tradeoff unique to FortiGate, or to a specific model? No. Regardless of vendor or model, you must make a choice. This is because of the difference between scans in theory, that have no limits, and scans on real-world devices, that have finite RAM. In order to detect 100% of malware regardless of file size, a firewall would need infinitely large RAM--something that no device has in the real world. Most viruses are very small. This table shows a typical tradeoff. You can see that with the default 10 MB threshold, only 0.01% of viruses pass through.

NEW QUESTION 57

Which statement about video filtering on FortiGate is true?


- A. Full SSL Inspection is not required.
- B. It is available only on a proxy-based firewall policy.
- C. It inspects video files hosted on file sharing services.
- D. Video filtering FortiGuard categories are based on web filter FortiGuard categories.

Answer: B

NEW QUESTION 60

Refer to the exhibit.

A network administrator is troubleshooting an IPsec tunnel between two FortiGate devices. The administrator has determined that phase 1 status is up, but phase 2 fails to come up.

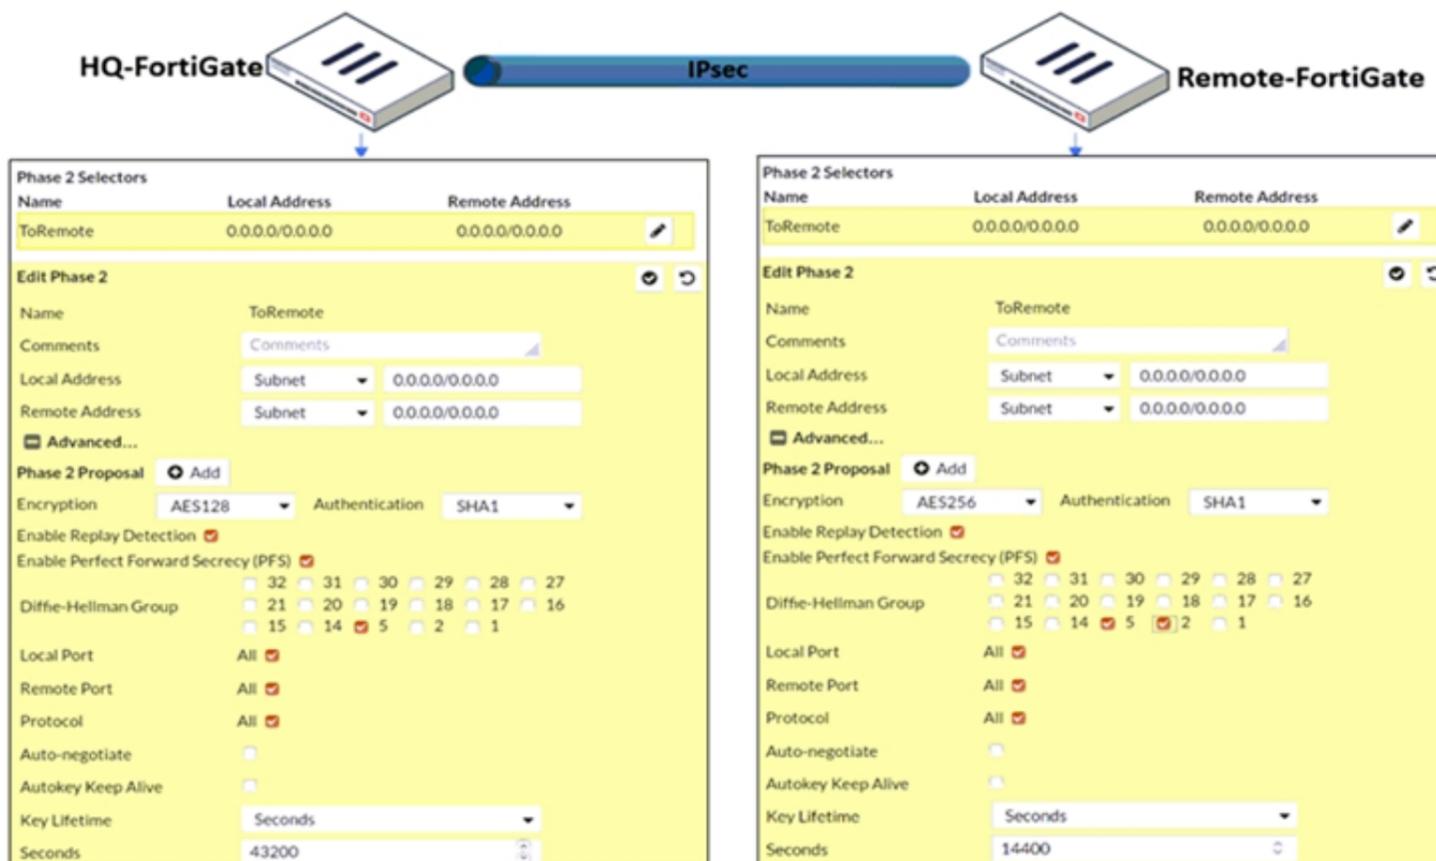

Based on the phase 2 configuration shown in the exhibit, which configuration change will bring phase 2 up?

- A. On Remote-FortiGate, set Seconds to 43200.
- B. On HQ-FortiGate, set Encryption to AES256.
- C. On HQ-FortiGate, enable Diffie-Hellman Group 2.
- D. On HQ-FortiGate, enable Auto-negotiate.

Answer: B

NEW QUESTION 65

Refer to the exhibits to view the firewall policy (Exhibit A) and the antivirus profile (Exhibit B).

Edit AntiVirus Profile

Name:

Comments: 29/255

Detect Viruses: Block Monitor

Feature set: Flow-based Proxy-based

Inspected Protocols

HTTP

SMTP

POP3

IMAP

FTP

CIFS

APT Protection Options

Treat Windows Executables in Email Attachments as Viruses

Include Mobile Malware Protection

Virus Outbreak Prevention ⓘ

Use FortiGuard Outbreak Prevention Database

Use External Malware Block List ⓘ ⚠

Which statement is correct if a user is unable to receive a block replacement message when downloading an infected file for the first time?

- A. The firewall policy performs the full content inspection on the file.
- B. The flow-based inspection is used, which resets the last packet to the user.
- C. The volume of traffic being inspected is too high for this model of FortiGate.
- D. The intrusion prevention security profile needs to be enabled when using flow-based inspection mode.

Answer: B

Explanation:

- "ONLY" If the virus is detected at the "START" of the connection, the IPS engine sends the block replacement message immediately
- When a virus is detected on a TCP session (FIRST TIME), but where "SOME PACKETS" have been already forwarded to the receiver, FortiGate "resets the connection" and does not send the last piece of the file. Although the receiver got most of the file content, the file has been truncated and therefore, can't be opened. The IPS engine also caches the URL of the infected file, so that if a "SECOND ATTEMPT" to transmit the file is made, the IPS engine will then send a block replacement message to the client instead of scanning the file again.

In flow mode, the FortiGate drops the last packet killing the file. But because of that the block replacement message cannot be displayed. If the file is attempted to download again the block message will be shown.

NEW QUESTION 70

Refer to the exhibits.

Exhibit A shows a topology for a FortiGate HA cluster that performs proxy-based inspection on traffic. Exhibit B shows the HA configuration and the partial output of the get system ha status command.

Exhibit A Exhibit B

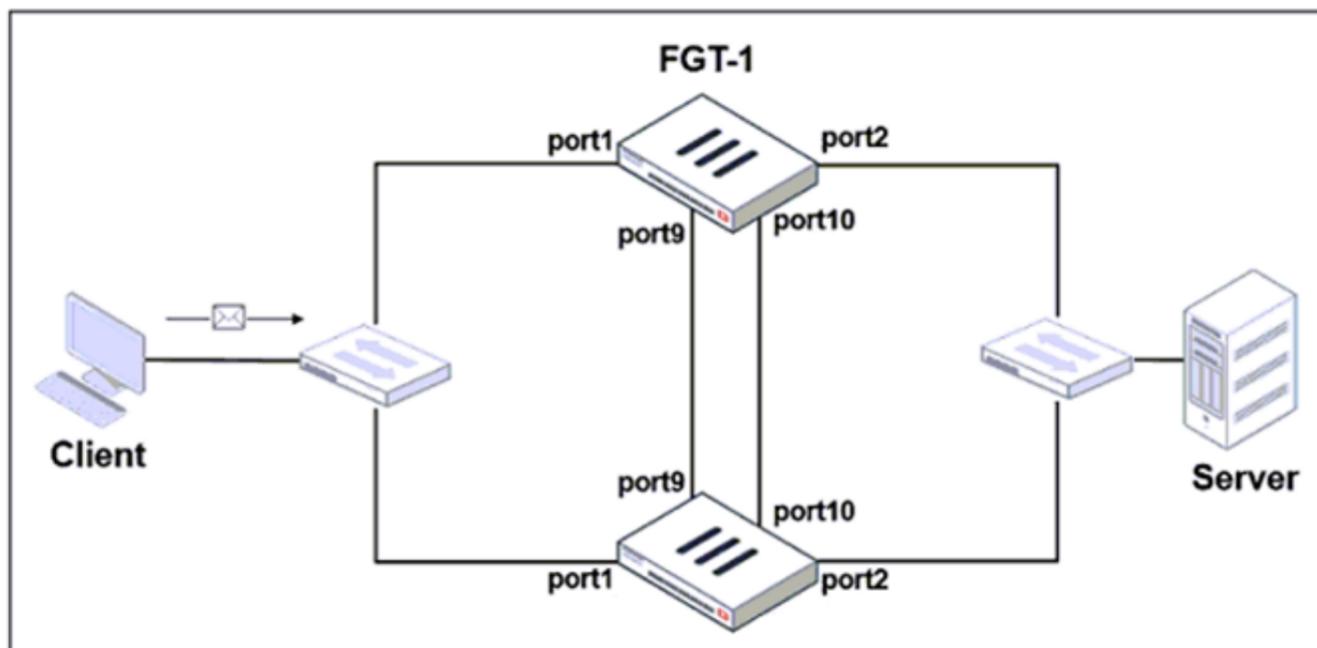


Exhibit A Exhibit B

```

set group-id 3
set group-name "NSE"
set mode a-a
set password *
set hbdev "port9" 50 "port10" 50
set session-pickup enable
set override disable
set monitor port3
end

# get system ha status
...
Primary      : FGT-2, FGVM010000065036, HA cluster index = 1
Secondary    : FGT-1, FGVM010000064692, HA cluster index = 0
number of vcluster: 1
vcluster 1: work 169.254.0.2
Primary: FGVM010000065036, HA operating index = 1
Secondary: FGVM010000064692, HA operating index = 0
    
```

Based on the exhibits, which two statements about the traffic passing through the cluster are true? (Choose two.)

- A. For non-load balanced connections, packets forwarded by the cluster to the server contain the virtual MAC address of port2 as source.
- B. The traffic sourced from the client and destined to the server is sent to FGT-1.
- C. The cluster can load balance ICMP connections to the secondary.
- D. For load balanced connections, the primary encapsulates TCP SYN packets before forwarding them to the secondary.

Answer: AB

NEW QUESTION 75

Refer to the exhibit.

```

# diagnose test application ipsmonitor
1: Display IPS engine information
2: Toggle IPS engine enable/disable status
3: Display restart log
4: Clear restart log
5: Toggle bypass status
98: Stop all IPS engines
99: Restart all IPS engines and monitor
    
```

Examine the intrusion prevention system (IPS) diagnostic command.

Which statement is correct If option 5 was used with the IPS diagnostic command and the outcome was a decrease in the CPU usage?

- A. The IPS engine was inspecting high volume of traffic.
- B. The IPS engine was unable to prevent an intrusion attack .
- C. The IPS engine was blocking all traffic.
- D. The IPS engine will continue to run in a normal state.

Answer: A

NEW QUESTION 78

An administrator has configured a strict RPF check on FortiGate. Which statement is true about the strict RPF check?

- A. The strict RPF check is run on the first sent and reply packet of any new session.
- B. Strict RPF checks the best route back to the source using the incoming interface.
- C. Strict RPF checks only for the existence of at least one active route back to the source using the incoming interface.
- D. Strict RPF allows packets back to sources with all active routes.

Answer: C

NEW QUESTION 81

An administrator is configuring an Ipsec between site A and siteB. The Remotes Gateway setting in both sites has been configured as Static IP Address. For site A, the local quick mode selector is 192.168. 1.0/24 and the remote quick mode selector is 192.168.2.0/24. Which subnet must the administrator configure for the local quick mode selector for site B?

- A. 192.168.3.0/24
- B. 192.168.2.0/24
- C. 192.168. 1.0/24
- D. 192.168.0.0/8

Answer: C

NEW QUESTION 82

Which statements about the firmware upgrade process on an active-active HA cluster are true? (Choose two.)

- A. The firmware image must be manually uploaded to each FortiGate.
- B. Only secondary FortiGate devices are rebooted.
- C. Uninterruptable upgrade is enabled by default.
- D. Traffic load balancing is temporarily disabled while upgrading the firmware.

Answer: CD

NEW QUESTION 83

An administrator has configured outgoing Interface any in a firewall policy. Which statement is true about the policy list view?

- A. Policy lookup will be disabled.
- B. By Sequence view will be disabled.
- C. Search option will be disabled
- D. Interface Pair view will be disabled.

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD47821>

NEW QUESTION 85

What is the limitation of using a URL list and application control on the same firewall policy, in NGFW policy-based mode?

- A. It limits the scope of application control to the browser-based technology category only.
- B. It limits the scope of application control to scan application traffic based on application category only.
- C. It limits the scope of application control to scan application traffic using parent signatures only
- D. It limits the scope of application control to scan application traffic on DNS protocol only.

Answer: B

NEW QUESTION 89

Refer to the exhibits.
Exhibit A.

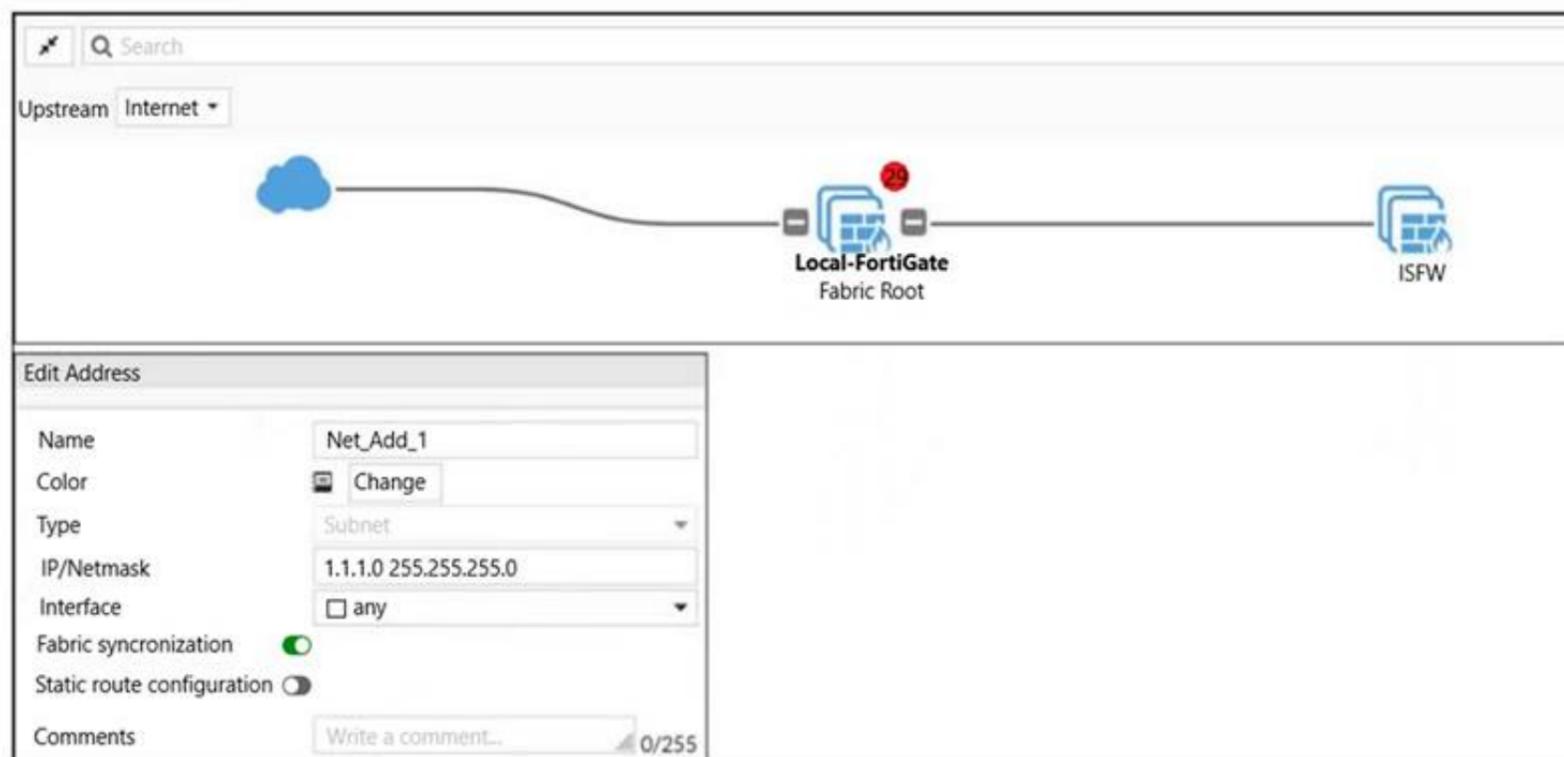


Exhibit B.

```
Local-FortiGate # show full-configuration system csf
config system csf
    set status enable
    set upstream-ip 0.0.0.0
    set upstream-port 8013
    set group-name "fortinet"
    set group-password ENC X18CtzrcUBUq9yz9nryP+YfM16
    BJkv7S/trtoh2gYAe5CH8YMAa0GT18aX+/dKH/o5izw1ZEoN1QN2N
    FGLT4r5z2AyYI8i1PxutiLcsCp1AdZadv1CxDe66IdLX7I6o22J9P
    set accept-auth-by-cert enable
    set log-unification enable
    set authorization-request-type serial
    set fabric-workers 2
    set downstream-access disable
    set configuration-sync default
    set fabric-object-unification local
    set saml-configuration-sync default
```

```
ISFW # show full-configuration system csf
config system csf
    set status enable
    set upstream-ip 10.0.1.254
    set upstream-port 8013
    set group-name ''
    set accept-auth-by-cert enable
    set log-unification enable
    set authorization-request-type serial
    set fabric-workers 2
    set downstream-access disable
    set configuration-sync default
    set saml-configuration-sync default
end

ISFW #
ISFW #
```

An administrator creates a new address object on the root FortiGate (Local-FortiGate) in the security fabric. After synchronization, this object is not available on the downstream FortiGate (ISFW).

What must the administrator do to synchronize the address object?

- A. Change the csf setting on Local-FortiGate (root) to set configuration-sync local.
- B. Change the csf setting on ISFW (downstream) to set configuration-sync local.
- C. Change the csf setting on Local-FortiGate (root) to set fabric-object-unification default.
- D. Change the csf setting on ISFW (downstream) to set fabric-object-unification default.

Answer: C

NEW QUESTION 94

Which of the following are valid actions for FortiGuard category based filter in a web filter profile ui proxy-based inspection mode? (Choose two.)

- A. Warning
- B. Exempt
- C. Allow
- D. Learn

Answer: AC

NEW QUESTION 98

Which statement about the IP authentication header (AH) used by IPsec is true?

- A. AH does not provide any data integrity or encryption.
- B. AH does not support perfect forward secrecy.
- C. AH provides data integrity but no encryption.
- D. AH provides strong data integrity but weak encryption.

Answer: C

NEW QUESTION 101

If the Issuer and Subject values are the same in a digital certificate, which type of entity was the certificate issued to?

- A. A CRL
- B. A person
- C. A subordinate CA

D. A root CA

Answer: D

NEW QUESTION 106

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your NSE4_FGT-7.2 Exam with Our Prep Materials Via below:

https://www.certleader.com/NSE4_FGT-7.2-dumps.html