

# VMware


## Exam Questions 2V0-21.23

VMware vSphere 8.x Professional



### NEW QUESTION 1

Refer to the exhibit.

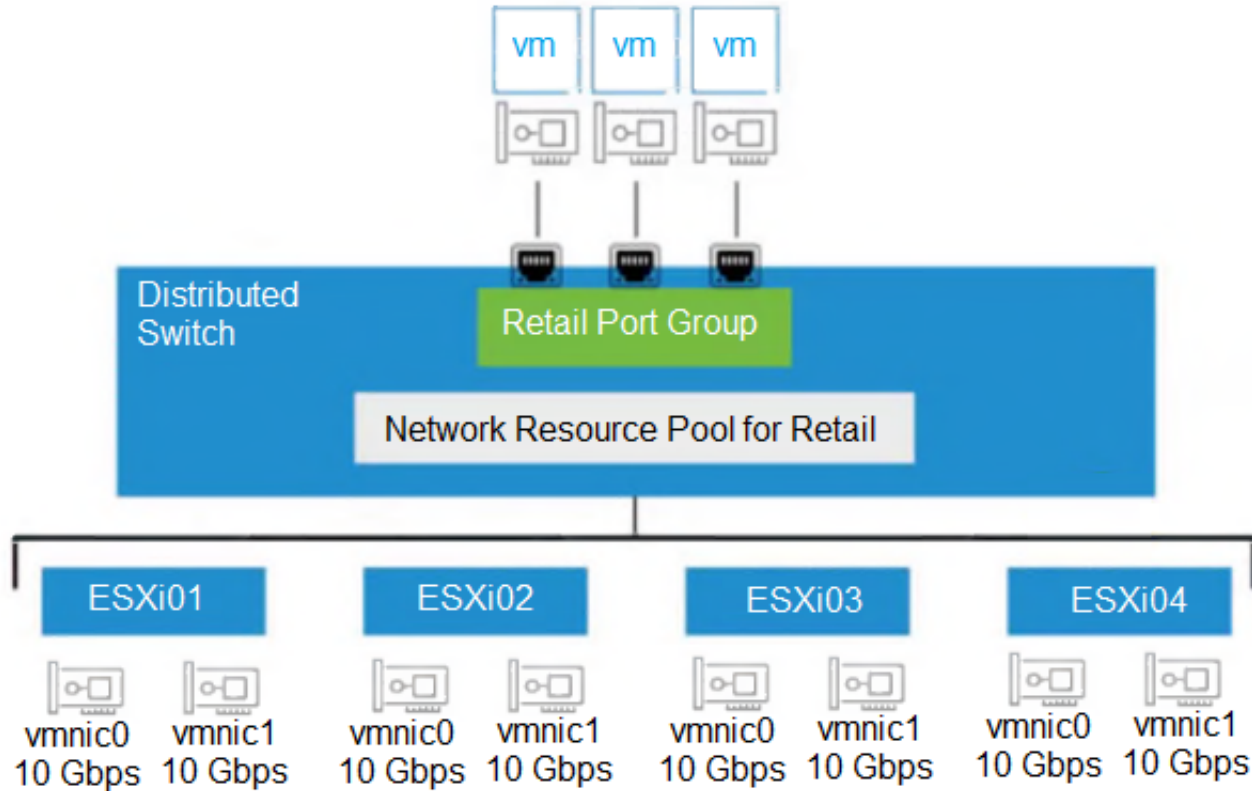

An administrator set up the following configuration:

- The distributed switch has four ESXi hosts, and each host has two 10 Gbps NICs.
- In the Network I/O Control configuration, the amount of bandwidth reserved for virtual machine (VM) traffic is 4 Gbps.

The administrator wants to guarantee that VMs in the Retail distributed port group can access 50 percent of the available reserved bandwidth for VM traffic. Given this scenario, what should the size (in Gbps) of the Retail network resource pool be?

- A. 40
- B. 32
- C. 8
- D. 16

**Answer: D**

**Explanation:**

$4\text{Gbps} \times 8\text{Nic} = 32\text{Gbps} \times 50\% = 16\text{Gbps}$

### NEW QUESTION 2

An administrator is responsible for performing maintenance tasks on a vSphere cluster. The cluster has the following configuration:

. Identically configured vSphere ESXi hosts (esx01, esx02, esx03 and esx04)

- All workloads are deployed into a single VMFS datastore provided by the external storage array
  - vSphere High Availability (HA) has not been enabled
  - vSphere Distributed Resource Scheduler (DRS) has not been enabled
- Currently, a critical production application workload (VM1) is running on esx01.

Given this scenario, which two actions are required to ensure VM1 continues to run when esx01 is placed into maintenance mode? (Choose two.)

- A. Fully automated DRS must be enabled on the cluster so that VM1 will be automatically migrated to another host within the cluster when esx01 is placed into maintenance mode.
- B. VM1 must be manually shut down and cold migrated to another host within the cluster using vSphere vMotion before esx01 is placed into maintenance mode.
- C. vSphere HA must be enabled on the cluster so that VM1 will be automatically migrated to another host within the cluster when esx01 is placed into maintenance mode.
- D. VM1 must be manually live migrated to another host within the cluster using vSphere vMotion before esx01 is placed into maintenance mode.
- E. VM1 must be manually migrated to another host within the cluster using vSphere Storage vMotion before esx01 is placed into maintenance mode.

**Answer: AD**

**Explanation:**

Two actions that are required to ensure VM1 continues to run when esx01 is placed into maintenance mode are enabling fully automated DRS on the cluster, which allows balancing the workload across hosts and migrating VMs without user intervention; and manually live migrating VM1 to another host within the cluster using vSphere vMotion, which allows moving a running VM without downtime.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.resmgmt.doc/GUID-F01B2F12-C5BB-> <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenterhost.doc/GUID-F01B2F12-C5B>

### NEW QUESTION 3

An administrator is adding a new ESXi host to an existing vSphere cluster. When selecting the cluster, the administrator is unable to use the Cluster Quickstart workflow to add and configure the additional host.

What could be the root cause of this issue?

- A. The administrator has previously dismissed the Cluster Quickstart workflow.
- B. The administrator must manually add the host to the cluster before using the Cluster Quickstart workflow.
- C. The administrator has not been assigned the required permissions to use the Cluster Quickstart workflow.
- D. The administrator must enable the Cluster Quickstart workflow option in VMware vCenter.

**Answer: A**

**Explanation:**

Option A is correct because it indicates that the administrator has previously dismissed the Cluster Quickstart workflow, which will prevent them from using it to add and configure an additional host. To use the Cluster Quickstart workflow again, the administrator must enable it in the cluster settings. Option B is incorrect because the administrator does not need to manually add the host to the cluster before using the Cluster Quickstart workflow, as this is one of the steps in the workflow. Option C is incorrect because the administrator does not need any special permissions to use the Cluster Quickstart workflow, as long as they have permissions to perform cluster operations. Option D is incorrect because there is no option to enable the Cluster Quickstart workflow in VMware vCenter, as this is a feature of vSphere clusters. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenterhost.doc/GUID-9F9E3F8C-0E2>

**NEW QUESTION 4**

An administrator is tasked with configuring vSphere Trust Authority. The administrator has completed the following steps:

- Set up the workstation
- Enabled the Trust Authority Administrator
- Enabled the Trust Authority State
- Collected information about the ESXi hosts and vCenter to be trusted Which step does the administrator need to complete next?

- A. Import the Trusted Host information to the Trust Authority Cluster
- B. Import the Trusted Cluster information to the Trusted Hosts
- C. Create the Key Provider on the Trusted Cluster
- D. Import the Trusted Host information to the Trusted Cluster

**Answer:** A

**Explanation:**

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/images/GUID-D205B3C1> <https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-security/GUID-39D8AB34-AD45-4B0A-8FB0-7A1>

**NEW QUESTION 5**

During the staging of a patch on a vCenter Server Appliance, an error was encountered and the process stopped. An administrator resolved the root cause and is ready to continue with the staging of the patch.

From the vCenter Management Interface, which action should the administrator take to continue the process from the point at which the error occurred?

- A. Use the Stage and Install option to resume the staging.
- B. Use the Resume option to resume the staging.
- C. Use the Unstage option to restart the staging.
- D. Use the Stage Only option to restart the staging.

**Answer:** B

**Explanation:**

[docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.upgrade.doc/GUID-FF533442-66F0-4797-976](https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.upgrade.doc/GUID-FF533442-66F0-4797-976)

**NEW QUESTION 6**

An administrator is deploying a new all flash vSAN cluster based on the vSAN Original Storage Architecture (OSA).

What is the minimum supported network throughput in Gb/s for each host?

- A. 50
- B. 10
- C. 25
- D. 1

**Answer:** B

**Explanation:**

The minimum supported network throughput in Gb/s for each host in an all flash vSAN cluster based on the vSAN Original Storage Architecture (OSA) is 10.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vsan-planning.doc/GUID-FCEA0CDD>


vSAN Express Storage Architecture (ESA) are only supported with 25Gbps and higher connection speeds.

ESA ReadyNodes configured for vSAN ESA will be configured with 25/50/100Gbps NICs. vSAN OSA

all-flash configurations are only supported with a 10Gb or higher connections. One reason for this is that the improved performance with an all-flash configuration may consume more network bandwidth between the hosts to gain higher throughput. <https://core.vmware.com/resource/vmware-vsan-design-guide#sec6815-sub3>

**NEW QUESTION 7**

Exhibit switch

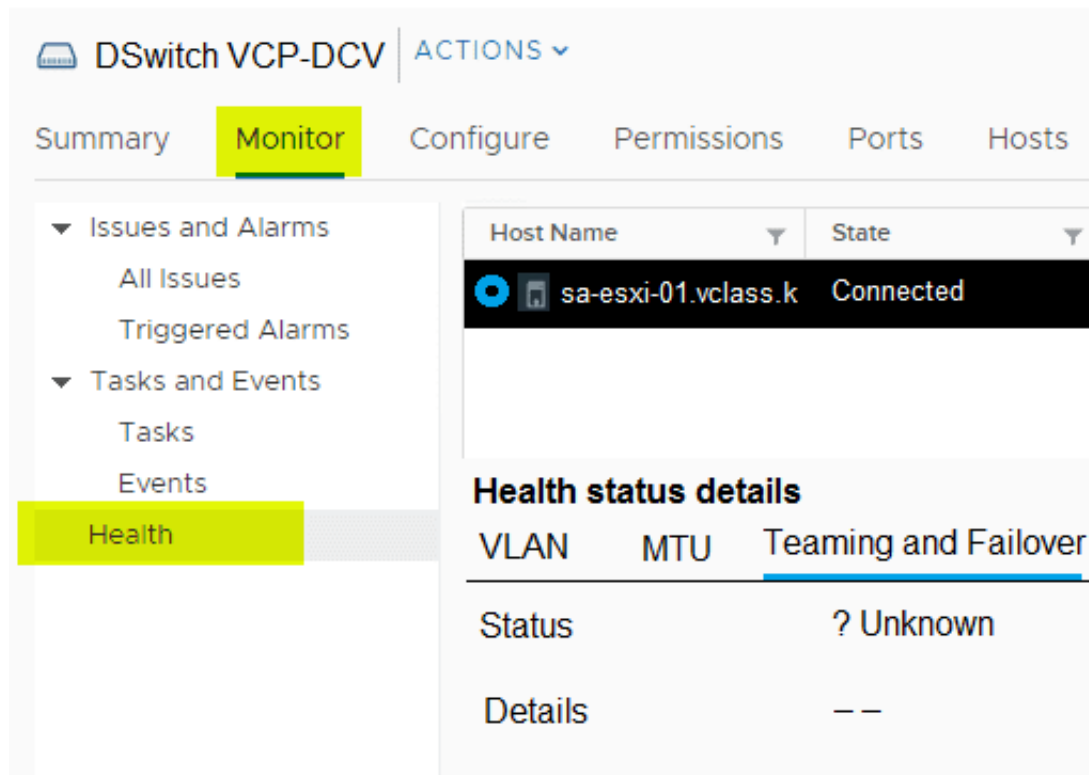

An administrator configures a distributed switch and adds the first VMware ESXi server to it. The administrator also performs the following activities:

- The administrator assigns two uplinks to the distributed switch.
  - The administrator enables uplink teaming.
- When attempting to perform a health check of the teaming policy, the health status of the Teaming and Failover reports as 'Unknown?', as seen in the exhibit.  
 What can the administrator changes in the distributed switch for the health status to report correctly?

- Add a minimum of three hosts with two uplinks each
- Add a minimum of two hosts with two uplinks each
- Add a minimum of three hosts with four uplinks each
- Add a minimum of two hosts with one uplink each

**Answer: B**

#### NEW QUESTION 8

An administrator is attempting to configure Storage I/O Control (SIOC) on five datastores within a vSphere environment. The administrator is being asked to determine why SIOC configuration completed successfully on only four of the datastores.  
 What are two possible reasons why the configuration was not successful? (Choose two.)

- The datastore contains Raw Device Mappings (RDMs).
- SAS disks are used for the datastore.
- The datastore has multiple extents.
- The datastore is using iSCSI.
- The administrator is using NFS storage.

**Answer: AC**

#### Explanation:

SIOC configuration may fail if the datastore contains RDMs or has multiple extents, as these are not supported by SIOC.  
 References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-FB3F5C5C-D3F6-4>

Storage I/O Control is supported on Fibre Channel-connected, iSCSI-connected, and NFS-connected storage. Raw Device Mapping (RDM) is not supported.  
 Storage I/O Control does not support datastores with multiple extents.

#### NEW QUESTION 9

If a distributed switch uses the "Route based on physical NIC load" load balancing algorithm, what does the mean send or receive utilization of an uplink need to exceed for the flow of traffic to move to the second uplink?

- 75 percent of the capacity over a 30 second period
- 60 percent of the capacity over a 30 second period
- 60 percent of the capacity over a 40 second period
- 75 percent of the capacity over a 40 second period

**Answer: A**

#### Explanation:

The distributed switch calculates uplinks for virtual machines by taking their port ID and the number of uplinks in the NIC team. The distributed switch tests the uplinks every 30 seconds, and if their load exceeds 75 percent of usage, the port ID of the virtual machine with the highest I/O is moved to a different uplink.  
<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-networking/GUID-959E1CFE-2AE4-4A67-B4D4-2>

#### NEW QUESTION 10

An administrator is tasked with moving an application and guest operating system (OS) running on top of a physical server to a software-defined data center (SDDC) in a remote secure location.

The following constraints apply:

- The remote secure location has no network connectivity to the outside world.
- The business owner is not concerned if all changes in the application make it to the SDDC in the secure location.
- The application's data is hosted in a database with a high number of transactions.

What could the administrator do to create an image of the guest OS and application that can be moved to this remote data center?

- A. Create a hot clone of the physical server using VMware vCenter Converter.
- B. Create a cold clone of the physical server using VMware vCenter Converter.
- C. Restore the guest OS from a backup.
- D. Use storage replication to replicate the guest OS and application.

**Answer: B**

**Explanation:**

Option B is correct because it allows the administrator to create a cold clone of the physical server using VMware vCenter Converter, which will create an image of the guest OS and application that can be moved to this remote data center without requiring network connectivity or affecting the application's data. Option A is incorrect because creating a hot clone of the physical server using VMware vCenter Converter will require network connectivity and may affect the application's data due to changes during conversion. Option C is incorrect because restoring the guest OS from a backup will require network connectivity and may not include the latest changes in the application. Option D is incorrect because using storage replication to replicate the guest OS and application will require network connectivity and may not be feasible for a physical server. References:

<https://docs.vmware.com/en/vCenter-Converter-Standalone/6.2/com.vmware.convsa.guide/GUID-9F9E3F8C-0E>

**NEW QUESTION 10**

The vCenter inventory contains a virtual machine (VM) template called Linux-01. The administrator wants to install a software patch into Linux-01 while allowing users to continue to access Linux-01 to deploy VMs. Which series of steps should the administrator take to accomplish this task?

- A. \* 1. Verify that Linux-01 is in a content library\* 2. Clone Linux-01\* 3. Convert the clone to a VM\* 4. Install the software patch.
- B. \* 1. Convert Linux-01 to a VM \* 2 Install the software patch\* 3 Convert the VM back to a VM template \* 4 Add Linux-01 to the content library.
- C. \* 1. Verify that Linux-01 is in a content library\* 2. Checkout Linux-01\* 3. Install the software patch \* 4.Check in Linux-01
- D. \* 1. Clone Linux-01.\* 2. Convert the clone to a VM\* 3. Install the software patch.\* 4. Convert the VM back to a template.

**Answer: C**

**Explanation:**

The administrator should clone Linux-01, which creates a copy of the virtual machine template. The administrator should then convert the clone to a VM, which allows the administrator to power on and modify the virtual machine. The administrator should then install the software patch on the VM, which updates the application. The administrator should then convert the VM back to a template, which preserves the changes made to the VM and allows users to deploy VMs from it. References:

[https://docs.vmware.com/en/VMware-vSphere/8.0/com.vmware.vsphere.vm\\_admin.doc/GUID-E8E854DD-AA](https://docs.vmware.com/en/VMware-vSphere/8.0/com.vmware.vsphere.vm_admin.doc/GUID-E8E854DD-AA)

**NEW QUESTION 14**

An administrator has a requirement to revert a running virtual machine to a previous snapshot after a failed attempt to upgrade an application. When the administrator originally took the snapshot the following choices in the Take Snapshot dialog were made:

- > Snapshot the virtual machine's memory = false
- > Quiesce guest file system = false

What will be the result of the administrator selecting the 'Revert to Latest Snapshot?' option to return the virtual machine to a previous snapshot?

- A. The virtual machine will be restored to the parent snapshot in a powered on state
- B. The virtual machine will be restored to the parent snapshot in a powered off state.
- C. The virtual machine will be restored to the child snapshot in a powered off state
- D. The virtual machine will be restored to the child snapshot in a powered on state.

**Answer: B**

**Explanation:**

Powered on (does not include memory) Reverts to the parent snapshot and the virtual machine is powered off. Powered off (does not include memory) Reverts to the parent snapshot and the virtual machine is powered off. <https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-vm-administration/GUID-50BD0E64-75A6-4164-B>

**NEW QUESTION 17**

An administrator is tasked with configuring certificates for a VMware software-defined data center (SDDC) based on the following requirements:

- All certificates should use certificates trusted by the Enterprise Certificate Authority (CA).
- The solution should minimize the ongoing management overhead of replacing certificates.

Which three actions should the administrator take to ensure that the solution meets corporate policy? (Choose three.)

- A. Replace the VMware Certificate Authority (VMCA) certificate with a self-signed certificate generated from the
- B. Replace the machine SSL certificates with custom certificates generated from the Enterprise CA.
- C. Replace the machine SSL certificates with trusted certificates generated from the VMware Certificate Authority (VMCA).
- D. Replace the VMware Certificate Authority (VMCA) certificate with a custom certificate generated from the Enterprise CA.
- E. Replace the solution user certificates with custom certificates generated from the Enterprise CA.
- F. Replace the solution user certificates with trusted certificates generated from the VMware Certificate Authority (VMCA).

**Answer: BDE**

**Explanation:**

Option B, D and E are correct because they allow the administrator to replace the machine SSL certificates, the VMware Certificate Authority (VMCA) certificate and the solution user certificates with custom certificates generated from the Enterprise CA, which will ensure that all certificates are trusted by the Enterprise CA and minimize the ongoing management overhead of replacing certificates. Option A is incorrect because replacing the VMCA certificate with a self-signed certificate generated from the VMCA will not ensure that the certificate is trusted by the Enterprise CA. Option C is incorrect because replacing the machine SSL certificates with trusted certificates generated from the VMCA will not ensure that the certificates are trusted by the Enterprise CA. Option F is incorrect because replacing the solution user certificates with trusted certificates generated from the VMCA will not ensure that the certificates are trusted by the Enterprise CA. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-A2A4371A-B888>



### NEW QUESTION 21

Which four elements can a vSphere Lifecycle Manager image contain? (Choose four.)

- A. ESXi base image
- B. ESXi configuration
- C. Vendor agents
- D. Vendor add-ons
- E. BIOS updates
- F. Firmware and drivers add-on
- G. Independent components

**Answer:** ADFG

#### Explanation:

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-lifecycle-manager/GUID-9A20C2DA-F45F-4C9B-9> A vSphere Lifecycle Manager image can consist of the following four elements:

ESXi base image

The base image contains an image of VMware ESXi Server and additional components, such as drivers and adapters that are necessary to boot a server. The base image is the only mandatory element in a vSphere Lifecycle Manager image. All other elements are optional.

Vendor add-on

The vendor add-on is a collection of software components that OEMs create and distribute. The vendor add-on can contain drivers, patches, and solutions.

Firmware and drivers add-on

The firmware and drivers add-on is a special type of vendor add-on designed to assist in the firmware update process. The firmware and drivers add-on contains firmware for a specific server type and corresponding drivers. To add a firmware and drivers add-on to your image, you must install the hardware support manager plug-in provided by the hardware vendor for the hosts in the respective cluster.

Independent components

The component is the smallest discrete unit in an image. The independent components that you add to an image contain third-party software, for example drivers or adapters.

### NEW QUESTION 23

Which step is completed during Stage 1 of the vCenter Server Appliance deployment?

- A. Join a vCenter Single Sign-On domain
- B. Create a new vCenter Single Sign-On domain
- C. Select the deployment size
- D. Configure SSH access

**Answer:** C

#### Explanation:


The minimum network throughput in Gb/s for vSAN using the Express Storage Architecture (ESA) is 1 Gb/s, which is the minimum requirement for vSAN network adapters. However, VMware recommends using 10 Gb/s or higher for better performance and reliability. References:

<https://docs.vmware.com/en/VMware-vSphere/8.0/com.vmware.vsphere.vsan-planning.doc/GUID-9F1D4A3B>

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-1E39EF05-1DD7-4E> <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-1E39EF05-1DD7-4E>

### NEW QUESTION 28

Refer to the exhibit.

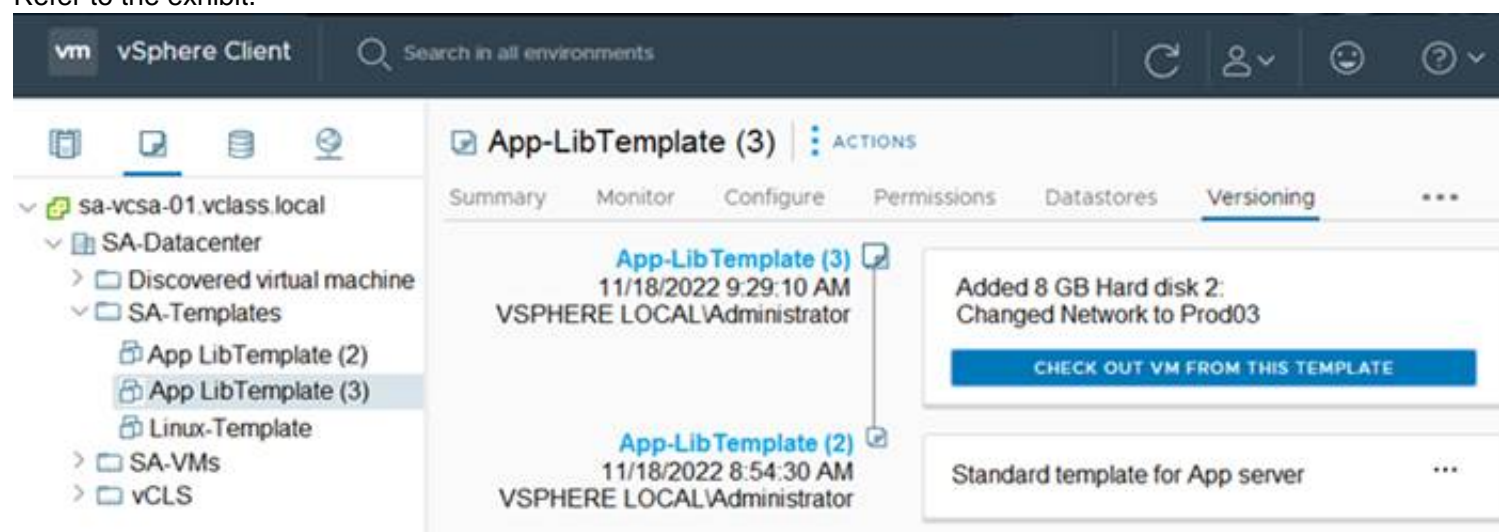

Given the configuration shown in the exhibit, what should the administrator do if the latest VM template contains changes that are no longer needed?

- A. Delete App-LibTemplate (2)
- B. Revert to App-LibTemplate (2)
- C. Delete App-LibTemplate (3)
- D. Check out App-LibTemplate (3)

**Answer:** B

#### Explanation:

Deleting App-LibTemplate (3) will remove the changes that are no longer needed and revert to the previous version of the template.

References:

[https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm\\_admin.doc/GUID-9A5093A5-C54](https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-9A5093A5-C54)

[https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm\\_admin.doc/GUID-D69B0279-CC9](https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-D69B0279-CC9) If the latest VM template contains changes that are no longer needed, the administrator should revert to the previous version of the template1.

Here are the steps to revert to a previous version of a template1:

- Navigate to the Versioning tab of the VM template.
  - From the vertical timeline, navigate to the previous state of the VM template.
  - Click the horizontal ellipsis icon (⋮), and select Revert to This Version.
  - The Revert to Version dialog box opens. Enter a reason for the revert operation and click Revert. So, in this case, the correct answer is: B. Revert to App-LibTemplate (2)
- This will make App-LibTemplate (2) the current VM template1. Please note that this operation will not delete App-LibTemplate (3), it will simply make App-LibTemplate (2) the current version1.

#### NEW QUESTION 32

An administrator must gracefully restart a virtual machine (VM) through the vSphere Client but the option is greyed out. The administrator has full administrative access on VMware vCenter and all the objects available in vCenter, but has no access to log onto the operating system. Which action should the administrator take to meet the objective?

- A. Upgrade the virtual hardware
- B. Migrate the VM to another host
- C. Install VMware Tools
- D. Restart vCenter

**Answer: C**

#### Explanation:

Installing VMware Tools will enable the graceful restart option for the virtual machine, as well as other features such as time synchronization and guest OS customization.

References:

[https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm\\_admin.doc/GUID-9A5093A5-C54](https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-9A5093A5-C54)

#### NEW QUESTION 37

An administrator plans to bring VMware vCenter offline in order to perform hardware maintenance on the host where the vCenter Server Appliance is running. Which vSphere feature must be configured to ensure that vCenter users experience minimal downtime?

- A. vSphere Distributed Resource Scheduler
- B. Hybrid Linked Mode
- C. vCenter Server High Availability
- D. Enhanced Linked Mode


**Answer: C**

#### Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.avail.doc/GUID-4A626993-A829-495>

#### NEW QUESTION 38

Refer to the exhibit.

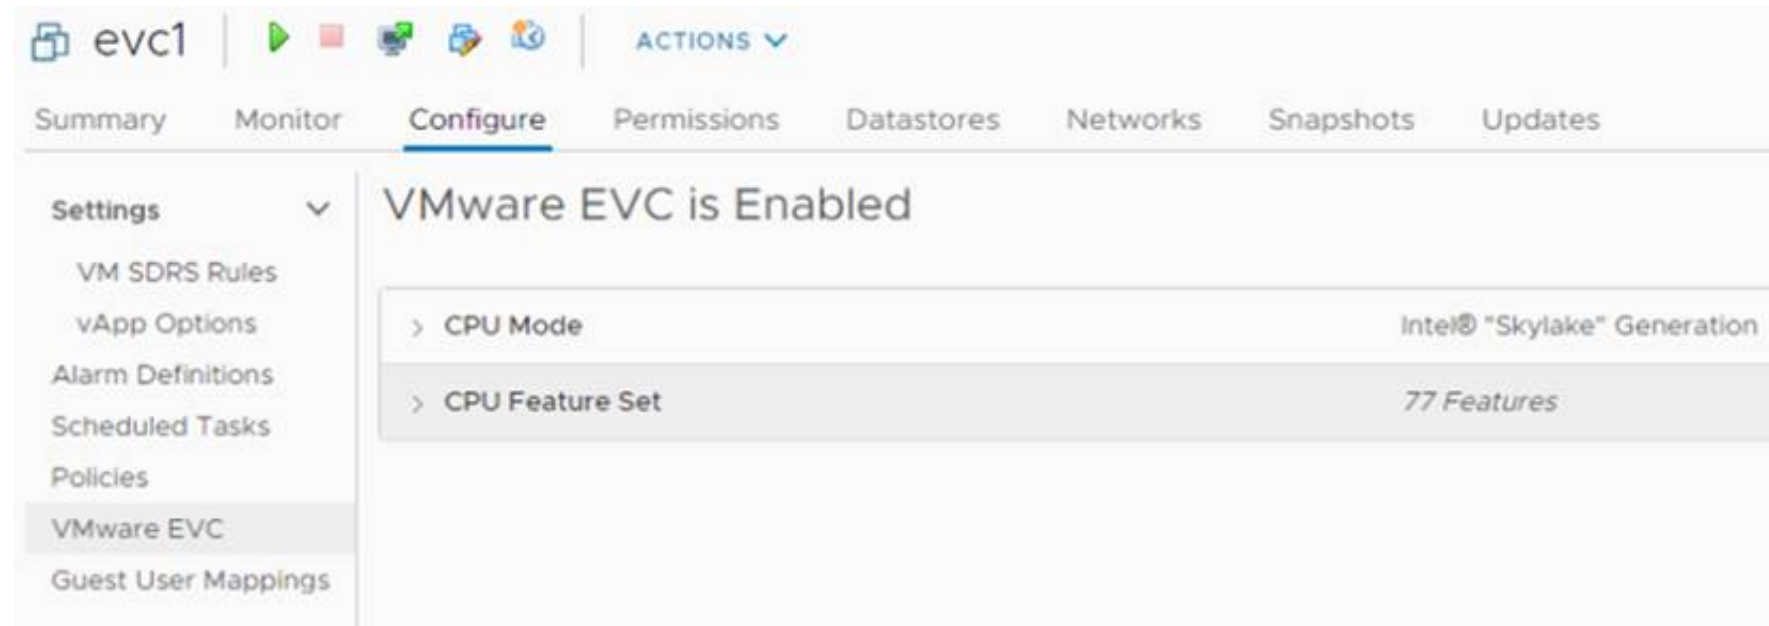

An administrator is tasked with adding new capacity to an existing software-defined data center (SDDC).

- The SDDC currently hosts two vSphere clusters (ClusterA and ClusterB) with different CPU compatibilities.
- vSphere vMotion and vSphere Distributed Resource Scheduler (DRS) are currently in use in the SDDC.
- The new capacity will be implemented by provisioning four ESXi hosts running a new generation of Intel Skylake CPUs.
- All workload virtual machines (VMs) must support live migration to any cluster in the SDDC.

The administrator noticed the running critical "ever virtual machine (VM) shown in the exhibit is not migrating using vSphere vMotion to the original Clusters A or B. Which three steps must the administrator take to support this functionality? (Choose three.)

- A. Power on the VM.
- B. Disable the Enhanced vMotion Compatibility (EVC) on the VM.
- C. Reboot the VM.
- D. Configure the Enhanced vMotion Compatibility (EVC) on vSphere Cluster A and B to support Intel Skylake.
- E. Power off the VM.
- F. Configure the Enhanced vMotion Compatibility (EVC) on the VM to Intel Skylake.

**Answer: ADE**

**NEW QUESTION 42**

An administrator is preparing for a deployment of a new vCenter Server Appliance. The following information has been provided to complete the deployment:

- ESXi Host name (FQDN): esx01.corp.local . ESXi IP Address: 172.20.10.200
- vCenter Server Name (FQDN): vcasa01.corp.local
- vCenter Server IP Address: 172.20.10.100
- NTP Server: 172.20.10.20
- DNS Server: 172.20.10.1
- Deployment Size: Tiny
- Storage Size: Default

Which two actions must the administrator complete before starting the installation of the vCenter Server Appliance? (Choose two.)

- A. Create a DNS CNAME record for the vCenter Server (vcasa01.corp.local)
- B. Create a DNS CNAME record for the ESXi Host server (esx01.corp.local)
- C. Create a reverse DNS A record for the vCenter Server (vcasa01).
- D. Create a reverse DNS A record for the ESXi Host server (esx01)
- E. Create a forward DNS A record for the vCenter Server (vcasa01).

**Answer:** CE

**Explanation:**

The administrator must create a forward DNS A record for the vCenter Server (vcasa01), which maps the FQDN of the vCenter Server to its IP address. The administrator must also create a reverse DNS A record for the ESXi Host server (esx01), which maps the IP address of the ESXi Host to its FQDN. These DNS records are required for name resolution and certificate validation during the deployment of the vCenter Server Appliance. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-88571D8A-46E1-464>

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-vcenter-upgrade/GUID-752FCA83-1A9B-499E-9C6> If you plan to use an FQDN for the appliance system name, you must verify that the FQDN is resolvable by a DNS server, by adding forward and reverse DNS A records.

**NEW QUESTION 44**

An administrator is tasked with looking into the disaster recovery (DR) options for a software-defined data center (SDDC).

The following requirements must be met:

- All virtual machines (VMs) must be protected to a secondary site.
- The source VMs must remain online until the failover.
- When failing over to the secondary site, application downtime is allowed
- The DR failover must be managed from the vSphere Client.
- Costs must remain as low as possible.

How can the administrator accomplish this task?

- A. Configure VMware Cloud Disaster Recovery (VCDR) and combine it with array-based storage replication
- B. Configure VMware Site Recovery Manager and combine it with vSphere Replication.
- C. Configure a subscribed content library on the secondary site.
- D. Configure VMware Site Recovery Manager and combine it with array-based storage replication.

**Answer:** B

**Explanation:**

<https://blogs.vmware.com/virtualblocks/2017/11/29/vsr-technicaloverview/>

**NEW QUESTION 48**

An administrator has a requirement to revert a running virtual machine to a previous snapshot after a failed attempt to upgrade an application. When the administrator originally took the snapshot, the following choices in the Take Snapshot dialog were made:

- Snapshot the virtual machine's memory = false
- Quiesce guest file system = false

What will be the result of the administrator selecting the 'Revert to Latest Snapshot?' option to return the virtual machine to a previous snapshot? (Choose two.)

- A. The virtual machine will be restored to the parent snapshot
- B. The virtual machine will be restored in a powered off state
- C. The virtual machine will be restored to the child snapshot
- D. The virtual machine will be restored in a powered on state
- E. The virtual machine will be restored in a suspended state

**Answer:** AB

**Explanation:**

[https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm\\_admin.doc/GUID-3E1BB630-9223](https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-3E1BB630-9223)

**NEW QUESTION 52**

An administrator remotely deploys VMware ESXi using an out of band management connection and now needs to complete the configuration of the management network so that the host is accessible through the vSphere Host Client.

The following information has been provided to complete the configuration:

- Host FQDN esxi01.corp.local
- Management VLAN ID: 10 DHCP: No
- Management IP Address: 172.16.10.101/24
- Management IP Gateway: 172.16.10.1
- . Corporate DNS Servers: 172.16.10.5, 172.16.10.6
- DNS Domain: corp.local

In addition, all host configurations must also meet the following requirements:

- The management network must use only IPv4 network protocols.
- The management network must be fault tolerant

Which four high level tasks should the administrator complete in the Direct Console User Interface (DCUI) in order to meet the requirements and successfully log into the vSphere Host Client? (Choose four.)



- A. Set the value of the VMware ESXi Management Network VLAN ID to 10
- B. Configure at least two network adapters for the VMware ESXi Management Network
- C. Update the VMware ESXi Management Network IPv4 configuration to use a static IPv4 address
- D. Create a DNS A Record for the VMware ESXi host on the corporate DNS servers
- E. Disable IPv6 for the VMware ESXi Management Network
- F. Restore the original Management vSphere Standard Switch.
- G. Update the VMware ESXi Management Network DNS configuration to use the corporate DNS servers for 'names' resolution

**Answer:** ABCD

#### NEW QUESTION 55

An administrator wants to allow a DevOps engineer the ability to delete Tanzu Kubernetes Grid (TKG) cluster objects in a vSphere Namespace. Which role would provide the minimum required permissions to perform this operation?

- A. Administrator
- B. Can View
- C. Owner
- D. Can Edit

**Answer:** D

#### Explanation:

The Can Edit role would provide the minimum required permissions to delete Tanzu Kubernetes Grid (TKG) cluster objects in a vSphere Namespace, as it allows creating, updating, and deleting objects within a namespace.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/vmware-vsphere-with-tanzu/GUID-C2E9B5C1-D6F1-4E9B>

#### NEW QUESTION 59

An administrator decides to restore VMware vCenter from a file-based backup following a failed upgrade. Which interface should the administrator use to complete the restore?

- A. Direct Console User Interface (DCUI)
- B. vCenter Management Interface (VAMI)
- C. vSphere Client
- D. vCenter GUI Installer

**Answer:** D

#### Explanation:

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-vcenter-installation/GUID-F02AF073-7CFD-45B2>- You can use the vCenter Server appliance GUI installer to restore a vCenter Server to an ESXi host or a vCenter Server instance. The restore procedure has two stages. The first stage deploys a new vCenter Server appliance. The second stage populates the newly deployed vCenter Server appliance with the data stored in the file-based backup.

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-vcenter-installation/GUID-F02AF073-7CFD-45B2>

#### NEW QUESTION 60

An administrator manually configures a reference ESXi host that meets company security standards for vSphere environments. The administrator now needs to apply all of the security standards to every identically configured host across multiple vSphere clusters within a single VMware vCenter instance. Which four steps would the administrator complete to meet this requirement? (Choose four.)

- A. Extract the host profile from the reference host
- B. Export the host profile from vCenter.
- C. Import host customization on the reference host.
- D. Attach the host profile to each cluster that requires the secure configuration.
- E. Check the compliance of each host against the host profile.
- F. Reset host customization on the reference host.
- G. Remediate all non-compliant hosts.

**Answer:** ADEG

#### Explanation:

To apply the security standards from a reference host to other hosts across multiple clusters, the administrator needs to extract a host profile from the reference host, which captures its configuration settings; attach the host profile to each cluster that requires the same configuration; check the compliance of each host against the host profile, which compares their settings; and remediate all non-compliant hosts, which applies the configuration settings from the host profile.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-F8F105EC-A6EA>

#### NEW QUESTION 61

An administrator is investigating user logon failures for a VMware vCenter instance. Where can the administrator find log files containing information related to user login activities?

- A. On the vCenter Management Interface
- B. On the ESXi host using the Direct Console User Interface (DCUI)
- C. On the vCenter Server Appliance
- D. In the vSphere Client when viewing the vCenter virtual machine

**Answer:** C

#### Explanation:

The administrator can find log files containing information related to user login activities on the vCenter Server Appliance, which is a preconfigured Linux-based

virtual machine that runs all vCenter Server services. The log files are located in /var/log/vmware/vmware-vpx/vpxd.log and /var/log/vmware/sso/ssoAdminServer.log directories. References:  
<https://docs.vmware.com/en/VMware-vSphere/8.0/com.vmware.vsphere.troubleshooting.doc/GUID-5F9A7E49>

**NEW QUESTION 64**

Following a merger with another company, an administrator is tasked with configuring an identity source for VMware vCenter so that all vSphere administrators can authenticate using their existing Active Directory accounts. Each company has user accounts in their own Active Directory forests.

The following additional information has been provided:

- The corporate policy states that only Windows-based machine accounts are allowed in Active Directory. Which action should the administrator take to configure vCenter Single Sign-On (SSO) to meet this requirement?

- A. Configure SSO to use Active Directory over LDAP as the identity source.
- B. Configure SSO to use OpenLDAP as the identity source.
- C. Join the vCenter Server Appliance to the LDAP domain.
- D. Configure SSO to use Active Directory (Integrated Windows Authentication) as the identity source.

**Answer:** A

**Explanation:**

Integrated Windows Authentication is now deprecated (from v7). "The Active Directory over LDAP identity source is preferred over the Active Directory (Integrated Windows Authentication) option." <https://kb.vmware.com/s/article/78506>

**NEW QUESTION 68**

A VMkernel port is labelled PROD01 and uses the default TCP/IP stack. Currently, this VMkernel port is configured for supporting live virtual machine (VM) migrations.

Which configuration change should the administrator make to isolate live VM migration traffic from other network traffic?

- A. Remove PROD01 and create a new VMkernel port and set the TCP/IP stack to vSphere vMotion.
- B. Remove PROD01 and create a new VMkernel port with the TCP/IP stack set to provisioning.
- C. Create a new VMkernel port and set the TCP/IP stack to provisioning.
- D. Modify PROD01 by changing the TCP/IP stack to vSphere vMotion.

**Answer:** A

**Explanation:**

Select a TCP/IP stack from the list. Once you set a TCP/IP stack for the VMkernel adapter, you cannot change it later. If you select the vMotion or the Provisioning TCP/IP stack, you will be able to use only these stacks to handle vMotion or Provisioning traffic on the host. All VMkernel adapters for vMotion on the default TCP/IP stack are disabled for future vMotion sessions. If you set the Provisioning TCP/IP stack, VMkernel adapters on the default TCP/IP stack are disabled for operations that include Provisioning traffic, such as virtual machine cold migration, cloning, and snapshot migration.

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-networking/GUID-AA3656B0-005A-40A0-A293-43>

**NEW QUESTION 69**

A vSphere cluster hosts a three-tier application. The cluster has 50% resources available. If a host in the cluster fails, the database server must be online before the application server, and the application server must be online before the Web server.

Which feature can be used to meet these requirements?

- A. Predictive DRS
- B. vSphere HA Orchestrated Restart
- C. vSphere HA Restart Priority
- D. Proactive HA

**Answer:** B

**Explanation:**

<https://www.vladan.fr/what-is-vmware-orchestrated-restart/>

**NEW QUESTION 71**

An administrator is tasked with applying updates to a vSphere cluster running vSAN using vSphere Lifecycle Manager. Downtime to the ESXi hosts must be minimal while the work is completed.

The administrator has already completed the following steps and no errors have been returned:

- Downloaded all applicable software and created a new Image
- Attached the new Image to the cluster and run a compliance check against the Image for the cluster
- Ran a remediation pre-check for the cluster

Which two series of steps should the administrator perform to start the remediation of the cluster using the new image? (Choose two.)

- A. \* 1. Use the Remediate option in vSphere Lifecycle Manager to remediate all of the ESXi hosts in the cluster in parallel.\* 2. Allow vSphere Lifecycle Manager to automatically control maintenance mode on the ESXi hosts.
- B. \* 1. Place each of the ESXi hosts into maintenance mode manually.\* 2. Use the Stage option in vSphere Lifecycle Manager to stage the required software on all ESXi hosts one at a time.
- C. \* 1. Leave all ESXi hosts in the cluster operational.\* 2. Use the Stage All option in vSphere Lifecycle Manager to stage the required software onto all ESXi hosts one at a time.
- D. \* 1. Leave all ESXi hosts in the cluster operational\* 2. Use the Stage All option in vSphere Lifecycle Manager to stage the required software onto all ESXi hosts in the cluster in parallel.
- E. \* 1. Use the Remediate Option in vSphere Lifecycle Manager to remediate all of the ESXi hosts in the cluster in sequence.\* 2. Allow vSphere Lifecycle Manager to automatically control maintenance mode on the ESXi hosts

**Answer:** AD

**Explanation:**

Option A and D are correct because they allow vSphere Lifecycle Manager to automatically control maintenance mode on the ESXi hosts and remediate them in parallel or in sequence. Option B and C are incorrect because they require manual intervention to place the hosts into maintenance mode or to stage the software on each host, which is not efficient or minimal downtime. References: <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere-lifecycle-manager.doc/GUID-9F9E3F8>

#### NEW QUESTION 76

An administrator needs to provide encryption for workloads within an existing vSphere cluster. The following requirements must be met:

- Workloads should be encrypted at rest.
- Encrypted workloads must automatically be encrypted during transit.
- Encryption should not require any specific hardware.

What should the administrator configure to meet these requirements?

- A. Encrypted vSphere vMotion
- B. Unified Extensible Firmware Interface (UEFI) Secure Boot
- C. Host Encryption
- D. VM Encryption

**Answer:** D

#### Explanation:

The feature that should be configured to provide encryption for workloads within an existing vSphere cluster without requiring any specific hardware is VM Encryption, which allows encrypting VMs at rest and during vMotion.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-F8F105EC-A6EA>

#### NEW QUESTION 77

An administrator is tasked with configuring an appropriate Single Sign-On (SSO) solution for VMware vCenter based on the following criteria:

- The solution should support the creation of Enhanced Link Mode groups.
- All user accounts are stored within a single Active Directory domain and the solution must support only this Active Directory domain as the identity source.
- All user account password and account lockout policies must be managed within the Active Directory domain.
- The solution should support token-based authentication.

Which SSO solution should the administrator choose based on the criteria?

- A. vCenter Identity Provider Federation with Active Directory Federation Services as the identity provider
- B. vCenter Single Sign-On with Active Directory over LDAP as the identity source
- C. vCenter Single Sign-On with Active Directory (Windows Integrated Authentication) as the identity source
- D. vCenter Identity Provider Federation with Active Directory over LDAP as the identity provider

**Answer:** A

#### Explanation:

„ In vCenter Server Identity Provider Federation, vCenter Server uses the OpenID Connect (OIDC) protocol to receive an identity token that authenticates the user with vCenter Server.“ Integrated Windows Authentication is deprecated since vSphere 7.0

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.authentication.doc/GUID-157188E3-53>

#### NEW QUESTION 78

An administrator is configuring vSphere Lifecycle Manager to install patches to a vSphere cluster. The cluster runs workload virtual machines (VMs) that are incompatible with vSphere vMotion, and therefore cannot be live migrated between hosts during the installation of the patches.

Which configuration in vSphere Lifecycle Manager will allow the administrator to reduce the downtime associated with the patching operation without migrating the VMs?

- A. Enable Distributed Power Management (DPM) and set the VM power state to the suspend to disk option
- B. Enable Quick Boot and set the VM power state to the suspend to disk option
- C. Enable vSphere High Availability (HA) admission control and set the VM power state to the suspend to memory option
- D. Enable Quick Boot and set the VM power state to the suspend to memory option

**Answer:** D

#### Explanation:

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-lifecycle-manager/GUID-06A5D316-9452-4A5D-A> The administrator should enable Quick Boot and set the VM power state to the suspend to memory option, which will allow the administrator to reduce the downtime associated with the patching operation without migrating the VMs. Quick Boot is a feature that skips the hardware initialization phase during host reboot, which reduces the system boot time. Suspend to memory is an option that preserves the state of the VMs in the host memory and restores them from memory after the reboot, which minimizes the VM downtime. These two features work together to optimize the remediation process and speed up the patching operation. References: <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere-lifecycle-manager.doc/GUID-5AF3C6>

#### NEW QUESTION 82

An administrator notices a Fibre Channel adapter in an ESXi host has been experiencing inconsistent connectivity states.

Which trigger can be used to quickly identify the issue and alert the administrator so that the issue can be resolved?

- A. Host Connection Lost
- B. Lost Network Path Redundancy
- C. Lost Network Connectivity
- D. Lost Storage Connectivity

**Answer:** D

#### Explanation:

<https://kb.vmware.com/s/article/2014553>

Book course: 6-23 Fibre Channel SAN Components Using SAN switches, you can set up path redundancy to address any path failures from host server to switch, or from storage array to switch. 6-25 Multipathing with Fibre Channel By default, ESXi hosts use only one path from a host to a given LUN at any one time. If the path actively being used by the ESXi host fails, the server selects another available path.

The trigger that can be used to quickly identify the issue and alert the administrator so that the issue can be resolved is:

Lost Storage Connectivity

This alert is triggered when an ESXi host loses connectivity to storage devices. In this case, it would alert the administrator to the inconsistent connectivity states of the Fibre Channel adapter<sup>12</sup>.

#### NEW QUESTION 87

An administrator is required to configure several Microsoft Windows virtual machines (VMs) to support Secure Boot for a critical secure application. The following information is provided:

- The corporate security policy states that all forms of data encryption must utilize a key provider.
- The firmware of each VM is currently set to use Unified Extensible Firmware Interface (UEFI).
- Due to the nature of the application running within the VMs, the guest operating system for each VM is currently a minimum of Windows Server 2008 and Windows 7.

Which security feature should the administrator implement to meet these requirements?

- A. vSphere Virtual Machine Encryption
- B. vSphere Visualization-Based Security
- C. Virtual Intel Software Guard Extensions (vSGX)
- D. Virtual Trusted Platform Module (vTPM)

**Answer: D**

#### Explanation:

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-security/GUID-6F811A7A-D58B-47B4-84B4-7339> A vTPM is a virtualized version of a physical TPM and is used to protect VMs and their data by tying the cryptographic functions to the hardware of the server on which the VMs are running<sup>12</sup>. This allows for secure boot, disk encryption, and other security features<sup>12</sup>. It also supports key providers, which is a requirement in this case<sup>12</sup>.

#### NEW QUESTION 90

An administrator is tasked with adding two additional hosts into an existing production vSphere cluster to support the need for additional capacity.

The vSphere cluster currently has four identically configured ESXi hosts (esx01, esx02, esx03 and esx04) that utilize Intel Skylake-based CPUs. The two new hosts (esx05 and esx06) are configured identically in terms of memory and storage to the existing hosts: but utilize Intel Ice Lake-based CPUs.

The administrator must ensure that:

- Any virtual machine migrates to any of the six ESXi hosts running in the cluster.
- There is no virtual machine downtime during the process of adding the new hosts. Which step should the administrator take to meet these requirements?

- A. Create a new vSphere cluster with Enhanced vMotion Compatibility (EVC) enabled and move all hosts into A' the new cluster
- B. Create a new vSphere cluster and move only three hosts into the new cluster.
- C. Configure Enhanced vMotion Compatibility (EVC) mode on the existing cluster and add the two new hosts into the cluster.
- D. Create a new vSphere cluster with vSphere High Availability (HA) enabled and move all hosts into the new cluster

**Answer: C**

#### Explanation:

The step that the administrator should take to meet these requirements is to configure Enhanced vMotion Compatibility (EVC) mode on the existing cluster and add the two new hosts into the cluster. EVC mode allows migration of virtual machines between different generations of CPUs by masking unsupported processor features. EVC mode can be enabled on an existing cluster without affecting powered-on virtual machines. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenterhost.doc/GUID-9F444D9B-44A>

<https://blogs.vmware.com/vsphere/2019/06/enhanced-vmotion-compatibility-evc-explained.html>

#### NEW QUESTION 92

After adding a new vSphere ESXi host with identical hardware configuration to an existing vSphere cluster, which task would an administrator complete prior to checking the compliance with an existing host profile?

- A. Attach the host profile to the new host
- B. Duplicate the host profile
- C. Copy the host settings from the new host
- D. Import the host profile

**Answer: A**

#### Explanation:

The task that should be completed prior to checking the compliance with an existing host profile is to attach the host profile to the new host, which allows applying the configuration template of the reference host to the new host.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.hostprofiles.doc/GUID-0E5BF330-A76> <https://www.nakivo.com/blog/how-to-create-and-set-up-vmware-vsphere-host-profiles/>

#### NEW QUESTION 94

.....



## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### 2V0-21.23 Practice Exam Features:

- \* 2V0-21.23 Questions and Answers Updated Frequently
- \* 2V0-21.23 Practice Questions Verified by Expert Senior Certified Staff
- \* 2V0-21.23 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* 2V0-21.23 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The 2V0-21.23 Practice Test Here](#)**