

# Cisco


## Exam Questions 300-620

Implementing Cisco Application Centric Infrastructure (DCACI)




**NEW QUESTION 1**


An engineer is implementing a Cisco ACI data center network that includes Cisco Nexus 2000 Series 10G fabric extenders. Which physical topology is supported?  
A.

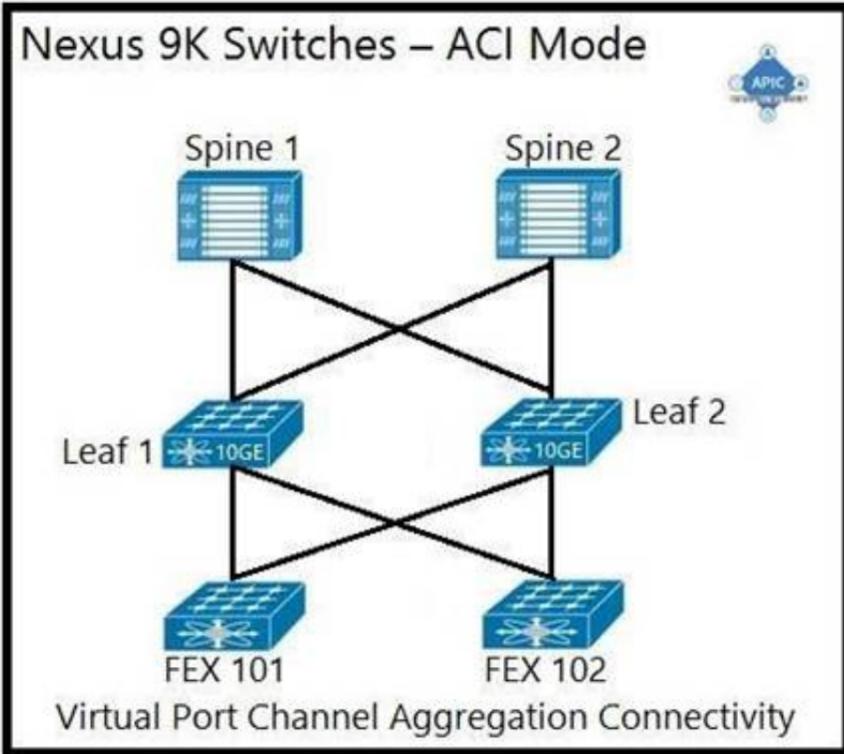


B.

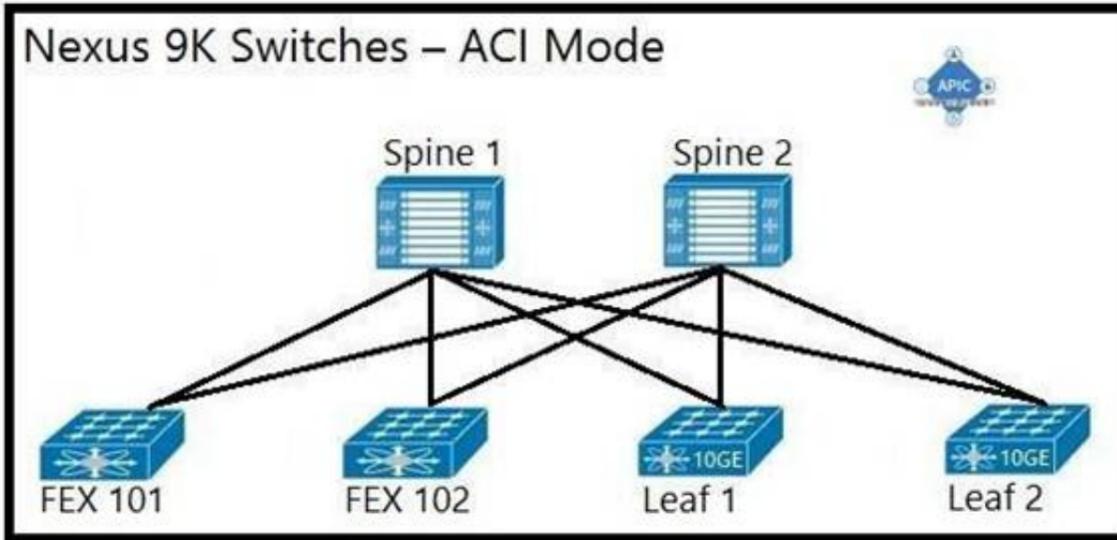

C.

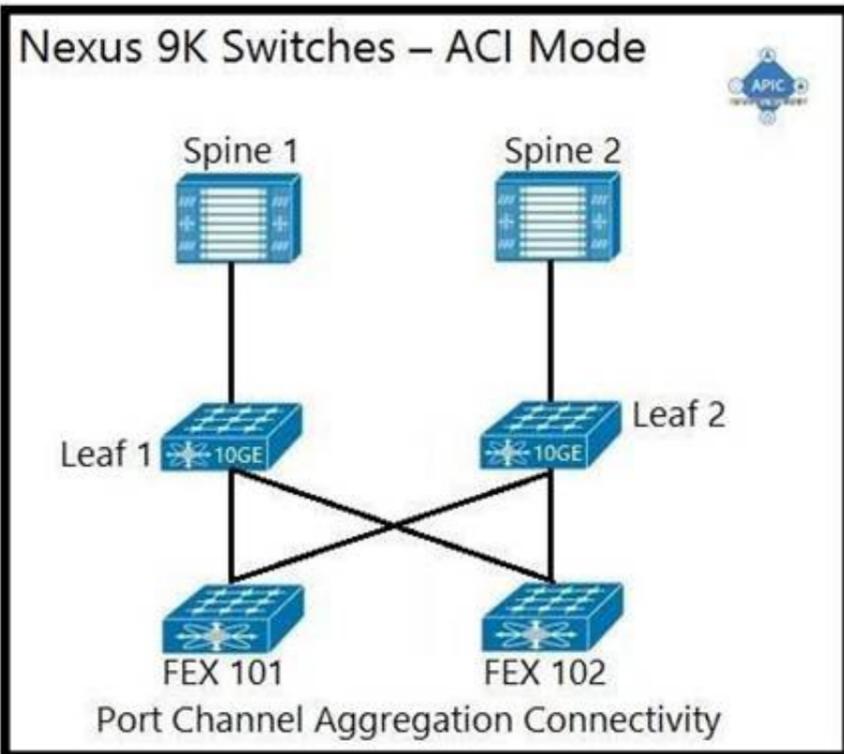

A.

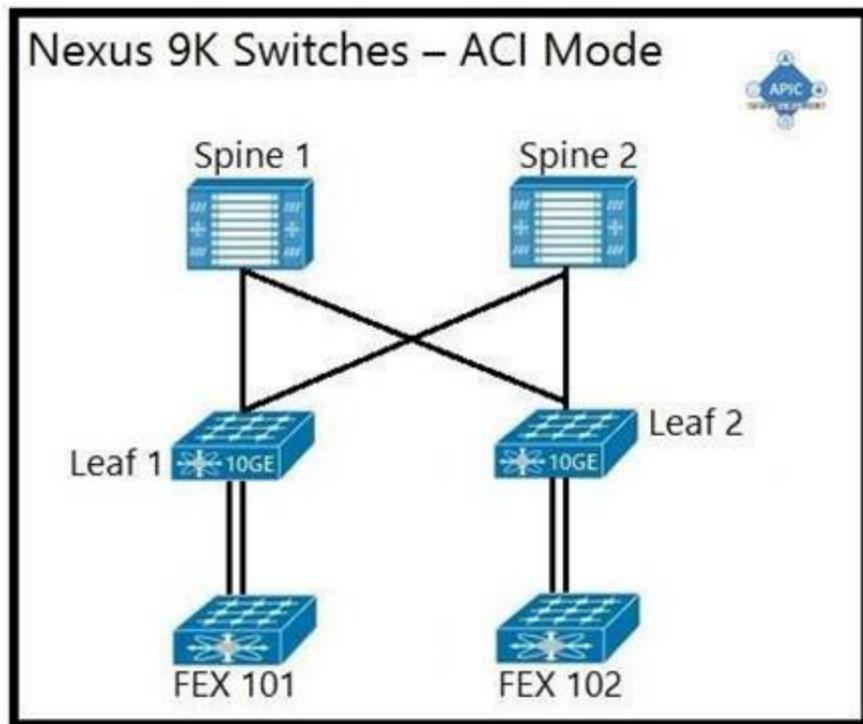

**Answer: D**

**NEW QUESTION 2**

An engineer is creating a configuration import policy that must terminate if the imported configuration is incompatible with the existing system. Which import mode achieves this result?

- A. merge
- B. atomic
- C. best effort
- D. replace

**Answer: B**

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/4-x/aci-fundamentals/Cisco-ACI-Fundamentals-401/Cisco-ACI-Fundamentals-401\\_chapter\\_01011.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/4-x/aci-fundamentals/Cisco-ACI-Fundamentals-401/Cisco-ACI-Fundamentals-401_chapter_01011.html)

**NEW QUESTION 3**

Which type of policy configures the suppression of faults that are generated from a port being down?

- A. fault lifecycle assignment
- B. event lifecycle assignment
- C. fault severity assignment
- D. event severity assignment

**Answer: C**

**Explanation:**


Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/all/faults/guide/b\\_APIC\\_Faults\\_Errors/b\\_IFC\\_Faults\\_Errors\\_chapter\\_01.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/all/faults/guide/b_APIC_Faults_Errors/b_IFC_Faults_Errors_chapter_01.html)

**NEW QUESTION 4**

DRAG DROP

An engineer is configuring a VRF for a tenant named Cisco. Drag and drop the child objects on the left onto the correct containers on the right for this configuration.

- Application profile
- Bridge domain
- EPG
- VRF

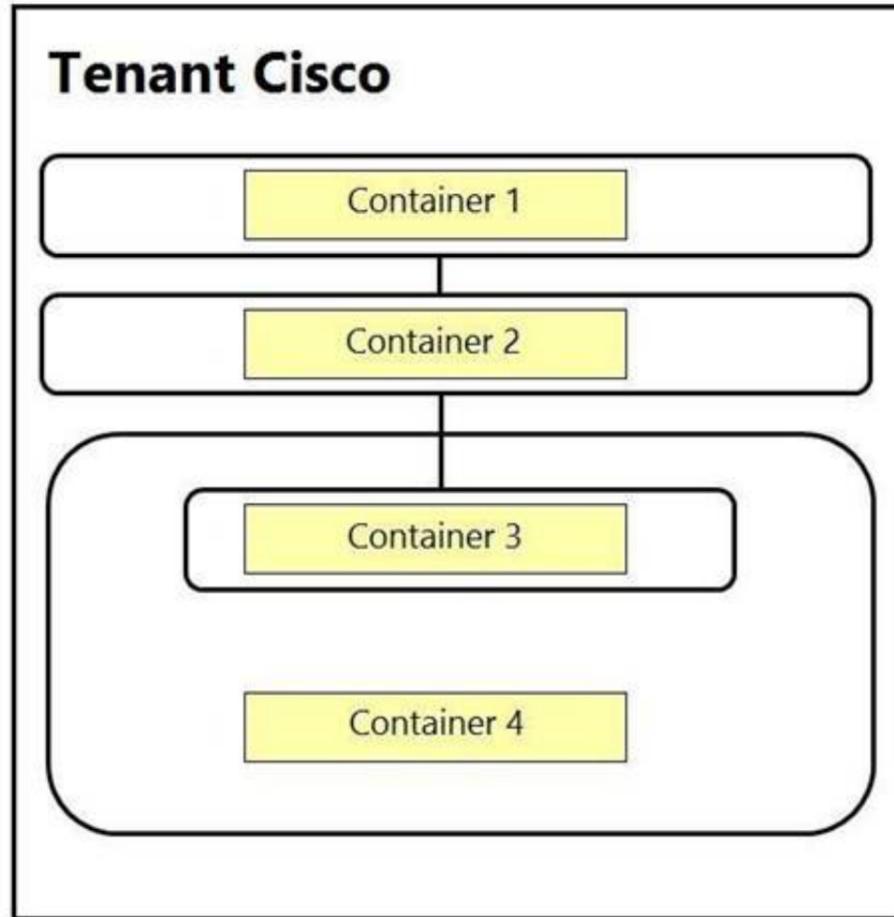


- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

- Application profile
- Bridge domain
- EPG
- VRF

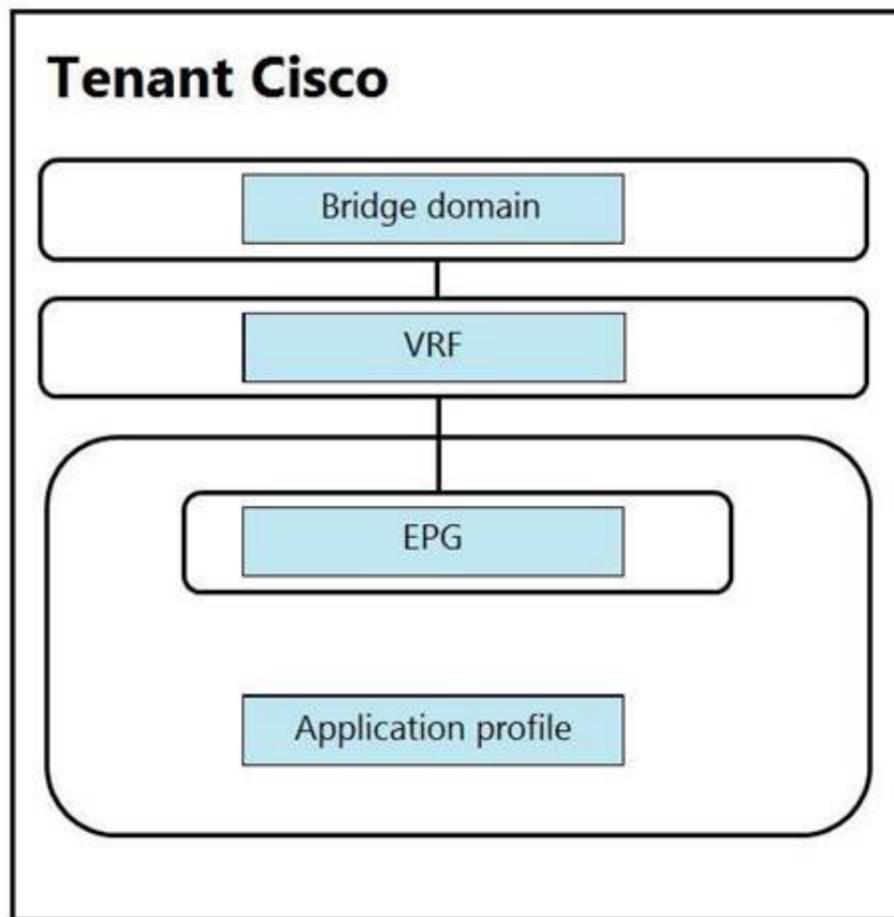

**NEW QUESTION 5**

Which feature dynamically assigns or modifies the EPG association of virtual machines based on their attributes?

- A. vzAny contracts
- B. standard contracts
- C. application EPGs
- D. uSeg EPGs

**Answer:** D

**NEW QUESTION 6**

Which feature allows firewall ACLs to be configured automatically when new endpoints are attached to an EPG?

- A. ARP gleaning

- B. dynamic endpoint attach
- C. hardware proxy
- D. network-stitching

**Answer:** B

**NEW QUESTION 7**

How is an EPG extended outside of the ACI fabric?

- A. Create an external bridged network that is assigned to a leaf port.
- B. Create an external routed network that is assigned to an EPG.
- C. Enable unicast routing within an EPG.
- D. Statically assign a VLAN ID to a leaf port in an EPG.

**Answer:** D

**Explanation:**

Reference: <https://www.dcllessons.com/l2-external-network-with-aci>

**NEW QUESTION 8**

Where is the COOP database located?

- A. leaf
- B. spine
- C. APIC
- D. endpoint


**Answer:** B

**Explanation:**

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

**NEW QUESTION 9**

Refer to the exhibit.

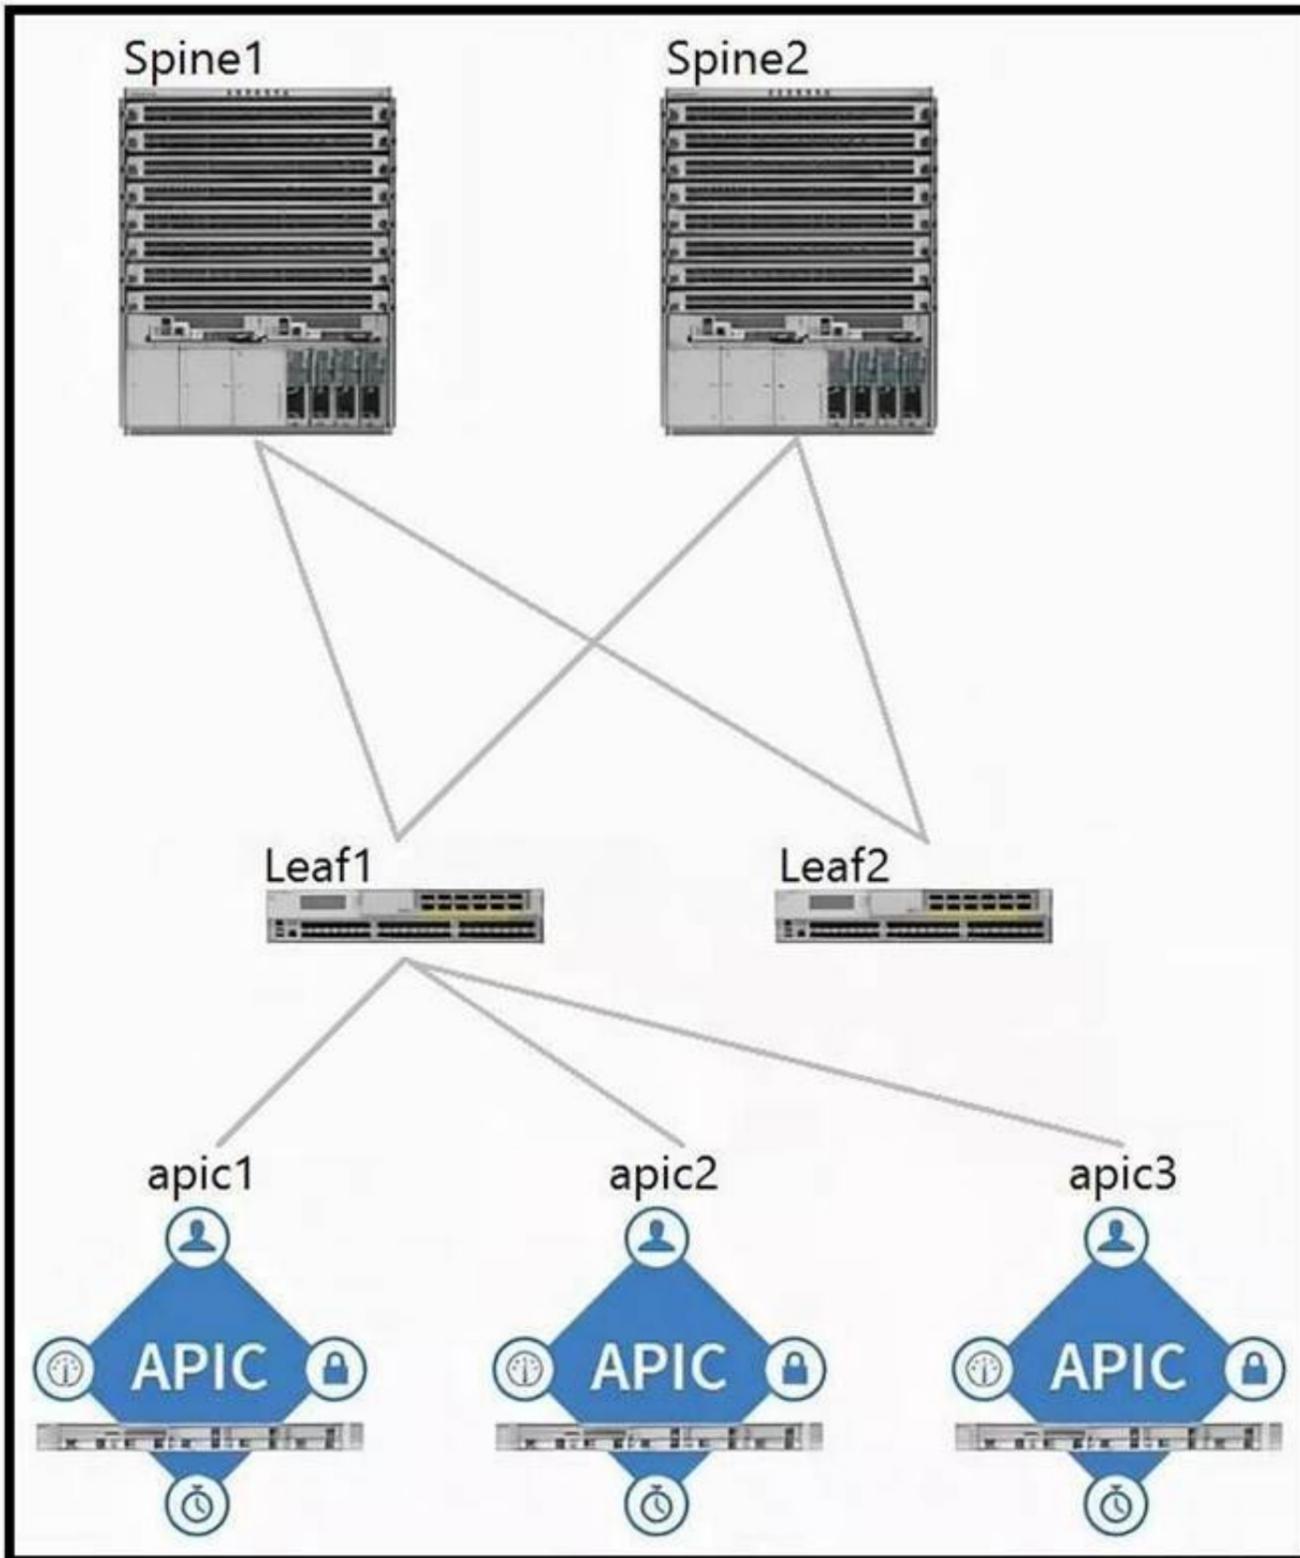

Which two components should be configured as route reflectors in the ACI fabric? (Choose two.)

- A. Spine1
- B. apic1
- C. Spine2
- D. Leaf1
- E. Leaf2
- F. apic2

**Answer:** AC

**NEW QUESTION 10**

When creating a subnet within a bridge domain, which configuration option is used to specify the network visibility of the subnet?

- A. limit IP learning to subnet
- B. scope
- C. gateway IP
- D. subnet control

**Answer:** C

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating\\_ACI/guide/b\\_Cisco\\_Operating\\_ACI/b\\_Cisco\\_Operating\\_ACI\\_chapter\\_0111.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating_ACI/guide/b_Cisco_Operating_ACI/b_Cisco_Operating_ACI_chapter_0111.html)

**NEW QUESTION 10**

Which two types of interfaces are supported on border leaf switches to connect to an external router? (Choose two.)

- A. subinterface with VXLAN tagging
- B. subinterface with 802.1Q tagging
- C. FEX host interface
- D. out of band interface

E. Switch Virtual Interface

**Answer:** BE

**NEW QUESTION 15**

An engineer is extending an EPG out of the ACI fabric using static path binding. Which statement about the endpoints is true?

- A. Endpoints must connect directly to the ACI leaf port.
- B. External endpoints are in a different bridge domain than the endpoints in the fabric.
- C. Endpoint learning encompasses the MAC address only.
- D. External endpoints are in the same EPG as the directly attached endpoints.

**Answer:** C

**NEW QUESTION 19**

What must be enabled in the bridge domain to have the endpoint table learn the IP addresses of endpoints?

- A. L2 unknown unicast: flood
- B. GARP based detection
- C. unicast routing
- D. subnet scope

**Answer:** C

**Explanation:**

Reference: <https://hsvglobalschool.in/dhkycw/cisco-aci-bridge-domain.html>

**NEW QUESTION 21**

An engineer is extending EPG connectivity to an external network. The external network houses the Layer 3 gateway and other end hosts. Which ACI bridge domain configuration should be used?

- A. Forwarding: CustomL2 Unknown Unicast: Hardware Proxy L3 Unknown Multicast Flooding: Flood Multi Destination Flooding: Flood in BD ARP Flooding: Enabled
- B. Forwarding: Custom L2 Unknown Unicast: FloodL3 Unknown Multicast Flooding: Flood Multi Destination Flooding: Flood in BD ARP Flooding: Enabled
- C. Forwarding: CustomL2 Unknown Unicast: Hardware Proxy L3 Unknown Multicast Flooding: Flood Multi Destination Flooding: Flood in BD ARP Flooding: Disabled
- D. Forwarding: Custom L2 Unknown Unicast: FloodL3 Unknown Multicast Flooding: Flood Multi Destination Flooding: Flood in BD ARP Flooding: Disabled

**Answer:** D

**NEW QUESTION 26**

An engineer is implementing a connection that represents an external bridged network. Which two configurations are used? (Choose two.)

- A. Layer 2 remote fabric
- B. Layer 2 outside
- C. Layers 2 internal
- D. Static path binding
- E. VXLAN outside

**Answer:** AB

**NEW QUESTION 30**

An engineer has set the VMM resolution immediacy to pre-provision in a Cisco ACI environment. No Cisco Discovery Protocol neighborship has been formed between the hypervisors and the ACI fabric leaf nodes. How does this affect the download policies to the leaf switches?

- A. No policies are downloaded because LLDP is the only supported discovery protocol.
- B. Policies are downloaded when the hypervisor host is connected to the VMM VDS.
- C. Policies are downloaded to the ACI leaf switch regardless of Cisco Discovery Protocol neighborship.
- D. No policies are downloaded because there is no discovery protocol neighborship.

**Answer:** C

**NEW QUESTION 32**

Which tenant is used when configuring in-band management IP addresses for Cisco APICs, leaf nodes, and spine nodes?

- A. default
- B. infra
- C. common
- D. mgmt

**Answer:** D

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b\\_KB\\_Configuring\\_Static\\_Management\\_Access.html#concept\\_CFF63FEBE947424291B0F10E6F23DA7D](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Configuring_Static_Management_Access.html#concept_CFF63FEBE947424291B0F10E6F23DA7D)

### NEW QUESTION 33

What represents the unique identifier of an ACI object?

- A. universal resource identifier (URI)
- B. application programming interface
- C. management information tree
- D. distinguished name

**Answer:** D

#### Explanation:

Reference: <https://www.slideshare.net/CiscoDevNet/introduction-to-aci-apis>

### NEW QUESTION 38

What must be configured to allow SNMP traffic on the APIC controller?

- A. out-of-band management interface
- B. contract under tenant mgmt
- C. SNMP relay policy
- D. out-of-band bridge domain

**Answer:** B

### NEW QUESTION 43

Which statement about ACI syslog is true?

- A. Notifications for different scopes of syslog objects can be sent only to one destination.
- B. Syslog messages are sent to the destination through the spine.
- C. All syslog messages are sent to the destination through APIC.
- D. Switches send syslog messages directly to the destinations.

**Answer:** A

#### Explanation:

Reference: <https://www.ciscolive.com/c/dam/r/ciscolive/us/docs/2016/pdf/BRKACI-2303.pdf>

### NEW QUESTION 45

Which two protocols support accessing backup files on a remote location from the APIC? (Choose two.)

- A. TFTP
- B. FTP
- C. SFTP
- D. SMB
- E. HTTPS

**Answer:** BC

#### Explanation:

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/troubleshooting/b\\_APIC\\_Troubleshooting/b\\_APIC\\_Troubleshooting\\_appendix\\_010011.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/troubleshooting/b_APIC_Troubleshooting/b_APIC_Troubleshooting_appendix_010011.html)

### NEW QUESTION 49

Which statement regarding ACI Multi-Pod and TEP pool is true?

- A. The IP addresses used in the IPN network can overlap TEP pool of the APIC.
- B. A different TEP pool must be assigned to each Pod.
- C. The Pod1 TEP pool must be split and a portion of the TEP pool allocated to each Pod.
- D. The same TEP pool is used in all Pods.

**Answer:** B

#### Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739714.html>

### NEW QUESTION 50

A Solutions Architect is asked to design two data centers based on Cisco ACI technology that can extend L2/L3, VXLAN, and network policy across locations. ACI Multi-Pod has been selected. Which two requirements must be considered in this design? (Choose two.)

- A. ACI underlay protocols, i.
- B. COOP, IS-IS and MP-BGP, spans across pod
- C. Create QoS policies to make sure those protocols have higher priority.
- D. A single APIC Cluster is required in a Multi-Pod design
- E. It is important to place the APIC Controllers in different locations in order to maximize redundancy and reliability.
- F. ACI Multi-Pod requires an IP Network supporting PIM-Bidir.
- G. ACI Multi-Pod does not support Firewall Clusters across Pod
- H. Firewall Clusters should always be local.
- I. Multi-Pod requires multiple APIC Controller Clusters, one per po

J. Make sure those clusters can communicate to each other through a highly available connection.

**Answer:** AE

**NEW QUESTION 53**

.....

## **Thank You for Trying Our Product**

### **We offer two products:**

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### **300-620 Practice Exam Features:**

- \* 300-620 Questions and Answers Updated Frequently
- \* 300-620 Practice Questions Verified by Expert Senior Certified Staff
- \* 300-620 Most Realistic Questions that Guarantee you a Pass on Your First Try
- \* 300-620 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The 300-620 Practice Test Here](#)**