



**Fortinet**

## **Exam Questions NSE4\_FGT-7.0**

Fortinet NSE 4 - FortiOS 7.0

#### NEW QUESTION 1

An administrator wants to simplify remote access without asking users to provide user credentials. Which access control method provides this solution?

- A. ZTNA IP/MAC filtering mode
- B. ZTNA access proxy
- C. SSL VPN
- D. L2TP

**Answer:** B

#### Explanation:

FortiGate Infrastructure 7.2 Study Guide (p.165): "ZTNA access proxy allows users to securely access resources through an SSL-encrypted access proxy. This simplifies remote access by eliminating the use of VPNs."

This is true because ZTNA access proxy is a feature that allows remote users to access internal applications without requiring VPN or user credentials. ZTNA access proxy uses a secure tunnel between the user's device and the FortiGate, and authenticates the user based on device identity and context. The user only needs to install a lightweight agent on their device, and the FortiGate will automatically assign them to the appropriate application group based on their device profile. This simplifies remote access and enhances security by reducing the attack surface<sup>12</sup>

#### NEW QUESTION 2

A network administrator has enabled full SSL inspection and web filtering on FortiGate. When visiting any HTTPS websites, the browser reports certificate warning errors. When visiting HTTP websites, the browser does not report errors.

What is the reason for the certificate warning errors?

- A. The matching firewall policy is set to proxy inspection mode.
- B. The certificate used by FortiGate for SSL inspection does not contain the required certificate extensions.
- C. The full SSL inspection feature does not have a valid license.
- D. The browser does not trust the certificate used by FortiGate for SSL inspection.


**Answer:** D

#### Explanation:

FortiGate Security 7.2 Study Guide (p.235): "If FortiGate receives a trusted SSL certificate, then it generates a temporary certificate signed by the built-in Fortinet\_CA\_SSL certificate and sends it to the browser. If the browser trusts the Fortinet\_CA\_SSL certificate, the browser completes the SSL handshake. Otherwise, the browser also presents a warning message informing the user that the site is untrusted. In other words, for this function to work as intended, you must import the Fortinet\_CA\_SSL certificate into the trusted root CA certificate store of your browser."

#### NEW QUESTION 3

Refer to the exhibit.

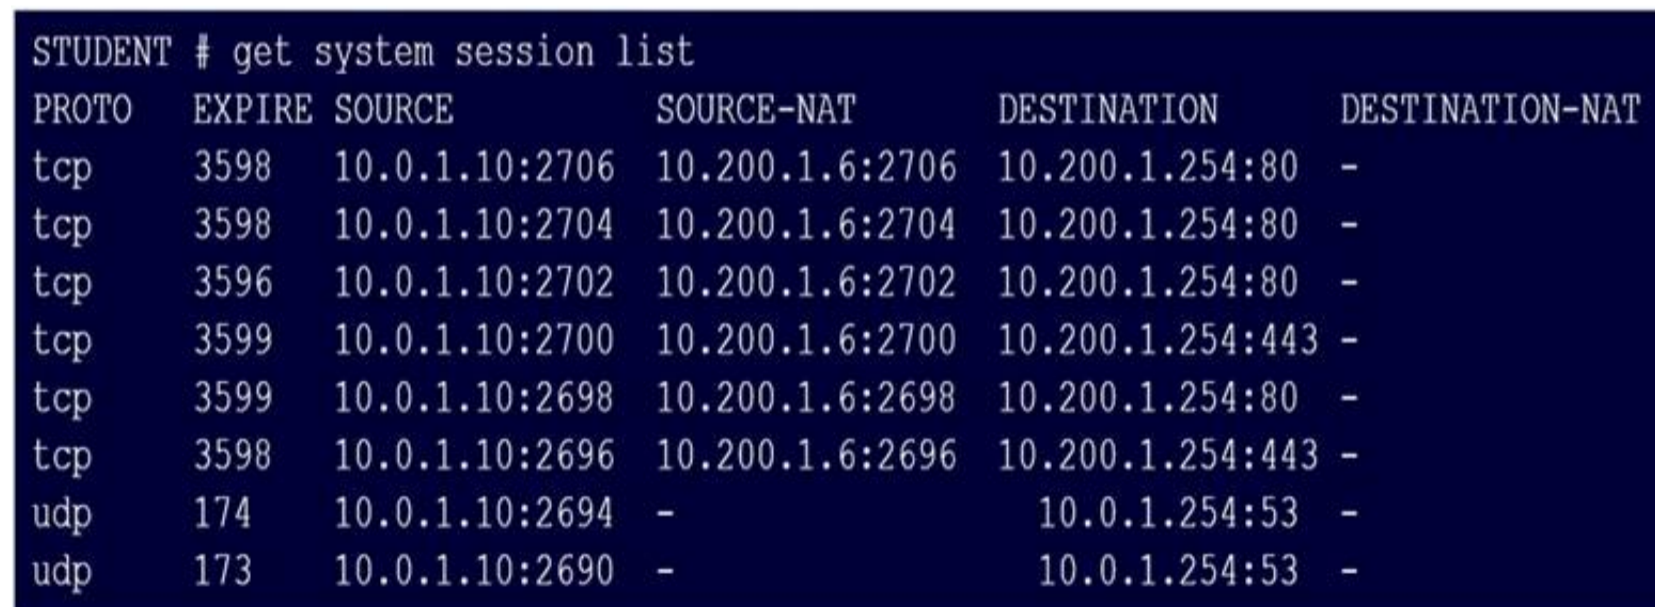

STUDENT #	get	system	session	list		
PROTO	EXPIRE	SOURCE	SOURCE-NAT	DESTINATION	DESTINATION-NAT	
tcp	3598	10.0.1.10:2706	10.200.1.6:2706	10.200.1.254:80	-	
tcp	3598	10.0.1.10:2704	10.200.1.6:2704	10.200.1.254:80	-	
tcp	3596	10.0.1.10:2702	10.200.1.6:2702	10.200.1.254:80	-	
tcp	3599	10.0.1.10:2700	10.200.1.6:2700	10.200.1.254:443	-	
tcp	3599	10.0.1.10:2698	10.200.1.6:2698	10.200.1.254:80	-	
tcp	3598	10.0.1.10:2696	10.200.1.6:2696	10.200.1.254:443	-	
udp	174	10.0.1.10:2694	-	10.0.1.254:53	-	
udp	173	10.0.1.10:2690	-	10.0.1.254:53	-	

Which contains a session list output. Based on the information shown in the exhibit, which statement is true?

- A. Destination NAT is disabled in the firewall policy.
- B. One-to-one NAT IP pool is used in the firewall policy.
- C. Overload NAT IP pool is used in the firewall policy.
- D. Port block allocation IP pool is used in the firewall policy.

**Answer:** B

#### Explanation:

FortiGate\_Security\_6.4 page 155 . In one-to-one, PAT is not required.

#### NEW QUESTION 4

An employee needs to connect to the office through a high-latency internet connection.

Which SSL VPN setting should the administrator adjust to prevent SSL VPN negotiation failure?

- A. idle-timeout
- B. login-timeout
- C. udp-idle-timer
- D. session-ttl

**Answer:** B

**Explanation:**

FortiGate Infrastructure 7.2 Study Guide (p.222):

"When connected to SSL VPN over high latency connections, FortiGate can time out the client before the client can finish the negotiation process, such as DNS lookup and time to enter a token. Two new CLI commands under config vpn ssl settings have been added to address this. The first command allows you to set up the login timeout, replacing the previous hard timeout value. The second command allows you to set up the maximum DTLS hello timeout for SSL VPN connections."

**NEW QUESTION 5**

What are two benefits of flow-based inspection compared to proxy-based inspection? (Choose two.)

- A. FortiGate uses fewer resources.
- B. FortiGate performs a more exhaustive inspection on traffic.
- C. FortiGate adds less latency to traffic.
- D. FortiGate allocates two sessions per connection.

**Answer:** AC

**NEW QUESTION 6**

An organization requires remote users to send external application data running on their PCs and access FTP resources through an SSL/TLS connection. Which FortiGate configuration can achieve this goal?

- A. SSL VPN bookmark
- B. SSL VPN tunnel
- C. Zero trust network access
- D. SSL VPN quick connection

**Answer:** B

**Explanation:**

FortiGate Infrastructure 7.2 Study Guide (p.198): "Tunnel mode requires FortiClient to connect to FortiGate. FortiClient adds a virtual network adapter identified as fortissl to the user's PC. This virtual adapter dynamically receives an IP address from FortiGate each time FortiGate establishes a new VPN connection. Inside the tunnel, all traffic is SSL/TLS encapsulated. The main advantage of tunnel mode over web mode is that after the VPN is established, any IP network application running on the client can send traffic through the tunnel."

An SSL VPN tunnel allows remote users to establish a secure and encrypted Virtual Private Network (VPN) connection to the private network using the SSL/TLS protocol<sup>1</sup>. An SSL VPN tunnel can provide access to network resources such as FTP servers, as well as external applications running on the user's PC<sup>1</sup>.

An SSL VPN bookmark is a web link that provides access to network resources through the SSL VPN web portal<sup>1</sup>. It does not support external applications running on the user's PC.

Zero trust network access (ZTNA) is a security model that provides role-based application access to remote users without exposing the private network to the internet<sup>2</sup>. It does not use SSL/TLS protocol, but rather a proprietary ZTNA protocol.

SSL VPN quick connection is a feature that allows users to connect to an SSL VPN tunnel without installing FortiClient or any other software on their PC<sup>3</sup>. It requires a web browser that supports Java or ActiveX. It does not support external applications running on the user's PC.

**NEW QUESTION 7**

An administrator does not want to report the logon events of service accounts to FortiGate. What setting on the collector agent is required to achieve this?

- A. Add the support of NTLM authentication.
- B. Add user accounts to Active Directory (AD).
- C. Add user accounts to the FortiGate group filter.
- D. Add user accounts to the Ignore User List.

**Answer:** D

**NEW QUESTION 8**

Refer to the exhibits.

**SSL-VPN Settings**

**Connection Settings**

Listen on Interface(s): port1

Listen on Port: 10443

Web mode access will be listening at <https://10.200.1.1:10443>

Redirect HTTP to SSL-VPN: ☐

Restrict Access: Allow access from any host Limit access to specific hosts

Idle Logout: ☒

Inactive For: 300 Seconds

Server Certificate: Fortinet\_Factory

Require Client Certificate: ☐

**Tunnel Mode Client Settings**

Address Range: Automatically assign addresses Specify custom IP ranges

Tunnel users will receive IPs in the range of 10.212.134.200 - 10.212.134.210

DNS Server: Same as client system DNS Specify

Specify WINS Servers: ☐

**Authentication/Portal Mapping**

+ Create New Edit Delete

Users/Groups	Portal
sslvpn	tunnel-access
All Other Users/Groups	full-access

**Connection status**

Connection: VPN

Server: <https://10.200.1.1:1443/>

Status: Connecting...

Duration: —

Bytes received: 0

Bytes sent: 0

Stop

The SSL VPN connection fails when a user attempts to connect to it. What should the user do to successfully connect to SSL VPN?

- A. Change the SSL VPN port on the client.
- B. Change the Server IP address.
- C. Change the idle-timeout.
- D. Change the SSL VPN portal to the tunnel.

**Answer:** A

#### NEW QUESTION 9

Which statements about the firmware upgrade process on an active-active HA cluster are true? (Choose two.)

- A. The firmware image must be manually uploaded to each FortiGate.
- B. Only secondary FortiGate devices are rebooted.

- C. Uninterruptable upgrade is enabled by default.
- D. Traffic load balancing is temporally disabled while upgrading the firmware.

**Answer:** CD

#### NEW QUESTION 10

Which of the following are valid actions for FortiGuard category based filter in a web filter profile ui proxy-based inspection mode? (Choose two.)

- A. Warning
- B. Exempt
- C. Allow
- D. Learn

**Answer:** AC

#### NEW QUESTION 10

FortiGate is operating in NAT mode and is configured with two virtual LAN (VLAN) subinterfaces added to the same physical interface. In this scenario, what are two requirements for the VLAN ID? (Choose two.)

- A. The two VLAN subinterfaces can have the same VLAN ID, only if they have IP addresses in the same subnet.
- B. The two VLAN subinterfaces can have the same VLAN ID, only if they belong to different VDOMs.
- C. The two VLAN subinterfaces must have different VLAN IDs.
- D. The two VLAN subinterfaces can have the same VLAN ID, only if they have IP addresses in different subnets.

**Answer:** BC

#### Explanation:

<https://community.fortinet.com/t5/FortiGate/Technical-Note-How-to-use-vmac-vlan-to-share-the-same-VLAN/t> When FortiGate is operating in NAT mode, it means that it uses network address translation (NAT) to modify the source or destination IP addresses of the traffic passing through it<sup>1</sup>. NAT mode allows FortiGate to hide the IP addresses of the internal network from the external network, and to conserve IP addresses by using a single public IP address for multiple private IP addresses<sup>1</sup>.

A virtual LAN (VLAN) subinterface is a logical interface that allows traffic from different VLANs to enter and exit the FortiGate unit<sup>2</sup>. A VLAN subinterface is created by adding a VLAN ID to a physical interface or an aggregate interface<sup>2</sup>. A VLAN ID is a numerical identifier that distinguishes one VLAN from another<sup>2</sup>.

In this scenario, there are two requirements for the VLAN ID of the VLAN subinterfaces added to the same physical interface:


➤ The two VLAN subinterfaces must have different VLAN IDs. This is because the VLAN ID is used to tag the traffic with the appropriate VLAN information, and to separate the traffic into different VLANs<sup>2</sup>. If the two VLAN subinterfaces have the same VLAN ID, they will not be able to distinguish the traffic from each other, and they will not be able to forward the traffic to the correct destination.

➤ The two VLAN subinterfaces can have the same VLAN ID, only if they belong to different VDOMs. This is because VDOMs are virtual instances of FortiGate that can have their own interfaces, policies, and routing tables<sup>3</sup>. Each VDOM operates independently from other VDOMs, and can have its own VLAN subinterfaces with different or identical VLAN IDs<sup>3</sup>. However, this requires inter-VDOM links to allow traffic between different VDOMs<sup>3</sup>.

#### NEW QUESTION 13

Refer to the exhibit.

#### Network Diagram

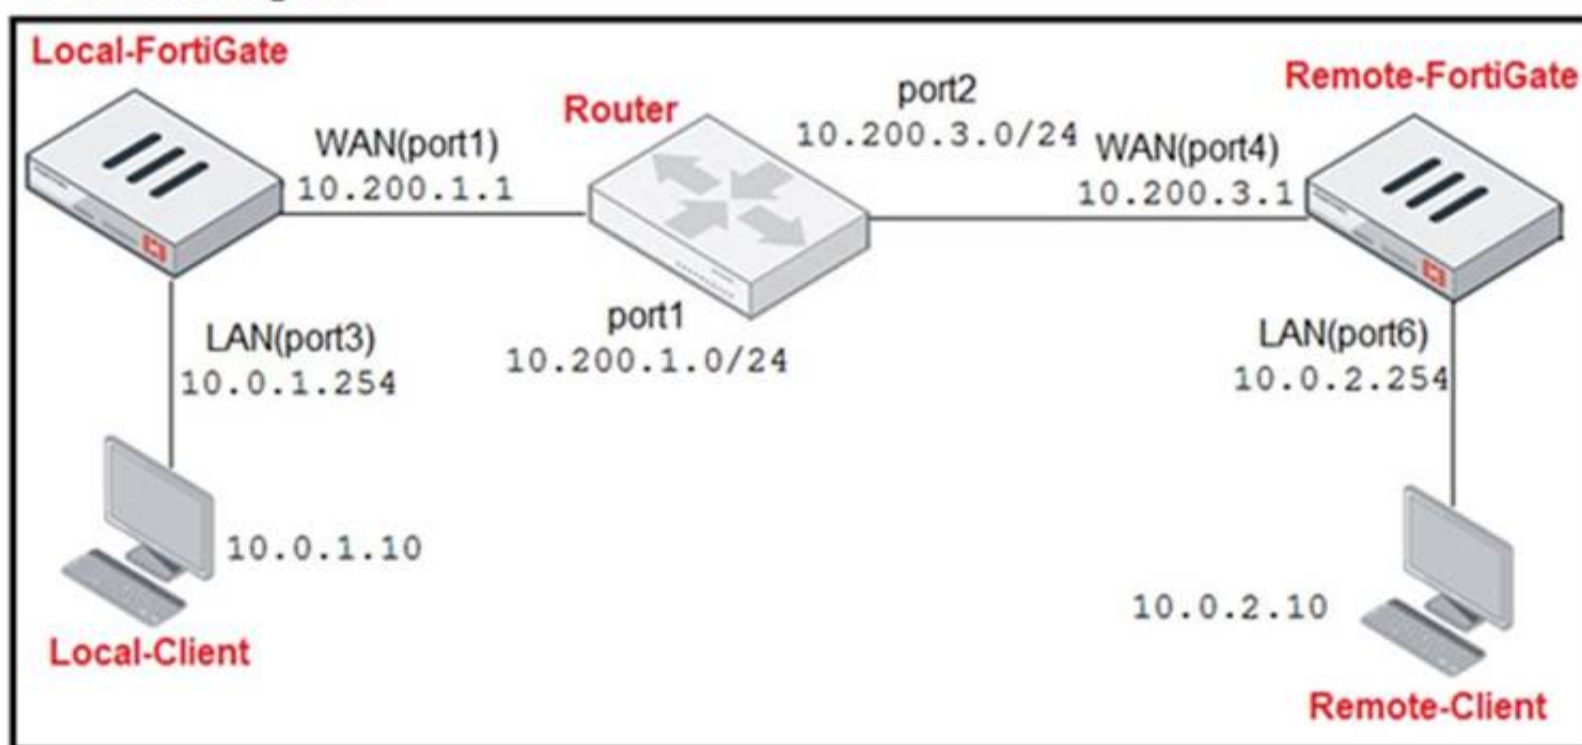

Central SNAT Policies Local-FortiGate

+ Create New Edit Delete Search Q						
ID	From	To	Source Address	Protocol Number	Destination Address	Translated Address
2	LAN(port3)	WAN(port1)	all	6	REMOTE_FORTIGATE	SNAT-Pool
1	LAN(port3)	WAN(port1)	all	1	all	SNAT-Remote1
3	LAN(port3)	WAN(port1)	all	2	all	SNAT-Remote

IP Pool Local-FortiGate

+ Create New Edit Clone Delete Search Q			
Name	External IP Range	Type	ARP Reply
SNAT-Pool	10.200.1.49-10.200.1.49	Overload	Enabled
SNAT-Remote	10.200.1.149-10.200.1.149	Overload	Enabled
SNAT-Remote1	10.200.1.99-10.200.1.99	Overload	Enabled

Protocol Number Table

Protocol Number Table	
Protocol	Protocol Number
TCP	6
ICMP	1
IGMP	2

The exhibit contains a network diagram, central SNAT policy, and IP pool configuration. The WAN (port1) interface has the IP address 10.200. 1. 1/24. The LAN (port3) interface has the IP address 10.0. 1.254/24. A firewall policy is configured to allow to destinations from LAN (port3) to WAN (port1). Central NAT is enabled, so NAT settings from matching Central SNAT policies will be applied. Which IP address will be used to source NAT the traffic, if the user on Local-Client (10.0. 1. 10) pings the IP address of Remote-FortiGate (10.200.3. 1)?

A. 10.200. 1. 149  
B. 10.200. 1. 1  
C. 10.200. 1.49  
D. 10.200. 1.99

Answer: D

NEW QUESTION 16

Why does FortiGate Keep TCP sessions in the session table for several seconds, even after both sides (client and server) have terminated the session?

A. To allow for out-of-order packets that could arrive after the FIN/ACK packets  
B. To finish any inspection operations  
C. To remove the NAT operation  
D. To generate logs

Answer: A

Explanation:

TCP provides the ability for one end of a connection to terminate its output while still receiving data from the other end. This is called a half-close. FortiGate unit implements a specific timer before removing an entry in the firewall session table.

NEW QUESTION 20

An administrator configures FortiGuard servers as DNS servers on FortiGate using default settings. What is true about the DNS connection to a FortiGuard server?

A. It uses UDP 8888.  
B. It uses UDP 53.  
C. It uses DNS over HTTPS.  
D. It uses DNS overTLS.

Answer: D

Explanation:

FortiGate Security 7.2 Study Guide (p.15): "When using FortiGuard servers for DNS, FortiOS uses DNS over TLS (DoT) by default to secure the DNS traffic." When using FortiGuard servers for DNS, FortiOS defaults to using DNS over TLS (DoT) to secure the DNS traffic1. DNS over TLS is a protocol that encrypts and authenticates DNS queries and responses using the Transport Layer Security (TLS) protocol2. This prevents eavesdropping, tampering, and spoofing of DNS data by third parties. The default FortiGuard DNS servers are 96.45.45.45 and 96.45.46.46, and they use the hostname globalsdns.fortinet.net1. The FortiGate verifies the server hostname using the server-hostname setting in the system dns configuration1.

### NEW QUESTION 23

Which scanning technique on FortiGate can be enabled only on the CLI?

- A. Heuristics scan
- B. Trojan scan
- C. Antivirus scan
- D. Ransomware scan

**Answer:** A

### NEW QUESTION 28

Which two inspection modes can you use to configure a firewall policy on a profile-based next-generation firewall (NGFW)? (Choose two.)

- A. Proxy-based inspection
- B. Certificate inspection
- C. Flow-based inspection
- D. Full Content inspection

**Answer:** AC

### NEW QUESTION 30

Which two statements are correct regarding FortiGate HA cluster virtual IP addresses? (Choose two.)

- A. Heartbeat interfaces have virtual IP addresses that are manually assigned.
- B. A change in the virtual IP address happens when a FortiGate device joins or leaves the cluster.
- C. Virtual IP addresses are used to distinguish between cluster members.
- D. The primary device in the cluster is always assigned IP address 169.254.0.1.

**Answer:** BD

### NEW QUESTION 31

Refer to the exhibit.



The screenshot shows the FortiGate SLA configuration interface. The 'Name' field is 'SLA1'. The 'Protocol' is set to 'Ping'. The 'Server' field contains two entries: '4.2.2.2' and '4.2.2.1'. The 'Participants' field is set to 'All SD-WAN Members'. The 'Enable probe packets' checkbox is unchecked. There are 'Specify' and 'X' buttons next to the server and participant fields.

An administrator has configured a performance SLA on FortiGate, which failed to generate any traffic. Why is FortiGate not sending probes to 4.2.2.2 and 4.2.2.1 servers? (Choose two.)

- A. The Detection Mode setting is not set to Passive.
- B. Administrator didn't configure a gateway for the SD-WAN members, or configured gateway is not valid.
- C. The configured participants are not SD-WAN members.
- D. The Enable probe packets setting is not enabled.

**Answer:** BD

### NEW QUESTION 32

Which of the following are purposes of NAT traversal in IPsec? (Choose two.)

- A. To detect intermediary NAT devices in the tunnel path.
- B. To dynamically change phase 1 negotiation mode aggressive mode.
- C. To encapsulation ESP packets in UDP packets using port 4500.
- D. To force a new DH exchange with each phase 2 rekey.

**Answer:** AC

### NEW QUESTION 33

Which two statements are true when FortiGate is in transparent mode? (Choose two.)

- A. By default, all interfaces are part of the same broadcast domain.
- B. The existing network IP schema must be changed when installing a transparent mode.
- C. Static routes are required to allow traffic to the next hop.
- D. FortiGate forwards frames without changing the MAC address.

**Answer:** AD

#### NEW QUESTION 38

Which statements best describe auto discovery VPN (ADVPN). (Choose two.)

- A. It requires the use of dynamic routing protocols so that spokes can learn the routes to other spokes.
- B. ADVPN is only supported with IKEv2.
- C. Tunnels are negotiated dynamically between spokes.
- D. Every spoke requires a static tunnel to be configured to other spokes so that phase 1 and phase 2 proposals are defined in advance.

**Answer:** AC

#### NEW QUESTION 42

On FortiGate, which type of logs record information about traffic directly to and from the FortiGate management IP addresses?

- A. System event logs
- B. Forward traffic logs
- C. Local traffic logs
- D. Security logs

**Answer:** C

#### NEW QUESTION 44

Which timeout setting can be responsible for deleting SSL VPN associated sessions?

- A. SSL VPN idle-timeout
- B. SSL VPN http-request-body-timeout
- C. SSL VPN login-timeout
- D. SSL VPN dtls-hello-timeout

**Answer:** A

#### NEW QUESTION 48

The HTTP inspection process in web filtering follows a specific order when multiple features are enabled in the web filter profile. What order must FortiGate use when the web filter profile has features enabled, such as safe search?

- A. DNS-based web filter and proxy-based web filter
- B. Static URL filter, FortiGuard category filter, and advanced filters
- C. Static domain filter, SSL inspection filter, and external connectors filters
- D. FortiGuard category filter and rating filter

**Answer:** B

#### Explanation:

FortiGate Security 7.2 Study Guide (p.285): "Remember that the web filtering profile has several features. So, if you have enabled many of them, the inspection order flows as follows: 1. The local static URL filter 2. FortiGuard category filtering (to determine a rating) 3. Advanced filters (such as safe search or removing Active X components)"

#### NEW QUESTION 52

Which two statements are true about the Security Fabric rating? (Choose two.)

- A. It provides executive summaries of the four largest areas of security focus.
- B. Many of the security issues can be fixed immediately by clicking Apply where available.
- C. The Security Fabric rating must be run on the root FortiGate device in the Security Fabric.
- D. The Security Fabric rating is a free service that comes bundled with all FortiGate devices.

**Answer:** BC

#### NEW QUESTION 55

Refer to the exhibit.

Edit IPS Sensor

Name

WINDOWS\_SERVERS

Comments

Write a comment...

0/255

Block malicious URLs

☐

IPS Signatures and Filters

+ Create New

Edit

Delete

Details	Exempt IPs	Action	Packet Logging	Status
NTP.Spoofed.KoD.DoS	0	Monitor	Enabled	Enabled
<div>OS</div> Windows		Block	Disabled	Enabled

The exhibit shows the IPS sensor configuration.  
If traffic matches this IPS sensor, which two actions is the sensor expected to take? (Choose two.)

- A. The sensor will allow attackers matching the Microsoft Windows.iSCSI.Target.DoS signature.
- B. The sensor will block all attacks aimed at Windows servers.
- C. The sensor will reset all connections that match these signatures.
- D. The sensor will gather a packet log for all matched traffic.

Answer: AB

NEW QUESTION 59

By default, FortiGate is configured to use HTTPS when performing live web filtering with FortiGuard servers. Which CLI command will cause FortiGate to use an unreliable protocol to communicate with FortiGuard servers for live web filtering?

- A. set fortiguard-anycast disable
- B. set webfilter-force-off disable
- C. set webfilter-cache disable
- D. set protocol tcp

Answer: A

Explanation:

y default, "fortiguard-anycast" is enabled, and this setting only works with "set protocol https". To use udp (ie. "set protocol udp"), "fortiguard-anycast" must be disabled.

NEW QUESTION 63

Which two statements about FortiGate FSSO agentless polling mode are true? (Choose two.)

- A. FortiGate uses the AD server as the collector agent.
- B. FortiGate uses the SMB protocol to read the event viewer logs from the DCs.
- C. FortiGate does not support workstation check .
- D. FortiGate directs the collector agent to use a remote LDAP server.

Answer: BC

Explanation:

You can deploy FSSO w/o installing an agent. FG polls the DCs directly, instead of receiving logon info indirectly from a collector agent. Because FG collects all of the data itself, agentless polling mode requires greater system resources, and it doesn't scale as easily. Agentless polling mode operates in a similar way to WinSecLog, but with only two event IDs: 4768 and 4769. Because there's no collector agent, FG uses the SMB protocol to read the event viewer logs from the DCs. FG acts as a collector. It 's responsible for polling on top of its normal FSSO tasks but does not have all the extra features, such as workstation checks, that are available with the external collector agent.

NEW QUESTION 64

Refer to the exhibit.

```
FGT1 # get router info routing-table database
Codes: K - kernel, C - connected, S - static, R - RIP, B - BGP
       O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       > - selected route, * - FIB route, p - stale info

S      *> 0.0.0.0/0 [10/0] via 172.20.121.2, port1, [20/0]
      *>          [10/0] via 10.0.0.2, port2, [30/0]
S      0.0.0.0/0 [20/0] via 192.168.15.2, port3, [10/0]
C      *> 10.0.0.0/24 is directly connected, port2
S      172.13.24.0/24 [10.0] is directly connected, port4
C      *> 172.20.121.0/24 is directly connected, port1
S      *> 192.167.1.0/24 [10/0] via 10.0.0.2, port2
C      *> 192.168.15.0/24 is directly connected, port3
```

Given the routing database shown in the exhibit, which two statements are correct? (Choose two.)

- A. The port3 default route has the lowest metric.
- B. The port1 and port2 default routes are active in the routing table.
- C. The ports default route has the highest distance.
- D. There will be eight routes active in the routing table.

**Answer:** BC

**Explanation:**

<https://community.fortinet.com/t5/FortiGate/Technical-Tip-How-to-identify-Inactive-Routes-in-the-Routing/ta-p>

**NEW QUESTION 66**

An administrator observes that the port1 interface cannot be configured with an IP address. What can be the reasons for that? (Choose three.)

- A. The interface has been configured for one-arm sniffer.
- B. The interface is a member of a virtual wire pair.
- C. The operation mode is transparent.
- D. The interface is a member of a zone.
- E. Captive portal is enabled in the interface.

**Answer:** ABC

**Explanation:**

[https://help.fortinet.com/fos50hlp/54/Content/FortiOS/fortigate-whats-new-54/Top\\_VirtualWirePair.htm](https://help.fortinet.com/fos50hlp/54/Content/FortiOS/fortigate-whats-new-54/Top_VirtualWirePair.htm)

**NEW QUESTION 71**

A team manager has decided that, while some members of the team need access to a particular website, the majority of the team does not. Which configuration option is the most effective way to support this request?

- A. Implement a web filter category override for the specified website.
- B. Implement a DNS filter for the specified website.
- C. Implement web filter quotas for the specified website.
- D. Implement web filter authentication for the specified website.

**Answer:** D

**NEW QUESTION 74**

Refer to the exhibit.

```
session info: proto=6 proto_state=02 duration=6 expire=6 timeout=3600 flags=0000
0000 socktype=0 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=may_dirty
statistic(bytes/packets/allow_err): org=180/3/1 reply=264/3/1 tuples=2
tx speed(Bps/kbps): 26/0 rx speed(Bps/kbps): 39/0
origin->sink: org pre->post, reply pre->post dev=3->5/5->3 gwy=10.0.1.11/0.0.0.0
hook=pre dir=org act=dnat 10.200.3.1:38024->10.200.1.11:80(10.0.1.11:80)
hook=post dir=reply act=snat 10.0.1.11:80->10.200.3.1:38024(10.200.1.11:80)
pos/(before,after) 0/(0,0), 0/(0,0)
misc=0 policy_id=8 auth_info=0 chk_client_info=0 vd=0
serial=0001fb06 tos=ff/ff app_list=0 app=0 url_cat=0
rpd_b_link_id= 00000000 rpd_b_svc_id=0 ngfwid=n/a
npu_state=0x040000
```

Which contains a session diagnostic output. Which statement is true about the session diagnostic output?

- A. The session is in SYN\_SENT state.
- B. The session is in FIN\_ACK state.
- C. The session is in FTN\_WAIT state.
- D. The session is in ESTABLISHED state.

**Answer:** A

**Explanation:**

Indicates TCP (proto=6) session in SYN\_SENT state (proto=state=2) <https://kb.fortinet.com/kb/viewContent.do?externalId=FD30042>

#### NEW QUESTION 78

Refer to the exhibit.

```
# diagnose test application ipsmonitor
1: Display IPS engine information
2: Toggle IPS engine enable/disable status
3: Display restart log
4: Clear restart log
5: Toggle bypass status
98: Stop all IPS engines
99: Restart all IPS engines and monitor
```

Examine the intrusion prevention system (IPS) diagnostic command.

Which statement is correct If option 5 was used with the IPS diagnostic command and the outcome was a decrease in the CPU usage?

- A. The IPS engine was inspecting high volume of traffic.
- B. The IPS engine was unable to prevent an intrusion attack .
- C. The IPS engine was blocking all traffic.
- D. The IPS engine will continue to run in a normal state.

**Answer:** A

**Explanation:**

fortinet-fortigate-security-study-guide-for-fortios-72 page 417 If there are high-CPU use problems caused by the IPS, you can use the diagnose test application ipsmonitor command with option 5 to isolate where the problem might be. Option 5 enables IPS bypass mode. In this mode, the IPS engine is still running, but it is not inspecting traffic. If the CPU use decreases after that, it usually indicates that the volume of traffic being inspected is too high for that FortiGate model.

#### NEW QUESTION 81

Refer to the exhibits.

**Edit Policy**

Name Facebook SSL Inspection

Incoming interface port2

Outgoing interface port1

Source all

Destination all

Service ALL

**Firewall/Network Options**

CentralNAT is enabled so NAT settings from matching Central SNAT policies will be applied

**Security Profiles**

SSL Inspection certificate-inspection

**Edit Policy**

Name Facebook Access

Incoming interface port2

Outgoing interface port1

Source all

Destination all

Schedule always

Service AppDefault Specify

Application

- Facebook
- Facebook\_Like.Button
- Facebook\_Video.Play

URL Category

ACCEPT DENY

**Firewall/Network Options**

Protocol Options default

The exhibits show the SSL and authentication policy (Exhibit A) and the security policy (Exhibit B) for Facebook .

Users are given access to the Facebook web application. They can play video content hosted on Facebook but they are unable to leave reactions on videos or other types of posts.

Which part of the policy configuration must you change to resolve the issue?

- A. Make SSL inspection needs to be a deep content inspection.
- B. Force access to Facebook using the HTTP service.
- C. Get the additional application signatures are required to add to the security policy.
- D. Add Facebook in the URL category in the security policy.

**Answer:** A

**Explanation:**

They can play video (tick) content hosted on Facebook, but they are unable to leave reactions on videos or other types of posts. This indicate that the rule are partially working as they can watch video but cant react, i.e. liking the content. So must be an issue with the SSL inspection rather then adding an app rule.

**NEW QUESTION 86**

Which two configuration settings are synchronized when FortiGate devices are in an active-active HA cluster? (Choose two.)

- A. FortiGuard web filter cache
- B. FortiGate hostname
- C. NTP
- D. DNS


**Answer:** CD

**Explanation:**

In the 7.2 Infrastructure Guide (page 306) the list of configuration settings that are NOT synchronized includes both 'FortiGate host name' and 'Cache'

**NEW QUESTION 89**

Refer to the exhibit to view the application control profile.

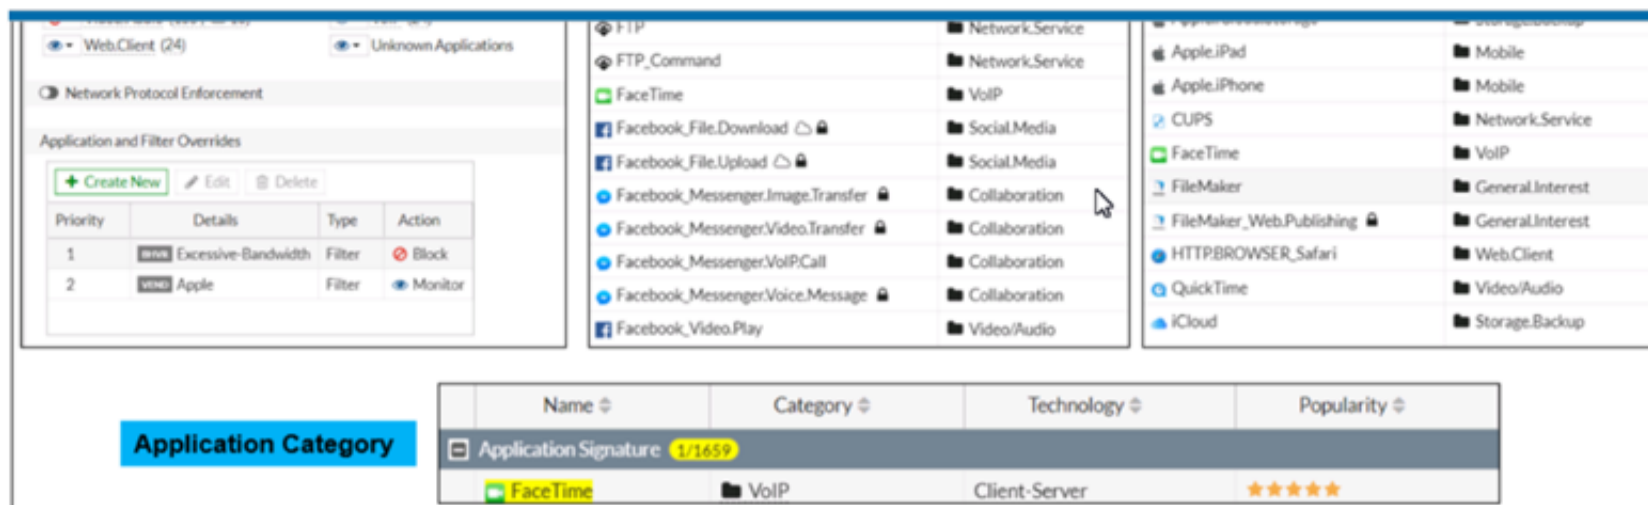

Based on the configuration, what will happen to Apple FaceTime?

- A. Apple FaceTime will be blocked, based on the Excessive-Bandwidth filter configuration
- B. Apple FaceTime will be allowed, based on the Apple filter configuration.
- C. Apple FaceTime will be allowed only if the filter in Application and Filter Overrides is set to Learn
- D. Apple FaceTime will be allowed, based on the Categories configuration.

Answer: A

### NEW QUESTION 91

Which statement is correct regarding the security fabric?

- A. FortiManager is one of the required member devices.
- B. FortiGate devices must be operating in NAT mode.
- C. A minimum of two Fortinet devices is required.
- D. FortiGate Cloud cannot be used for logging purposes.

Answer: B

### Explanation:


FortiGate Security 7.2 Study Guide (p.428): "You must have a minimum of two FortiGate devices at the core of the Security Fabric, plus one FortiAnalyzer or cloud logging solution. FortiAnalyzer Cloud or FortiGate Cloud can act as the cloud logging solution. The FortiGate devices must be running in NAT mode."

### NEW QUESTION 94

Refer to the exhibit.

The exhibit shows a diagram of a FortiGate device connected to the network, the firewall policy and VIP configuration on the FortiGate device, and the routing table on the ISP router.

When the administrator tries to access the web server public address (203.0.113.2) from the internet, the connection times out. At the same time, the administrator runs a sniffer on FortiGate to capture incoming web traffic to the server and does not see any output.

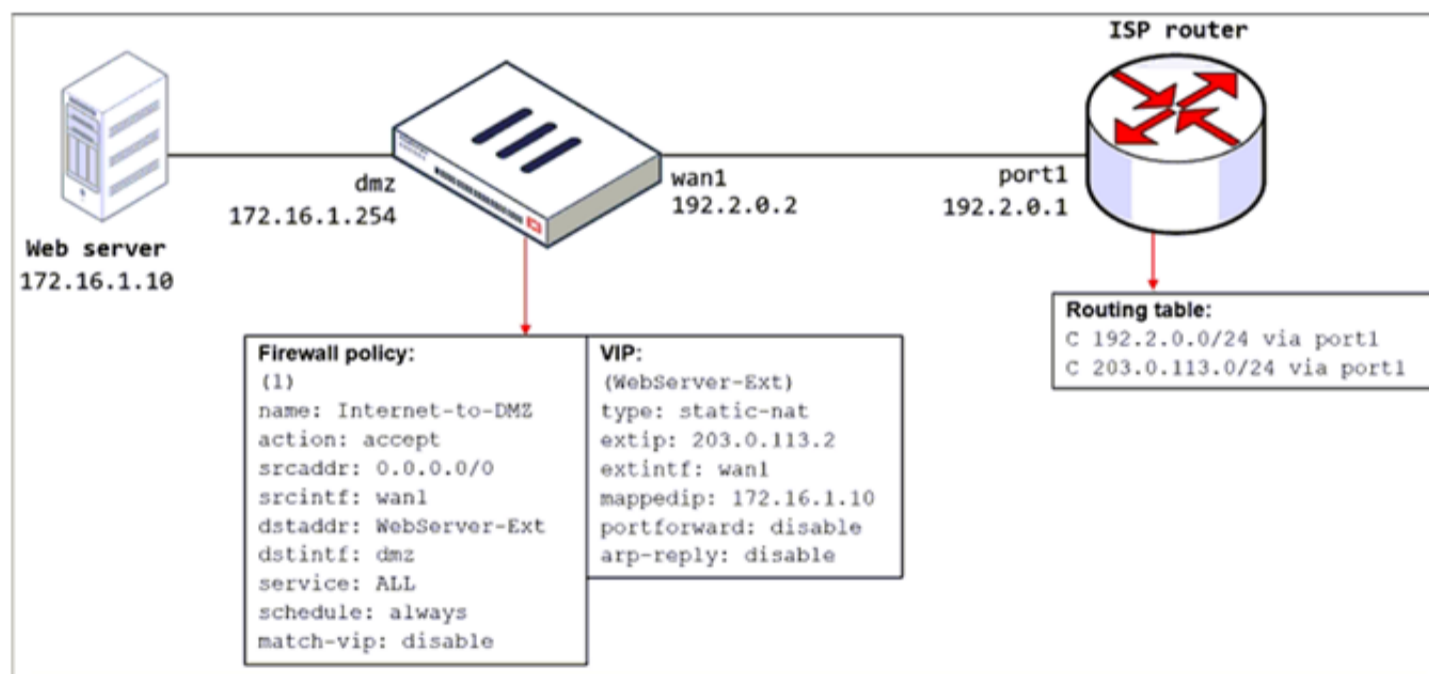

Based on the information shown in the exhibit, what configuration change must the administrator make to fix the connectivity issue?

- A. Configure a loopback interface with address 203.0.113.2/32.
- B. In the VIP configuration, enable arp-reply.
- C. Enable port forwarding on the server to map the external service port to the internal service port.
- D. In the firewall policy configuration, enable match-vip.

Answer: B

### Explanation:

FortiGate Security 7.2 Study Guide (p.115): "Enabling ARP reply is usually not required in most networks because the routing tables on the adjacent devices contain the correct next hop information, so the networks are reachable. However, sometimes the routing configuration is not fully correct, and having ARP reply enabled can solve the issue for you. For this reason, it's a best practice to keep ARP reply enabled."

NEW QUESTION 95


Which two statements are correct about NGFW Policy-based mode? (Choose two.)

- A. NGFW policy-based mode does not require the use of central source NAT policy
- B. NGFW policy-based mode can only be applied globally and not on individual VDOMs
- C. NGFW policy-based mode supports creating applications and web filtering categories directly in a firewall policy
- D. NGFW policy-based mode policies support only flow inspection

Answer: CD

NEW QUESTION 97

Refer to the exhibit.

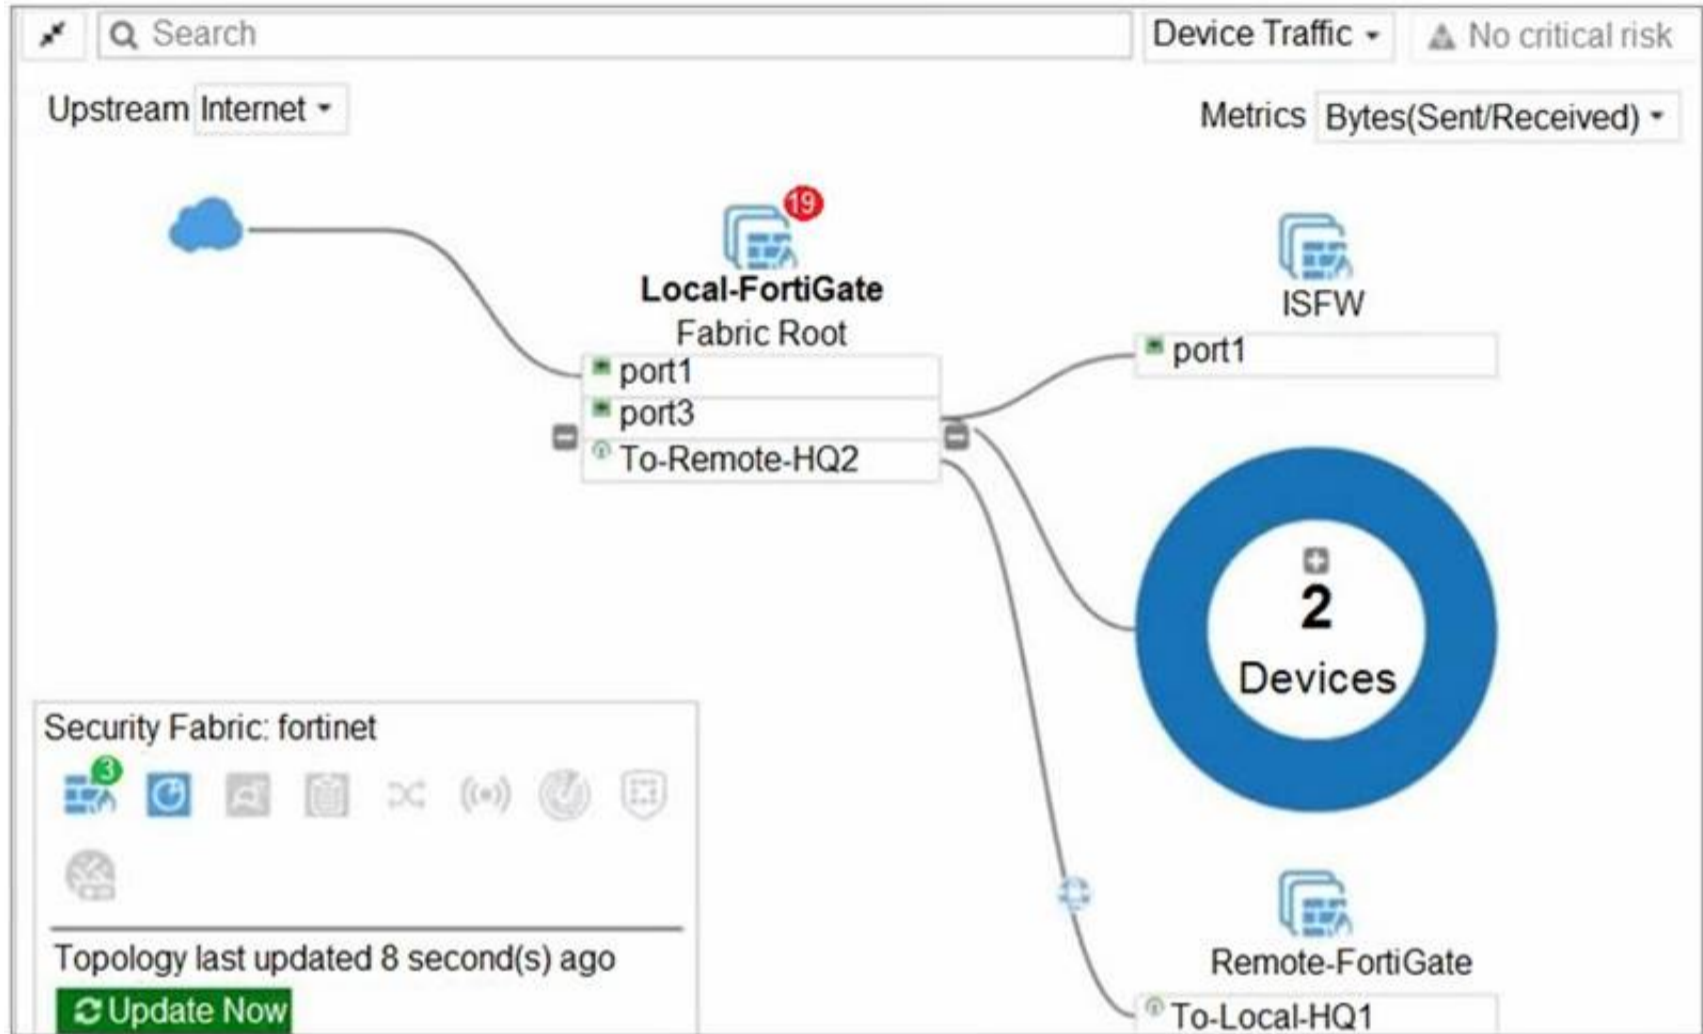

Given the security fabric topology shown in the exhibit, which two statements are true? (Choose two.)

- A. There are five devices that are part of the security fabric.
- B. Device detection is disabled on all FortiGate devices.
- C. This security fabric topology is a logical topology view.
- D. There are 19 security recommendations for the security fabric.

Answer: CD

Explanation:

References: <https://docs.fortinet.com/document/fortigate/5.6.0/cookbook/761085/results>  
<https://docs.fortinet.com/document/fortimanager/6.2.0/new-features/736125/security-fabric-topology>

NEW QUESTION 99

Refer to the exhibit.

	Name	Type	IP/Netmask	VLAN ID
Physical Interface 14				
	port1	Physical Interface	10.200.1.1/255.255.255.0	
	port1-vlan10	VLAN	10.1.10.1/255.255.255.0	10
	port1-vlan1	VLAN	10.200.5.1/255.255.255.0	1
	port10	Physical Interface	10.0.11.1/255.255.255.0	
	port2	Physical Interface	10.200.2.1/255.255.255.0	
	port2-vlan10	VLAN	10.0.10.1/255.255.255.0	10
	port2-vlan1	VLAN	10.0.5.1/255.255.255.0	1

Given the interfaces shown in the exhibit. which two statements are true? (Choose two.)

- A. Traffic between port2 and port2-vlan1 is allowed by default.
- B. port1-vlan10 and port2-vlan10 are part of the same broadcast domain.
- C. port1 is a native VLAN.

D. port1-vlan and port2-vlan1 can be assigned in the same VDOM or to different VDOMs.

**Answer:** CD

**Explanation:**

<https://community.fortinet.com/t5/FortiGate/Technical-Tip-rules-about-VLAN-configuration-and-VDOM-interf>  
<https://kb.fortinet.com/kb/viewContent.do?externalId=FD30883>

**NEW QUESTION 100**

Refer to the exhibit showing a debug flow output.

```
id=20085 trace_id=1 func=print_pkt_detail line=5594 msg="vd-root:0 received a packet(proto=1,
10.0.1.10:19938->10.0.1.250:2048) from port1. type=8, code=0, id=19938, seq=1."
id=20085 trace_id=1 func=init_ip_session_common line=5760 msg="allocate a new session-00003dd5"
id=20085 trace_id=1 func=vf_ip_route_input_common line=2598 msg="find a route: flag=84000000 gw-
10.0.1.250 via root"
id=20085 trace_id=2 func=print_pkt_detail line=5594 msg="vd-root:0 received a packet(proto=1,
10.0.1.250:19938->10.0.1.10:0) from local. type=0, code=0, id=19938, seq=1."
id=20085 trace_id=2 func=resolve_ip_tuple_fast line=5675 msg="Find an existing session, id-
00003dd5, reply direction"
```

What two conclusions can you make from the debug flow output? (Choose two.)

- A. The debug flow is for ICMP traffic.
- B. The default route is required to receive a reply.
- C. A new traffic session was created.
- D. A firewall policy allowed the connection.

**Answer:** AC

**Explanation:**

The debug flow output shows the result of a diagnose command that captures the traffic flow between the source and destination IP addresses1. The debug flow output reveals the following information about the traffic flow1:

- The protocol is 1, which means that the traffic uses ICMP protocol2. ICMP is a protocol that is used to send error messages and test connectivity between devices2.
- The session state is 0, which means that a new traffic session was created3. A session is a data structure that stores information about a connection between two devices3.
- The policy ID is 1, which means that the traffic matched the firewall policy with ID 14. A firewall policy is a rule that defines how FortiGate processes traffic based on the source, destination, service, and action parameters4.
- The action is 0, which means that the traffic was allowed by the firewall policy. An action is a parameter that specifies what FortiGate does with the traffic that matches a firewall policy.

Therefore, two conclusions that can be made from the debug flow output are:

- The debug flow is for ICMP traffic.
- A new traffic session was created.

**NEW QUESTION 102**

Which statement about video filtering on FortiGate is true?

- A. Full SSL Inspection is not required.
- B. It is available only on a proxy-based firewall policy.
- C. It inspects video files hosted on file sharing services.
- D. Video filtering FortiGuard categories are based on web filter FortiGuard categories.

**Answer:** B

**NEW QUESTION 106**

When configuring a firewall virtual wire pair policy, which following statement is true?

- A. Any number of virtual wire pairs can be included, as long as the policy traffic direction is the same.
- B. Only a single virtual wire pair can be included in each policy.
- C. Any number of virtual wire pairs can be included in each policy, regardless of the policy traffic direction settings.
- D. Exactly two virtual wire pairs need to be included in each policy.

**Answer:** A

**NEW QUESTION 109**

Refer to the exhibit.



Which contains a network diagram and routing table output. The Student is unable to access Webserver.  
 What is the cause of the problem and what is the solution for the problem?

- A. The first packet sent from Student failed the RPF check. This issue can be resolved by adding a static route to 10.0.4.0/24 through wan1.
- B. The first reply packet for Student failed the RPF check. This issue can be resolved by adding a static route to 10.0.4.0/24 through wan1.
- C. The first reply packet for Student failed the RPF check. This issue can be resolved by adding a static route to 203.0.114.24/32 through port3.
- D. The first packet sent from Student failed the RPF check. This issue can be resolved by adding a static route to 203.0.114.24/32 through port3.

Answer: D

#### NEW QUESTION 112

You have enabled logging on a FortiGate device for event logs and all security logs, and you have set up logging to use the FortiGate local disk.  
 What is the default behavior when the local disk is full?

- A. No new log is recorded after the warning is issued when log disk use reaches the threshold of 95%.
- B. No new log is recorded until you manually clear logs from the local disk.
- C. Logs are overwritten and the first warning is issued when log disk use reaches the threshold of 75%.
- D. Logs are overwritten and the only warning is issued when log disk use reaches the threshold of 95%.

Answer: C

#### Explanation:

config log disk setting  
 set diskfull [ overwrite | nolog ]  
 Action to take when disk is full. The system can overwrite the oldest log messages or stop logging when the disk is full. (default --> overwrite)  
 config log memory global-setting  
 set full-first-warning-threshold {integer}  
 Log full first warning threshold as a percent. (default --> 75)

#### NEW QUESTION 117

Refer to the exhibit, which contains a session diagnostic output.

```

session info: proto=17 proto_state=01 duration=254 expire=179 timeout=0 flags=00000000 socktype=0 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ helper=dns-udp vlan_cos=0/255
state=log may_dirty f00 log-start
statistic(bytes/packets/allow_err): org=1420/22/1 reply=5678/22/1 tuples=2
tx speed(Bps/kbps): 5/0 rx speed(Bps/kbps): 22/0
origin->sink: org pre->post, reply pre->post dev=5->3/3->5 gwy=10.200.1.254/10.0.1.200
hook=post dir=org act=snat 10.0.1.200:2486->208.91.112.53:53(10.200.1.1:62902)
hook=pre dir=reply act=dnat 208.91.112.53:53->10.200.1.1:62902(10.0.1.200:2486)
misc=0 policy_id=3 auth_info=0 chk_client_info=0 vd=0
serial=0001fc1e tos=ff/ff app_list=0 app=0 url_cat=0
rpd_b_link_id= 00000000 rpd_b_svc_id=0 ngfwid=n/a
npu_state=0x040000
  
```

Which statement is true about the session diagnostic output?

- A. The session is a UDP unidirectional state.
- B. The session is in TCP ESTABLISHED state.
- C. The session is a bidirectional UDP connection.
- D. The session is a bidirectional TCP connection.

Answer: C

**Explanation:**

<https://kb.fortinet.com/kb/viewContent.do?externalId=FD30042>

**NEW QUESTION 119**

Which statement is correct regarding the inspection of some of the services available by web applications embedded in third-party websites?

- A. The security actions applied on the web applications will also be explicitly applied on the third-party websites.
- B. The application signature database inspects traffic only from the original web application server.
- C. FortiGuard maintains only one signature of each web application that is unique.
- D. FortiGate can inspect sub-application traffic regardless where it was originate

**Answer:** D

**NEW QUESTION 124**

Which three methods are used by the collector agent for AD polling? (Choose three.)

- A. FortiGate polling
- B. NetAPI
- C. Novell API
- D. WMI
- E. WinSecLog

**Answer:** BDE

**Explanation:**

FortiGate Infrastructure 7.2 Study Guide (p.127-128): "As previously stated, collector agent-based polling mode has three methods (or options) for collecting login information. The order on the slide from left to right shows most recommend to least recommended: (WMI, WinSecLog, and NetAPI)"

**NEW QUESTION 125**

.....

## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### NSE4\_FGT-7.0 Practice Exam Features:

- \* NSE4\_FGT-7.0 Questions and Answers Updated Frequently
- \* NSE4\_FGT-7.0 Practice Questions Verified by Expert Senior Certified Staff
- \* NSE4\_FGT-7.0 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* NSE4\_FGT-7.0 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The NSE4\\_FGT-7.0 Practice Test Here](#)**