



Fortinet

Exam Questions NSE7_EFW-7.0

Fortinet NSE 7 - Enterprise Firewall 7.0

About ExamBible

Your Partner of IT Exam

Found in 1998

ExamBible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, ExamBible has its unique advantages that other companies could not achieve.

Our Advances

* 99.9% Uptime

All examinations will be up to date.

* 24/7 Quality Support

We will provide service round the clock.

* 100% Pass Rate

Our guarantee that you will pass the exam.

* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

NEW QUESTION 1

Which two conditions must be met for a statistic route to be active in the routing table? (Choose two.)

- A. The link health monitor (if configured) is up.
- B. There is no other route, to the same destination, with a higher distance.
- C. The outgoing interface is up.
- D. The next-hop IP address is up.

Answer: AC

NEW QUESTION 2

Which two statements about bulk configuration changes made using FortiManager CLI scripts are correct? (Choose two.)

- A. When run on the Device Database, you must use the installation wizard to apply the changes to the managed FortiGate device.
- B. When run on the Remote FortiGate directly, administrators do not have the option to review the changes prior to installation.
- C. When run on the All FortiGate in ADOM, changes are automatically installed without the creation of a new revision history.
- D. When run on the Policy Package, ADOM database, changes are applied directly to the managed FortiGate device.

Answer: AB

NEW QUESTION 3

An administrator has configured the following CLI script on FortiManager, which failed to apply any changes to the managed device after being executed.

```
# conf rout stat
#   edit 0
#   set gateway 10.20.121.2
#   set priority 20
#   set device "wan1"
#   next
# end
```

Why didn't the script make any changes to the managed device?

- A. Commands that start with the # sign are not executed.
- B. CLI scripts will add objects only if they are referenced by policies.
- C. Incomplete commands are ignored in CLI scripts.
- D. Static routes can only be added using TCL scripts.

Answer: A

Explanation:

https://help.fortinet.com/fmgr/50hlp/56/5-6-2/FortiManager_Admin_Guide/1000_Device%20Manager/2400_Sc

A sequence of FortiGate CLI commands, as you would type them at the command line. A comment line starts with the number sign (#). A comment line will not be executed.

NEW QUESTION 4

Refer to the exhibit, which shows the output of diagnose sys session list.

```
# diagnose sys session list
session info: proto=6 proto_state=01 duration=73 expire=3597 timeout=3600
flags=00000000 sockflag=00000000 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=may_dirty synced none app_ntf
statistic(bytes/packets/allow_err): org=822/11/1 reply=9037/15/1 tuples=2
origin->sink: org pre->post, reply pre->post dev=4->2/2->4
gwy=100.64.1.254/10.0.1.10
hook=post dir=org act=snat 10.0.1.10:65464->54.192.15.182:80(100.64.1.1:65464)
hook-pre dir=reply act=dnat 54.192.15.182:80->100.64.1.1:65464(10.0.1.10:65464)
pos/(before,after) 0/(0,0), 0/(0,0)
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=00000098 tos=ff/ff ips_view=0 app_list=0 app=0
dd_type=0 dd_mode=0
```

If the HA ID for the primary device is 0, what will happen if the primary fails and the secondary becomes the primary?

- A. Traffic for this session continues to be permitted on the new primary device after failover, without requiring the client to restart the session with the server.
- B. The secondary device has this session synchronized; however, because application control is applied, the session will be marked dirty and have to be re-evaluated after failover.
- C. The session state will be preserved but the kernel will need to re-evaluate the session due to NAT being applied.

D. The session will be removed from the session table of the secondary device due to the presence of allowed error packets, which will force the client to restart the session with the server.

Answer: A

Explanation:

<https://community.fortinet.com/t5/FortiGate/Technical-Note-How-to-see-if-a-session-is-synced-in-HA/ta-p/1941>

NEW QUESTION 5

Refer to the exhibit, which shows a central management configuration.

```
config system central-management
  set type fortimanager
  set fmg "10.0.1.242"
  config server-list
    edit 1
      set server-type rating
      set addr-type ipv4
      set server-address 10.0.1.240
    next
    edit 2
      set server-type update
      set addr-type ipv4
      set server-address 10.0.1.243
    next
    edit 3
      set server-type rating
      set addr-type ipv4
      set server-address 10.0.1.244
    next
  end
  set include-default-servers enable
end
```

Which server will FortiGate choose for web filter rating requests, if 10.0.1.240 is experiencing an outage?

- A. Public FortiGuard servers
- B. 10.0.1.243
- C. 10.0.1.242
- D. 10.0.1.244

Answer: D

Explanation:

by default, (include-default-servers) enabled .this allows fortigate to communicate with the public fortiguard servers , if the fortimanager devices (configured in server-list) are unavailable .

NEW QUESTION 6

Refer to the exhibit, which contains partial output from an IKE real-time debug.

```
ike 0: comes 10.0.0.2:500->10.0.0.1:500,ifindex=7...
ike 0: IKEv1 exchange=Aggressive id=a2fbd6bb6394401a/06b89c022d4df682 len=426
ike 0:Remotesite:3: initiator: aggressive mode get 1st response...
ike 0:Remotesite:3: VID DPD AFCAD71368A1F1C96B8696FC77570100
ike 0:Remotesite:3: DPD negotiated
ike 0:Remotesite:3: VID FORTIGATE 8299031757A36082C6A621DE00000000
ike 0:Remotesite:3: peer is FortiGate/FortiOS (v0 b0)
ike 0:Remotesite:3: VID FRAGMENTATION 4048B7D56EBCE88525E7DE7F00D6C2D3
ike 0:Remotesite:3: VID FRAGMENTATION 4048B7D56EBCE88525E7DE7F00D6C2D3C0000000
ike 0:Remotesite:3: received peer identifier FQDN 'remote'
ike 0:Remotesite:3: negotiation result
ike 0:Remotesite:3: proposal id = 1:
ike 0:Remotesite:3:   protocol id = ISAKMP:
ike 0:Remotesite:3:   trans_id = KEY_IKE.
ike 0:Remotesite:3:   encapsulation = IKE/none
ike 0:Remotesite:3:   type=OAKLEY_ENCRYPT_ALG, val=AES_CBC, key-len=128
ike 0:Remotesite:3:   type=OAKLEY_HASH_ALG, val=SHA.
ike 0:Remotesite:3:   type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:Remotesite:3:   type=OAKLEY_GROUP, val=MODP1024.
ike 0:Remotesite:3: ISAKMP SA lifetime=86400
ike 0:Remotesite:3: NAT-T unavailable
ike 0:Remotesite:3: ISAKMP SA a2fbd6bb6394401a/06b89c022d4df682 key 16:39915120ED73E520787C801DE3678916
ike 0:Remotesite:3: PSK authentication succeeded
ike 0:Remotesite:3: authentication OK
ike 0:Remotesite:3: add INITIAL-CONTACT
ike 0:Remotesite:3: enc A2FBD6BB6394401A06B89C022D4DF682081004010000000000000500B000018882A078E09026CA8B2
ike 0:Remotesite:3: out A2FBD6BB6394401A06B89C022D4DF6820810040100000000000005C64D5CBA90B873F150CB8B5CC2A
ike 0:Remotesite:3: sent IKE msg (agg_i2send): 10.0.0.1:500->10.0.0.2:500, len=140, id=a2fbd6bb6394401a/
ike 0:Remotesite:3: established IKE SA a2fbd6bb6394401a/06b89c022d4df682
```

Which two statements about this debug output are correct? (Choose two.)

- A. The initiator provided remote as its IPsec peer ID.
- B. It shows a phase 2 negotiation.
- C. Perfect Forward Secrecy (PFS) is enabled in the configuration.
- D. The local gateway IP address is 10.0.0.1.

Answer: AD

Explanation:

A because : received peer identifier FQDN 'remote' D because : ike 0: comes 10.0.0.2:500 -> 10.0.0.1:500

NEW QUESTION 7

Which ADVPN configuration must be configured using a script on FortiManager, when using VPN Manager to manage FortiGate VPN tunnels?

- A. Set protected network to all
- B. Enable AD-VPN in IPsec phase 1
- C. Configure IP addresses on IPsec virtual interfaces
- D. Disable add-route on hub

Answer: B

NEW QUESTION 8

A FortiGate is rebooting unexpectedly without any apparent reason. What troubleshooting tools could an administrator use to get more information about the problem? (Choose two.)

- A. Firewall monitor.
- B. Policy monitor.
- C. Logs.
- D. Crashlogs.

Answer: CD

NEW QUESTION 9

The CLI command set intelligent-mode <enable | disable> controls the IPS engine's adaptive scanning behavior. Which of the following statements describes IPS adaptive scanning?

- A. Determines the optimal number of IPS engines required based on system load.
- B. Downloads signatures on demand from FDS based on scanning requirements.
- C. Determines when it is secure enough to stop scanning session traffic.
- D. Choose a matching algorithm based on available memory and the type of inspection being performed.

Answer: C

Explanation:

Configuring IPS intelligenceStarting with FortiOS 5.2, intelligent-mode is a new adaptive detection method. This command is enabled the default and it means that the IPS engine will perform adaptive scanning so that, for some traffic, the FortiGate can quickly finish scanning and offload the traffic to NPU or kernel. It is a balanced method which could cover all known exploits. When disabled, the IPS engine scans every single byte.
 config ips globalset intelligent-mode {enable|disable}end

NEW QUESTION 10

Four FortiGate devices configured for OSPF connected to the same broadcast domain. The first unit is elected as the designated router The second unit is elected as the backup designated router Under normal operation, how many OSPF full adjacencies are formed to each of the other two units?

- A. 1
- B. 2
- C. 3
- D. 4

Answer: B

NEW QUESTION 10

How does FortiManager handle FortiGuard requests from FortiGate devices, when it is configured as a local FDS?

- A. FortiManager can download and maintain local copies of FortiGuard databases.
- B. FortiManager supports only FortiGuard push to managed devices.
- C. FortiManager will respond to update requests only if they originate from a managed device.
- D. FortiManager does not support rating requests.

Answer: A

NEW QUESTION 11

Refer to the exhibit, which contains partial output from an IKE real-time debug.

```
ike 0: comes 10.0.0.2:500->10.0.0.1:500, ifindex=7. . .
ike 0: IKEv2 exchange=Aggressive id=a2fbd6bb6394401a/06b89c022d4df682 len=426
ike 0: Remotesite:3: initiator: aggressive mode get 1st response. . .
ike 0: Remotesite:3: VID DPD AFCAD71368A1F1C96B8696FC77570100
ike 0: Remotesite:3: DPD negotiated
ike 0: Remotesite:3: VID FORTIGATE 8299031757A36082C6A621DE00000000
ike 0: Remotesite:3: peer is FortiGate/FortiOS (v0 b0)
ike 0: Remotesite:3: VID FRAGMENTATION 4048B7D56EBCE88525E7DE7F00D6C2D3
ike 0: Remotesite:3: VID FRAGMENTATION 4048B7D56EBCE88525E7DE7F00D6C2D3C0000000
ike 0: Remotesite:3: received peer identifier FQDN 'remote'
ike 0: Remotesite:3: negotiation result
ike 0: Remotesite:3: proposal id = 1:
ike 0: Remotesite:3:   protocol id = ISAKMP:
ike 0: Remotesite:3:   trans_id = KEY_IKE.
ike 0: Remotesite:3:   encapsulation = IKE/none.
ike 0: Remotesite:3:   type=OAKLEY_ENCRYPT_ALG, val=AES_CBC, key-len=128
ike 0: Remotesite:3:   type=OAKLEY_HASH_ALG, val=SHA.
ike 0: Remotesite:3:   type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0: Remotesite:3:   type=OAKLEY_GROUP, val=MODP1024.
ike 0: Remotesite:3: ISAKMP SA lifetime=86400
ike 0: Remotesite:3: NAT-T unavailable
ike 0: Remotesite:3: ISAKMP SA a2fbd6bb6394401a/06b89c022d4df682 key
16:39915120ED73ED73E520787C801DE3678916
ike 0: Remotesite:3: PSK authentication succeeded
ike 0: Remotesite:3: authentication OK
ike 0: Remotesite:3: add INITIAL-CONTACT
ike 0: Remotesite:3: enc
A2FBD6BB6394401A06B89C022D4DF682081004010000000000000500B000018882A07BE09026CA8B2
ike 0: Remotesite:3: out
A2FBD6BB6394401A06B89C022D4DF682081004010000000000000500B000018882A07BE09026CA8B2
ike 0: Remotesite:3: sent IKE msg (agg_i2send): 10.0.0.1:500->10.0.0.2:500, len=140,
id=a2fbd6bb6394401a/
ike 0: Remotesite:3: established IKE SA a2fbd6bb6394401a/06b89c022d4df682
```

Which two statements about this debug output are correct? (Choose two.)

- A. The remote gateway IP address is 10.0.0.1.
- B. The initiator provided remote as its IPsec peer ID.
- C. It shows a phase 1 negotiation.
- D. The negotiation is using AES128 encryption with CBC hash.

Answer: BC

NEW QUESTION 16

Which two statements about the Security Fabric are true? (Choose two.)

- A. Only the root FortiGate collects network information and forwards it to FortiAnalyzer.
- B. FortiGate uses FortiTelemetry protocol to communicate with FortiAnalyzer.
- C. All FortiGate devices in the Security Fabric must have bidirectional FortiTelemetry connectivity.
- D. Branch FortiGate devices must be configured first.

Answer: BC

NEW QUESTION 18

Refer to the exhibit, which contains the partial output of a diagnose command.

```
Spoke-2 # dia vpn tunnel list
list all ipsec tunnel in vd 0

-----
name=VPN ver=1 serial=1 10.200.5.1:0->10.200.4.1:0
bound_if=3 lgwy=static/1 tun=intf/0 mode=auto/1 encap=none/0
proxyid_num=1 child_num=0 refcnt=15 ilast=10 olast=792 auto-discovery=0
stat: rxp=0 txp=0 rxb=0 txb=0
dpd: mode=on-demand on=1 idle=20000ms retry=3 count=0 seqno=0
natt: mode=none draft=0 interval=0 remote_port=0
proxyid=VPN proto=0 sa=1 ref=2 serial=1
  src: 0:10.1.2.0/255.255.255.0:0
  dst: 0:10.1.1.0/255.255.255.0:0
  SA: ref=3 options=2e type=00 soft=0 mtu=1438 expire=42403/0B replaywin=2048 seqno=1 esn=0
replaywin_lastseq=00000000
life: type=01 bytes=0/0 timeout=43177/43200
dec: spi=cccl1f66d esp=aes key=16 280e5cd6f9bacc65ac771556c464ffbd
  ah=sha1 key=20 c68091d68753578785de6a7a6b276b506c527efe
enc: spi=df14200b esp=aes key=16 b02a7e9f5542b69aff6aa391738ee393
  ah=sha1 key=20 889f7529887c215c25950be2ba83e6fe1a5367be
dec: pkts/bytes=0/0, enc:pkts/bytes=0/0
```

Based on the output, which two statements are correct? (Choose two.)

- A. Anti-replay is enabled
- B. The remote gateway IP is 10.200.4.1.
- C. DPD is disabled.
- D. Quick mode selectors are disabled.

Answer: AB

NEW QUESTION 19

An administrator wants to capture encrypted phase 2 traffic between two FortiGate devices using the built-in sniffer. If the administrator knows that there is no NAT device located between both FortiGate devices, which command should the administrator run?

- A. diagnose sniffer packet any 'ah'
- B. diagnose sniffer packet any 'ip proto 50'
- C. diagnose sniffer packet any 'udp port 4500'
- D. diagnose sniffer packet any 'udp port 500'

Answer: B

Explanation:

Enterprise_Firewall_7.0_Study_Guide-Online.pdf p. 443 Phase 2 : ESP => IP protocol 50
 This command will capture any packets that use the IP protocol number 50, which is ESP (Encapsulating Security Payload). ESP is used to encrypt and authenticate the phase 2 traffic between two FortiGate device1s.

NEW QUESTION 20

Refer to the exhibit, which contains partial output from an IKE real-time debug.

```
ike 0:H2S_0_1:1249: notify msg received: SHORTCUT-QUERY
ike 0:H2S_0_1: recv shortcut-query 12594932268010586978 4384dd592d62cd52/0000000000000000 100.64.3.1
10.1.1.254->10.1.2.254 psk 64 ppk 0 ttl 32 nat 0 ver 1 mode 0
ike 0:H2S_0_0: iif 13 10.1.1.254->10.1.2.254 route lookup oif 13
ike 0:H2S_0_0: forward shortcut-query 12594932268010586978 4384dd592d62cd52/0000000000000000
100.64.3.1 10.1.1.254->10.1.2.254 psk 64 ppk 0 ttl 31 ver 1 mode 0, ext-ma
ike 0:H2S_0_0:1248: sent IKE msg (SHORTCUT-QUERY): 100.64.1.1:500->100.64.5.1:500, len=236,
id=e2beec89f13c7074/06a73dfb3a5d3b54:340a645c
ike 0: comes 100.64.5.1:500->100.64.1.1:500, ifindex=3. . .
ike 0: IKEv1 exchange=Informational id=e2beec89f13c7074/06a73dfb3a5d3b5d:26254ae9 len=236
ike 0:H2S_0_0:1248: notify msg received: SHORTCUT-REPLY
ike 0:H2S_0_0: recv shortcut-reply 12594932268010586978 4384dd592d62cd52/89bf040f5f7408c0 100.64.5.1
to 10.1.1.254 psk 64 ppk 0 ver 1 mode 0 ext-mapping 100.64.3.1:500
ike 0:H2S_0_0: iif 13.10.1.2.254->10.1.1.254 route lookup oif 13
ike 0:H2S_0_1: forward shortcut-reply 12594932268010586978 4384dd592d62cd52/89bf040f5f7408c0
100.64.5.1 to 10.1.1.254 psk 64 ppk 0 ttl 31 ver 1 mode 0 ext-mapping 100.
```

Based on the debug output, which phase 1 setting is enabled in the configuration of this VPN?

- A. auto-discovery-shortcut
- B. auto-discovery-forwarder
- C. auto-discovery-sender
- D. auto-discovery-receiver

Answer: D

NEW QUESTION 24

Refer to the exhibit, which contains the partial output of the get vpn ipsec tunnel details command.

```
Hub # get vpn ipsec tunnel details
gateway
  name: 'Hub2Spoke1'
  type: route-based
  local-gateway: 10.10.1.1:0 (static)
  remote-gateway: 10.10.2.2:0 (static)
  mode: ike-v1
  interface: 'wan2' (6)
  rx packets: 1025 bytes: 524402 errors: 0
  tx packets: 641 bytes: 93 errors: 0
  dpd: on-demand/negotiated idle: 20000ms retry: 3 count: 0
selectors
  name: 'Hub2Spoke1'
  auto-negotiate: disable
  mode: tunnel
  src: 0:192.168.1.0/0.0.0.0:0
  dst: 0:10.10.20.0/0.0.0.0:0
SA
  lifetime/rekey: 43200/32137
  mtu: 1438
  tx-esp-seq: 2ce
  replay: enabled
inbound
  spi: 01e54b14
  enc: aes-cb 914dc5d092667ed436ea7f6efb867976
  auth: sha1 a81b019d4cdfda32ce51e6b01d0b1ea42a74adce
outbound
  spi: 3dd3545f
  enc: aes-cb 017b8ff6c4ba21eac99b22380b7de74d
```

Based on the output, which two statements are correct? (Choose two.)

- A. Phase 2 authentication is set to sha1 on both sides.
- B. Anti-replay is disabled.
- C. Hub2Spoke1 is a policy-based VPN.
- D. Hub2Spoke1 is configured on interface wan2.

Answer: AD

NEW QUESTION 26

View the IPS exit log, and then answer the question below.

```
# diagnose test application ipsmonitor 3 ipseengine exit log"
```

```
pid = 93 (cfg), duration = 5605322 (s) at Wed Apr 19 09:57:26 2017 code = 11, reason: manual
```

What is the status of IPS on this FortiGate?

- A. IPS engine memory consumption has exceeded the model-specific predefined value.
- B. IPS daemon experienced a crash.
- C. There are communication problems between the IPS engine and the management database.
- D. All IPS-related features have been disabled in FortiGate's configuration.

Answer: D

Explanation:

The command diagnose test application ipsmonitor includes many options that are useful for troubleshooting purposes. Option 3 displays the log entries generated every time an IPS engine process stopped. There are various reasons why these logs are generated: Manual: Because of the configuration, IPS no longer needs to run (that is, all IPS-related features have been disabled)

NEW QUESTION 31

Refer to the exhibit, which contains a CLI script configuration on FortiManager.

Script Name	Static Route
Comments	<div style="border: 1px solid #ccc; height: 60px; width: 100%;"></div>
Type	CLI Script
Run script on	Remote FortiGate Directly (...)
Script details	<pre># conf rout stat # edit 0 # set gateway 10.20.121.2 # set priority 20 # set device "wan1" # next # end</pre>

An administrator configured the CLI script on FortiManager, but the script failed to apply any changes to the managed device after being executed. What are two reasons why the script did not make any changes to the managed device? (Choose two.)

- A. Static routes can be added using only TCL scripts.
- B. The commands that start with the # sign did not run.
- C. CLI scripts must start with #!.
- D. Incomplete commands can cause CLI scripts to fail.

Answer: BD

Explanation:

ref CLI scripts do not include Tool Command Language (Tcl) commands, and the first line of the script is not “#!” as it is for Tcl scripts.
https://help.fortinet.com/fmgr/50hlp/56/5-6-1/FortiManager_Admin_Guide/1000_Device%20Manager/2400_Sc

NEW QUESTION 34

Refer to the exhibit, which contains partial output from an IKE real-time debug.

```
ike 0:253000:27: responder: main mode get 1st message...
ike 0:253000:27: VID DPD AFCAD71368A1F1C96B8696FC77570100
ike 0:253000:27: VID FRAGMENTATION 4048B7D56EBCE88525E7DE7F00D6C2D3
ike 0:253000:27: VID FRAGMENTATION 4048B7D56EBCE88525E7DE7F00D6C2D3C0000000
ike 0:253000:27: VID FORTIGATE 8299031757A36082C6A621DE00000000
ike 0:253000:27: incoming proposal:
ike 0:253000:27: proposal id = 0:
ike 0:253000:27:   protocol id = ISAKMP:
ike 0:253000:27:   trans_id = KEY_IKE.
ike 0:253000:27:   encapsulation = IKE/none
ike 0:253000:27:   type=OAKLEY_ENCRYPT_ALG, val=AES_CBC, key-len=256
ike 0:253000:27:   type=OAKLEY_HASH_ALG, val=SHA2_256.
ike 0:253000:27:   type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:253000:27:   type=OAKLEY_GROUP, val=MODP1536.
ike 0:253000:27: ISAKMP SA lifetime=86400
ike 0:253000:27: my proposal, gw Remotesite:
ike 0:253000:27: proposal id = 1:
ike 0:253000:27:   protocol id = ISAKMP:
ike 0:253000:27:   trans_id = KEY_IKE.
ike 0:253000:27:   encapsulation = IKE/none
ike 0:253000:27:   type=OAKLEY_ENCRYPT_ALG, val=AES_CBC, key-len=128
ike 0:253000:27:   type=OAKLEY_HASH_ALG, val=SHA.
ike 0:253000:27:   type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:253000:27:   type=OAKLEY_GROUP, val=MODP1536.
ike 0:253000:27: ISAKMP SA lifetime=86400
ike 0:253000:27: negotiation failure
ike Negot:253a8cbe6335e6fd/0000000000000000:27: no SA proposal chosen
```

Why did the tunnel not come up?

- A. The local gateway has configured less secure encryption and hashing algorithms compared to the remote gateway.
- B. The Diffie-Hellman group does not match on the local and remote gateways.
- C. The proposal ID does not match between local and remote gateways.
- D. The encapsulation method for phase 2 is set to none on local and remote gateways.

Answer: A

Explanation:

local gateway: encryption AES-128, hash SHA remote gateway: encryption AES-256, hash SHA-256 So local gateway has less secure settings

NEW QUESTION 38

Examine the partial output from two web filter debug commands; then answer the question below:

```
# diagnose test application urlfilter 3
Domain | IP      DB Ver  T URL
34000000| 34000000  16.40224 P Bhttp://www.fgt99.com/
# get webfilter categories
g07 General Interest - Business:
  34 Finance and Banking
  37 Search Engines and Portals
  43 General Organizations
  49 Business
  50 Information and Computer Security
  51 Government and Legal Organizations
  52 Information Technology
```

Based on the above outputs, which is the FortiGuard web filter category for the web site www.fgt99.com?

- A. Finance and banking
- B. General organization.
- C. Business.
- D. Information technology.

Answer: C

NEW QUESTION 40

Which statement about protocol options is true?

- A. Protocol options allows administrators a streamlined method to instruct FortiGate to block all sessions corresponding to disabled protocols.
- B. Protocol options allows administrators the ability to configure the Any setting for all enabled protocols which provides the most efficient use of system resources.
- C. Protocol options allow administrators to configure a maximum number of sessions for each configured protocol.
- D. Protocol options allows administrators to configure which Layer 4 port numbers map to upper-layer protocols, such as HTTP, SMTP, FTP, and so on.

Answer: D

NEW QUESTION 42

View the exhibit, which contains the output of a diagnose command, and then answer the question below.

```
# diagnose debug rating
Locale      : english
License     : Contract
Expiration  : Thu Sep 28 17:00:00 20xx
-- Server List (Thu Apr 19 10:41:32 20xx) --
IP          Weight  RTT   Flags  TZ   Packets  Curr Lost  Total Lost
64.26.151.37  10     45    -5     -5   262432  0          846
64.26.151.35  10     46    -5     -5   329072  0          6806
66.117.56.37  10     75    -5     -5   71638   0          275
65.210.95.240 20     71    -8     -8   36875   0          92
209.222.147.36 20     103   DI     -8   34784   0          1070
208.91.112.194 20     107   D      -8   35170   0          1533
96.45.33.65   60     144   0      0    33728   0          120
80.85.69.41   71     226   1      1    33797   0          192
62.209.40.74  150    97    9      9    33754   0          145
121.111.236.179 45     44    F      -5   26410  26226     26227
```

Which statements are true regarding the output in the exhibit? (Choose two.)

- A. FortiGate will probe 121.111.236.179 every fifteen minutes for a response.

- B. Servers with the D flag are considered to be down.
- C. Servers with a negative TZ value are experiencing a service outage.
- D. FortiGate used 209.222.147.3 as the initial server to validate its contract.

Answer: AD

Explanation:

* A – because flag is Failed so fortigate will check if server is available every 15 min D-state is I , contact to validate contract info

NEW QUESTION 45

View the exhibit, which contains the output of a debug command, and then answer the question below.

```
#dia hardware sysinfo shm
SHM counter:          150
SHM allocated:        0
SHM total:            625057792
conserve mode: on - mem
system last entered: Mon Apr 24 16:36:37 2017
sys fd last entered: n/a
SHM FS total:        641236992
SHM FS free:         641208320
SHM FS avail:        641208320
SHM FS alloc:         28672
```

What statement is correct about this FortiGate?

- A. It is currently in system conserve mode because of high CPU usage.
- B. It is currently in FD conserve mode.
- C. It is currently in kernel conserve mode because of high memory usage.
- D. It is currently in system conserve mode because of high memory usage.

Answer: D

NEW QUESTION 47

Refer to the exhibit, which contains the partial output of the get vpn ipsec tunnel details command.

```
Hub # get vpn ipsec tunnel details
gateway
name: 'Hub2Spoke1'
type: route-based
local-gateway: 10.10.1.1:0 (static)
remote-gateway: 10.10.2.2:0 (static)
mode: ike-v1
interface: 'wan2' (6)
rx packets: 1025 bytes: 524402 errors: 0
tx packets: 641 bytes: 93 errors: 0
dpd: on-demand/negotiated idle: 20000ms retry: 3 count: 0
selectors
name: 'Hub2Spoke1'
auto-negotiate: disable
mode: tunnel
src: 0:192.168.1.0/0.0.0.0:0
dst: 0:10.10.20.0/0.0.0.0:0
SA
lifetime/rekey: 43200/32137
mtu: 1438
tx-esp-seq: 2ce
replay: enabled
inbound
spi: 01e54b14
enc: aes-cb 914dc5d092667ed436ea7f6efb867976
auth: sha1 a81b019d4cdfda32ce51e6b01d0b1ea42a74adce
outbound
spi: 3dd3545f
enc: aes-cb 017b8ff6c4ba21eac99b22380b7de74d
auth: sha1 edd8141f4956140eef703d9042621d3dbf5cd961
NPU acceleration: encryption(outbound) decryption(inbound)
```

Based on the output, which two statements are correct? (Choose two.)

- A. The npu_flag for this tunnel is 03.
- B. Different SPI values are a result of auto-negotiation being disabled for phase 2 selectors.
- C. Anti-replay is enabled.
- D. The npu_flag for this tunnel is 02.

Answer: AC

NEW QUESTION 52

View the global IPS configuration, and then answer the question below.

```
config ips global
    set fail-open disable
    set intelligent-mode disable
    set engine-count 0
    set algorithm engine-pick
end
```

Which of the following statements is true regarding this configuration?

- A. IPS will scan every byte in every session.
- B. FortiGate will spawn IPS engine instances based on the system load.
- C. New packets will be passed through without inspection if the IPS socket buffer runs out of memory.
- D. IPS will use the faster matching algorithm which is only available for units with more than 4 GB memory.

Answer: A

NEW QUESTION 57

Which configuration can be used to reduce the number of BGP sessions in an IBGP network?

- A. Neighbor range
- B. Route reflector
- C. Next-hop-self
- D. Neighbor group

Answer: B

Explanation:

Route reflectors help to reduce the number of IBGP sessions inside an AS. A route reflector forwards the routes learned from one peer to the other peers. If you configure route reflectors, you don't need to create a full mesh IBGP network. All clients in a cluster only talk to route reflector to get sync routing updates. Route reflectors pass the routing updates to other route reflectors and border routers within the AS.

NEW QUESTION 60

A FortiGate's port1 is connected to a private network. Its port2 is connected to the Internet. Explicit web proxy is enabled in port1 and only explicit web proxy users can access the Internet. Web cache is NOT enabled. An internal web proxy user is downloading a file from the Internet via HTTP. Which statements are true regarding the two entries in the FortiGate session table related with this traffic? (Choose two.)

- A. Both sessions have the local flag on.
- B. The destination IP addresses of both sessions are IP addresses assigned to FortiGate's interfaces.
- C. One session has the proxy flag on, the other one does not.
- D. One of the sessions has the IP address of port2 as the source IP address.

Answer: AD

NEW QUESTION 61

Refer to the exhibit, which shows the output of a debug command.

```
FGT # get router info ospf interface port4
port4 is up, line protocol is up
Internet Address 172.20.121.236/24, Area 0.0.0.0, MTU 1500
Process ID 0, Router ID 0.0.0.4, Network Type BROADCAST, Cost: 1
Transmit Delay is 1 sec, State DROther, Priority 1
Designated Router (ID) 172.20.140.2, Interface Address 172.20.121.2
Backup Designated Router (ID) 0.0.0.1, Interface Address 172.20.121.239
Timer intervals configured, Hello 10.000, Dead 40, Wait 40, Retransmit 5
Hello due in 00:00:05
Neighbor Count is 4, Adjacent neighbor count is 2
Crypt Sequence Number is 411
Hello received 106 sent 27, DD received 6 sent 3
LS-Req received 2 sent 2, LS-Upd received 7 sent 17
LS-Ack received 4 sent 3, Discarded 1
```

Which two statements about the output are true? (Choose two.)

- A. In the network connected to port 4, two OSPF routers are down.
- B. Based on the network type of port 4, OSPF hello packets will be sent to 224.0.0.5.
- C. Based on the network type of port 4, OSPF hello packets will be sent to 224.0.0.6.
- D. There are a total of 5 OSPF routers attached to the Port4 network segment.

Answer: BD

NEW QUESTION 63

Which statement is true regarding File description (FD) conserve mode?

- A. IPS inspection is affected when FortiGate enters FD conserve mode.
- B. A FortiGate enters FD conserve mode when the amount of available description is less than 5%.
- C. FD conserve mode affects all daemons running on the device.
- D. Restarting the WAD process is required to leave FD conserve mode.

Answer: B

NEW QUESTION 67

A FortiGate device has the following LDAP configuration:

```
config user ldap
  edit "WindowsLDAP"
    set server "10.0.1.10"
    set cnid "cn"
    set dn "cn=Users, dc=trainingAD, dc=training, dc=lab"
    set type regular
    set username "dc=trainingAD, dc=training, dc=lab"
    set password xxxxxxxx
  next
end
```

The administrator executed the 'dsquery' command in the Windows LDAP server 10.0.1.10, and got the following output:

>dsquery user -samid administrator

"CN=Administrator, CN=Users, DC=trainingAD, DC=training, DC=lab" Based on the output, what FortiGate LDAP setting is configured incorrectly?

- A. cnid.
- B. username.
- C. password.
- D. dn.

Answer: B

Explanation:

<https://kb.fortinet.com/kb/viewContent.do?externalId=FD37516>

NEW QUESTION 72

View the exhibit, which contains the output of a debug command, and then answer the question below.

```
# diagnose hardware sysinfo conserve
memory conserve mode:          on
total RAM:                     3040 MB
memory used:                   2706 MB 89% of total RAM
Memory freeable:              334 MB 11% of total RAM
memory used + freeable threshold extreme: 2887 MB 95% of total RAM
memory used threshold red:     2675 MB 88% of total RAM
memory used threshold green:   2492 MB 82% of total RAM
```

Which one of the following statements about this FortiGate is correct?

- A. It is currently in system conserve mode because of high CPU usage.
- B. It is currently in extreme conserve mode because of high memory usage.
- C. It is currently in proxy conserve mode because of high memory usage.
- D. It is currently in memory conserve mode because of high memory usage.

Answer: D

NEW QUESTION 74

Refer to the exhibit, which contains the debug output of diagnose dvm device list.

```

FMG-VM64# diagnose dvm device list
There are currently 1 devices/vdoms managed:
TYPE      OID      SN      HA      IP      NAME      ADOM      IPS  FIRMWARE
fmg/      217     FGVM01... -    10.200.1.1 Local-FortiGate My_ADOM 15.0.0831 6.0 MR4 (1579)
faz enabled
          |- STATUS: db: modified; conf: in sync; cond: pending; dm: retrieved; conn: up

          |- vdom: [3] root flags:0 adom:My_ADOM pkg: [imported] Local-FortiGate_root
    
```

Which two statements about the output shown in the exhibit are correct? (Choose two.)

- A. ADOMs are disabled on the FortiManager
- B. The FortiGate configuration is in sync with latest running revision history.
- C. There are pending device-level changes yet to be installed on Local-FortiGate.
- D. The policy package has been modified for Local-FortiGate.

Answer: BC

NEW QUESTION 75

Refer to the exhibit, which shows a FortiGate configuration.

```

config system fortiguard
  set protocol udp
  set port 8888
  set load-balance-servers 1
  set auto-join-forticloud enable
  set update-server-location any
  set sandbox-region ""
  set fortiguard-anycast disable
  set antispam-force-off disable
  set antispam-cache enable
  set antispam-cache-ttl 1800
  set antispam-cache-mpercent 2
  set antispam-timeout 7
  set webfilter-force-off enable
  set webfilter-cache enable
  set webfilter-cache-ttl 3600
  set webfilter-timeout 15
  set sdns-server-ip "208.91.112.220"
  set sdns-server-port 53
  unset sdns-options
  set source-ip 0.0.0.0
  set source-ip6 ::
  set proxy-server-ip 0.0.0.0
  set proxy-server-port 0
  set proxy-username ""
  set ddns-server-ip 0.0.0.0
  set ddns-server-port 443
end
    
```

An administrator is troubleshooting a web filter issue on FortiGate. The administrator has configured a web filter profile and applied it to a policy; however, the web filter is not inspecting any traffic that is passing through the policy. What must the administrator change to fix the issue?

- A. Increase webfilter-timeout.
- B. Change protocol to TCP.
- C. Enable fortiguard-anycast.
- D. Disable webfilter-force-off.

Answer: D

NEW QUESTION 77

Refer to the exhibit, which shows the output of a web filtering diagnose command.

```
# diagnose webfilter fortiguard statistics list
Rating Statistics:
-----
DNS failures           :      273
DNS lookups           :      280
Data send failures    :         0
Data read failures    :         0
Wrong package type    :         0
Hash table miss       :         0
Unknown server        :         0
Incorrect CRC         :         0
Proxy request failures :         0
Request timeout       :         1
Total requests        :     2409
Requests to FortiGuard servers :     1182
Server errored responses :         0
Relayed rating        :         0
Invalid profile       :         0

Allowed               :     1021
Blocked               :     3909
Logged                :     3927
Blocked Errors        :         565
Allowed Errors        :         0
Monitors              :         0
Authenticates         :         0
Warnings:             :         18
Ovrd request timeout :         0
Ovrd send failures    :         0
Ovrd read failures    :         0
Ovrd errored responses :         0
...

Cache Statistics:
-----
Maximum memory       :         0
Memory usage         :         0

Nodes                :         0
Leaves               :         0
Prefix nodes         :         0
Exact nodes          :         0

Requests             :         0
Misses               :         0
Hits                 :         0
Prefix hits          :         0
Exact hits           :         0

No cache directives  :         0
Add after prefix     :         0
Invalid DB put       :         0
DB updates           :         0

Percent full         :         0%
Branches             :         0%
Leaves               :         0%
Prefix nodes         :         0%
Exact nodes          :         0%

Miss rate            :         0%
Hit rate             :         0%
Prefix hits          :         0%
Exact hits           :         0%
...
```

Which configuration change would result in non-zero results in the cache statistics section?

- A. set server-type rating under config system central-management
- B. set webfilter-cache enable under config system fortiguard
- C. set webfilter-force-off disable under config system fortiguard
- D. set ngfw-mode policy-based under config system settings

Answer: B

Explanation:

Enterprise_Firewall_7.0_Study_Guide-Online.pdf p 362

NEW QUESTION 82

View the exhibit, which contains the partial output of an IKE real-time debug, and then answer the question below.

```
ike 0:c49e59846861b0f6/0000000000000000:278: responder: main mode get 1st message...
ike 0:c49e59846861b0f6/0000000000000000:278: incoming proposal:
ike 0:c49e59846861b0f6/0000000000000000:278: proposal id = 0:
ike 0:c49e59846861b0f6/0000000000000000:278:   protocol id = ISAKMP:
ike 0:c49e59846861b0f6/0000000000000000:278:   trans_id = KEY_IKE.
ike 0:c49e59846861b0f6/0000000000000000:278:   encapsulation = IKE/none
ike 0:c49e59846861b0f6/0000000000000000:278:   type=OAKLEY_ENCRYPT_ALG, val=3DES_CBC.
ike 0:c49e59846861b0f6/0000000000000000:278:   type=OAKLEY_HASH_ALG, val=SHA2_256.
ike 0:c49e59846861b0f6/0000000000000000:278:   type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:c49e59846861b0f6/0000000000000000:278:   type=OAKLEY_GROUP, val=MODP2048.
ike 0:c49e59846861b0f6/0000000000000000:278: ISAKMP SA lifetime=86400
...
ike 0:c49e59846861b0f6/0000000000000000:278: my proposal, gw VPN:
ike 0:c49e59846861b0f6/0000000000000000:278: proposal id = 1:
ike 0:c49e59846861b0f6/0000000000000000:278:   protocol id = ISAKMP:
ike 0:c49e59846861b0f6/0000000000000000:278:   trans_id = KEY_IKE.
ike 0:c49e59846861b0f6/0000000000000000:278:   encapsulation = IKE/none
ike 0:c49e59846861b0f6/0000000000000000:278:   type=OAKLEY_ENCRYPT_ALG, val=AES_CBC,
key-len=256
ike 0:c49e59846861b0f6/0000000000000000:278:   type=OAKLEY_HASH_ALG, val=SHA2_256.
ike 0:c49e59846861b0f6/0000000000000000:278:   type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:c49e59846861b0f6/0000000000000000:278:   type=OAKLEY_GROUP, val=MODP2048.
ike 0:c49e59846861b0f6/0000000000000000:278: ISAKMP SA lifetime=86400
...
ike 0:c49e59846861b0f6/0000000000000000:278: negotiation failure
ike Negotiate ISAKMP SA Error: ike 0:c49e59846861b0f6/0000000000000000:278:
proposal chosen
...
```

Why didn't the tunnel come up?

- A. The pre-shared keys do not match.
- B. The remote gateway's phase 2 configuration does not match the local gateway's phase 2 configuration.
- C. The remote gateway's phase 1 configuration does not match the local gateway's phase 1 configuration.
- D. The remote gateway is using aggressive mode and the local gateway is configured to use man mode.

Answer: C

NEW QUESTION 87

Examine the output of the 'get router info ospf neighbor' command shown in the exhibit; then answer the question below.

```
# get router info ospf neighbor

OSPF process 0:
Neighbor ID   Pri   State           Dead Time   Address           Interface
0.0.0.69      1     Full/DR         00:00:32   10.126.0.69      wan1
0.0.0.117     1     Full/DROther    00:00:34   10.126.0.117     wan1
0.0.0.2       1     Full/-         00:00:36   172.16.1.2       ToRemote
```

Which statements are true regarding the output in the exhibit? (Choose two.) Refer to the exhibit, which shows the output of a debug command. Which statement about the output is true?

- A. The OSPF routers with the IDs 0.0.0.69 and 0.0.0.117 are both designated routers for the wan1 network.
- B. I network.
- C. The OSPF router with the ID 0.0.0.2 is the designated router for the ToRemote network.
- D. The local FortiGate is the designated router for the wan1 network.
- E. The interface ToRemote is a point-to-point OSPF network.

Answer: D

Explanation:

<https://www.cisco.com/c/en/us/support/docs/ip/open-shortest-path-first-ospf/13685-13.html>

NEW QUESTION 92

Which statement about IKE and IKE NAT-T is true?

- A. IKE is used to encapsulate ESP traffic in some situations, and IKE NAT-T is used only when the local FortiGate is using NAT on the IPsec interface.
- B. IKE is the standard implementation for IKEv1 and IKE NAT-T is an extension added in IKEv2.
- C. They both use UDP as their transport protocol and the port number is configurable.
- D. They each use their own IP protocol number.

Answer: C

Explanation:

IKE without NAT-T runs over UDP port 500. IKE with NAT-T runs over UDP port 4500. It can be configurable - <https://docs.fortinet.com/document/fortigate/7.0.0/new-features/33578/configurable-ike-port>

NEW QUESTION 94

Two independent FortiGate HA clusters are connected to the same broadcast domain. The administrator has reported that both clusters are using the same HA virtual MAC address. This creates a duplicated MAC address problem in the network. What HA setting must be changed in one of the HA clusters to fix the problem?

- A. Group ID.
- B. Group name.
- C. Session pickup.
- D. Gratuitous ARPs.

Answer: A

Explanation:

https://help.fortinet.com/fos50hlp/54/Content/FortiOS/fortigate-high-availability-52/HA_failoverVMAC.htm

NEW QUESTION 98

Examine the output of the 'get router info bgp summary' command shown in the exhibit; then answer the question below.

```
Student# get router info bgp summary
BGP router identifier 10.200.1.1, local AS number 65500
BGP table version is 2
1 BGP AS-PATH entries
0 BGP community entries

Neighbor V    AS  MsgRcvd  MsgSent  TblVer  InQ  OutQ  Up/Down  State/PfxRcd
10.200.3.1 4  65501    92      112     0    0    0       never      Connect

Total number of neighbors 1
```

Which statement can explain why the state of the remote BGP peer 10.200.3.1 is Connect?

- A. The local peer is receiving the BGP keepalives from the remote peer but it has not received any BGP prefix yet.
- B. The TCP session for the BGP connection to 10.200.3.1 is down.
- C. The local peer has received the BGP prefixed from the remote peer.
- D. The local peer is receiving the BGP keepalives from the remote peer but it has not received the OpenConfirm yet.

Answer: B

Explanation:

<http://www.ciscopress.com/articles/article.asp?p=2756480&seqNum=4>

NEW QUESTION 102

Refer to the exhibit, which contains the partial output of a diagnose command.

```
Spoke-2 # dia vpn tunnel list
list all ipsec tunnel in vd 0
-----
name=VPN ver=1 serial=1 10.200.5.1:0 -> 10.200.4.1:0
bound_if=3 lgwy=statistic/1 tun=intf/0 mode=auto/1 encap=none/0
proxyid_num=1 child_num=0 refernt=15 ilast=10 olast=792 auto-discovery=0
stat: rxp=0 txp=0 rxb=0 txb=0
dpd: mode=on-demand on=1 idle=20000ms retry=3 count=0 seqno=0
natt: mode=none draft=0 interval=0 remote_port=0
proxyid=VPN proto=0 sa=1 ref=2 serial=1
  src: 0:10.1.2.0/255.255.255.0:0
  dat: 0:10.1.1.0/255.255.255.0:0
  SA: ref=3 options=2e type=00 soft=0 mtu=1438 expire=42403/OB replaywin=204B seqno=1
esn=replaywin_lastseq=00000000
  life: type=01 bytes=0/0 timeout=43177/43200
  dec: spi=ccclf66d esp=aes key=16 280e5cd6f9bacc65ac771556c464ffbd
      ah=shal key=20 c68091d68753578785de6a7a6b276b506e527
```

Based on the output, which two statements are correct? (Choose two.)

- A. Anti-replay is enabled.
- B. DPD is disabled.
- C. Remote gateway IP is 10.200.4.1.
- D. Quick mode selectors are disabled.

Answer: AC

NEW QUESTION 105

Refer to the exhibit, which shows the output of a diagnose command

```
FGT # diagnose debug rating
Locale      : english
Service     : Web-filter
Status      : Enable
License     : Contract
Service     : Antispam
Status      : Disable
Service     : Virus Outbreak Prevention
Status      : Disable
-- Server List (Mon Apr 19 10:41:32 20xx) --
IP          Weight  RTT    Flags  TZ   Packets  Curr Lost  Total Lost
64.26.151.37  10     45     -5     -5   262432   0          846
64.26.151.35  10     46     -5     -5   329072   0          6806
66.117.56.37  10     75     -5     -5   71638    0          275
65.210.95.240 20     71     -8     -8   36875    0          92
209.222.147.36 20     103    DI     -8   34784    0          1070
208.91.112.194 20     107    D      -8   35170    0          1533
96.45.33.65   60     144    0      0    33728    0          120
80.85.69.41   71     226    1      1    33797    0          192
62.209.40.74  150    97     9      9    33754    0          145
121.111.236.179 45     44     F      -5   26410    26226     26227
```

What can you conclude from the RTT value?

- A. Its value represents the time it takes to receive a response after a rating request is sent to a particular server.
- B. Its value is incremented with each packet lost.
- C. It determines which FortiGuard server is used for license validation.
- D. Its initial value is statically set to 10.

Answer: A

NEW QUESTION 107

What configuration changes can reduce the memory utilization in a FortiGate? (Choose two.)

- A. Reduce the session time to live.
- B. Increase the TCP session timers.
- C. Increase the FortiGuard cache time to live.
- D. Reduce the maximum file size to inspect.

Answer: AD

NEW QUESTION 111

Refer to the exhibit, which shows a partial routing table.

```
FGT # get router info routing-table all
...
Routing table for VRF=7
C    10.73.9.0/24 is directly connected, port2

Routing table for VRF=12
C    10.1.0.0/24 is directly connected, port3
S    10.10.4.0/24 [10/0] via 10.1.0.100, port3
C    10.64.1.0/24 is directly connected, port1

Routing table for VRF=21
S    10.1.0.0/24 [10/0] via 10.72.3.254, port4
C    10.72.3.0/24 is directly connected, port4
```

Assuming all the appropriate firewall policies are configured, which two pings will FortiGate route? (Choose two.)

- A. Source IP address: 10.1.0.10. Destination IP address: 10.64.1.52
- B. Source IP address: 10.72.3.52. Destination IP address: 10.1.0.254
- C. Source IP address: 10.10.4.24, Destination IP address: 10.72.3.20
- D. Source IP address: 10.73.9.10, Destination IP address: 10.72.3.15

Answer: AB

NEW QUESTION 112

Which action will FortiGate take when using the default settings for SSL certificate inspection, where the server name indication (SNI) does not match either the common name (CN) or any of the subject alternative names (SAN) in the server certificate?

- A. FortiGate uses the CN information from the Subject field in the server certificate.
- B. FortiGate uses the first entry listed in the SAN field in the server certificate.
- C. FortiGate uses the SNI from the user's web browser.
- D. FortiGate closes the connection because this represents an invalid SSL/TLS configuration.

Answer: A

Explanation:

#Config firewall ssl-ssh-profile

edit <profile_name> config https

set sni-server-cert-check [enable* | strict | disable]

Enable: If the SNI does NOT match the CN or SAN fields in the returned server's certificate, FG uses the CN field instead of the SNI to obtain the FQDN.

Strict: If the SNI does NOT match the CN or SAN fields in the returned server's certificate, FG closes the connection.

Disable: FG does not check the SNI.

NEW QUESTION 114

The logs in a FSSO collector agent (CA) are showing the following error: failed to connect to registry: PIKA1026 (192.168.12.232)

What can be the reason for this error?

- A. The CA cannot resolve the name of the workstation.
- B. The FortiGate cannot resolve the name of the workstation.
- C. The remote registry service is not running in the workstation 192.168.12.232.
- D. The CA cannot reach the FortiGate with the IP address 192.168.12.232.

Answer: C

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD30548>

NEW QUESTION 118

A corporate network allows Internet Access to FSSO users only. The FSSO user student does not have Internet access after successfully logged into the Windows AD network. The output of the 'diagnose debug authd fssolist' command does not show student as an active FSSO user. Other FSSO users can access the Internet without problems. What should the administrator check? (Choose two.)

- A. The user student must not be listed in the CA's ignore user list.
- B. The user student must belong to one or more of the monitored user groups.
- C. The student workstation's IP subnet must be listed in the CA's trusted list.
- D. At least one of the student's user groups must be allowed by a FortiGate firewall policy.

Answer: AD

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD38828>

NEW QUESTION 121

View the exhibit, which contains the partial output of a diagnose command, and then answer the question below.

```
Spoke-2 # dia vpn tunnel list
list all ipsec tunnel in vd 0
name=VPN ver=1 serial=1 10.200.5.1:0->10.200.4.1:0
bound_if=3 lgwy=static/1 tun=intf/0 mode=auto/1 encap=none/0
proxyid_num=1 child_num=0 refcnt=15 ilast=10 olast=792 auto-discovery=0
stat: rxp=0 txp=0 rxb=0 txb=0
dpd: mode=on-demand on=1 idle=20000 ms retry=3 count=0 seqno=0
natt: mode=none draft=0 interval=0 remote_port=0
proxyid=VPN proto=0 sa=1 ref=2 serial=1
  src: 0:10.1.2.0/255.255.0:0
  dst: 0:10.1.1.0/255.255.255.0:0
  SA: ref=3 options=2e type=00 soft=0 mtu=1438 expire=42403/0B replaywin=2048 seqno=1 esn=0
replaywin_lastseq=00000000
life: type=01 bytes=0/0 timeout=43177/43200
dec: spi=ccc1f66d esp=aes key=16 280e5cd6f9bacc65ac771556c464ffbd
  ah=shal key=20 c68091d68753578785de6a7a6b276b506c527efe
enc: spi=df14200b esp=aes key=16 b02a7e9f5542b69aff6aa391738ee393
  ah=shal key=20 889f7529887c215c25950be2ba83e6fela5367be
dec:pkts/bytes=0/0, enc:pkts/bytes=0/0
```

Based on the output, which of the following statements is correct?

- A. Anti-reply is enabled.
- B. DPD is disabled.
- C. Quick mode selectors are disabled.
- D. Remote gateway IP is 10.200.5.1.

Answer: A

NEW QUESTION 123

Which three conditions are required for two FortiGate devices to form an OSPF adjacency? (Choose three.)

- A. OSPF interface network types match.
- B. OSPF router IDs are unique.
- C. OSPF interface priority settings are unique.
- D. Authentication settings match.
- E. OSPF link costs match.

Answer: ABD

Explanation:

Enterprise_Firewall_7.0_Study_Guide-Online.pdf p 280

NEW QUESTION 127

Examine the output of the 'get router info bgp summary' command shown in the exhibit; then answer the question below.

```
# get router info bgp summary
BGP router identifier 0.0.0.117, local AS number 65117
BGP table version is 104
3 BGP AS-PATH entries
0 BGP community entries

Neighbor    V    AS  MsgRcvd  MsgSent  TblVer  InQ  OutQ  Up/Down  State/PfxRcd
10.125.0.60 4  65060  1698      1756    103    0    0  03:02:49      1
10.127.0.75 4  65075  2206      2250    102    0    0  02:45:55      1
10.200.3.1  4  65501   101        115     0     0    0  never         Active

Total number of neighbors 3
```

Which statements are true regarding the output in the exhibit? (Choose two.)

- A. BGP state of the peer 10.125.0.60 is Established.
- B. BGP peer 10.200.3.1 has never been down since the BGP counters were cleared.
- C. Local BGP peer has not received an OpenConfirm from 10.200.3.1.
- D. The local BGP peer has received a total of 3 BGP prefixes.

Answer: AC

NEW QUESTION 131

View the exhibit, which contains the output of a BGP debug command, and then answer the question below.

```
# get router info bgp summary
BGP router identifier 0.0.0.117, local AS number 65117
BGP table version is 104
3 BGP AS-PATH entries
0 BGP community entries
```

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
10.125.0.60	4	65060	1698	1756	103	0	0	03:02:49	1
10.127.0.75	4	65075	2206	2250	102	0	0	02:45:55	1
10.200.3.1	4	65501	101	115	0	0	0	never	Active

Total number of neighbors 3

Which of the following statements about the exhibit are true? (Choose two.)

- A. For the peer 10.125.0.60, the BGP state of is Established.
- B. The local BGP peer has received a total of three BGP prefixes.
- C. Since the BGP counters were last reset, the BGP peer 10.200.3.1 has never been down.
- D. The local BGP peer has not established a TCP session to the BGP peer 10.200.3.1.

Answer: AD

NEW QUESTION 135


Which statement about memory conserve mode is true?

- A. A FortiGate exits conserve mode when the configured memory use threshold reaches yellow.
- B. A FortiGate starts dropping all the new and old sessions when the configured memory use threshold reaches extreme.
- C. A FortiGate starts dropping new sessions when the configured memory use threshold reaches red
- D. A FortiGate enters conserve mode when the configured memory use threshold reaches red

Answer: D

NEW QUESTION 140

Exhibits:

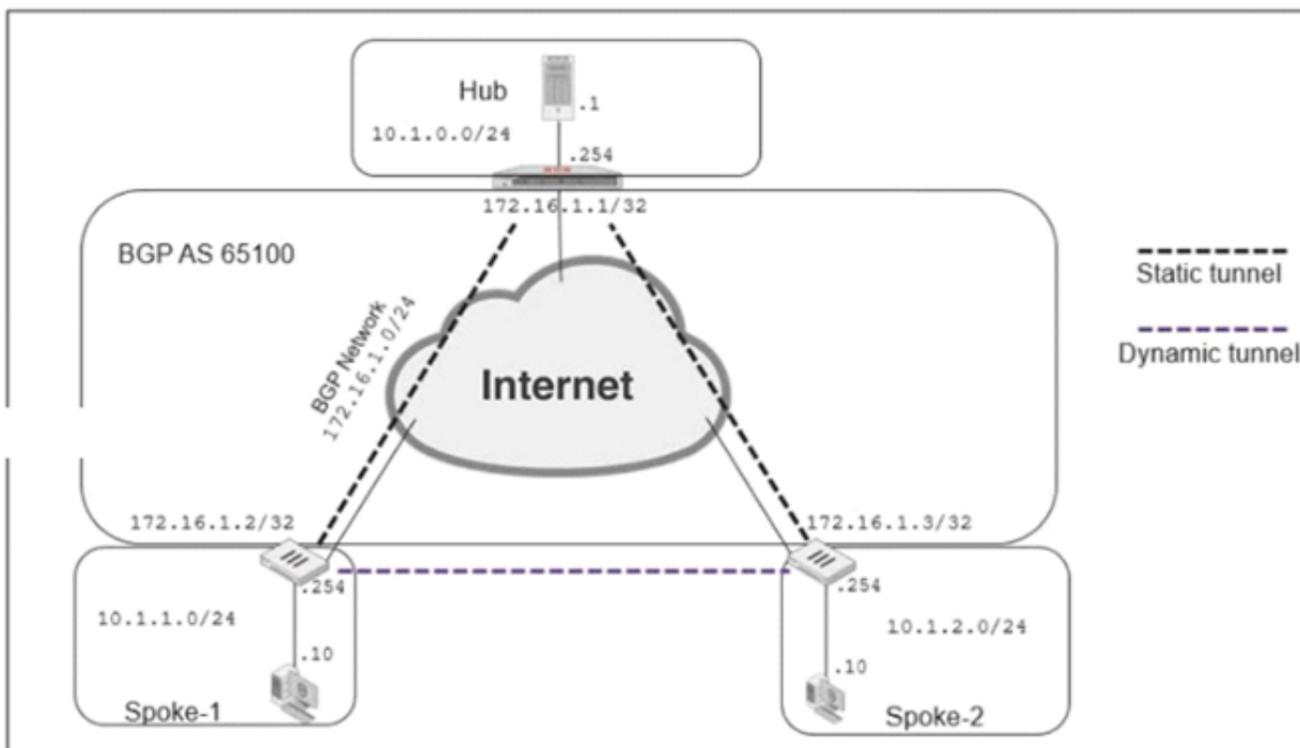

```

now router bgp
router bgp
  as 65100
  router-id 172.16.1.1
fig neighbor-group
  edit "advpn"
    set remote-as 65100

    set route-reflector-client disable
  next

fig neighbor-range
  edit 1
    set prefix 172.16.1.0 255.255.255.0
    set neighbor-group "advpn"
  next

```

Refer to the exhibits, which contain the network topology and BGP configuration for a hub.

An administrator is trying to configure ADVPN with a hub-spoke VPN setup using iBGP. All the VPNs are up and connected to the hub. The hub is receiving route information from both spokes over iBGP; however, the spokes are not receiving route information from each other.

What change must the administrator make to the hub BGP configuration so that the routes learned by one spoke are forwarded to the other spokes?

- A. Configure an individual neighbor and remove neighbor-range configuration.
- B. Configure the hub as a route reflector client.
- C. Change the router id to 10.1.0.254.
- D. Make the configuration of remote-as different from the configuration of local-as.

Answer: B

Explanation:

Source:

<https://community.fortinet.com/t5/FortiGate/Technical-Tip-Configuring-BGP-route-reflector/ta-p/191503> Source 2: RFC 4456

NEW QUESTION 144

Examine the following partial output from a sniffer command; then answer the question below.

```

# diagnose sniff packet any 'icmp' 4
interfaces= [any]
filters = [icmp]
2.101199 wan2 in 192.168.1.110-> 4.2.2.2: icmp: echo request
2.101400 wan1 out 172.17.87.16-> 4.2.2.2: icmp: echo request
.....
2.123500 wan2 out 4.2.2.2-> 192.168.1.110: icmp: echo reply
244 packets received by filter
5 packets dropped by kernel

```

What is the meaning of the packets dropped counter at the end of the sniffer?

- A. Number of packets that didn't match the sniffer filter.
- B. Number of total packets dropped by the FortiGate.
- C. Number of packets that matched the sniffer filter and were dropped by the FortiGate.
- D. Number of packets that matched the sniffer filter but could not be captured by the sniffer.

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=11655>

NEW QUESTION 146

View the exhibit, which contains an entry in the session table, and then answer the question below.

```

session info: proto=6 proto_state=11 duration=53 expire=265 timeout=300 flags=00000000
sockflag=00000000
origin-shaper=
reply-shaper=
per_ip_shaper=
ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
user=AALI state=redir log local may_dirty npu nlb none acct-ext
statistic (bytes/packets/allow_err): org=2651/17/1 reply=19130/28/1 tuples=3
tx speed (Bps/kbps): 75/0 rx speed (Bps/kbps): 542/4
origin->sink: org pre->post, reply pre->post dev=7->6/6->7 gwy=172.20.121.2/10.0.0.2
hook=post dir=org act=snat 192.167.1.100:49545->216.58.216.238:443(172.20.121.96:49545)
hook=pre dir=reply act=dnat 216.58.216.238:443->172.20.121.96:49545 (192.167.1.100:49545)
hook=post dir=reply act=noop 216.58.216.238:443->192.167.1.100:49545 (0.0.0.0:0)
pos/(before, after) 0/(0,0), 0/(0,0)
src_mac=08:5b:0e:6c:7b:7a
misc=0 policy_id=21 auth_info=0 chk_client_info=0 vd=0
serial=007f2948 tos=ff/ff app_list=0 app=0 url_cat=41
dd_type=0 dd_mode=0
npu_state=00000000
npu info: flag=0x00/0x00, offload=0/0, ips_offload=0/0, epid=0/0, ipid=0/0, vlan=0x0000/0x0000
vlifid=0/0, vtag_in=0x0000/0x0000 in_npu=0/0, out_npu=0/0, fwd_en=0/0, qid=0/0

```

Which one of the following statements is true regarding FortiGate's inspection of this session?

- A. FortiGate applied proxy-based inspection.
- B. FortiGate forwarded this session without any inspection.
- C. FortiGate applied flow-based inspection.
- D. FortiGate applied explicit proxy-based inspection.

Answer: A

Explanation:

<https://kb.fortinet.com/kb/viewContent.do?externalId=FD30042>

NEW QUESTION 148

View these partial outputs from two routing debug commands:

```

# get router info kernel
tab=254 vf=0 scope=0 type=1 proto=11 prio=0 0.0.0.0/0.0.0.0/0->0.0.0.0/0 pref=0.0.0.0 gwy=10.200.1.254
dev=2(port1)
tab=254 vf=0 scope=0 type=1 proto=11 prio=0 0.0.0.0/0.0.0.0/0->0.0.0.0/0 pref=0.0.0.0 gwy=10.200.2.254
dev=3(port2)
tab=254 vf=0 scope=253 type=1 proto=2 prio=0 0.0.0.0/0.0.0.0/0->10.0.1.0/24 pref=10.0.1.254 gwy=0.0.0.0
dev=4(port3)
# get router info routing-table all
S* 0.0.0.0/0 [10/0] via 10.200.1.254, port1
    [10/0] via 10.200.2.254, port2, [10/0]
C 10.0.1.0/24 is directly connected, port3
C 10.200.1.0/24 is directly connected, port1
C 10.200.2.0/24 is directly connected, port2

```

Which outbound interface will FortiGate use to route web traffic from internal users to the Internet?

- A. Both port1 and port2
- B. port3
- C. port1
- D. port2

Answer: C

NEW QUESTION 152

Refer to the exhibit, which shows the output of a debug command.

```

FGT # get router info ospf neighbor

OSPF process 0:
Neighbor ID      Pri   State           Dead Time   Address        Interface
0.0.0.69         1     Full/DR         00:00:32   10.126.0.69   wan1
0.0.0.117        1     Full/DROther    00:00:34   10.126.0.117  wan2
0.0.0.2          1     Full/-          00:00:38   172.16.1.2    ToRemote

```

What can be concluded from the debug command output?

- A. The OSPF router with the ID 0.0.0.69 has its OSPF priority set to 0.
- B. The local FortiGate has a different MTU value from the OSPF router with ID 0.0.0.2, based on the state information.
- C. There are more than two OSPF routers on the wan2 network.
- D. The interface ToRemote is a broadcast OSPF network.

Answer: C

Explanation:

Enterprise_Firewall_7.0_Study_Guide-Online.pdf p 296

NEW QUESTION 157

Refer to the exhibits, which show the configuration on FortiGate and partial internet session information from a user on the internal network.

```

Configuration Session
config system global
    set snat-route-change disable
end
config router static
    edit 1
        set gateway 10.200.1.254
        set priority 5
        set device "port1"
    next
    edit 2
        set gateway 10.200.2.254
        set priority 10
        set device "port2"
    next
end
    
```

```

Configuration Session
FGT # diagnose sys session list
session info: proto=6 proto_state=01 duration=600 expire=3179 timeout=3600 flags=00000000
sockflag=00000000 sockport=0 av_idx=0 use=4
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=log may_dirty npu f00
statistic(bytes/packets/allow_err): org=3208/25/1 reply=11144/29/1 tuples=2
tx speed(Bps/kbps): 0/0 rx speed(Bps/kbps): 0/0
orgin->sink: org pre->post, reply pre->post dev=4->2/2->4 gwy=10.200.1.254/10.0.1.10
hook=post dir=org act=snat 10.0.1.10:64907->54.239.158.170:80(10.200.1.1:64907)
hook=pre dir=reply act=dnat 54.239.158.170:80->10.200.1.1:64907(10.0.1.10:64907)
pos/(before,after) 0/(0,0), 0/(0,0)
src_mac=b4:f7:a1:e9:91:97
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=00317c5b tos=ff/ff app_list=0 app=0 url_cat=0
rpd_b_link_id = 00000000
dd_type=0 dd_mode=0
npu_state=0x000c00
npu info: flag=0x00/0x00, offload=0/0, ips_offload=0/0, epid=0/0, ipid=0/0, vlan=0x0000/0x0000
vlifid=0/0, vtag_in=0x0000/0x0000 in_npu=0/0, out_npu=0/0, fwd_en=0/0, qid=0/0
no_ofld_reason:
    
```

An administrator would like to test session failover between the two service provider connections. What changes must the administrator make to force this existing session to immediately start using the other interface? (Choose two.)

- A. Configure set snat-route-change enable.
- B. Change the priority of the port2 static route to 5.
- C. Change the priority of the port1 static route to 11.
- D. unset snat-route-change to return it to the default setting.

Answer: AC

Explanation:

Enterprise_Firewall_7.0_Study_Guide-Online.pdf p 148-149

NEW QUESTION 160

In which two ways does FortiManager function when it is deployed as a local FDS? (Choose two.)

- A. It provides VM license validation services.
- B. It supports rating requests from non-FortiGate devices.
- C. It caches available firmware updates for unmanaged devices.
- D. It can be configured as an update server, a rating server, or both.

Answer: AD

NEW QUESTION 161

Refer to the exhibit, which contains partial outputs from two routing debug commands.

```
FortiGate # get router into routing-table database

S   0.0.0.0/0 [20/0] via 100.64.2.254, port2, [10/0]
S  *>0.0.0.0/0 [10/0] via 100.64.1.254, port1

FortiGate # get router info routing-table all

S*  0.0.0.0/0 [10/0] via 100.64.1.254, port1
```

Why is the port2 default route not in the second command's output?

- A. It has a higher priority value than the default route using port1.
- B. It is disabled in the FortiGate configuration.
- C. It has a lower priority value than the default route using port1.
- D. It has a higher distance than the default route using port1.

Answer: D

NEW QUESTION 165

An administrator is running the following sniffer in a FortiGate: diagnose sniffer packet any "host 10.0.2.10" 2
 What information is included in the output of the sniffer? (Choose two.)

- A. Ethernet headers.
- B. IP payload.
- C. IP headers.
- D. Port names.

Answer: BC

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=11186>

NEW QUESTION 167

Which two statements about application-layer test commands are true? (Choose two.)

- A. Some of them display real-time application debugs.
- B. Some of them can be used to restart an application.
- C. Some of them display statistics and configuration information about a feature or process.
- D. Some of them only display output, after you run the diagnose debug console enable command.

Answer: BC

NEW QUESTION 170

What is the purpose of an internal segmentation firewall (ISFW)?

- A. It inspects incoming traffic to protect services in the corporate DMZ.
- B. It is the first line of defense at the network perimeter.
- C. It splits the network into multiple security segments to minimize the impact of breaches.
- D. It is an all-in-one security appliance that is placed at remote sites to extend the enterprise network.

Answer: C

Explanation:

ISFW splits your network into multiple security segments. They serve as a breach containers from attacks that come from inside.

NEW QUESTION 173

View the exhibit, which contains a partial output of an IKE real-time debug, and then answer the question below.

```
ike 0:H2S_0_1: shortcut 10.200.5.1:0 10.1.2.254->10.1.1.254
...
ike 0:H2S_0_1:15: sent IKE msg (SHORTCUT-OFFER): 10.200.1.1:500->10.200.5.1:500,
len=164, id=4134df8580d5cdd/ce54851612c7432f:a21f14fe
ike 0: comes 10.200.5.1:500->10.200.1.1:500,ifindex=3....
ike 0: IKEv1 exchange=Informational id=4134df8580d5bcdd/ce54851612c7432f:6266ee8c
len=196

ike 0:H2S_0_1:15: notify msg received: SHORTCUR-QUERY
ike 0:H2S_0_1: rcv shortcut-query 16462343159772385317

ike 0:H2S_0_0:16: senr IKE msg (SHORTCUT-QUERY): 10.200.1.1:500->10.200.3.1:500,
len=196, id=7c6b6cca6700a935/dba061eaf51b89f7:b326df2a
ike 0: comes 10.200.3.1:500->10.200.1.1:500,ifindex=3....
ike 0: IKEv1 exchange=Informational id=7c6b6cca6700a935/dba061eaf51b89f7:1c1dbf39
len=188

ike 0:H2S_0_0:16: notify msg received: SHORTCUT-REPLY
ike 0:H2S_0_0: rcv shortcut-reply 16462343159772385317
f97a7565a441e2aa/667d3e2e3442211e 10.200.3.1 to 10.1.2.254 psk 64
ike 0:H2S_0_0: shortcut-reply route to 10.1.2.254 via H2S_0_1 29
ike 0:H2S: forward shortcut-reply 16462343159772385317
f97a7565a441e2aa/667d3e2e3442211e 10.200.3.1 to 10.1.2.254 psk 64 ttl 31
ike 0:H2S_0_1:15: enc

...
ike 0:H2S_0_1:15: sent IKE msg (SHORTCUT-REPLY): 10.200.1.1:500->10.200.5.1:500,
len=188, id=4134df8580d5bcdd/ce54851612c7432f:70ed6d2c
```

Based on the debug output, which phase-1 setting is enabled in the configuration of this VPN?

- A. auto-discovery-sender
- B. auto-discovery-forwarder
- C. auto-discovery-shortcut
- D. auto-discovery-receiver

Answer: B

NEW QUESTION 174

Which statement about NGFW policy-based application filtering is true?

- A. After the application has been identified, the kernel uses only the Layer 4 header to match the traffic.
- B. The IPS security profile is the only security option you can apply to the security policy with the action set to ACCEPT.
- C. After IPS identifies the application, it adds an entry to a dynamic ISDB table.
- D. FortiGate will drop all packets until the application can be identified.

Answer: D

NEW QUESTION 179

A FortiGate device has the following LDAP configuration:

```
config user ldap
  edit "WindowsLDAP"
    set server "10.0.1.10"
    set cnid "cn"
    set dn "cn=user, dc=trainingAD, dc=training, dc=lab"
    set type regular
    set username "cn=administrator, cn=users, dc=trainingAD,
dc=training, dc=lab"
    set password xxxxx
  next
end
```

The LDAP user student cannot authenticate. The exhibit shows the output of the authentication real time debug while testing the student account:

```
#diagnose debug application fnbamd -1
#diagnose debug enable
#diagnose test authserver ldap WindowsLDAP student password
fnbamd_fsm.c[1819] handle_req-Rcvd auth req 4 for student in WindowsLDAP
opt=27 prot=0
fnbamd_fsm.c[336] _compose_group_list_from_req_Group 'WindowsLDAP'
fnbamd_pop3.c[573] fnbamd_pop3_start-student
fnbamd_cfg.c[932] fnbamd_cfg-get_ldap_list_by_server-Loading LDAP server
'WindowsLDAP'
fnbamd_ldap.c[992] resolve_ldap_FQDN-Resolved address 10.0.1.10, result 10.0.1.10
fnbamd_fsm.c[428] create_auth_session-Total 1 server (s) to try
fnbamd_ldap.c[1700] fnbamd_ldap_get_result-Error in ldap result: 49
(Invalid credentials)
fnbamd_ldap.c[2028] fnbamd_ldap_get_result-Auth denied
fnbamd_auth.c[2188] fnbamd_auth_poll_ldap-Result for ldap svr 10.0.1.10 is denied
fnbamd_comm.c[169] fnbamd_comm_send_result-Sending result 1 for req 4
fnbamd_fsm.c[568] destroy_auth_session-delete session 4
authenticate 'student' against 'WindowsLDAP' failed!
```

Based on the above output, what FortiGate LDAP settings must the administrator check? (Choose two.)

- A. cnid.
- B. username.
- C. password.
- D. dn.

Answer: BC

Explanation:

<https://kb.fortinet.com/kb/viewContent.do?externalId=13141>

NEW QUESTION 184

An administrator has enabled HA session synchronization in a HA cluster with two members. Which flag is added to a primary unit's session to indicate that it has been synchronized to the secondary unit?

- A. redir.
- B. dirty.
- C. synced
- D. nds.

Answer: C

Explanation:

The synced sessions have the 'synced' flag. The command 'diag sys session list' can be used to see the sessions on the member, with the associated flags.

NEW QUESTION 187

View the exhibit, which contains the output of diagnose sys session list, and then answer the question below.

```
# diagnose sys session list
session info: proto=6 proto_state=01 duration=73 expire=3597 timeout=3600
flags=00000000 sockflag=00000000 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
ha_id=0 policy_dir=0 tunnel=/
state=may_dirty synced none app_ntf
statistic (bytes/packets/allow_err): org=822/11/1 reply=9037/15/1 tuples=2
origin->sink: org pre->post, reply pre->post dev=4->2/2->4 gw=10.200.1.254/10.0.1.10
hook=post dir=org act=snst 10.0.1.10:65464->54.192.15.182:80 (10.200.1.1:65464)
hook-pre dir=reply act=dnat 54.192.15.182:80->10.200.1.1:65464 (10.0.1.10:65464)
pos/ (before, after) 0/(0/0), 0/(0,0)
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=00000098 tos=ff/ff ips_view=0 app_list=0 app=0
dd_type=0 dd_mode=0
```

If the HA ID for the primary unit is zero (0), which statement is correct regarding the output?

- A. This session is for HA heartbeat traffic.
- B. This session is synced with the slave unit.
- C. The inspection of this session has been offloaded to the slave unit.
- D. This session cannot be synced with the slave unit.

Answer: B

NEW QUESTION 190

An administrator has configured a dial-up IPsec VPN with one phase 2, extended authentication (XAuth) and IKE mode configuration. The administrator has also enabled the IKE real time debug:

```
diagnose debug application ike-1 diagnose debug enable
```

In which order is each step and phase displayed in the debug output each time a new dial-up user is connecting to the VPN?

- A. Phase1; IKE mode configuration; XAuth; phase 2.
- B. Phase1; XAuth; IKE mode configuration; phase2.
- C. Phase1; XAuth; phase 2; IKE mode configuration.
- D. Phase1; IKE mode configuration; phase 2; XAuth.

Answer: B

Explanation:

https://help.fortinet.com/fos50hlp/54/Content/FortiOS/fortigate-ipsecvpn-54/IPsec_VPN_Concepts/IKE_Packet

NEW QUESTION 191

Refer to the exhibit, which contains the output of a debug command.

```
# diagnose hardware sysinfo conserve
memory conserve mode:          on
total RAM:                     3040 MB
memory used:                   2706 MB 89% of total RAM
Memory freeable:              334 MB 11% of total RAM
memory used + freeable threshold extreme: 2887 MB 95% of total RAM
memory used threshold red:     2675 MB 88% of total RAM
memory used threshold green:   2492 MB 82% of total RAM
```

If the default settings are in place, what can be concluded about the conserve mode shown in the exhibit?

- A. FortiGate is currently blocking all new sessions regardless of the content inspection requirements or configuration settings due to high memory use.
- B. FortiGate is currently allowing new sessions that require flow-based or proxy-based content inspection but is not performing inspection on those sessions.
- C. FortiGate is currently blocking new sessions that require flow-based or proxy-based content inspection.
- D. FortiGate is currently allowing new sessions that require flow-based content inspection and blocking sessions that require proxy-based content inspection.

Answer: C

NEW QUESTION 195

View the exhibit, which contains the output of get sys ha status, and then answer the question below.

```

NGFW # get sys ha status
HA Health Status: ok
Model: FortiGate0VM64
Mode: HA A-P
Group: 0
Debug: 0
Cluster Uptime: 0 days 01:07:35
Master selected using:
<2017/04/24 09:43:44> FGVM010000077649 is selected as the master because it has the largest value of override pr
<2017/04/24 08:50:53> FGVM010000077 is selected as the master because it's the only member in the cluster.
ses_pickup: disable
override: enable
Configuration Status:
FGVM010000077649(updated 1 seconds ago): in-sync
FGVM010000077650(updated 0 seconds ago): out-of-sync
System Usage stats:
FGVM010000077649(updated 1 seconds ago):
sessions=30, average-cpu-user/nice/system/idle=0%/0%/0%/100%, memory-60%
FGVM010000077650(updated 0 seconds ago):
sessions=2, average-cpu-user/nice/system/idle=0%/0%/0%/100%, memory-61%
HBDEV stats:
FGVM010000077649(updated 1 seconds ago):
port7: physical/10000full, up, rx-bytes/packets/dropped/errors=7358367/17029/25/0, tx=7721830/17182/0/0
FGVM010000077650(updated 0 seconds ago):
port7: physical/10000full, up, rx-bytes/packets/dropped/errors=7793722/17190/0/0, tx=8940374/20806/0/0
Master: NGFW      , FGVM010000077649
Slave : NGFW-2    , FGVM010000077650
number of vcluster: 1
vcluster 1: work 169.254.0.2
Master:0 FGVM0100000077649
Slave :1 FGVM0100000077650
    
```

Which statements are correct regarding the output? (Choose two.)

- A. The slave configuration is not synchronized with the master.
- B. The HA management IP is 169.254.0.2.
- C. Master is selected because it is the only device in the cluster.
- D. port 7 is used the HA heartbeat on all devices in the cluster.

Answer: AD

NEW QUESTION 197

Refer to the exhibit, which shows the output of get system ha status. NGFW-1 and NGFW-2 have been up for a week.

```

NGFW-1 # get sys ha status
HA Health Status: OK
Model: FortiGate-VM64
Mode: HA A-P
Group: 0
Debug: 0
Cluster Uptime: 0 days 0:1:25
Cluster state change time: 2021-10-18 12:07:47
Primary selected using:
<2021/10/18 12:07:47> FGVM010000077649 is selected as the primary because its override priority is larger than peer member
FGVM010000077650.
ses_pickup: disable
override: disable
Configuration Status:
FGVM010000077649(updated 4 seconds ago): in-sync
FGVM010000077650(updated 1 seconds ago): out-of-sync
System Usage stats:
FGVM010000077649(updated 4 seconds ago):
sessions=166, average-cpu-user/nice/system/idle=1%/0%/0%/99%, memory=45%
FGVM010000077650(updated 1 seconds ago):
sessions=3, average-cpu-user/nice/system/idle=0%/0%/0%/100%, memory=44%
HBDEV stats:
FGVM010000077649(updated 4 seconds ago):
port7: physical/1000auto, up, rx-bytes/packets/dropped/errors=167663/567/0/0, tx=262623/656/0/0
FGVM010000077650(updated 1 seconds ago):
port7: physical/1000auto, up, rx-bytes/packets/dropped/errors=271373/680/0/0, tx=176013/592/0/0
Primary   : NGFW-1      , FGVM010000077649, HA cluster index = 1
Secondary : NGFW-2      , FGVM010000077650, HA cluster index = 0
number of vcluster: 1
vcluster 1: work 169.254.0.2
Primary: FGVM010000077649, HA operating index = 0
Secondary: FGVM010000077650, HA operating index = 1
    
```

Which two statements about the output are true? (Choose two.)

- A. If FGVM...649 is rebooted, FGVM...650 will become the primary and retain that role, even after FGVM...649 rejoins the cluster.
- B. If no action is taken, the primary FortiGate will leave the cluster due to the current sync status.
- C. If port7 becomes disconnected on the secondary, both FortiGate devices will elect itself the primary.
- D. If a configuration change is made to the primary FortiGate at this time, the secondary will initiate a synchronization reset.

Answer: AC

Explanation:

* A. If FGVM...649 is rebooted, FGVM...650 will become the primary that is normal since it will be the only active firewall and retain that role since override is disabled. Even after FGVM...649 rejoins the cluster, 650 will not fail over as slave. C. If port7 (heartbeat port) becomes disconnected on the secondary, both

FortiGate devices will elect itself the primary because when heartbeat communication fails, all cluster members think they are the primary unit (condition referred to as Split Brain) <https://docs.fortinet.com/document/fortigate/6.4.0/best-practices/493254/heartbeat-interfaces>

NEW QUESTION 199

Examine the following partial output from two system debug commands; then answer the question below.

```
# diagnose hardware sysinfo memory
MemTotal: 3092728 kB
MemFree: 1954204 kB
MemShared: 0 kB
Buffers: 284 kB
Cached: 143004 kB
SwapCached: 0 kB
Active: 34092 kB
Inactive: 109256 kB
HighTotal 1179648 kB
HighFree: 853516 kB
LowTotal: 1913080 kB
LowFree: 1100688 kB
SwapTotal: 0 kB
SwapFree: 0 kB
# diagnose hardware sysinfo shm
SHM counter: 285
SHM allocated: 6823936
SHM total: 623452160
concermode: 0
shm last entered: n/a
system last entered: n/a
SHM FS total: 639725568
SHM FS free: 632614912
```

SHM FS alloc: 7110656

Which of the following statements are true regarding the above outputs? (Choose two.)

- A. The unit is running a 32-bit FortiOS
- B. The unit is in kernel conserve mode
- C. The Cached value is always the Active value plus the Inactive value
- D. Kernel indirectly accesses the low memory (LowTotal) through memory paging

Answer: AC

NEW QUESTION 204

View the exhibit, which contains the output of a real-time debug. Which statement about this output is true?

```
FGT # diagnose debug application urlfilter -1
FGT # diagnose debug enable

msg="received a request /tmp/.wad512_0_0.url.socket, addr_len=30:
d=training.fortinet.com:443, id=687, cat=255, vfname='root', vfid=0,
profile='default', type=0, client=10.1.10.1, url_source=1, url="/"
action=9(ftgd-allow) wf-act=5(ALLOW) user="N/A" src=10.1.10.1 sport=58334
dst=13.226.142.41 dport=443 service="https" cat=52 url_cat=52 ip_cat=0
hostname="training.fortinet.com" url="/"
```

Which of the following statements is true regarding this output?

- A. The requested URL belongs to category ID 255.
- B. The server hostname is training.fortinet.com.
- C. FortiGate found the requested URL in its local cache.
- D. This web request was inspected using the ftgd-allow web filter profile.

Answer: C

Explanation:

Example log for no local cache case: #id=93000 msg="pid=57 urlfilter_main-723 in main.c received pkt:count=91 "IPS and WAD will only send request to urlfilter daemon when cache is missed." So the WAD process by itself found the URL rating in the local cache and didn't ask for help from the URL process as in the example.

NEW QUESTION 206

Refer to the exhibits, which show the configuration on FortiGate and partial session information for internet traffic from a user on the internal network.

```
config system global
  set snat-route-change disable
end
```

```
config router static
  edit 1
    set gateway 10.200.1.254
    set priority 5
    set device "port1"
  next
  edit 2
    set gateway 10.200.2.254
    set priority 10
    set device "port2"
  next
end
```

```
FGT # diagnose sys session list
session info: proto=6 proto_state=01 duration=600 expire=3179 timeout=3600 flags=00000000
sockflag=00000000 sockport=0 av_idx=0 use=4
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=log may_dirty npu f00
statistic (bytes/packets/allow_err): org=3208/25/1 reply=11144/29/1 tuples=2
tx speed (Bps/kbps): 0/0 rx speed (Bps/kbps): 0/0
origin->sink: org pre->post, reply pre->post dev=4->2/2->4 gwy=10.200.1.254/10.0.1.10
hook=post dir=org act=snat 10.0.1.10:64907 -> 54.239.158.170.80(10.200.1.1:64907)
hook=pre dir=reply act=dnat 54.239.158.170:80->10.200.1.1:64907(10.0.1.10:64907)
pos/ (before, after) 0/(0,0), 0/(0,0)
src_mac=b4:f7a1:e9:91:97
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=00317c5b tos=ff/ff app_list=0 app=0 url_cat=0
rpd_b_link_id = 00000000
dd_type=0 dd_mode=0
npu_state=0x000c00
npu info: flag=0x00/0x00, offload=0/0, ips_offload=0/0, epid=0/0, ipid=0/0, vlan=0x0000/0x0000
vlfid=0/0, vtag_in=0x0000/0x0000 in_npu=0/0, out_npu=0/0, fwd_en=0/0, qid=0/0
no_ofld_reason:
```

If the priority on route ID 2 were changed from 10 to 0, what would happen to traffic matching that user session?

- A. The session would remain in the session table, but its traffic would now egress from both port1 and port2.
- B. The session would remain in the session table, and its traffic would egress from port2.
- C. The session would be deleted, and the client would need to start a new session.
- D. The session would remain in the session table, and its traffic would egress from port1.

Answer: D

Explanation:

<https://community.fortinet.com/t5/FortiGate/Technical-Tip-Using-SNAT-route-change-to-update-existing-NAT/>

NEW QUESTION 209

Which two tasks are automated using the Import Configuration wizard on FortiManager? (Choose two.)

- A. Importing firewall address objects from managed devices
- B. Importing interface mappings from managed devices
- C. Importing static and dynamic route configurations from managed devices
- D. Importing devices to FortiManager

Answer: AB

Explanation:

<https://docs.fortinet.com/document/fortimanager/7.0.5/administration-guide/337348>

NEW QUESTION 210

Which of the following statements are correct regarding application layer test commands? (Choose two.)

- A. They are used to filter real-time debugs.
- B. They display real-time application debugs.
- C. Some of them display statistics and configuration information about a feature or process.
- D. Some of them can be used to restart an application.

Answer: CD

Explanation:

Application layer test commands don't display info in real time, but they do show statistics and configuration info about a feature or process. You can also use some of these commands to restart a process or execute a change in its operation.

NEW QUESTION 214

What does the dirty flag mean in a FortiGate session?

- A. Traffic has been blocked by the antivirus inspection.
- B. The next packet must be re-evaluated against the firewall policies.
- C. The session must be removed from the former primary unit after an HA failover.
- D. Traffic has been identified as from an application that is not allowed.

Answer: B

Explanation:

<https://kb.fortinet.com/kb/viewContent.do?externalId=FD40119&sliceId=1>

NEW QUESTION 216

Examine the output of the 'diagnose sys session list expectation' command shown in the exhibit; then answer the question below.

```
#diagnose sys session list expectation

session info: proto= proto_state=0 0 duration=3 expire=26 timeout=3600
flags=00000000
sockflag=.00000000.sockport=0.av_idx=0.use=3
origin-shaper=
reply-shaper=
per-ip-shaper=
ha_id=0.policy_dir=1.tunnel=/
state=new complex
statistic (bytes/packets/allow_err): org=0/0/0 reply=0/0/0 tuples=2
orgin-> sink: org pre-> post, reply pre->post dev=2->4/4->2
gwy=10.0.1.10/10.200.1.254
hook=pre dir=org act=dnat 10.171.121.38:0-> 10.200.1.1: 60426
(10.0.1.10: 50365)
hook= pre dir=org act=noop 0.0.0.0.:0-> 0.0.0.0:0 (0.0.0.0:0)
pos/(before, after) 0/(0,0), 0/(0,0)
misc=0.policy_id=1.auth_info=0.chk_client_info=0.vd=0
serial1=000000e9.tos=ff/ff.ips_view=0 app_list=0.app=0
dd type=0.dd_mode=0
```

Which statement is true regarding the session in the exhibit?

- A. It was created by the FortiGate kernel to allow push updates from FortiGuard.
- B. It is for management traffic terminating at the FortiGate.
- C. It is for traffic originated from the FortiGate.
- D. It was created by a session helper or ALG.

Answer: D

NEW QUESTION 219

Which of the following statements is true regarding a FortiGate configured as an explicit web proxy?

- A. FortiGate limits the number of simultaneous sessions per explicit web proxy use
- B. This limit CANNOT be modified by the administrator.
- C. FortiGate limits the total number of simultaneous explicit web proxy users.
- D. FortiGate limits the number of simultaneous sessions per explicit web proxy user The limit CAN be modified by the administrator
- E. FortiGate limits the number of workstations that authenticate using the same web proxy user credentials.This limit CANNOT be modified by the administrator.

Answer: B

Explanation:

https://help.fortinet.com/fos50hlp/52data/Content/FortiOS/fortigate-WAN-opt-52/web_proxy.htm#Explicit2

The explicit proxy does not limit the number of active sessions for each user. As a result the actual explicit proxy session count is usually much higher than the number of explicit web proxy users. If an excessive number of explicit web proxy sessions is compromising system performance you can limit the amount of users if the FortiGate unit is operating with multiple VDOMs.

NEW QUESTION 220

View the exhibit, which contains the output of a diagnose command, and the answer the question below.

```
# diagnose debug rating
Locale      : English
License     : Contract
Expiration  : Thu Sep 28 17:00:00 20XX
--- Server List (Thu APR 19 10:41:32 20XX) ---
IP          Weight  RTT   Flags  TZ   Packets  Curr Lost  Total Lost
64.26.151.37  10     45    -5     -5   262432  0          846
64.26.151.35  10     46    -5     -5   329072  0          6806
66.117.56.37  10     75    -5     -5   71638   0          275
66.210.95.240 20     71    -8     -8   36875   0          92
209.222.147.36 20     103   DI     -8   34784   0          1070
208.91.112.194 20     107   D      -8   35170   0          1533
96.45.33.65   60     144   0      0    33728   0          120
80.85.69.41   71     226   1      1    33797   0          192
62.209.40.74  150    97    9      9    33754   0          145
121.111.236.179 45     44    F      -5   26410   26226     26227
```

Which statements are true regarding the Weight value?

- A. Its initial value is calculated based on the round trip delay (RTT).
- B. Its initial value is statically set to 10.
- C. Its value is incremented with each packet lost.
- D. It determines which FortiGuard server is used for license validation.

Answer: C

NEW QUESTION 224

.....

Relate Links

100% Pass Your NSE7_EFW-7.0 Exam with Exambible Prep Materials

https://www.exambible.com/NSE7_EFW-7.0-exam/

Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>