

Exam Questions 200-301

Cisco Certified Network Associate

<https://www.2passeasy.com/dumps/200-301/>



NEW QUESTION 1

- (Topic 3)

Refer to the exhibit.

Switch#show ip dhcp snooping	Switch#show ip dhcp snooping statistics detail
Switch DHCP snooping is enabled	Packets Processed by DHCP Snooping = 34
Switch DHCP gleaning is disabled	Packets Dropped Because
DHCP snooping is configured on following VLANs:	IDB not known = 0
1	Queue full = 0
DHCP snooping is operational on following VLANs:	Interface is in errdisabled = 0
1	Rate limit exceeded = 0
DHCP snooping is configured on the following L3 Interfaces:	Received on untrusted ports = 32
Insertion of option 82 is disabled	Nonzero giaddr = 0
circuit-id default format: vlan-mod-port	Source mac not equal to chaddr = 0
remote-id: aabb.cc00.6500 (MAC)	No binding entry = 0
Option 82 on untrusted port is not allowed	Insertion of opt82 fail = 0
Verification of hwaddr field is enabled	Unknown packet = 0
Verification of giaddr field is enabled	Interface Down = 0
DHCP snooping trust/rate is configured on the following Interfaces:	Unknown output interface = 0
Interface Trusted Allow option Rate limit (pps)	Misdirected Packets = 0
	Packets with Invalid Size = 0
	Packets with Invalid Option = 0

The DHCP server and clients are connected to the same switch. What is the next step to complete the DHCP configuration to allow clients on VLAN 1 to receive addresses from the DHCP server?

- A. Configure the ip dhcp snooping trust command on the interlace that is connected to the DHCP client.
- B. Configure the ip dhcp relay information option command on the interface that is connected to the DHCP client.
- C. Configure the ip dhcp snooping trust command on the interface that is connected to the DHCP server.
- D. Configure the Ip dhcp relay information option command on the interface that is connected to the DHCP server.

Answer: C

NEW QUESTION 2

DRAG DROP - (Topic 3)

Drag and drop the Rapid PVST+ forwarding slate actions from the left to the right. Not all actions are used.

BPDUs received are forwarded to the system module.	action
BPDUs received from the system module are processed and transmitted.	action
Frames received from the attached segment are discarded.	action
Frames received from the attached segment are processed.	action
Switched frames received from other ports are advanced.	
The port in the forwarding state responds to network management messages.	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

BPDUs received are forwarded to the system module.	BPDUs received are forwarded to the system module.
BPDUs received from the system module are processed and transmitted.	BPDUs received from the system module are processed and transmitted.
Frames received from the attached segment are discarded.	Frames received from the attached segment are discarded.
Frames received from the attached segment are processed.	
Switched frames received from other ports are advanced.	
The port in the forwarding state responds to network management messages.	The port in the forwarding state responds to network management messages.

NEW QUESTION 3

- (Topic 3)

Refer to the exhibit.

```

R1# show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, * - candidate
default
       U - per-user static route, o - ODR
Gateway of last resort is not set
C 192.168.3.5 is directly connected, Loopback0
  10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
O   10.0.1.3/32 [110/100] via 192.168.0.40, 00:39:08, Serial0
C   10.0.1.0/24 is directly connected, Serial0
O   10.0.1.190/32 [110/5] via 192.168.0.35, 00:39:08, Serial0
O   10.0.1.0/24 [110/10] via 192.168.0.4, 00:39:08, Gigabit Ethernet 0/0
D   10.0.1.0/28 [90/10] via 192.168.0.7, 00:39:08, Gigabit Ethernet 0/0
    
```

Traffic sourced from the loopback0 Interface is trying to connect via ssh to the host at 10.0.1.15. What Is the next hop to the destination address?

- A. 192.168.0.7
- B. 192.168.0.4
- C. 192.168.0.40
- D. 192.168.3.5

Answer: B

NEW QUESTION 4

- (Topic 3)

What are two benefits of FHRPs? (Choose two.)

- A. They enable automatic failover of the default gateway.
- B. They allow multiple devices to serve as a single virtual gateway for clients in the network.
- C. They are able to bundle multiple ports to increase bandwidth.
- D. They prevent loops in the Layer 2 network.
- E. They allow encrypted traffic.

Answer: AB

NEW QUESTION 5

- (Topic 3)

What causes a port to be placed in the err-disabled state?

- A. nothing plugged into the port
- B. link flapping
- C. shutdown command issued on the port
- D. latency

Answer: B

NEW QUESTION 6

- (Topic 3)

Which Layer 2 switch function encapsulates packets for different VLANs so that the packets traverse the same port and maintain traffic separation between the VLANs?


- A. VLAN numbering
- B. VLAN DSCP
- C. VLAN tagging
- D. VLAN marking

Answer: C

NEW QUESTION 7

- (Topic 3)

Refer to the exhibit.

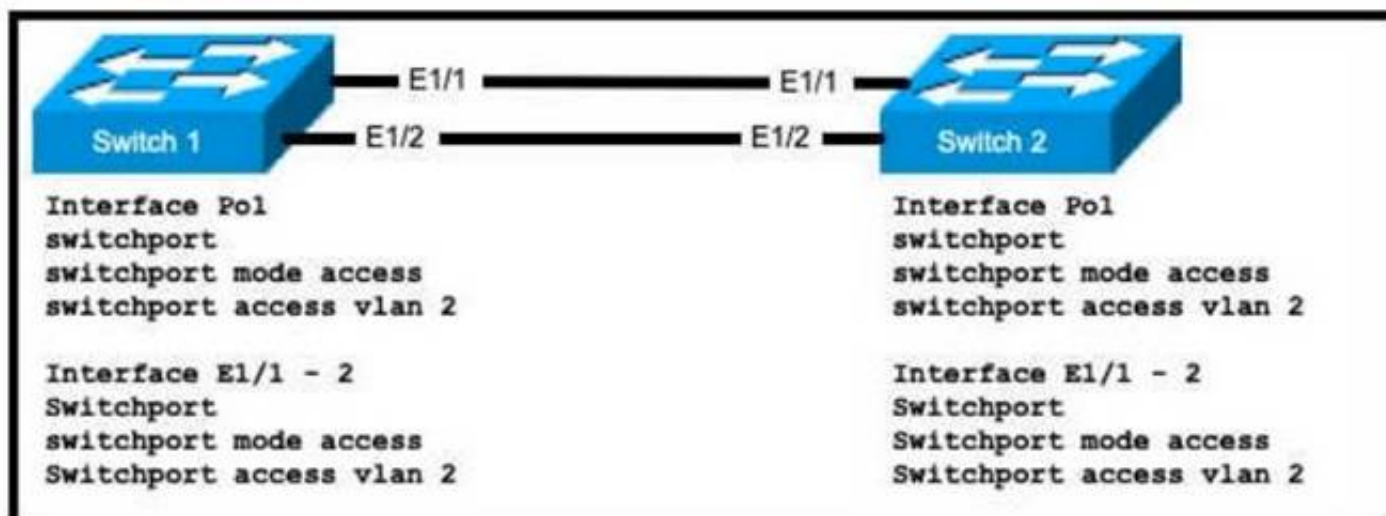

An engineer is configuring an EtherChannel using LACP between Switches 1 and 2 Which configuration must be applied so that only Switch 1 sends LACP initiation packets?

- A. Switch 1 (config-if)#channel-group 1 mode on Swrtch2(config-if)#channel-group 1 mode passive
- B. Switch1(config-if)#channel-group 1 mode passive Switch2(config-if)#channel-group 1 mode active
- C. Switch1{config-if}£channel-group 1 mode active Switch2(config-if)#channel-group 1 mode passive
- D. Switch1(config-if)#channel-group 1 mode on Switch2(config-if)#channel-group 1 mode active

Answer: C

NEW QUESTION 8

- (Topic 3)

Which type of network attack overwhelms the target server by sending multiple packets to a port until the half-open TCP resources of the target are exhausted?

- A. SYIM flood
- B. reflection
- C. teardrop
- D. amplification

Answer: A

NEW QUESTION 9

- (Topic 3)

Which protocol uses the SSL?

- A. HTTP
- B. SSH
- C. HTTPS
- D. Telnet

Answer: C

NEW QUESTION 10

- (Topic 3)

Which protocol is used for secure remote CLI access?

- A. HTTPS
- B. HTTP
- C. Telnet
- D. SSH

Answer: D

NEW QUESTION 10

- (Topic 3)

A network engineer must configure two new subnets using the address block 10 70 128 0/19 to meet these requirements:

- The first subnet must support 24 hosts
- The second subnet must support 472 hosts
- Both subnets must use the longest subnet mask possible from the address block Which two configurations must be used to configure the new subnets and meet a requirement to use the first available address in each subnet for the router interfaces? (Choose two)

- A. interface vlan 1234ip address 10.70.159.1 255.255.254.0
- B. interface vlan 1148ip address 10.70.148.1 255.255.254.0
- C. interface vlan 4722ip address 10.70.133.17 255.255.255.192
- D. interface vlan 3002ip address 10.70.147.17 255.255.255.224
- E. interface vlan 155ip address 10.70.155.65 255.255.255.224

Answer: BD

NEW QUESTION 14

- (Topic 3)

A network engineer is installing an IPv6-only capable device. The client has requested that the device IP address be reachable only from the internal network. Which type of IPv6 address must the engineer assign?


- A. unique local address
- B. link-local address
- C. aggregatable global address
- D. IPv4-compatible IPv6 address

Answer: B

NEW QUESTION 19

- (Topic 3)

Refer to the exhibit.



During outage

```
R1#show ip route 10.1.1.10
% Network not in table
```

Normal operation

```
R1#show ip route 10.1.1.10
Routing entry for 10.1.1.0/24
Known via "ospf 1", distance 110, metric 2, type intra area
  Last update from 172.16.2.2 on GigabitEthernet0/0, 00:00:18 ago
  Routing Descriptor Blocks:
    * 172.16.2.2, from 10.1.1.10, 00:00:18 ago, via GigabitEthernet0/0
      Route metric is 2, traffic share count is 1
```

Which route must be configured on R1 so that OSPF routing is used when OSPF is up. but the server is still reachable when OSPF goes down?

- A. ip route 10.1.1.10 255.255.255.255 172.16.2.2 100
- B. ip route 10.1.1.0 255.255.255.0 gi0/1 125
- C. ip route 10.1.1.0 255.255.255.0 172.16.2.2 100
- D. ip route 10.1.1.10 255.255.255.255 gi0/0 125

Answer: D

NEW QUESTION 22

- (Topic 3)

How does Rapid PVST+ create a fast loop-free network topology?

- A. It requires multiple links between core switches
- B. It generates one spanning-tree instance for each VLAN
- C. It maps multiple VLANs into the same spanning-tree instance
- D. It uses multiple active paths between end stations.

Answer: A

NEW QUESTION 24

DRAG DROP - (Topic 3)


Drag and drop the statements about networking from the left onto the corresponding networking types on the right.

Statements	Traditional Networking	Controller-Based Networking
This type allows better control over how networks work and how networks are configured.		
This type enables networks to integrate with applications through APIs.		
New devices are configured using the physical infrastructure.		
This type provisions resources from a centralized location.		
This type requires a distributed control plane.		

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

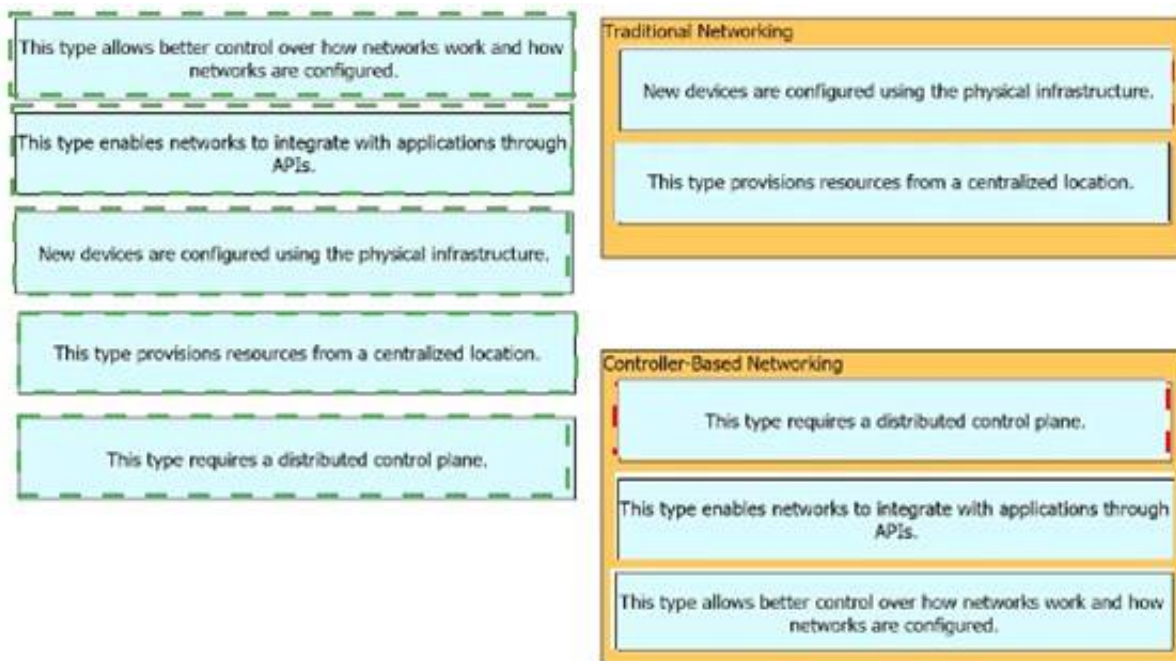

NEW QUESTION 25

- (Topic 3)

Which QoS per-hop behavior changes the value of the ToS field in the IPv4 packet header?

- A. shaping
- B. classification
- C. policing
- D. marking

Answer: D

NEW QUESTION 27

- (Topic 3)

Refer to the exhibit.

```
Hardware is ISR4331-3x1GE, address is 5486.bc25.1f70 (bia 5486.bc25.1f70)
Description: << WAN Link >>
Internet address is 192.0.2.2/30
MTU 1500 bytes, BW 1000000 Kbit/sec, DLY 10 usec,
    reliability 255/255, txload 1/255, rxload 1/255
Encapsulation ARPA, loopback not set
Keepalive not supported
Full Duplex, 1000Mbps, link type is auto, media type is RJ45
output flow-control is off, input flow-control is off
ARP type: ARPA, ARP Timeout 04:00:00
Last input 00:00:00, output 00:00:11, output hang never
Last clearing of "show interface" counters never
Input queue: 0/375/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: fifo
Output queue: 0/40 (size/max)
5 minute input rate 7000 bits/sec, 4 packets/sec
5 minute output rate 4000 bits/sec, 4 packets/sec
  22579370 packets input, 8825545968 bytes, 0 no buffer
    Received 67 broadcasts (0 IP multicasts)
      0 runs, 0 giants, 0 throttles
  3612699 input errors, 3612699 CRC, 0 frame, 0 overrun, 0 ignored
    0 watchdog, 10747057 multicast, 0 pause input
  12072167 packets output, 1697953637 bytes, 0 underruns
    0 output errors, 0 collisions, 1 interface resets
    6 unknown protocol drops
    0 babbles, 0 late collision, 0 deferred
    5 lost carrier, 0 no carrier, 0 pause output
    0 output buffer failures, 0 output buffers swapped out
```

What is a reason for poor performance on the network interface?


- A. The interface is receiving excessive broadcast traffic.
- B. The cable connection between the two devices is faulty.
- C. The interface is operating at a different speed than the connected device.
- D. The bandwidth setting of the interface is misconfigured

Answer: A

NEW QUESTION 28

- (Topic 3)

Refer to the exhibit.

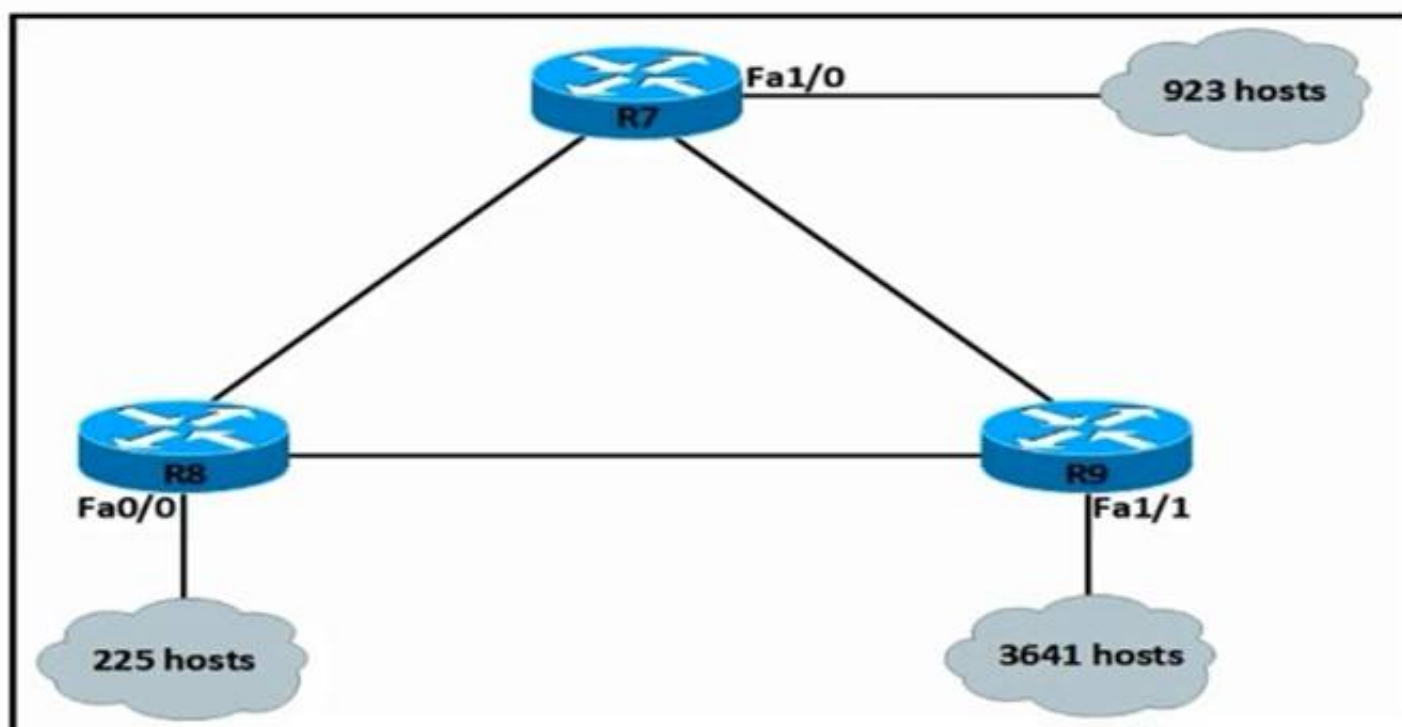

An IP subnet must be configured on each router that provides enough addresses for the number of assigned hosts and anticipates no more than 10% growth for now hosts. Which configuration script must be used?

A)

```

R7#
configure terminal
interface Fa1/0
ip address 10.1.56.1 255.255.252.0
no shutdown
  
```

```

R8#
configure terminal
interface Fa0/0
ip address 10.9.32.1 255.255.255.0
no shutdown
  
```

```

R9#
configure terminal
interface Fa1/1
ip address 10.23.96.1 255.255.240.0
no shutdown
  
```

B)

```

R7#
configure terminal
interface Fa1/0
ip address 10.1.56.1 255.255.248.0
no shutdown
  
```

```

R8#
configure terminal
interface Fa0/0
ip address 10.9.32.1 255.255.254.0
no shutdown
  
```

```

R9#
configure terminal
interface Fa1/1
ip address 10.23.96.1 255.255.248.0
no shutdown
  
```

C)

```
R7#
configure terminal
interface Fa1/0
ip address 10.1.56.1 255.255.240.0
no shutdown

R8#
configure terminal
interface Fa0/0
ip address 10.9.32.1 255.255.224.0
no shutdown

R9#
configure terminal
interface Fa1/1
ip address 10.23.96.1 255.255.192.0
no shutdown
```

D)

```
R7#
configure terminal
interface Fa1/0
ip address 10.1.56.1 255.255.192.0
no shutdown

R8#
configure terminal
interface Fa0/0
ip address 10.9.32.1 255.255.224.0
no shutdown

R9#
configure terminal
interface Fa1/1
ip address 10.23.96.1 255.255.128.0
no shutdown
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 32

- (Topic 3)

A network engineer must implement an IPv6 configuration on the vlan 2000 interface to create a routable locally-unique unicast address that is blocked from being advertised to the internet. Which configuration must the engineer apply?


- A. interface vlan 2000ipv6 address ffc0:0000:aaaa::1234:2343/64
- B. interface vlan 2000ipv6 address fc00:0000:aaaa:a15d:1234:2343:8aca/64
- C. interface vlan 2000ipv6 address fe80:0000:aaaa::1234:2343/64
- D. interface vlan 2000ipv6 address fd00::1234:2343/64

Answer: B

NEW QUESTION 33

- (Topic 3)

Refer to the exhibit.

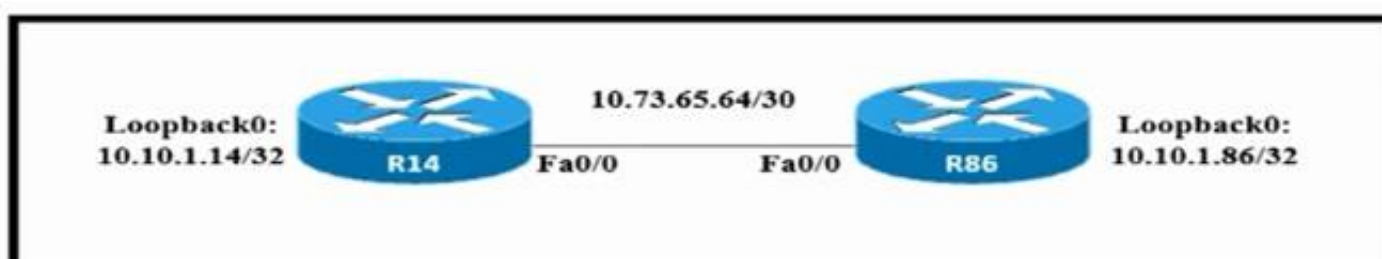

Which configuration allows routers R14 and R86 to form an OSPFv2 adjacency while acting as a central point for exchanging OSPF information between routers?

A)


```
R14#
interface Loopback0
ip ospf 10 area 0

interface FastEthernet0/0
ip address 10.73.65.65 255.255.255.252
ip ospf network broadcast
ip ospf 10 area 0
ip mtu 1500

router ospf 10
ip ospf priority 255
router-id 10.10.1.14
```

```
R86#
interface Loopback0
ip ospf 10 area 0

interface FastEthernet0/0
ip address 10.73.65.66 255.255.255.252
ip ospf network broadcast
ip ospf 10 area 0
ip mtu 1500
```

B)

```
R14#
interface FastEthernet0/0
ip address 10.73.65.65 255.255.255.252
ip ospf network broadcast
ip ospf priority 255
ip mtu 1500

router ospf 10
router-id 10.10.1.14
network 10.10.1.14 0.0.0.0 area 0
network 10.73.65.64 0.0.0.3 area 0
R86#
interface FastEthernet0/0
ip address 10.73.65.66 255.255.255.252
ip ospf network broadcast
ip mtu 1500

router ospf 10
router-id 10.10.1.86
network 10.10.1.86 0.0.0.0 area 0
network 10.73.65.64 0.0.0.3 area 0
```

C)

```
R14#
interface FastEthernet0/0
ip address 10.73.65.65 255.255.255.252
ip ospf network broadcast
ip ospf priority 0
ip mtu 1400

router ospf 10
router-id 10.10.1.14
network 10.10.1.14 0.0.0.0 area 0
network 10.73.65.64 0.0.0.3 area 0
R86#
interface Loopback0
ip address 10.10.1.86 255.255.255.255
```

D)

```
R14#
interface FastEthernet0/0
ip address 10.73.65.65 255.255.255.252
ip ospf network broadcast
ip ospf priority 255
ip mtu 1500

router ospf 10
router-id 10.10.1.14
network 10.10.1.14 0.0.0.0 area 0
network 10.73.65.64 0.0.0.3 area 0
R86#
interface FastEthernet0/0
ip address 10.73.65.66 255.255.255.252
ip ospf network broadcast
ip mtu 1400

router ospf 10
router-id 10.10.1.86
network 10.10.1.86 0.0.0.0 area 0
network 10.73.65.64 0.0.0.3 area 0
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 35

DRAG DROP - (Topic 3)

Drag and drop the facts about wireless architectures from the left onto the types of access point on the right. Not all options are used.

supports automatic deployment

managed from a web-based dashboard

accessible for management via Telnet, SSH, or a web GUI

configured and managed by a WLC

requires a management IP address

Autonomous Access Point

Cloud-Based Access Point

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

supports automatic deployment

managed from a web-based dashboard

accessible for management via Telnet, SSH, or a web GUI

configured and managed by a WLC

requires a management IP address

Autonomous Access Point

accessible for management via Telnet, SSH, or a web GUI

configured and managed by a WLC

Cloud-Based Access Point


requires a management IP address

supports automatic deployment

NEW QUESTION 40

- (Topic 3)

Refer to the exhibit.

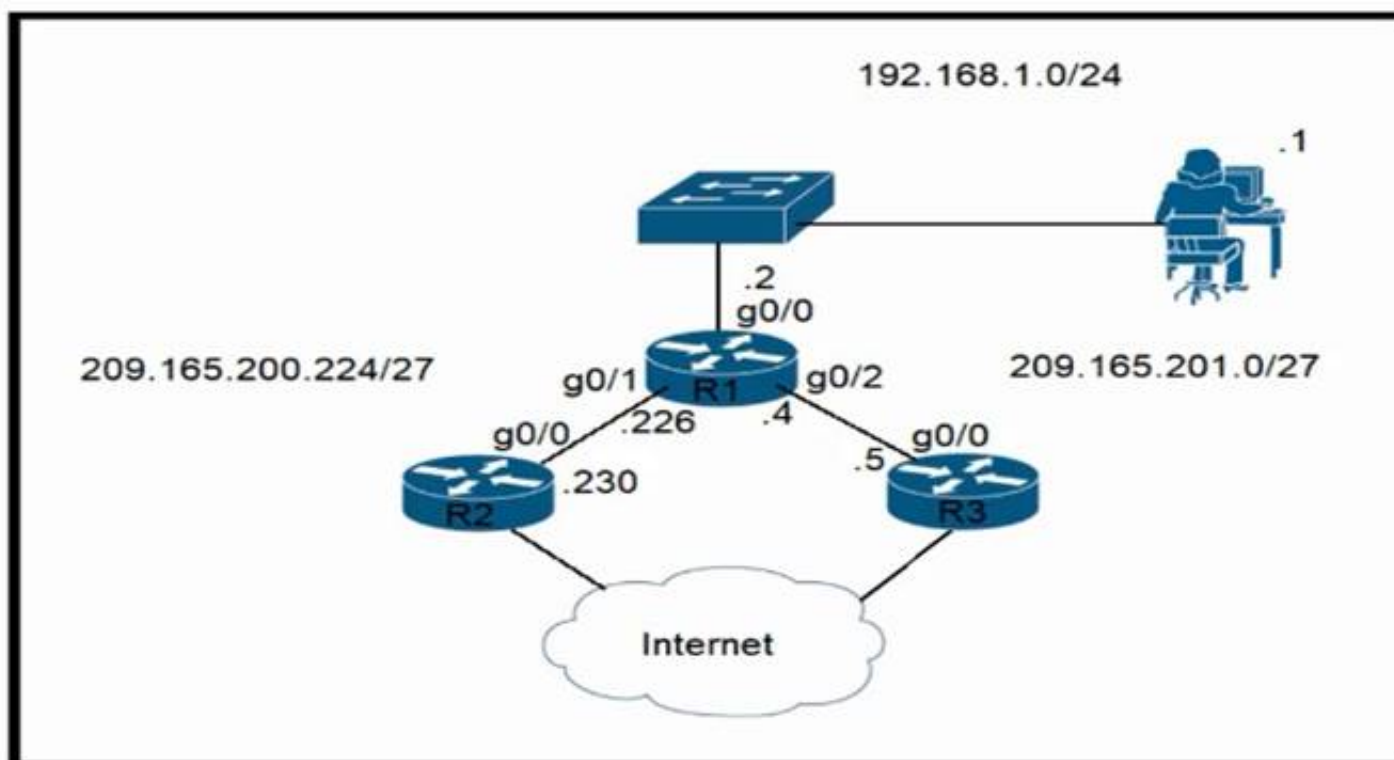

Router R1 currently is configured to use R3 as the primary route to the Internet, and the route uses the default administrative distance settings. A network engineer must configure R1 so that it uses R2 as a backup, but only if R3 goes down. Which command must the engineer configure on R1 so that it correctly uses R2 as a backup route, without changing the administrative distance configuration on the link to R3?

- A. ip route 0.0.0.0 0.0.0.0 g0/1 1
- B. ip route 0.0.0.0 0.0.0.0 209.165.201.5 10
- C. ip route 0.0.0.0 0.0.0.0 209.165.200.226 1
- D. ip route 0.0.0.0 0.0.0.0 g0/1 6

Answer: C

NEW QUESTION 42

- (Topic 3)

Refer to the exhibit.

```

service timestamps debug datetime msec
service timestamps log datetime msec
service password-encryption
!
hostname R4
!
boot-start-marker
boot-end-marker
!
ip cef
!
interface FastEthernet0/0
description WAN_INTERFACE
ip address 10.0.1.2 255.255.255.252
ip access-group 100 in
!
interface FastEthernet0/1
description LAN_INTERFACE
ip address 10.148.2.1 255.255.255.0
duplex auto
speed auto
!
ip forward-protocol nd
!
access-list 100 permit eigrp any any
access-list 100 permit icmp any any
access-list 100 permit tcp 10.149.3.0 0.0.0.255 host 10.0.1.2 eq 22
access-list 100 permit tcp any any eq 80
access-list 100 permit tcp any any eq 443
access-list 100 deny ip any any log

```

Which configuration enables DHCP addressing for hosts connected to interface FastEthernetO/1 on router R4?

- A. interface FastEthernet0/0 ip helper-address 10.0.1.1access-list 100 permit udp host 10.0.1.1 eq bootps host 10.148.2.1
- B. interface FastEthernet0/1 ip helper-address 10.0.1.1!access-list 100 permit tcp host 10.0.1.1 eq 67 host 10.148.2.1
- C. interface FastEthernetO/0 ip helper-address 10.0.1.1access-list 100 permit host 10.0.1.1 host 10.148.2.1 eq bootps

D. interface FastEthernet0/1 ip helper-address 10.0.1.1!access-list 100 permit udp host 10.0.1.1 eq bootps host 10.148.2.1

Answer: B

NEW QUESTION 43

- (Topic 2)

The service password-encryption command is entered on a router. What is the effect of this configuration?

- A. restricts unauthorized users from viewing clear-text passwords in the running configuration
- B. encrypts the password exchange when a VPN tunnel is established
- C. prevents network administrators from configuring clear-text passwords
- D. protects the VLAN database from unauthorized PC connections on the switch

Answer: A

NEW QUESTION 46

- (Topic 2)

What role does a hypervisor provide for each virtual machine in server virtualization?

- A. infrastructure-as-a-service.
- B. Software-as-a-service
- C. control and distribution of physical resources
- D. services as a hardware controller.

Answer: C

Explanation:

The hypervisor creates and manages virtual machines on a host computer and allocates physical system resources to them.

NEW QUESTION 51

- (Topic 2)

Which type of IPv6 address is publicly routable in the same way as IPv4 public address?

- A. global unicast
- B. link-local
- C. unique local
- D. multicast

Answer: A

NEW QUESTION 56

- (Topic 2)

While examining excessive traffic on the network, it is noted that all incoming packets on an interface appear to be allowed even though an IPv4 ACL is applied to the interface.

Which two misconfigurations cause this behavior? (Choose two)

- A. The packets fail to match any permit statement
- B. A matching permit statement is too high in the access test
- C. A matching permit statement is too broadly defined
- D. The ACL is empty
- E. A matching deny statement is too high in the access list

Answer: BC

NEW QUESTION 60

- (Topic 2)

What are two differences between optical-fiber cabling and copper cabling? (Choose two)

- A. Light is transmitted through the core of the fiber
- B. A BNC connector is used for fiber connections
- C. The glass core component is encased in a cladding
- D. Fiber connects to physical interfaces using RJ-45 connections
- E. The data can pass through the cladding

Answer: AC

NEW QUESTION 65

- (Topic 2)

Which protocol does an access point use to draw power from a connected switch?

- A. Internet Group Management Protocol
- B. Adaptive Wireless Path Protocol
- C. Cisco Discovery Protocol
- D. Neighbor Discovery Protocol

Answer: C

NEW QUESTION 70

- (Topic 2)

Using direct sequence spread spectrum, which three 2.4-GHz channels are used to limit collisions?

- A. 1,6,11
- B. 1,5,10
- C. 1,2,3
- D. 5,6,7

Answer: A

NEW QUESTION 73

- (Topic 2)

An engineer is configuring NAT to translate the source subnet of 10.10.0.0/24 to any of three addresses 192.168.30.1, 192.168.3.2, 192.168.3.3 Which configuration should be used?

☐ enable
configure terminal
ip nat pool mypool 192.168.3.1 192.168.3.3 prefix-length 30
route-map permit 10.10.0.0 255.255.255.0
ip nat outside destination list 1 pool mypool
interface g1/1
ip nat inside
interface g1/2
ip nat outside

☐ enable
configure terminal
ip nat pool mypool 192.168.3.1 192.168.3.3 prefix-length 30
access-list 1 permit 10.10.0.0 0.0.0.255
ip nat inside source list 1 pool mypool
interface g1/1
ip nat inside
interface g1/2
ip nat outside

☐ enable
configure terminal
ip nat pool mypool 192.168.3.1 192.168.3.3 prefix-length 30
access-list 1 permit 10.10.0.0 0.0.0.255
ip nat outside destination list 1 pool mypool
interface g1/1
ip nat inside
interface g1/2
ip nat outside

☐ enable
configure terminal
ip nat pool mypool 192.168.3.1 192.168.3.3 prefix-length 30
access-list 1 permit 10.10.0.0 0.0.0.254
ip nat inside source list 1 pool mypool
interface g1/1
ip nat inside
interface g1/2
ip nat outside

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 77

- (Topic 2)

What is the same for both copper and fiber interfaces when using SFP modules?

- A. They support an inline optical attenuator to enhance signal strength
- B. They provide minimal interruption to services by being hot-swappable
- C. They offer reliable bandwidth up to 100 Mbps in half duplex mode
- D. They accommodate single-mode and multi-mode in a single module

Answer: B

NEW QUESTION 79

DRAG DROP - (Topic 2)

Drag and drop the Cisco Wireless LAN Controller security settings from the left onto the correct security mechanism categories on the right.

web policy	Layer 2 Security Mechanisms
Passthrough	
WPA+WPA2	Layer 3 Security Mechanisms (for WLAN)
802.1X	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

web policy	Layer 2 Security Mechanisms
Passthrough	
WPA+WPA2	Layer 3 Security Mechanisms (for WLAN)
802.1X	

NEW QUESTION 82

- (Topic 2)

Which two QoS tools provides congestion management? (Choose two)

- A. CAR
- B. CBWFQ
- C. PQ
- D. PBR
- E. FRTS

Answer: BC

Explanation:

Type of queuing methods are available:• First-In-First-Out (FIFO)• Priority Queuing (PQ)• Custom Queuing (CQ)• Weighted Fair Queuing (WFQ)• Class-Based Weighted Fair Queuing (CBWFQ)• Low-Latency Queuing (LLQ)
<https://www.orbit-computer-solutions.com/qos-congestion-management-tools/>

NEW QUESTION 83

- (Topic 2)

What is a similarity between 1000BASE-LX and 1000BASE-T standards?

- A. Both use the same data-link header and trailer formats
- B. Both cable types support LP connectors
- C. Both cable types support Rj-45 connectors
- D. Both support up to 550 meters between nodes

Answer: A

Explanation:

"In computer networking, Gigabit Ethernet (GbE or 1 GigE) is the term applied to transmitting Ethernet frames at a rate of a gigabit per second." Both standards use Ethernet framing (same headers and trailers)

NEW QUESTION 88

- (Topic 2)

Which unified access point mode continues to serve wireless clients after losing connectivity to the Cisco Wireless LAN Controller?

- A. sniffer
- B. mesh
- C. flexconnect
- D. local

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/wireless/controller/8-5/config-guide/b_cg85/flexconnect.html

NEW QUESTION 92

DRAG DROP - (Topic 2)

Drag the descriptions of device management from the left onto the types of device management on the right.

implements changes via an SSH terminal

manages device configurations on a per-device basis

monitors the cloud for software updates

security is managed near the perimeter of the network with firewalls, VPNs, and IPS

uses CLI templates to apply a consistent configuration to multiple devices at an individual location

uses NetFlow to analyze potential security threats throughout the network and take appropriate action on that traffic

Cisco DNA Center Device Management

Traditional Device Management

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

implements changes via an SSH terminal

manages device configurations on a per-device basis

monitors the cloud for software updates

security is managed near the perimeter of the network with firewalls, VPNs, and IPS

uses CLI templates to apply a consistent configuration to multiple devices at an individual location

uses NetFlow to analyze potential security threats throughout the network and take appropriate action on that traffic

Cisco DNA Center Device Management

monitors the cloud for software updates

uses CLI templates to apply a consistent configuration to multiple devices at an individual location

uses NetFlow to analyze potential security threats throughout the network and take appropriate action on that traffic

Traditional Device Management

manages device configurations on a per-device basis

security is managed near the perimeter of the network with firewalls, VPNs, and IPS

implements changes via an SSH terminal

NEW QUESTION 97

- (Topic 2)

A network administrator needs to aggregate 4 ports into a single logical link which must negotiate layer 2 connectivity to ports on another switch. What must be configured when using active mode on both sides of the connection?

- A. 802.1q trunks
- B. Cisco vPC
- C. LLDP
- D. LACP

Answer: D

NEW QUESTION 101

- (Topic 2)


Which two actions influence the EIGRP route selection process? (Choose two)

- A. The router calculates the reported distance by multiplying the delay on the exiting Interface by 256.
- B. The router calculates the best backup path to the destination route and assigns it as the feasible successor.
- C. The router calculates the feasible distance of all paths to the destination route
- D. The advertised distance is calculated by a downstream neighbor to inform the local router of the bandwidth on the link
- E. The router must use the advertised distance as the metric for any given route

Answer: BC

Explanation:

The reported distance (or advertised distance) is the cost from the neighbor to the destination. It is calculated from the router advertising the route to the network. For example in the topology below, suppose router A & B are exchanging their routing tables for the first time. Router B says "Hey, the best metric (cost) from me to IOWA is 50 and the metric from you to IOWA is 90" and advertises it to router A. Router A considers the first metric (50) as the Advertised distance. The second metric (90), which is from NEVADA to IOWA (through IDAHO), is called the Feasible distance.

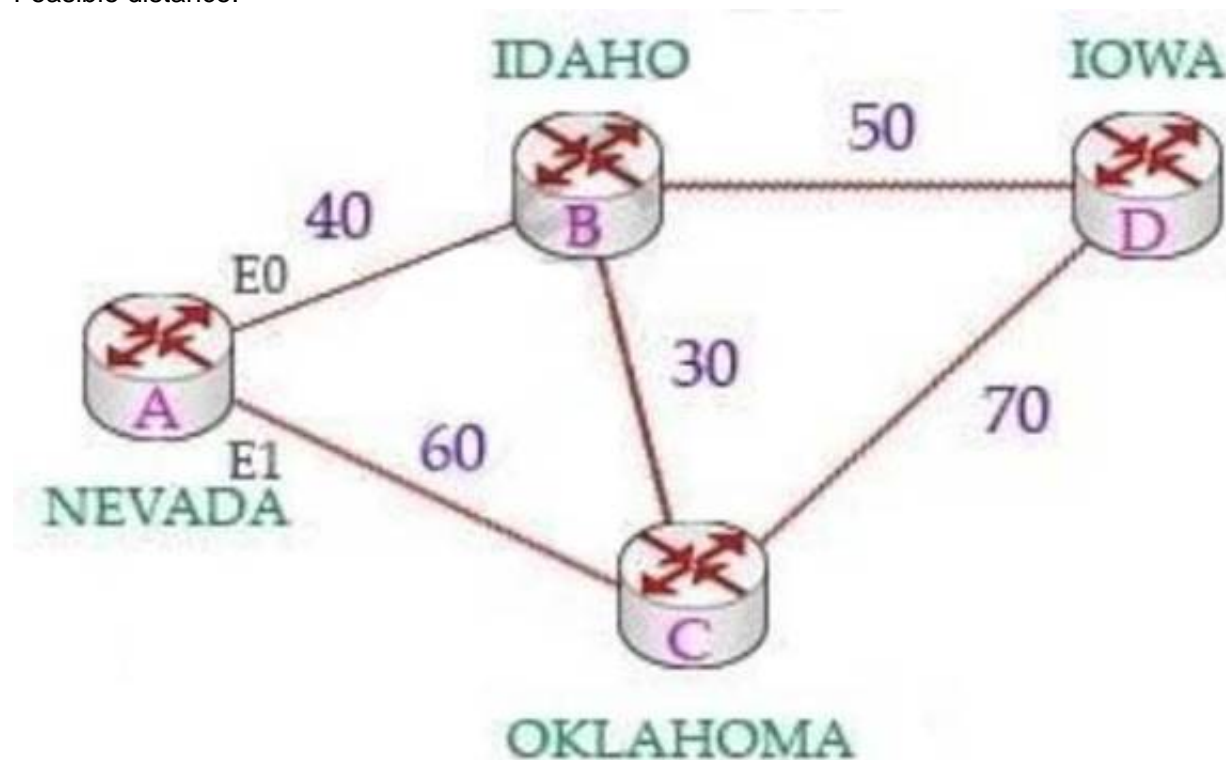

The reported distance is calculated in the same way of calculating the metric. By default (K1 = 1, K2 = 0, K3 = 1, K4 = 0, K5 = 0), the metric is calculated as follows:

$$metric = \left[\frac{10,000,000}{\text{slowest bandwidth[in kbps]}} + \frac{\text{sum of delay[in } \mu\text{sec]}}{10} \right] * 256$$

NEW QUESTION 104

- (Topic 2)

A packet is destined for 10.10.1.22. Which static route does the router choose to forward the packet?

- A. ip route 10.10.1.0 255.255.255.240 10.10.255.1
- B. ip route 10.10.1.16 255.255.255.252 10.10.255.1
- C. ip route 10.10.1.20 255.255.255.252 10.10.255.1
- D. ip route 10.10.1.20 255.255.255.254 10.10.255.1

Answer: C

NEW QUESTION 105

- (Topic 2)

An engineer requires a scratch interface to actively attempt to establish a trunk link with a neighbor switch. What command must be configured?

- A. switchport mode trunk
- B. switchport mode dynamic desirable
- C. switchport mode dynamic auto
- D. switchport nonegotiate

Answer: C

NEW QUESTION 106

- (Topic 2)

Which command must be entered to configure a DHCP relay?

- A. ip helper-address
- B. ip address dhcp
- C. ip dhcp pool
- D. ip dhcp relay

Answer: A

NEW QUESTION 108

- (Topic 2)

An engineer configured an OSPF neighbor as a designated router. Which state verifies the designated router is in the proper mode?

- A. Exchange
- B. 2-way
- C. Full
- D. Init

Answer: C

NEW QUESTION 111

- (Topic 2)

If a switch port receives a new frame while it is actively transmitting a previous frame, how does it process the frames?


- A. The new frame is delivered first, the previous frame is dropped, and a retransmission request is sent.
- B. The previous frame is delivered, the new frame is dropped, and a retransmission request is sent.
- C. The new frame is placed in a queue for transmission after the previous frame.
- D. The two frames are processed and delivered at the same time.

Answer: B

NEW QUESTION 115

- (Topic 2)

Refer to the exhibit.

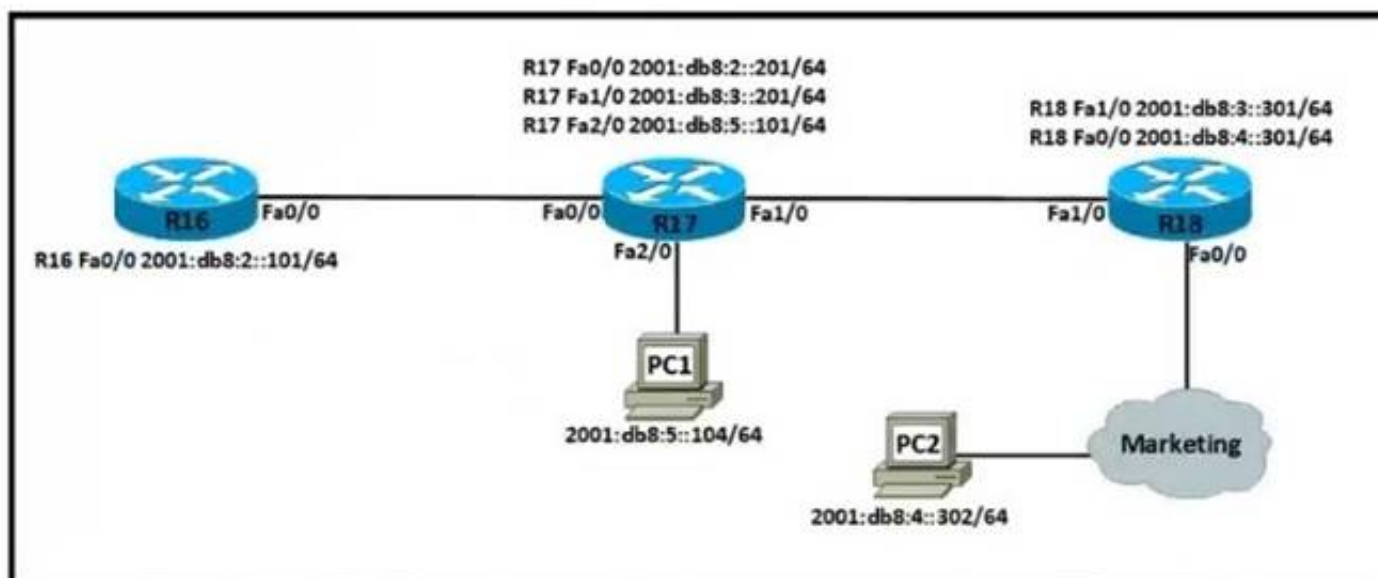

Which IPv6 configuration is required for R17 to successfully ping the WAN interface on R18?

A)

```
R17#
!
no ip domain lookup
ip cef
!
interface FastEthernet0/0
no ip address
duplex auto
speed auto
ipv6 address 2001:DB8:3::201/64
!
interface FastEthernet1/0
no ip address
duplex auto
speed auto
ipv6 address 2001:DB8:2::201/64
!
no cdp log mismatch duplex
ipv6 route 2001:DB8:4::/64 2001:DB8:5::101
```

B)

☐ R17#
!
no ip domain lookup
ip cef
ipv6 unicast-routing
!
interface FastEthernet0/0
no ip address
duplex auto
speed auto
ipv6 address 2001:DB8:2::201/64
!
interface FastEthernet1/0
no ip address
duplex auto
speed auto
ipv6 address 2001:DB8:3::201/64
!
no cdp log mismatch duplex
ipv6 route 2001:DB8:4::/64 2001:DB8:3::301

C)

☐ R17#
!
no ip domain lookup
ip cef
ipv6 cef
!
interface FastEthernet0/0
no ip address
duplex auto
speed auto
ipv6 address 2001:DB8:2::201/64
!
interface FastEthernet1/0
no ip address
duplex auto
speed auto
ipv6 address 2001:DB8:3::201/64
!
no cdp log mismatch duplex
ipv6 route 2001:DB8:4::/64 2001:DB8:4::302

D)

```

R17#
!
no ip domain lookup
ip cef
ipv6 unicast-routing
!
interface FastEthernet0/0
no ip address
duplex auto
speed auto
ipv6 address 2001:DB8:2::201/64
!
interface FastEthernet1/0
no ip address
duplex auto
speed auto
ipv6 address 2001:DB8:3::201/64
!
no cdp log mismatch duplex
ipv6 route 2001:DB8:4::/64 2001:DB8:2::201

```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

Explanation:

ipv6 unicast-routing statement included (IPv6 is enabled on the router). Compared to the exhibit, Fa0/0 and Fa0/1 have correct configurations. The route to subnet 2001:db8:4::/64 points to R18's Fa1/0 (correct next-hop).

NEW QUESTION 116

- (Topic 2)

A user configured OSPF in a single area between two routers. A serial interface connecting R1 and R2 is running encapsulation PPP. By default, which OSPF network type is seen on this interface when the user types `show ip ospf interface` on R1 or R2?

- A. port-to-multipoint
- B. broadcast
- C. point-to-point
- D. nonbroadcast

Answer: C

Explanation:

The default OSPF network type for HDLC and PPP on a serial link is point-to-point (while the default OSPF network type for an Ethernet link is Broadcast).

NEW QUESTION 118

- (Topic 2)

Refer to the exhibit.

```

interface GigabitEthernet3/1/4
switchport voice vlan 50
!

```

An administrator is tasked with configuring a voice VLAN. What is the expected outcome when a Cisco phone is connected to the GigabitEthernet3/1/4 port on a switch?

- A. The phone and a workstation that is connected to the phone do not have VLAN connectivity
- B. The phone and a workstation that is connected to the phone send and receive data in VLAN 50.
- C. The phone sends and receives data in VLAN 50, but a workstation connected to the phone has no VLAN connectivity
- D. The phone sends and receives data in VLAN 50, but a workstation connected to the phone sends and receives data in VLAN 1

Answer: D

NEW QUESTION 121

- (Topic 2)

What are two reasons for an engineer to configure a floating state route? (Choose two)

- A. to automatically route traffic on a secondary path when the primary path goes down
- B. to route traffic differently based on the source IP of the packet
- C. to enable fallback static routing when the dynamic routing protocol fails
- D. to support load balancing via static routing
- E. to control the return path of traffic that is sent from the router

Answer: AC

NEW QUESTION 123

- (Topic 2)

How does WPA3 improve security?


- A. It uses SAE for authentication.
- B. It uses a 4-way handshake for authentication.
- C. It uses RC4 for encryption.
- D. It uses TKIP for encryption.

Answer: A

NEW QUESTION 124

- (Topic 2)

Refer to me exhibit.

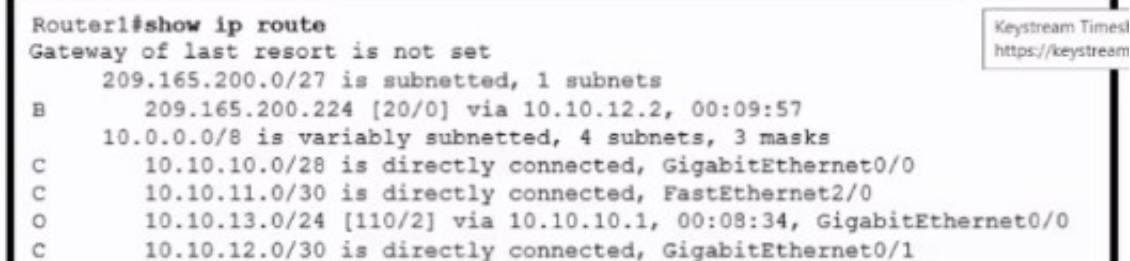

```
Router1#show ip route
Gateway of last resort is not set
  209.165.200.0/27 is subnetted, 1 subnets
B       209.165.200.224 [20/0] via 10.10.12.2, 00:09:57
  10.0.0.0/8 is variably subnetted, 4 subnets, 3 masks
C       10.10.10.0/28 is directly connected, GigabitEthernet0/0
C       10.10.11.0/30 is directly connected, FastEthernet2/0
O       10.10.13.0/24 [110/2] via 10.10.10.1, 00:08:34, GigabitEthernet0/0
C       10.10.12.0/30 is directly connected, GigabitEthernet0/1
```

Which action is taken by the router when a packet is sourced from 10.10.10.2 and destined for 10.10.10.16?

- A. It uses a route that is similar to the destination address
- B. It discards the packets.
- C. It floods packets to all learned next hops.
- D. It Queues the packets waiting for the route to be learned.

Answer: A

NEW QUESTION 127

- (Topic 2)

When OSPF learns multiple paths to a network, how does it select a route?

- A. It multiple the active K value by 256 to calculate the route with the lowest metric.
- B. For each existing interface, it adds the metric from the source router to the destination to calculate the route with the lowest bandwidth.
- C. It divides a reference bandwidth of 100 Mbps by the actual bandwidth of the existing interface to calculate the router with the lowest cost.
- D. It count the number of hops between the source router and the destination to determine the router with the lowest metric

Answer: C

NEW QUESTION 132

- (Topic 2)

Refer to the exhibit.


```
Switch1#show etherchannel summary
Flags:  D - down          P - in port-channel
        I - stand-alone  s - suspended
        H - Hot-standby (LACP only)
        R - Layer3       S - Layer2
        U - in use       f - failed to allocate aggregator
        u - unsuitable for bundling
        w - waiting to be aggregated
        d - default port

Number of channel-groups in use: 1
Number of aggregators:           1
Group  Port-channel  Protocol    Ports
-----+-----+-----+-----
 1      Po1 (SD)                LACP      Fa0/2 (I) Fa0/1 (I)

Switch1#show run
Building configuration...
interface Port-channel1
!
interface FastEthernet0/1
 channel-group 1 mode passive
!
interface FastEthernet0/2
 channel-group 1 mode passive

Switch2#show run
Building configuration...
interface Port-channel1
!
interface FastEthernet0/1
 channel-group 1 mode passive
!
interface FastEthernet0/2
 channel-group 1 mode passive
```

Which change to the configuration on Switch?
allows the two switches to establish an EtherChannel?

- A. Change the protocol to EtherChannel mode on.
- B. Change the LACP mode to active
- C. Change the LACP mode to desirable
- D. Change the protocol to PAqP and use auto mode

Answer: B

NEW QUESTION 134

- (Topic 2)

Which statement about Link Aggregation when implemented on a Cisco Wireless LAN Controller is true?

- A. To pass client traffic two or more ports must be configured.
- B. The EtherChannel must be configured in "mode active"
- C. When enabled the WLC bandwidth drops to 500 Mbps
- D. One functional physical port is needed to pass client traffic

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/wireless/controller/8-2/config-guide/b_cg82/b_cg82_chapter_010101011.html

NEW QUESTION 139

- (Topic 2)

Refer to the exhibit.

```
Switch(config)#hostname R1
R1(config)#interface FastEthernet0/1
R1(config-if)#no switchport
R1(config-if)#ip address 10.100.20.42 255.255.255.0
R1(config-if)#line vty 0 4
R1(config-line)#login
```

An engineer booted a new switch and applied this configuration via the console port. Which additional configuration must be applied to allow administrators to authenticate directly to enable privilege mode via Telnet using a local username and password?

- R1(config)#username admin privilege 15 secret p@ss1234
R1(config-if)#line vty 0 4
R1(config-line)#login local
- R1(config)#username admin secret p@ss1234
R1(config-if)#line vty 0 4
R1(config-line)#login local
R1(config)#enable secret p@ss1234
- R1(config)#username admin
R1(config-if)#line vty 0 4
R1(config-line)#password p@ss1234
R1(config-line)#transport input telnet
- R1(config)#username admin
R1(config-if)#line vty 0 4
R1(config-line)#password p@ss1234

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: A

NEW QUESTION 140

- (Topic 2)

What is the benefit of configuring PortFast on an interface?

- A. After the cable is connected, the interface uses the fastest speed setting available for that cable type
- B. After the cable is connected, the interface is available faster to send and receive user data
- C. The frames entering the interface are marked with higher priority and then processed faster by a switch.
- D. Real-time voice and video frames entering the interface are processed faster

Answer: B

NEW QUESTION 143

- (Topic 2)

Refer to the exhibit.

```
R1# show ip route

D    192.168.16.0/26 [90/2679326] via 192.168.1.1
R    192.168.16.0/24 [120/3] via 192.168.1.2
O    192.168.16.0/21 [110/2] via 192.168.1.3
1 L1 192.168.16.0/27 [115/30] via 192.168.1.4
```

Which route does R1 select for traffic that is destined to 192.168.16.2?

- A. 192.168.16.0/21
- B. 192.168.16.0/24
- C. 192.168.16.0/26
- D. 192.168.16.0/27

Answer: D

Explanation:

The destination IP addresses match all four entries in the routing table but the 192.168.16.0/27 has the longest prefix so it will be chosen. This is called the "longest prefix match" rule.

NEW QUESTION 148

- (Topic 2)

Refer to the exhibit.

```
R2#show ip route
C    192.168.1.0/26 is directly connected, FastEthernet0/1
```

Which two prefixes are included in this routing table entry? (Choose two.)

- A. 192.168.1.17
- B. 192.168.1.61
- C. 192.168.1.64
- D. 192.168.1.127
- E. 192.168.1.254

Answer: BC

NEW QUESTION 153

DRAG DROP - (Topic 2)

Refer to the exhibit.

```
[root@HostTest ~]# ip route
default via 192.168.1.193 dev eth1 proto static
192.168.1.0/26 dev eth1 proto kernel scope link src 192.168.1.200 metric 1

[root@HostTest ~]# ip addr show eth1
eth1: mtu 1500 qdisc pfifo fast qlen 1000
link/ether 00:0C:22:83:79:A3 brd ff:ff:ff:ff:ff:ff
inet 192.168.1.200/26 brd 192.168.1.255 scope global eth1
inet6 fe80::20c:29ff:fe89:79b3/64 scope link
valid_lft forever preferred_lft forever
```

Drag and drop the networking parameters from the left onto the correct values on the right.

default gateway	00:0C:22
host IP address	00:0C:22:83:79:A3
NIC MAC address	192.168.1.193
NIC vendor OUI	192.168.1.200
subnet mask	255.255.255.192

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

NIC vendor OUI → 00:0C:22
NIC MAC address → 00:0C:22:83:79:A3
default gateway → 192.168.1.193
host IP address → 192.168.1.200
subnet mask → 255.255.255.192

The “ip route” and “ip addr show eth1” are Linux commands.+ “ip route”: display the routing table+ “ip addr show eth1”: get depth information (only on eth1 interface) about your network interfaces like IP Address, MAC Address information

NEW QUESTION 157

- (Topic 2)

What are two benefits of FHRPs? (Choose two.)

- A. They prevent (oops in the Layer 2 network.
- B. They allow encrypted traffic.
- C. They are able to bundle muftlple ports to increase bandwidth
- D. They enable automatic failover of the default gateway.
- E. They allow multiple devices lo serve as a single virtual gateway for clients in the network

Answer: DE

NEW QUESTION 162

- (Topic 2)

What is a characteristic of private IPv4 addressing?

- A. traverse the Internet when an outbound ACL is applied
- B. issued by IANA in conjunction with an autonomous system number
- C. composed of up to 65.536 available addresses
- D. used without tracking or registration

Answer: D

NEW QUESTION 167

- (Topic 2)

What are two characteristics of a public cloud Implementation? (Choose two.)

- A. It is owned and maintained by one party, but it is shared among multiple organizations.
- B. It enables an organization to fully customize how It deploys network resources.
- C. It provides services that are accessed over the Internet.
- D. It Is a data center on the public Internet that maintains cloud services for only one company.
- E. It supports network resources from a centralized third-party provider and privately- owned virtual resources

Answer: CE


Explanation:

Private cloud is cloud infrastructure operated solely for a single organization, whether managed internally or by a third party, and hosted either internally or externally. Most public-cloud providers offer direct-connection services that allow customers to securely link their legacy data centers to their cloud-resident applications.

NEW QUESTION 172

- (Topic 2)

Refer to the exhibit.

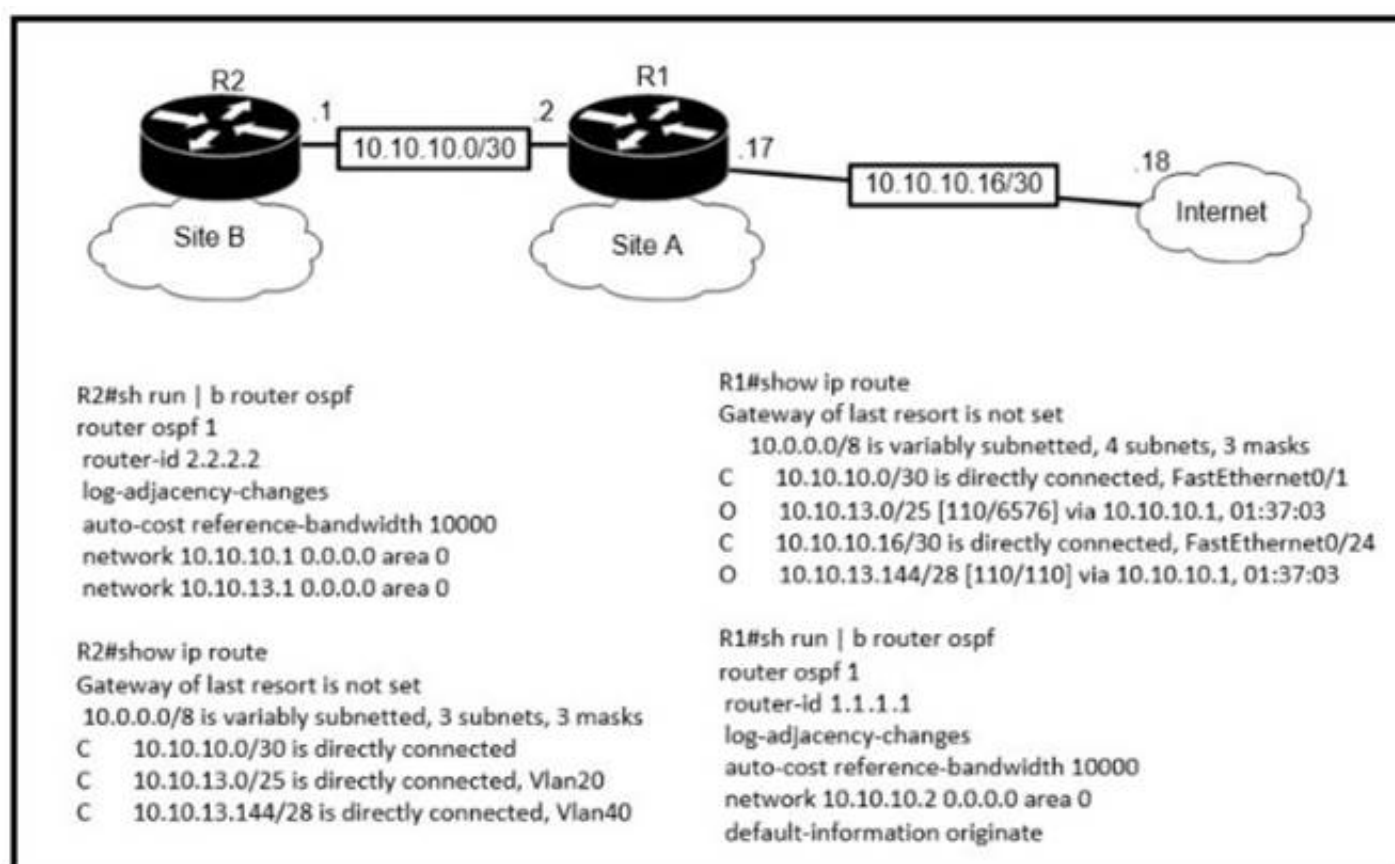

The default-information originate command is configured under the R1 OSPF configuration After testing workstations on VLAN 20 at Site B cannot reach a DNS server on the Internet Which action corrects the configuration issue?


- A. Add the default-information originate command on R2
- B. Configure the ip route 0.0.0.0 0.0.0.0 10.10.10.18 command on R1
- C. Configure the ip route 0.0.0.0 0.0.0.0 10.10.10.2 command on R2
- D. Add the always keyword to the default-information originate command on R1

Answer: B

NEW QUESTION 174

- (Topic 2)

Refer to the exhibit.

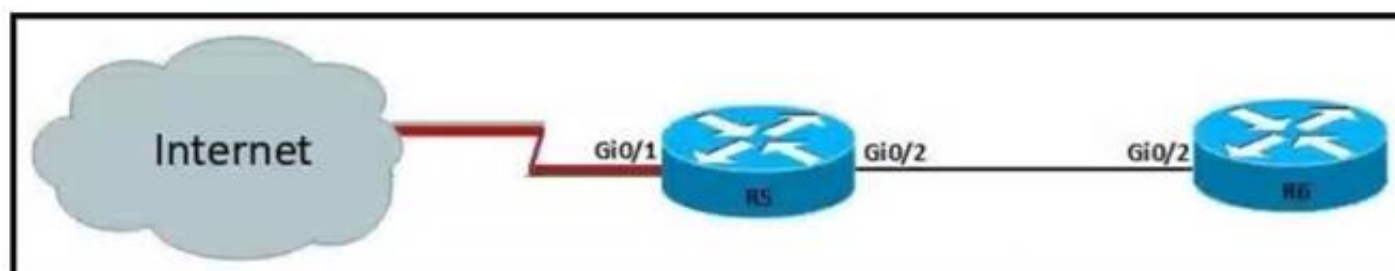

For security reasons, automatic neighbor discovery must be disabled on the R5 Gi0/1 interface. These tasks must be completed:

- Disable all neighbor discovery methods on R5 interface Gi0/1.
- Permit neighbor discovery on R5 interface Gi0/2.
- Verify there are no dynamically learned neighbors on R5 interface Gi0/1.
- Display the IP address of R6's interface Gi0/2. Which configuration must be used?

- ☐ R5(config)#int Gi0/1
R5(config-if)#no cdp run
R5(config-if)#exit
R5(config)#lldp run
R5(config)#cdp enable
R5#sh cdp neighbor
R5#sh lldp neighbor
- ☐ R5(config)#int Gi0/1
R5(config-if)#no cdp enable
R5(config-if)#exit
R5(config)#no lldp run
R5(config)#cdp run
R5#sh cdp neighbor
R5#sh lldp neighbor
- ☐ R5(config)#int Gi0/1
R5(config-if)#no cdp enable
R5(config-if)#exit
R5(config)#no lldp run
R5(config)#cdp run
R5#sh cdp neighbor detail
R5#sh lldp neighbor
- ☐ R5(config)#int Gi0/1
R5(config-if)#no cdp enable
R5(config-if)#exit
R5(config)#lldp run
R5(config)#no cdp run
R5#sh cdp neighbor detail
R5#sh lldp neighbor

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 176

- (Topic 2)

Refer to the exhibit.



An engineer configured the New York router with state routes that point to the Atlanta and Washington sites. When command must be configured on the Atlanta and Washington routers so that both sites are able to reach the loopback2 interface on the New York router?

- A. ipv6 route ::0 Serial 0/0/1
- B. ipv6 route 0/0 Serial 0/0/0
- C. ipv6 route ::0 Serial 0/0/0
- D. ip route 0.0.0.0.0.0.0.0 Serial 0/0/0
- E. ipv6 route ::0 2000::2

Answer: C

NEW QUESTION 177

- (Topic 2)

A wireless administrator has configured a WLAN; however, the clients need access to a less congested 5-GHz network for their voice quality. What action must be taken to meet the requirement?

- A. enable AAA override
- B. enable RX-SOP
- C. enable DTIM
- D. enable Band Select

Answer: D

NEW QUESTION 182

- (Topic 2)

When deploying syslog, which severity level logs informational message?

- A. 2
- B. 4
- C. 6

Answer: D

Explanation:

<https://en.wikipedia.org/wiki/Syslog>

NEW QUESTION 183

- (Topic 2)

What does an SDN controller use as a communication protocol to relay forwarding changes to a southbound API?

- A. OpenFlow
- B. Java
- C. REST
- D. XML

Answer: A

NEW QUESTION 184

- (Topic 2)

What are two reasons that cause late collisions to increment on an Ethernet interface? (Choose two)

- A. when the sending device waits 15 seconds before sending the frame again
- B. when the cable length limits are exceeded
- C. when one side of the connection is configured for half-duplex
- D. when Carrier Sense Multiple Access/Collision Detection is used
- E. when a collision occurs after the 32nd byte of a frame has been transmitted

Answer: BC

Explanation:

The usual possible causes are full-duplex/half-duplex mismatch, exceeded Ethernet cable length limits, or defective hardware such as incorrect cabling, non-compliant number of hubs in the network, or a bad NIC.

NEW QUESTION 188

- (Topic 2)

Which condition must be met before an NMS handles an SNMP trap from an agent?

- A. The NMS software must be loaded with the MIB associated with the trap.
- B. The NMS must be configured on the same router as the SNMP agent
- C. The NMS must receive a trap and an inform message from the SNMP agent within a configured interval
- D. The NMS must receive the same trap from two different SNMP agents to verify that it is reliable.

Answer: A

NEW QUESTION 192

- (Topic 2)

An implementer is preparing hardware for virtualization to create virtual machines on a host. What is needed to provide communication between hardware and virtual machines?

- A. hypervisor
- B. router
- C. straight cable
- D. switch

Answer: A

NEW QUESTION 196

- (Topic 2)

A network administrator must to configure SSH for remote access to router R1. The requirement is to use a public and private key pair to encrypt management traffic to and from the connecting client.

Which configuration, when applied, meets the requirements?


```
R1#enable
R1#configure terminal
R1(config)#ip domain-name cisco.com
R1(config)#crypto key generate ec keysizes 2048
```

```
R1#enable
R1#configure terminal
R1(config)#ip domain-name cisco.com
R1(config)#crypto key generate rsa modulus 1024
```

```
R1#enable
R1#configure terminal
R1(config)#ip domain-name cisco.com
R1(config)#crypto key generate ec keysizes 1024
```

```
R1#enable
R1#configure terminal
R1(config)#ip domain-name cisco.com
R1(config)#crypto key encrypt rsa name myKey
```


- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C


NEW QUESTION 201

- (Topic 2)

Refer to Exhibit.

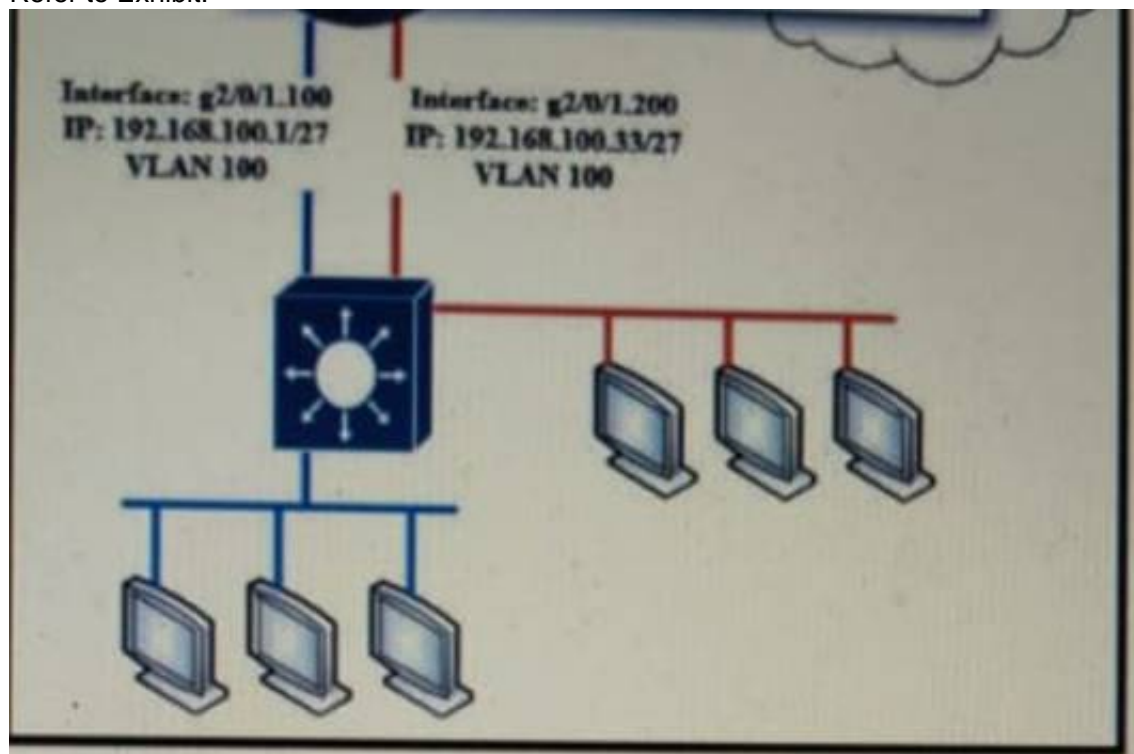

Which configuration must be applied to the router that configures PAT to translate all addresses in VLAN 200 while allowing devices on VLAN 100 to use their own IP addresses?

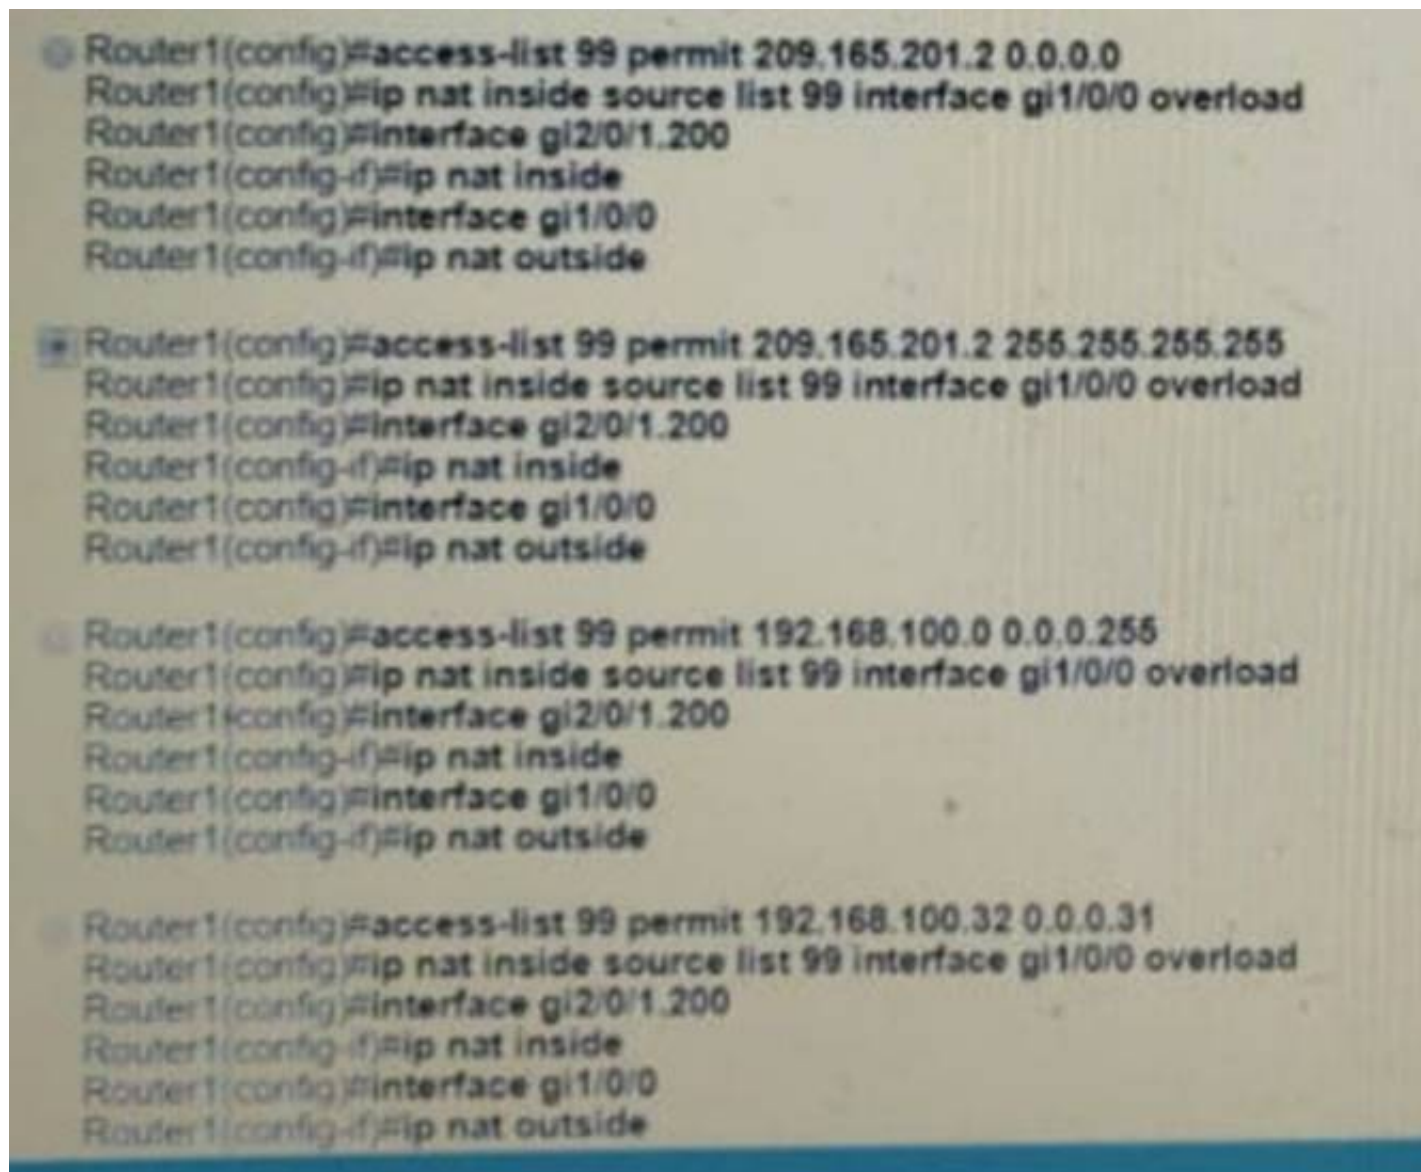

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 203

- (Topic 2)

Where does a switch maintain DHCP snooping information?

- A. in the MAC address table
- B. in the CAM table
- C. in the binding database
- D. in the frame forwarding database

Answer: C

NEW QUESTION 206

- (Topic 2)

A Cisco IP phone receive untagged data traffic from an attached PC. Which action is taken by the phone?

- A. It allows the traffic to pass through unchanged
- B. It drops the traffic
- C. It tags the traffic with the default VLAN
- D. It tags the traffic with the native VLAN

Answer: A

Explanation:

https://www.cisco.com/c/en/us/td/docs/switches/lan/catalyst2960x/software/15-0_2_EX/vlan/configuration_guide/b_vlan_152ex_2960-x_cg/b_vlan_152ex_2960-x_cg_chapter_0110.pdf

Untagged traffic from the device attached to the Cisco IP Phone passes through the phone unchanged, regardless of the trust state of the access port on the phone.

NEW QUESTION 208

- (Topic 2)

Refer to the exhibit.

```
ip arp inspection vlan 2
interface fastethernet 0/1
  switchport mode access
  switchport access vlan 2
```

What is the effect of this configuration?

- A. The switch port interface trust state becomes untrusted
- B. The switch port remains administratively down until the interface is connected to another switch
- C. Dynamic ARP inspection is disabled because the ARP ACL is missing
- D. The switch port remains down until it is configured to trust or untrust incoming packets


Answer: A

Explanation:

Dynamic ARP inspection (DAI) is a security feature that validates ARP packets in a network. It intercepts, logs, and discards ARP packets with invalid IP-to-MAC address bindings. This capability protects the network from certain man-in-the-middle attacks. After enabling DAI, all ports become untrusted ports.

NEW QUESTION 209

- (Topic 2)

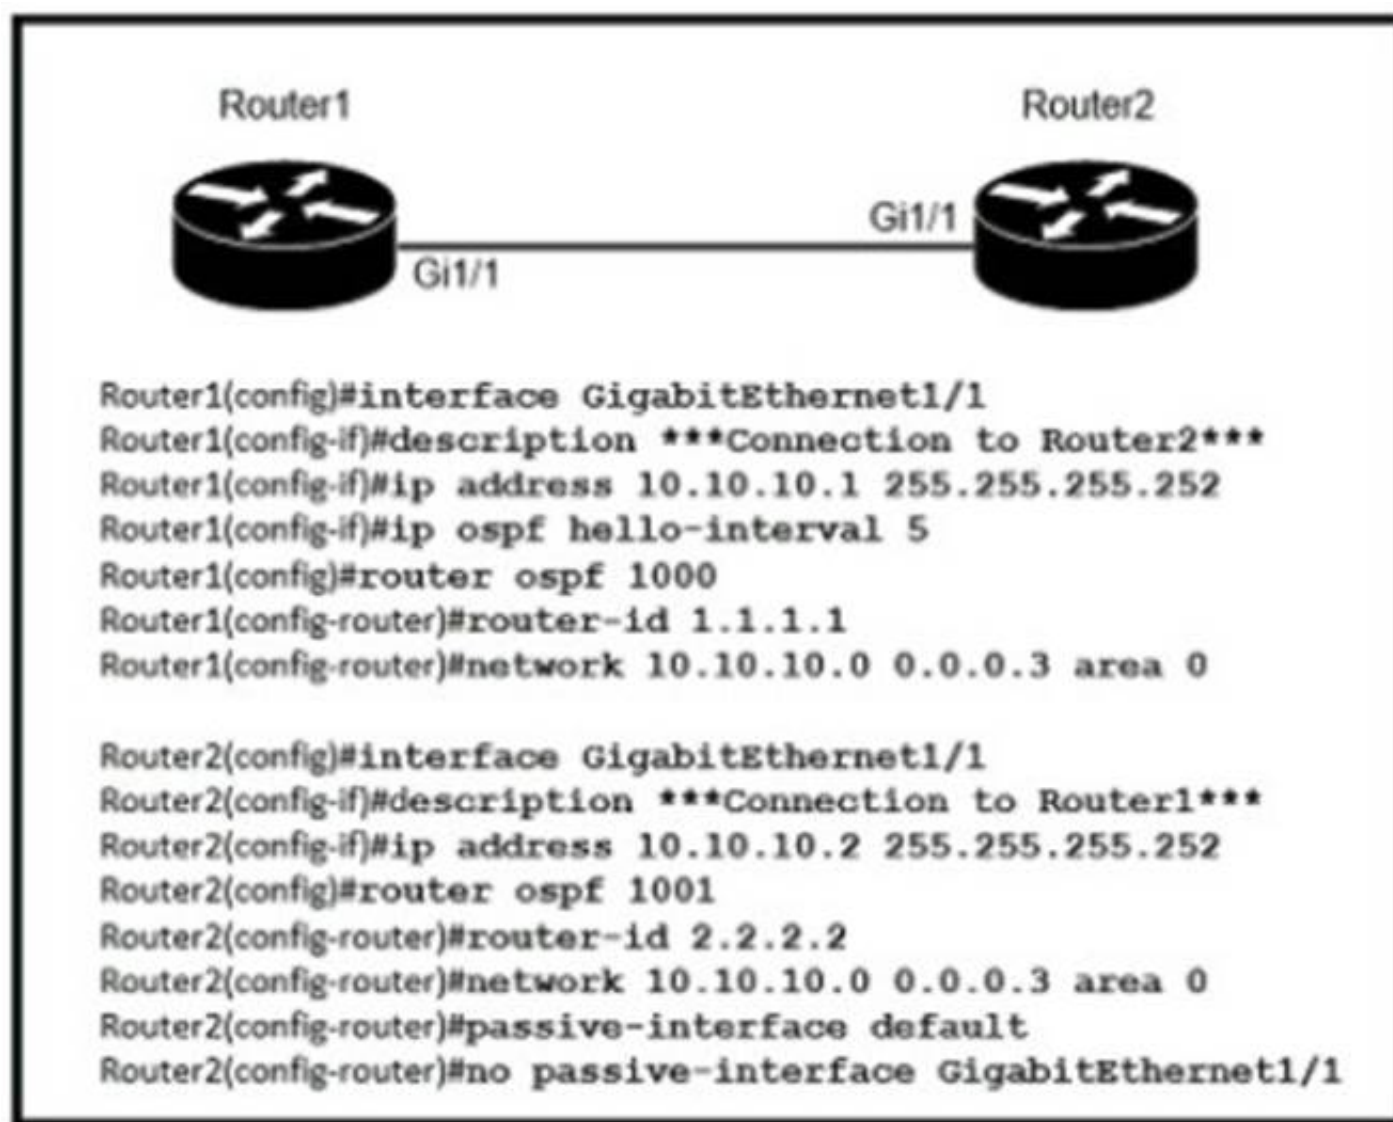

Refer to the exhibit. After the configuration is applied, the two routers fail to establish an OSPF neighbor relationship. what is the reason for the problem?

- A. The OSPF router IDs are mismatched.
- B. Router2 is using the default hello timer.
- C. The network statement on Router1 is misconfigured.
- D. The OSPF process IDs are mismatched.

Answer: B

NEW QUESTION 210

- (Topic 2)

which IPv6 address block forwards packets to a multicast address rather than a unicast address?

- A. 2000::/3
- B. FC00::/7
- C. FE80::/10
- D. FF00::/12

Answer: D

NEW QUESTION 214

- (Topic 2)

How does the dynamically-learned MAC address feature function?


- A. The CAM table is empty until ingress traffic arrives at each port
- B. Switches dynamically learn MAC addresses of each connecting CAM table.
- C. The ports are restricted and learn up to a maximum of 10 dynamically-learned addresses
- D. It requires a minimum number of secure MAC addresses to be filled dynamically

Answer: A

NEW QUESTION 218

- (Topic 2)

Refer to the exhibit.

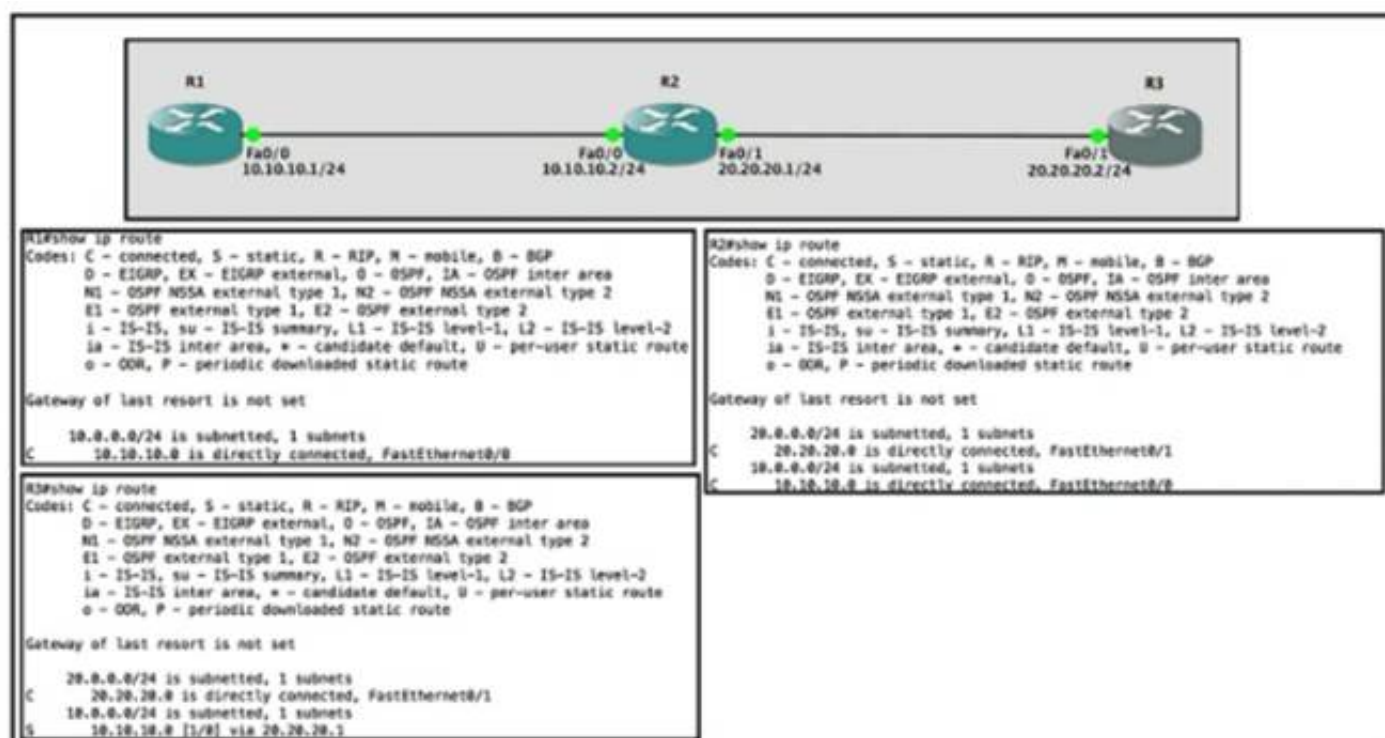

Router R1 Fa0/0 is unable ping router R3 Fa0/1.

Which action must be taken in router R1 to help resolve the configuration issue?


- A. set the default network as 20.20.20.0/24
- B. set the default gateway as 20.20.20.2
- C. configure a static route with Fa0/1 as the egress interface to reach the 20.20.20.0/24 network
- D. configure a static route with 10.10.10.2 as the next hop to reach the 20.20.20.0/24 network

Answer: D

NEW QUESTION 220

- (Topic 2)

Refer to the exhibit.

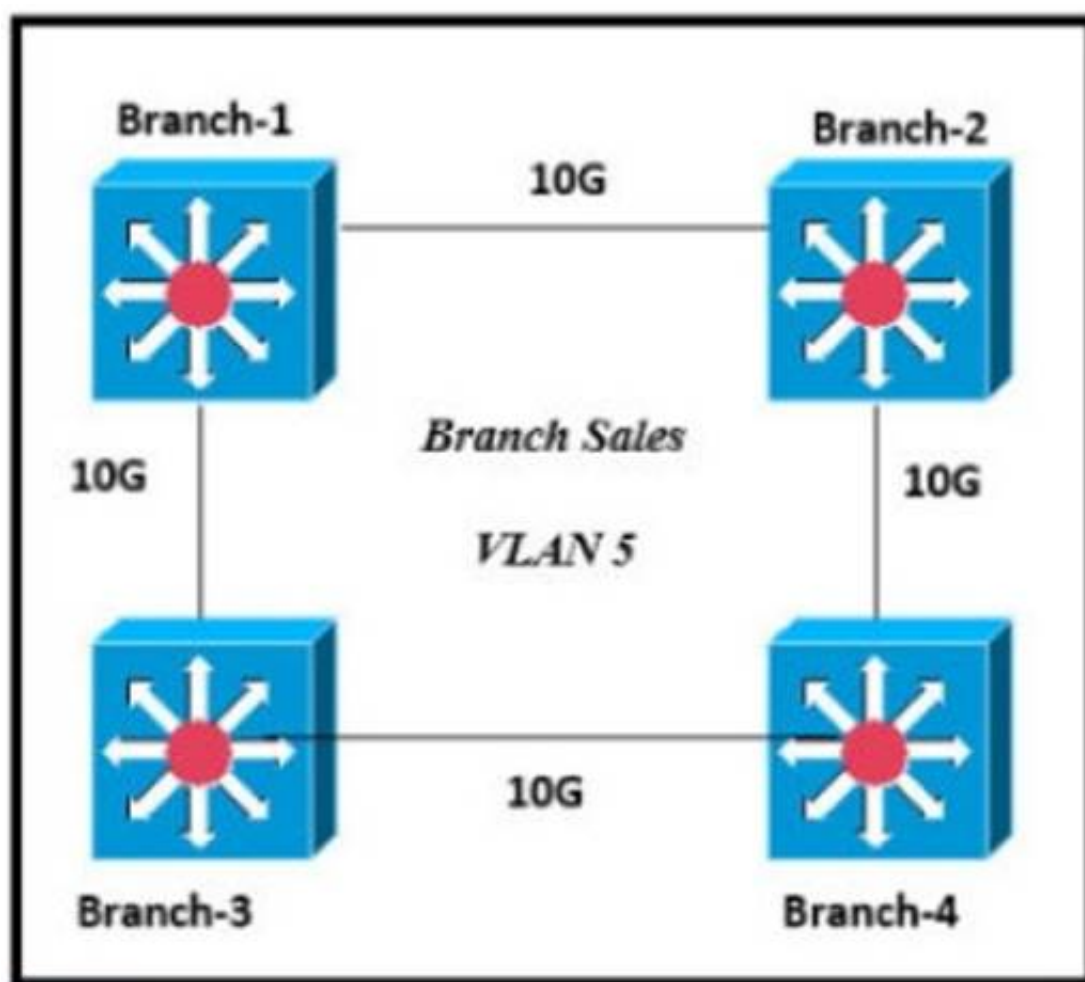

Only four switches are participating in the VLAN spanning-tree process.

Branch-1 priority 614440

Branch-2: priority 39082416

Branch-3: priority 0 Branch-4: root primary

Which switch becomes the permanent root bridge for VLAN 5?

- A. Branch-1

- B. Branch-2
- C. Branch-3
- D. Branch-4

Answer: C


Explanation:

Dynamic ARP inspection is an ingress security feature; it does not perform any egress checking.

NEW QUESTION 222

- (Topic 2)

Refer to the exhibit.

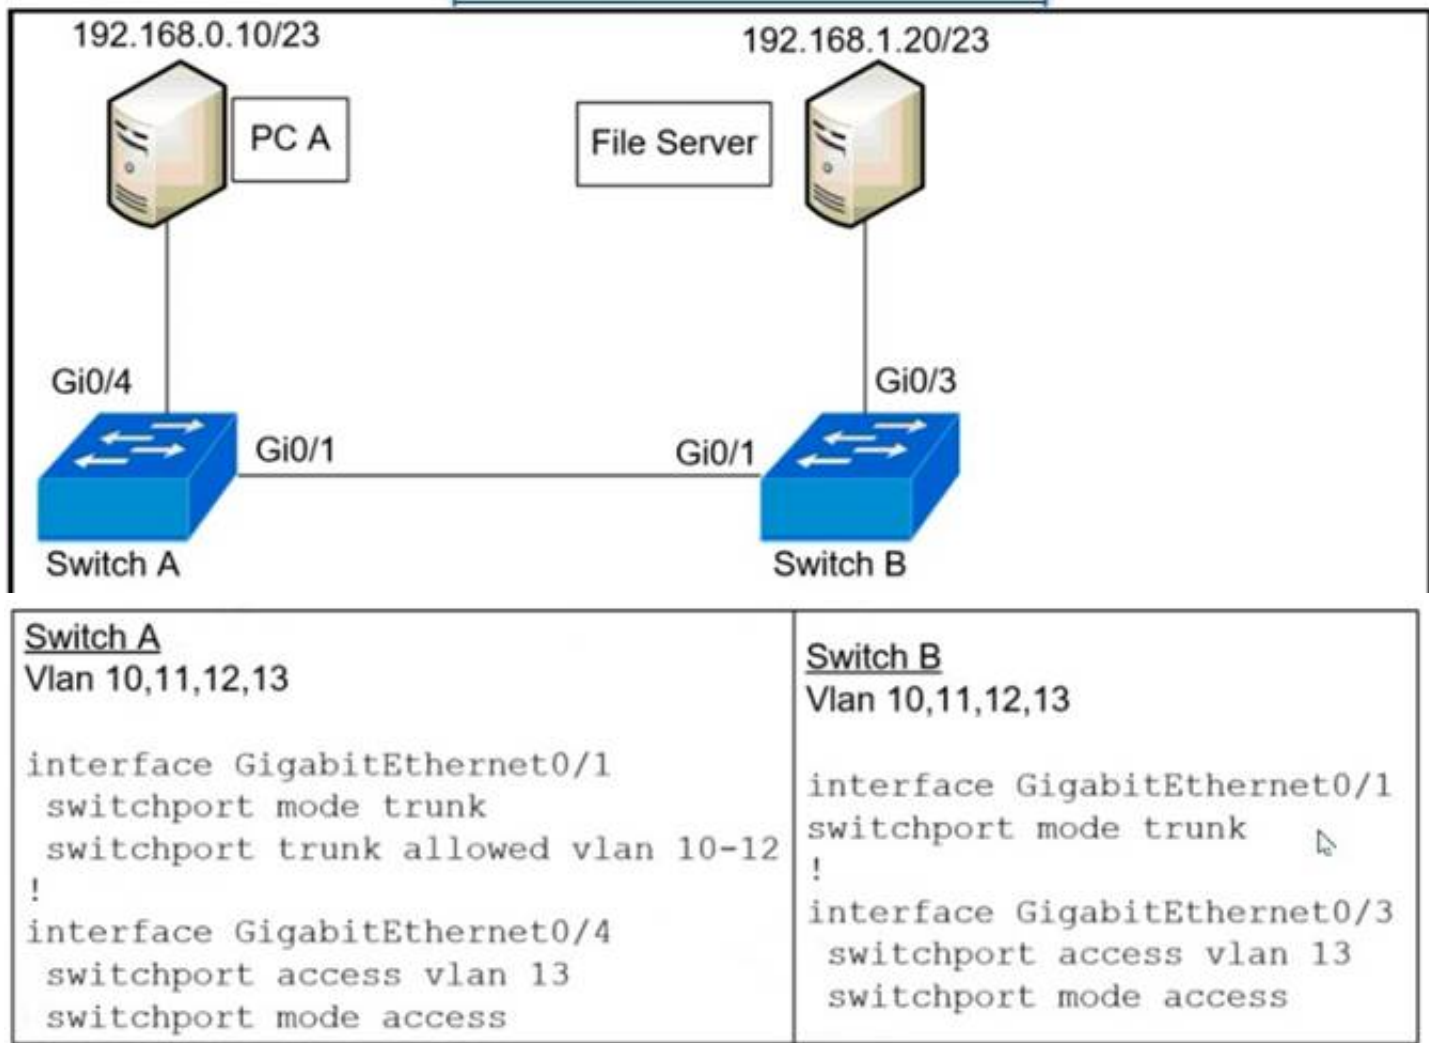

A network administrator assumes a task to complete the connectivity between PC A and the File Server. Switch A and Switch B have been partially configured with VLAN 10, 11, 12, and 13. What is the next step in the configuration?


- A. Add PC A to VLAN 10 and the File Server to VLAN 11 fa VLAN segmentation
- B. Add VLAN 13 to the trunk links on Switch A and Switch B for VLAN propagation
- C. Add a router on a stick between Switch A and Switch B allowing for Inter-VLAN routing.
- D. Add PC A to the same subnet as the Fie Server allowing for intra-VLAN communication.

Answer: B

NEW QUESTION 223

- (Topic 2)

Refer to the exhibit.

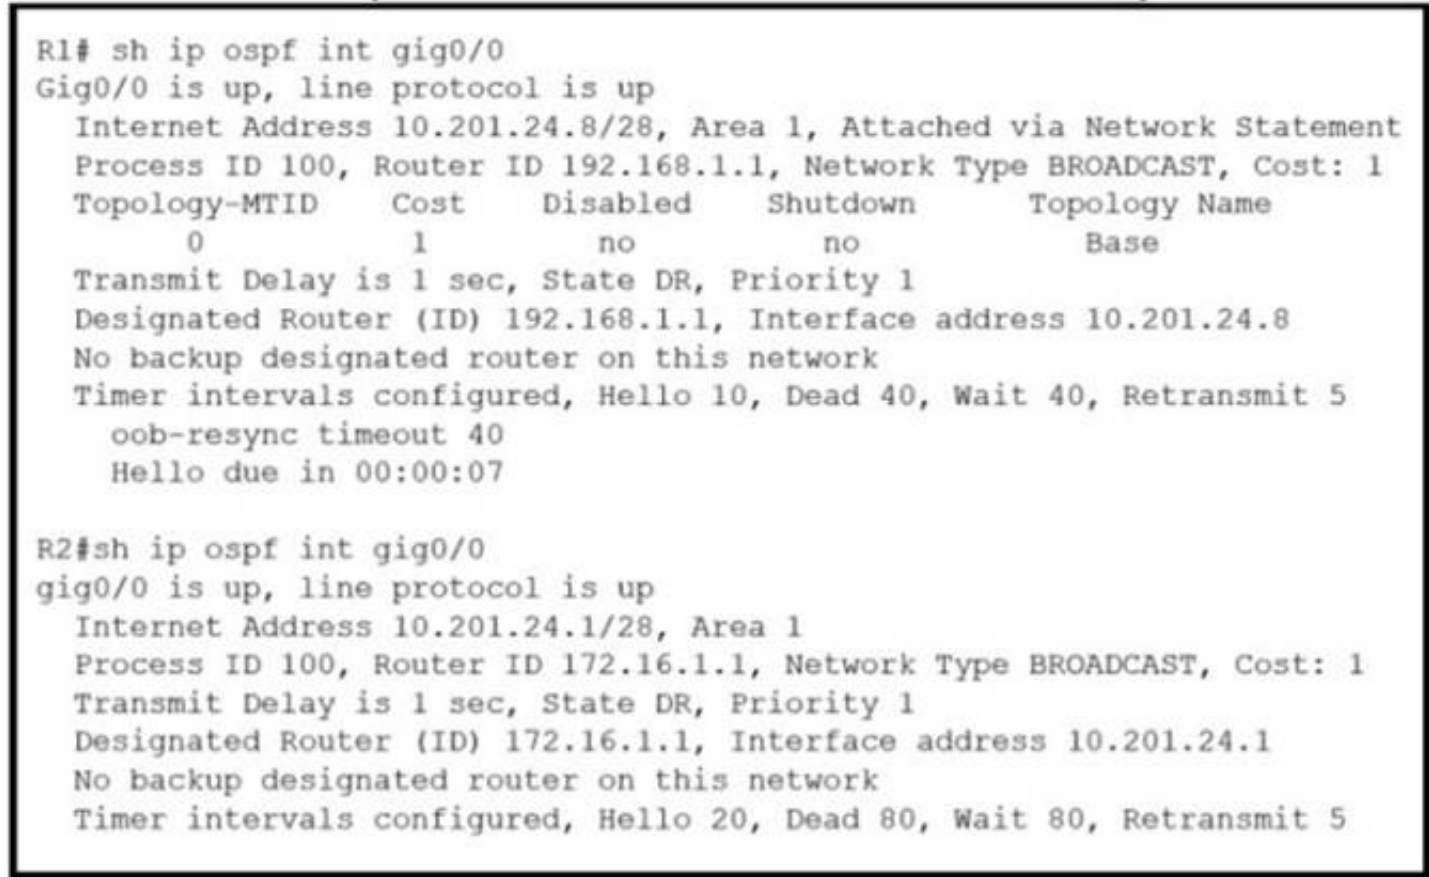

What action establishes the OSPF neighbor relationship without forming an adjacency?

- A. modify hello interval
- B. modify process ID
- C. modify priority
- D. modify network type

Answer: A

NEW QUESTION 227

- (Topic 2)

Which network plane is centralized and manages routing decisions?

- A. policy plane
- B. management plane
- C. control plane
- D. data plane

Answer: C

NEW QUESTION 228

- (Topic 2)

What is the path for traffic sent from one user workstation to another workstation on a separate switch in a three-tier architecture model?

- A. access - core - distribution - access
- B. access - distribution - distribution - access
- C. access - core - access
- D. access - distribution - core - distribution - access

Answer: D

NEW QUESTION 229

- (Topic 2)

Which technology must be implemented to configure network device monitoring with the highest security?

- A. IP SLA
- B. syslog
- C. NetFlow
- D. SNMPv3

Answer: C

NEW QUESTION 230

- (Topic 2)

Where does wireless authentication happen?

- A. SSID
- B. radio
- C. band
- D. Layer 2

Answer: D

NEW QUESTION 233

- (Topic 2)

Refer to the exhibit.

```
R1# show ip route | begin gateway
Gateway of last resort is 209.165.200.246 to network 0.0.0.0
S* 0.0.0.0/0 [1/0] via 209.165.200.246, Serial0/1/0
    is directly connected, Serial0/1/0
    172.16.0.0/16 is variably subnetted, 2 subnets, 2 masks
S   172.16.3.0/24 [1/0] via 209.165.200.250, Serial0/0/0
O   172.16.3.0/28 [110/1] via 209.165.200.254, 00:00:28, Serial0/0/1
    209.165.200.0/24 is variably subnetted, 6 subnets, 2 masks
C   209.165.200.244/30 is directly connected, Serial0/1/0
L   209.165.200.245/32 is directly connected, Serial0/1/0
C   209.165.200.248/30 is directly connected, Serial0/0/0
L   209.165.200.249/32 is directly connected, Serial0/0/0
C   209.165.200.252/30 is directly connected, Serial0/0/1
L   209.165.200.253/32 is directly connected, Serial0/0/1
```

A packet is being sent across router R1 to host 172.16.0.14. What is the destination route for the packet?

- A. 209.165.200.254 via Serial0/0/1
- B. 209.165.200.254 via Serial0/0/0
- C. 209.165.200.246 via Serial0/1/0
- D. 209.165.200.250 via Serial0/0/0

Answer: A

NEW QUESTION 235

- (Topic 2)

What is the function of a server?

- A. It transmits packets between hosts in the same broadcast domain.
- B. It provides shared applications to end users.
- C. It routes traffic between Layer 3 devices.
- D. It Creates security zones between trusted and untrusted networks

Answer: B

NEW QUESTION 236

- (Topic 2)

Which port type supports the spanning-tree portfast command without additional configuration?

- A. access ports
- B. Layer 3 main Interfaces
- C. Layer 3 subinterfaces
- D. trunk ports

Answer: A

NEW QUESTION 237

- (Topic 2)

What are two characteristics of a controller-based network? (Choose two)

- A. The administrator can make configuration updates from the CLI
- B. It uses northbound and southbound APIs to communicate between architectural layers
- C. It moves the control plane to a central point.
- D. It decentralizes the control plane, which allows each device to make its own forwarding decisions
- E. It uses Telnet to report system issues.

Answer: BC

NEW QUESTION 241

- (Topic 2)

Which action must be taken to assign a global unicast IPv6 address on an interface that is derived from the MAC address of that interface?

- A. configure a stateful DHCPv6 server on the network
- B. enable SLAAC on an interface
- C. disable the EUI-64 bit process
- D. explicitly assign a link-local address

Answer: A

NEW QUESTION 243

- (Topic 2)

What is a difference between RADIUS and TACACS+?

- A. RADIUS is most appropriate for dial authentication, but TACACS+ can be used for multiple types of authentication
- B. TACACS+ encrypts only password information and RADIUS encrypts the entire payload
- C. TACACS+ separates authentication and authorization, and RADIUS merges them
- D. RADIUS logs all commands that are entered by the administrator, but TACACS+ logs only start, stop, and interim commands

Answer: C

NEW QUESTION 248

- (Topic 2)

What is the purpose of an SSID?

- A. It provides network security
- B. It differentiates traffic entering access points
- C. It identifies an individual access point on a WLAN
- D. It identifies a WLAN

Answer: D

Explanation:

“In IEEE 802.11 wireless local area networking standards (including Wi-Fi), a service set is a group of wireless network devices which share a service set

identifier (SSID)... A service set forms a logical network of nodes operating with shared link-layer networking parameters; they form one logical network segment.“

NEW QUESTION 249

- (Topic 2)

Which type of organization should use a collapsed-core architecture?

- A. large and requires a flexible, scalable network design
- B. large and must minimize downtime when hardware fails
- C. small and needs to reduce networking costs currently
- D. small but is expected to grow dramatically in the near future

Answer: C

Explanation:

A collapsed-core architecture is a limited investment for a small company, and may be efficient and productive for a limited time.

NEW QUESTION 252

- (Topic 2)

Which QoS tool is used to optimize voice traffic on a network that is primarily intended for data traffic?

- A. FIFO
- B. WFQ
- C. PQ
- D. WRED

Answer: C

NEW QUESTION 255

- (Topic 2)

Which result occurs when PortFast is enabled on an interface that is connected to another switch?

- A. Spanning tree may fail to detect a switching loop in the network that causes broadcast storms
- B. VTP is allowed to propagate VLAN configuration information from switch to switch automatically.
- C. Root port choice and spanning tree recalculation are accelerated when a switch link goes down
- D. After spanning tree converges PortFast shuts down any port that receives BPDUs.

Answer: A

Explanation:

Enabling the PortFast feature causes a switch or a trunk port to enter the STP forwarding-state immediately or upon a linkup event, thus bypassing the listening and learning states.

Note: To enable portfast on a trunk port you need the trunk keyword “spanning-tree portfast trunk

NEW QUESTION 256

DRAG DROP - (Topic 2)

Drag and drop the descriptions from the left onto the configuration-management technologies on the right.

fundamental configuration elements are stored in a manifest	Ansible
uses TCP port 10002 for configuration push jobs	
uses Ruby for fundamental configuration elements	Chef
uses SSH for remote device communication	
uses TCP 8140 for communication	Puppet
uses YAML for fundamental configuration elements	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Ansible:– uses SSH for remote device communication– uses YAML for fundamental configuration elements

Chef:– uses TCP port 10002 for configuration push jobs– uses Ruby for fundamental configuration elements

Puppet:– fundamental configuration elements are stored in a manifest– uses TCP 8140 for communication

The focus of Ansible is to be streamlined and fast, and to require no node agent installation. Thus, Ansible performs all functions over SSH. Ansible is built on

Python, in contrast to the Ruby foundation of Puppet and Chef. TCP port 10002 is the command port. It may be configured in the Chef Push Jobs configuration file. This port allows Chef Push Jobs clients to communicate with the Chef Push Jobs server. Puppet is an open-source configuration management solution, which is built with Ruby and offers custom Domain Specific Language (DSL) and Embedded Ruby (ERB) templates to create custom Puppet language files, offering a declarative-paradigm programming approach. A Puppet piece of code is called a manifest, and is a file with .pp extension.

NEW QUESTION 259

DRAG DROP - (Topic 1)

Drag and drop the SNMP components from the left onto the descriptions on the right.

MIB	collection of variables that can be monitored
SNMP agent	unsolicited message
SNMP manager	responds to status requests and requests for information about a device
SNMP trap	resides on an NMS

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

MIB	MIB
SNMP agent	SNMP manager
SNMP manager	SNMP trap
SNMP trap	SNMP agent

NEW QUESTION 261

- (Topic 1)

Why was the RFC 1918 address space defined?

- A. conserve public IPv4 addressing
- B. preserve public IPv6 address space
- C. reduce instances of overlapping IP addresses
- D. support the NAT protocol

Answer: A

NEW QUESTION 262

- (Topic 1)

Refer to the exhibit.

```
import ncclient

with ncclient.manager.connect(host='192.168.1.1', port=830, username='root',
                             password='teset123!', allow_agent=False) as m:
    print(m.get_config('running').data_xml)
```

After running the code in the exhibit, which step reduces the amount of data that the NETCONF server returns to the NETCONF client, to only the interface's configuration?

- A. Use the lxml library to parse the data returned by the NETCONF server for the interface's configuration.
- B. Create an XML filter as a string and pass it to get_config() method as an argument.
- C. Create a JSON filter as a string and pass it to the get_config() method as an argument.
- D. Use the JSON library to parse the data returned by the NETCONF server for the interface's configuration.

Answer: D

NEW QUESTION 265

- (Topic 1)

Which type of information resides on a DHCP server?

- A. a list of the available IP addresses in a pool
- B. a list of public IP addresses and their corresponding names
- C. usernames and passwords for the end users in a domain
- D. a list of statically assigned MAC addresses

Answer: A

NEW QUESTION 269

- (Topic 1)

Which switch technology establishes a network connection immediately when it is plugged in?

- A. PortFast
- B. BPDU guard
- C. UplinkFast
- D. BackboneFast

Answer: A

Explanation:

PortFast is useful to connect hosts and switches to a switch. Access layer switches are more frequently “plugged in” and “plugged out” than distribution or core layer switches. Also, this feature’s target is just to minimize STP convergence time.

NEW QUESTION 272

- (Topic 1)

Which WAN access technology is preferred for a small office / home office architecture?

- A. broadband cable access
- B. frame-relay packet switching
- C. dedicated point-to-point leased line
- D. Integrated Services Digital Network switching.

Answer: A

NEW QUESTION 274

- (Topic 1)

What are two similarities between UTP Cat 5e and Cat 6a cabling? (Choose two.)

- A. Both operate at a frequency of 500 MHz.
- B. Both support runs of up to 55 meters.
- C. Both support runs of up to 100 meters.
- D. Both support speeds of at least 1 Gigabit.
- E. Both support speeds up to 10 Gigabit.

Answer: CD

NEW QUESTION 279

- (Topic 1)

What is a DNS lookup operation?

- A. DNS server pings the destination to verify that it is available
- B. serves requests over destination port 53
- C. DNS server forwards the client to an alternate IP address when the primary IP is down
- D. responds to a request for IP address to domain name resolution to the DNS server

Answer: D

NEW QUESTION 280

- (Topic 1)

How do TCP and UDP differ in the way they provide reliability for delivery of packets?

- A. TCP is a connectionless protocol that does not provide reliable delivery of data, UDP is a connection-oriented protocol that uses sequencing to provide reliable delivery.
- B. TCP does not guarantee delivery or error checking to ensure that there is no corruption of data UDP provides message acknowledgement and retransmits data if lost.
- C. TCP provides flow control to avoid overwhelming a receiver by sending too many packets at once, UDP sends packets to the receiver in a continuous stream without checking for sequencing
- D. TCP uses windowing to deliver packets reliably; UDP provides reliable message transfer between hosts by establishing a three-way handshake

Answer: C

NEW QUESTION 283

- (Topic 1)

What describes the operation of virtual machines?

- A. Virtual machines are responsible for managing and allocating host hardware resources
- B. In a virtual machine environment, physical servers must run one operating system at a time.
- C. Virtual machines are the physical hardware that support a virtual environment.

D. Virtual machines are operating system instances that are decoupled from server hardware

Answer: B

NEW QUESTION 284

DRAG DROP - (Topic 1)

Drag drop the descriptions from the left onto the correct configuration-management technologies on the right.

fundamental configuration elements are stored in a manifest

uses TCP port 10002 for configuration push jobs

uses Ruby for fundamental configuration elements

uses SSH for remote device communication

uses TCP 8140 for communication

uses YAML for fundamental configuration elements

Ansible

Chef

Puppet

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

The focus of Ansible is to be streamlined and fast, and to require no node agent installation. Thus, Ansible performs all functions over SSH. Ansible is built on Python, in contrast to the Ruby foundation of Puppet and Chef. TCP port 10002 is the command port. It may be configured in the Chef Push Jobs configuration file . This port allows Chef Push Jobs clients to communicate with the Chef Push Jobs server. Puppet is an open-source configuration management solution, which is built with Ruby and offers custom Domain Specific Language (DSL) and Embedded Ruby (ERB) templates to create custom Puppet language files, offering a declarative-paradigm programming approach. A Puppet piece of code is called a manifest, and is a file with .pp extension.

NEW QUESTION 286

- (Topic 1)

When configuring a WLAN with WPA2 PSK in the Cisco Wireless LAN Controller GUI, which two formats are available to select? (Choose two)

- A. ASCII
- B. base64
- C. binary
- D. decimal
- E. hexadecimal

Answer: AE


Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/wireless/controller/7-4/configuration/guides/consolidated/b_cg74_CONSOLIDATED/b_cg74_CONSOLIDATED_chapter_01010001.html

NEW QUESTION 288

- (Topic 1)

Refer to the exhibit.

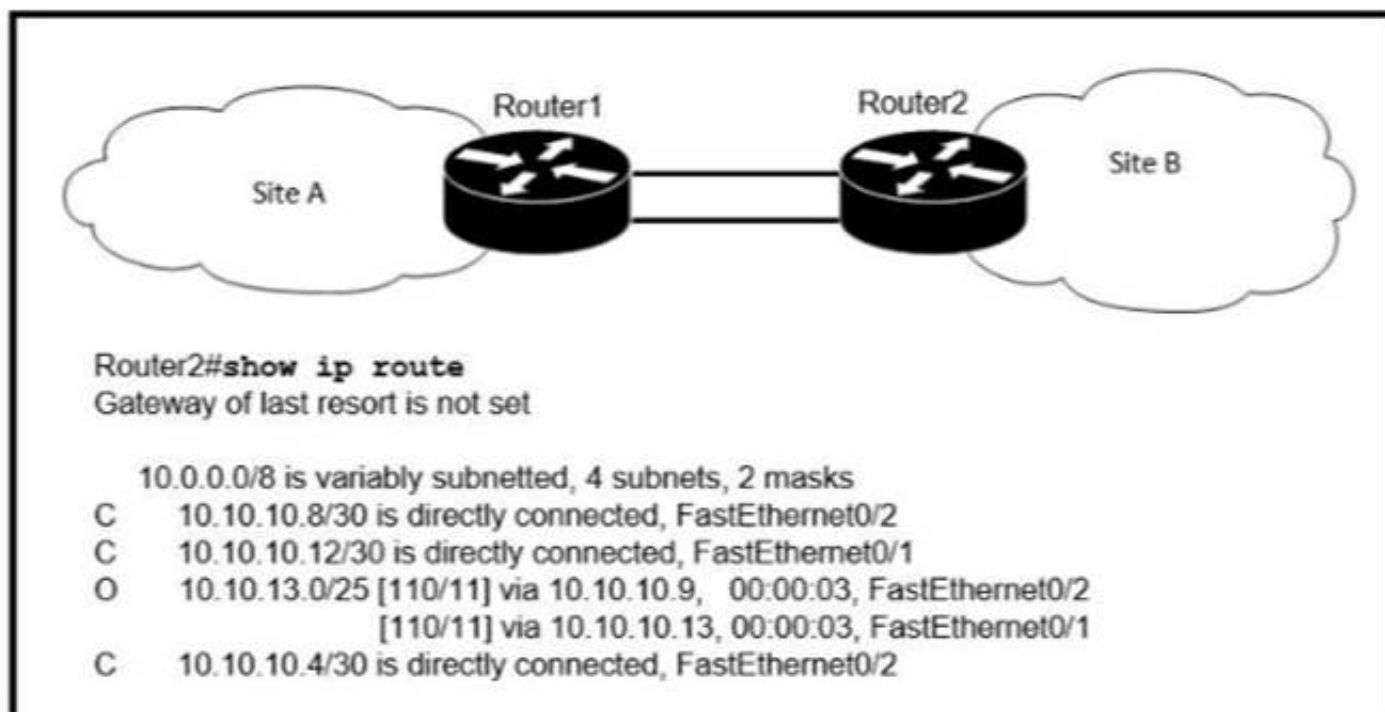

If OSPF is running on this network, how does Router 2 handle traffic from Site B to 10.10.13/25 at Site A?

- A. It sends packets out of interface Fa0/2 only.
- B. It sends packets out of interface Fa0/1 only.
- C. It cannot send packets to 10.10.13 128/25
- D. It load-balances traffic out of Fa0/1 and Fa0/2

Answer: C

Explanation:

Router2 does not have an entry for the subnet 10.10.13.128/25. It only has an entry for 10.10.13.0/25, which ranges from 10.10.13.0 to 10.10.13.127.
<https://study-ccna.com/administrative-distance-metric/>

NEW QUESTION 289

- (Topic 1)

Which virtual MAC address is used by VRRP group 1?

- A. 0050.0c05.ad81
- B. 0007.c061.bc01
- C. 0000.5E00.0101
- D. 0500.3976.6401

Answer: C

Explanation:

The virtual router MAC address associated with a virtual router is an IEEE 802 MAC Address in the following format:
 00-00-5E-00-01-{VRID} (in hex in internet standard bit-order)

NEW QUESTION 294

- (Topic 1)

In Which way does a spine and-leaf architecture allow for scalability in a network when additional access ports are required?

- A. A spine switch and a leaf switch can be added with redundant connections between them
- B. A spine switch can be added with at least 40 GB uplinks
- C. A leaf switch can be added with a single connection to a core spine switch.
- D. A leaf switch can be added with connections to every spine switch

Answer: D

Explanation:

Spine-leaf architecture is typically deployed as two layers: spines (such as an aggregation layer), and leaves (such as an access layer). Spine-leaf topologies provide high-bandwidth, low-latency, nonblocking server-to-server connectivity. Leaf (aggregation) switches are what provide devices access to the fabric (the network of spine and leaf switches) and are typically deployed at the top of the rack. Generally, devices connect to the leaf switches. Devices can include servers, Layer 4-7 services (firewalls and load balancers), and WAN or Internet routers. Leaf switches do not connect to other leaf switches. In spine-and-leaf architecture, every leaf should connect to every spine in a full mesh. Spine (aggregation) switches are used to connect to all leaf switches and are typically deployed at the end or middle of the row. Spine switches do not connect to other spine switches.

NEW QUESTION 299

- (Topic 1)

Which command on a port enters the forwarding state immediately when a PC is connected to it?


- A. switch(config)#spanning-tree portfast default
- B. switch(config)#spanning-tree portfast bpduguard default
- C. switch(config-if)#spanning-tree portfast trunk
- D. switch(config-if)#no spanning-tree portfast

Answer: C

NEW QUESTION 303

DRAG DROP - (Topic 1)


Drag and drop the descriptions of file-transfer protocols from the left onto the correct protocols on the right.

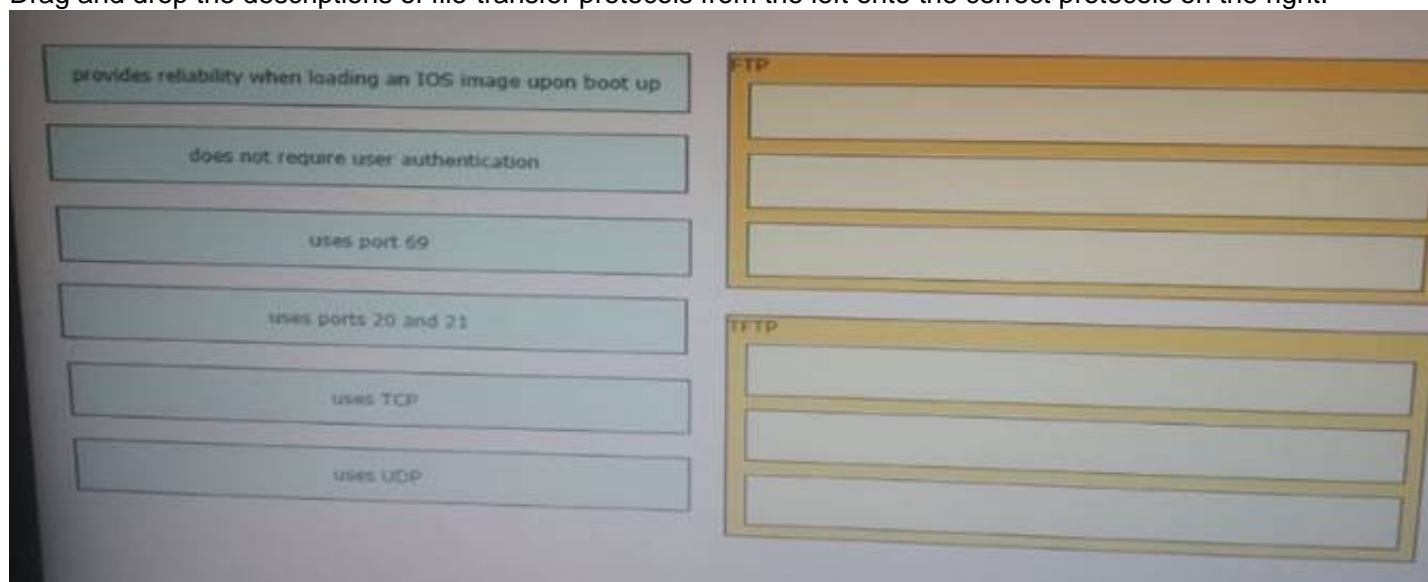

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

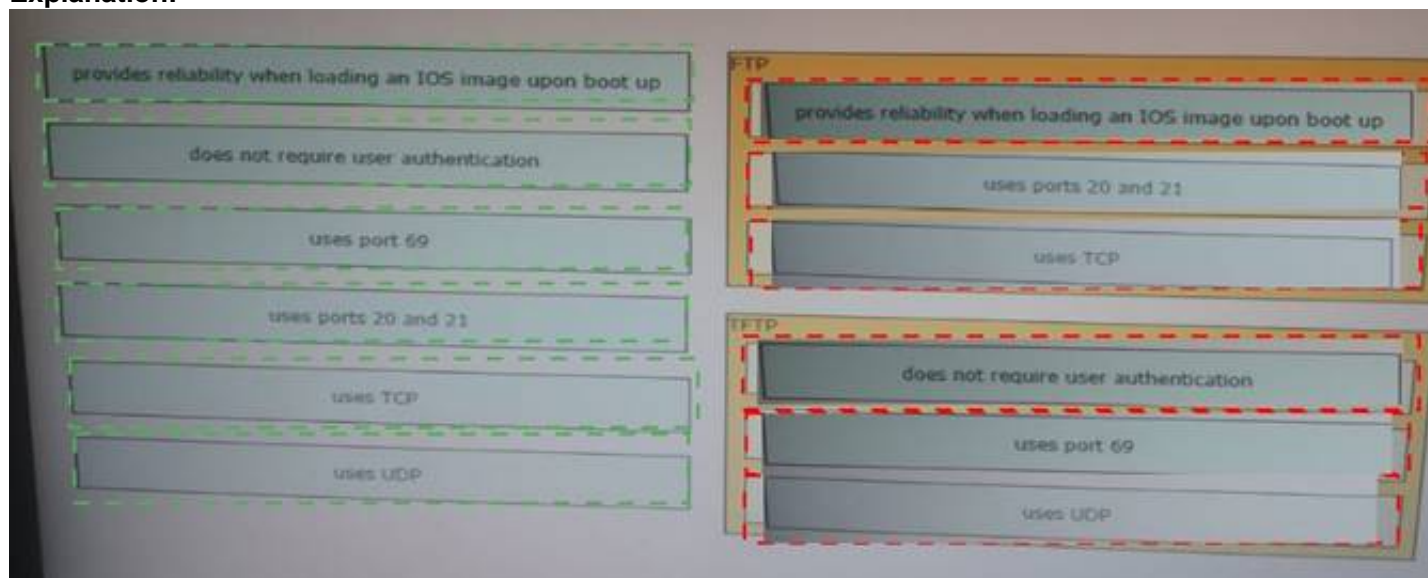

NEW QUESTION 305

- (Topic 1)

What is a practice that protects a network from VLAN hopping attacks?

- A. Enable dynamic ARP inspection
- B. Configure an ACL to prevent traffic from changing VLANs
- C. Change native VLAN to an unused VLAN ID
- D. Implement port security on internet-facing VLANs

Answer: C

NEW QUESTION 308

- (Topic 1)

What is a DHCP client?

- A. a host that is configured to request an IP address automatically
- B. a server that dynamically assigns IP addresses to hosts
- C. a workstation that requests a domain name associated with its IP address
- D. a router that statically assigns IP addresses to hosts

Answer: A

NEW QUESTION 309

- (Topic 1)


Which type of wireless encryption is used for WPA2 in preshared key mode?

- A. TKIP with RC4
- B. RC4
- C. AES-128
- D. AES-256

Answer: D

Explanation:

We can see in this picture we have to type 64 hexadecimal characters (256 bit) for the WPA2 passphrase so we can deduce the encryption is AES-256, not AES-128.

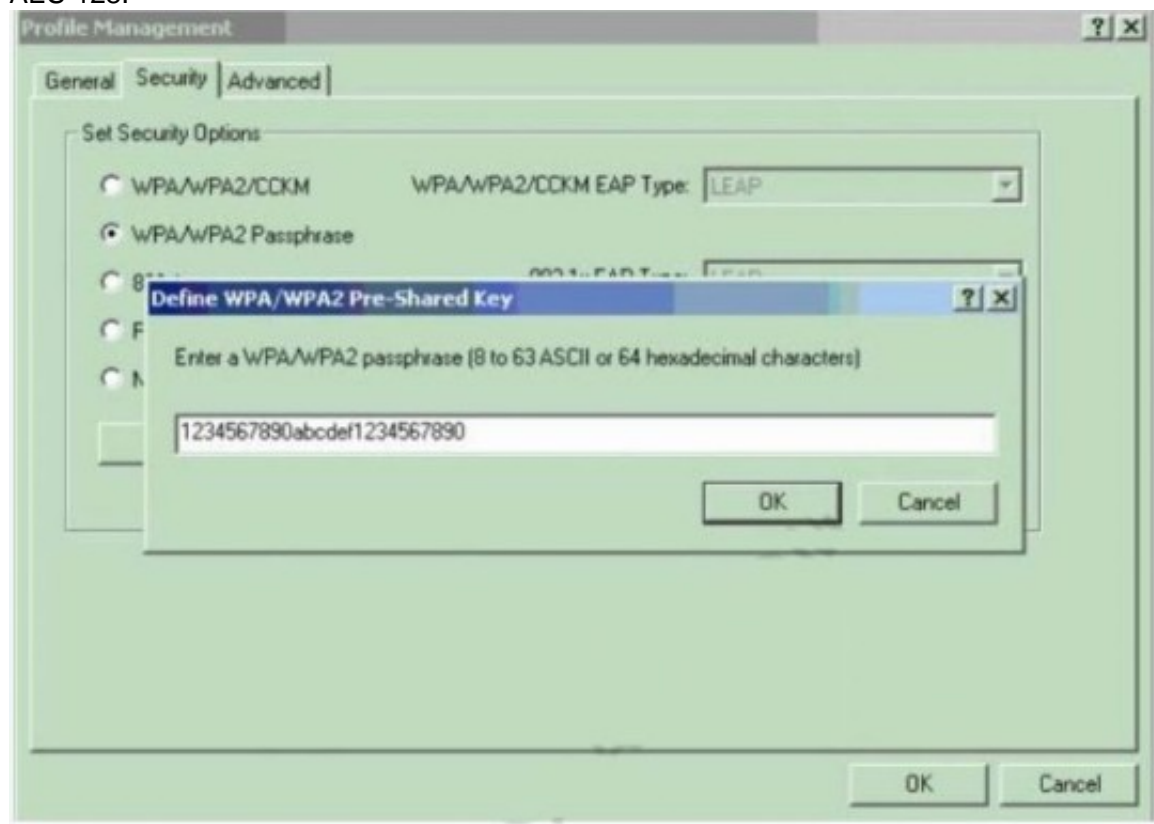

<https://www.cisco.com/c/en/us/support/docs/wireless-mobility/wireless-lan-wlan/67134-wpa2-config.html>

NEW QUESTION 314

DRAG DROP - (Topic 1)

Drag and drop the WLAN components from the left onto the correct descriptions on the right.

access point	device that manages access points
virtual interface	device that provides Wi-Fi devices with a connection to a wired network
dynamic interface	used for out of band management of a WLC
service port	used to support mobility management of the WLC
wireless LAN controller	applied to the WLAN for wireless client communication

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

access point	wireless LAN controller
virtual interface	access point
dynamic interface	service port
service port	virtual interface
wireless LAN controller	dynamic interface

NEW QUESTION 319

- (Topic 1)

What is an advantage of Cisco DNA Center versus traditional campus device management?

- A. It supports numerous extensibility options including cross-domain adapters and third- party SDKs.

- B. It supports high availability for management functions when operating in cluster mode.
- C. It enables easy autodiscovery of network elements in a brownfield deployment.
- D. It is designed primarily to provide network assurance.

Answer: A

NEW QUESTION 323

- (Topic 1)

Which mode must be used to configure EtherChannel between two switches without using a negotiation protocol?

- A. on
- B. auto
- C. active
- D. desirable

Answer: A

Explanation:

The Static Persistence (or “on” mode) bundles the links unconditionally and no negotiation protocol is used. In this mode, neither PAgP nor LACP packets are sent or received.

NEW QUESTION 325

- (Topic 1)

Refer to the exhibit.

```
ip arp inspection vlan 2-10
interface fastethernet 0/1
ip arp inspection trust
```

If the network environment is operating normally, which type of device must be connected to interface FastEthernet 0/1?

- A. DHCP client
- B. access point
- C. router
- D. PC

Answer: C

NEW QUESTION 328

- (Topic 1)

Which two encoding methods are supported by REST APIs? (Choose two)

- A. YAML
- B. JSON
- C. EBCDIC
- D. SGML
- E. XML

Answer: BE

Explanation:

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/rest_cfg/2_1_x/b_Cisco_APIC_REST_API_Configuration_Guide/b_Cisco_APIC_REST_API_Configuration_Guide_chapter_01.html

Reference:

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus1000/sw/5_x/rest_api_config/b_Cisco_N1KV_VMware_REST_API_Config_5x/b_Cisco_N1KV_VMware_REST_API_Config_5x_chapter_010.pdf

The Application Policy Infrastructure Controller (APIC) REST API is a programmatic interface that uses REST architecture. The API accepts and returns HTTP (not enabled by default) or HTTPS messages that contain JavaScript Object Notation (JSON) or Extensible Markup Language (XML) documents.

NEW QUESTION 330

- (Topic 1)

Which two capacities of Cisco DNA Center make it more extensible as compared to traditional campus device management? (Choose two)

- A. adapters that support all families of Cisco IOS software
- B. SDKs that support interaction with third-party network equipment
- C. customized versions for small, medium, and large enterprises
- D. REST APIs that allow for external applications to interact natively with Cisco DNA Center
- E. modular design that is upgradable as needed

Answer: BD

Explanation:

Cisco DNA Center offers 360-degree extensibility through four distinct types of platform capabilities: + Intent-based APIs leverage the controller and enable business and IT applications to deliver intent to the network and to reap network analytics and insights for IT and business innovation. + Process adapters, built on

integration APIs, allow integration with other IT and network systems to streamline IT operations and processes.+ Domain adapters, built on integration APIs, allow integration with other infrastructure domains such as data center, WAN, and security to deliver a consistent intent-based infrastructure across the entire IT environment.+ SDKs allow management to be extended to third-party vendor's network devices to offer support for diverse environments.

NEW QUESTION 333

- (Topic 1)

A network engineer must back up 20 network router configurations globally within a customer environment. Which protocol allows the engineer to perform this function using the Cisco IOS MIB?

- A. CDP
- B. SNMP
- C. SMTP
- D. ARP

Answer: B

Explanation:

SNMP is an application-layer protocol that provides a message format for communication between SNMP managers and agents. SNMP provides a standardized framework and a common language used for the monitoring and management of devices in a network. The SNMP framework has three parts: + An SNMP manager + An SNMP agent + A Management Information Base (MIB) The Management Information Base (MIB) is a virtual information storage area for network management information, which consists of collections of managed objects. With SNMP, the network administrator can send commands to multiple routers to do the backup

NEW QUESTION 337

- (Topic 1)

Which function is performed by the collapsed core layer in a two-tier architecture?

- A. enforcing routing policies
- B. marking interesting traffic for data policies
- C. attaching users to the edge of the network
- D. applying security policies

Answer: A

NEW QUESTION 339

- (Topic 1)

Which security program element involves installing badge readers on data-center doors to allow workers to enter and exit based on their job roles?

- A. role-based access control
- B. biometrics
- C. multifactor authentication
- D. physical access control

Answer: D

NEW QUESTION 340

- (Topic 1)

When a floating static route is configured, which action ensures that the backup route is used when the primary route fails?

- A. The floating static route must have a higher administrative distance than the primary route so it is used as a backup
- B. The administrative distance must be higher on the primary route so that the backup route becomes secondary.
- C. The floating static route must have a lower administrative distance than the primary route so it is used as a backup
- D. The default-information originate command must be configured for the route to be installed into the routing table

Answer: A

NEW QUESTION 341

- (Topic 1)

Which CRUD operation modifies an existing table or view?

- A. read
- B. create
- C. replace
- D. update

Answer: D

NEW QUESTION 343

- (Topic 1)

What is the function of a controller in controller-based networking?

- A. It serves as the centralized management point of an SDN architecture.
- B. It centralizes the data plane for the network.
- C. It is the card on a core router that maintains all routing decisions for a campus.
- D. It is a pair of core routers that maintain all routing decisions for a campus

Answer: A

NEW QUESTION 346

- (Topic 1)

Refer to the exhibit.

```

R1# show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, * - candidate default
       U - per-user static route, o - ODR
Gateway of last resort is not set
C    1.0.0.0/8 is directly connected, Loopback0
     10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
O    10.0.1.3/32 [110/100] via 10.0.1.3, 00:39:08, Serial0
C    10.0.1.0/24 is directly connected, Serial0
O    10.0.1.5/32 [110/5] via 10.0.1.50, 00:39:08, Serial0
O    10.0.1.4/32 [110/10] via 10.0.1.4, 00:39:08, Serial0

```

What is the next hop address for traffic that is destined to host 10.0.1.5?

- A. 10.0.1.3
- B. 10.0.1.50
- C. 10.0.1.4
- D. Loopback 0

Answer: B

NEW QUESTION 351

- (Topic 1)

What is a difference between local AP mode and FlexConnect AP mode?

- A. Local AP mode creates two CAPWAP tunnels per AP to the WLC
- B. FlexConnect AP mode fails to function if the AP loses connectivity with the WLC
- C. FlexConnect AP mode bridges the traffic from the AP to the WLC when local switching is configured
- D. Local AP mode causes the AP to behave as if it were an autonomous AP

Answer: A

NEW QUESTION 355

- (Topic 1)

Refer to the exhibit.

```

iBGP route 10.0.0.0/30
RIP route 10.0.0.0/30
OSPF route 10.0.0.0/16
OSPF route 10.0.0.0/30
EIGRP route 10.0.0.1/32

```

A router reserved these five routes from different routing information sources. Which two routes does the router install in its routing table? (Choose two)

- A. RIP route 10.0.0.0/30
- B. iBGP route 10.0.0.0/30
- C. OSPF route 10.0.0.0/30
- D. EIGRP route 10.0.0.1/32
- E. OSPF route 10.0.0.0/16

Answer: CD

NEW QUESTION 358

- (Topic 1)

Which MAC address is recognized as a VRRP virtual address?

- A. 0000.5E00.010a
- B. 0005.3711.0975
- C. 0000.0C07.AC99
- D. 0007.C070/AB01

Answer: A

Explanation:

With VRRP, the virtual router's MAC address is 0000.5E00.01xx, in which xx is the VRRP group.

NEW QUESTION 359

- (Topic 1)

What are two roles of Domain Name Services (DNS)? (Choose Two)

- A. builds a flat structure of DNS names for more efficient IP operations
- B. encrypts network Traffic as it travels across a WAN by default
- C. improves security by protecting IP addresses under Fully Qualified Domain Names (FQDNs)
- D. enables applications to identify resources by name instead of IP address
- E. allows a single host name to be shared across more than one IP address

Answer: DE

NEW QUESTION 364

- (Topic 1)

An engineer must configure the IPv6 address 2001:0db8:0000:0000:0700:0003:400F:572B on the serial0/0 interface of the HQ router and wants to compress it for easier configuration. Which command must be issued on the router interface?

- A. ipv6 address 2001:db8::700:3:400F:572B
- B. ipv6 address 2001:db8:0::700:3:4F:572B
- C. ipv6 address 2001:Odb8::7:3:4F:572B
- D. ipv6 address 2001::db8:0000::700:3:400F:572B

Answer: A

NEW QUESTION 369

- (Topic 1)

Which two events occur automatically when a device is added to Cisco DNA Center? (Choose two.)

- A. The device is assigned to the Global site.
- B. The device is placed into the Unmanaged state.
- C. The device is placed into the Provisioned state.
- D. The device is placed into the Managed state.
- E. The device is assigned to the Local site.

Answer: AB

NEW QUESTION 374

- (Topic 1)

Which network allows devices to communicate without the need to access the Internet?

- A. 1729.0.0/16
- B. 172.28.0.0/16
- C. 192.0.0.0/8
- D. 209.165.201.0/24

Answer: B

Explanation:

The private ranges of each class of IPv4 are listed below:

Class A private IP address ranges from 10.0.0.0 to 10.255.255.255 Class B private IP address ranges from 172.16.0.0 to 172.31.255.255 Class C private IP address ranges from 192.168.0.0 to 192.168.255.255 Only the network 172.28.0.0/16 belongs to the private IP address (of class B).

NEW QUESTION 379

- (Topic 1)

What is the primary purpose of a First Hop Redundancy Protocol?


- A. It allows directly connected neighbors to share configuration information.
- B. It allows a router to use bridge priorities to create multiple loop-free paths to a single destination.
- C. It reduces routing failures by allowing Layer 3 load balancing between OSPF neighbors that have the same link metric.
- D. It reduces routing failures by allowing more than one router to represent itself, as the default gateway of a network.

Answer: D

NEW QUESTION 383

- (Topic 1)

Refer to the exhibit.

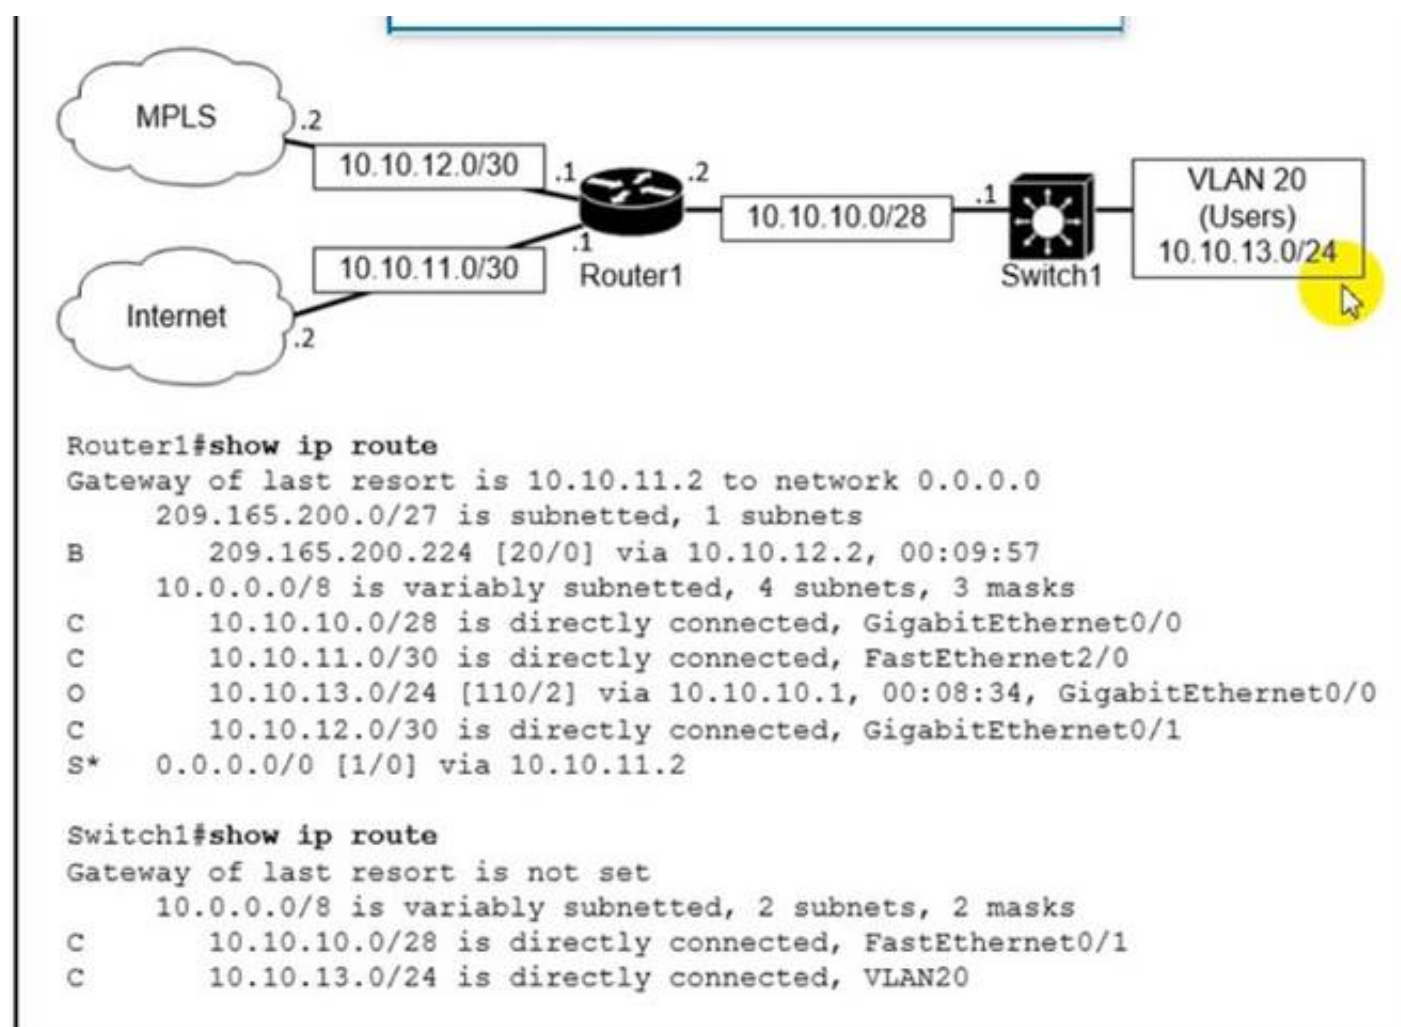

which path is used by the router for internet traffic ?

- A. 209.165.200.0/27
- B. 10.10.10.0/28
- C. 0.0.0.0/0
- D. 10.10.13.0/24

Answer: C

NEW QUESTION 385

- (Topic 1)

Which two WAN architecture options help a business improve scalability and reliability for the network? (Choose two.)

- A. asynchronous routing
- B. single-homed branches
- C. dual-homed branches
- D. static routing
- E. dynamic routing

Answer: AC

NEW QUESTION 388

- (Topic 1)

What software defined architecture plane assists network devices with making packet- forwarding decisions by providing Layer 2 reachability and Layer 3 routing information?

- A. data plane
- B. control plane
- C. policy plane
- D. management plane

Answer: B

NEW QUESTION 392

- (Topic 1)

Which output displays a JSON data representation?

- A. {
 "response": {
 "taskld": {},
 "url": "string"
 };
 "version": "string"
}
- B. {
 "response"- {
 "taskld"- {},
 "url"- "string"
 },
 "version"- "string"
}
- C. {
 "response": {
 "taskld": {},
 "url": "string"
 },
 "version": "string"
}
- D. {
 "response". {
 "taskld". {};
 "url". "string"
 };
 "version". "string"
}

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

Explanation:

JSON data is written as name/value pairs.A name/value pair consists of a field name (in double quotes), followed by a colon, followed by a value:"name": "Mark"JSON can use arrays. Array values must be of type string, number, object, array, boolean or null.For example:{"name": "John", "age": 30, "cars": ["Ford", "BMW", "Fiat"]}JSON can have empty object like "taskld": {}

NEW QUESTION 395

DRAG DROP - (Topic 1)

Drag and drop the IPv6 address type characteristics from the left to the right.

attached to a single subnet

addresses with prefix FC00::/7

configured only once per interface

addressing for exclusive use internally without Internet routing

Link-Local Address


Unique Local Address

A. Mastered

B. Not Mastered

Answer: A

Explanation:

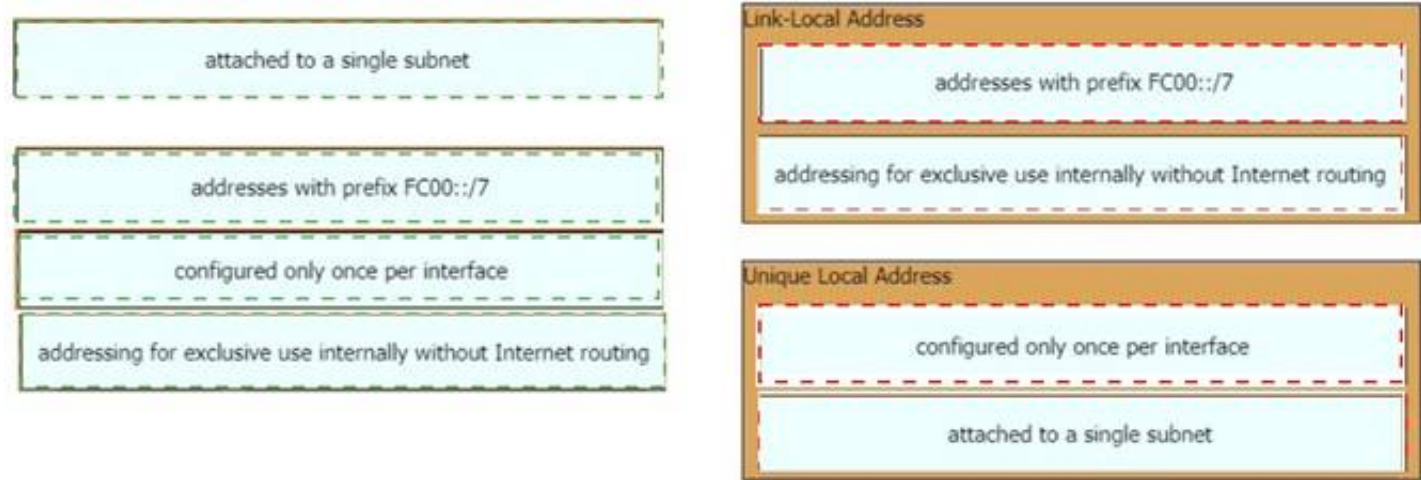

NEW QUESTION 396

- (Topic 1)
When configuring IPv6 on an interface, which two IPv6 multicast groups are joined? (Choose two)

- A. 2000::/3
- B. 2002::5
- C. FC00::/7
- D. FF02::1
- E. FF02::2

Answer: DE

Explanation:

Reference:
<https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/ipv6/configuration/xe-3s/ipv6-xe-36s-book/ip6-multicast.html>
When an interface is configured with IPv6 address, it automatically joins the all nodes (FF02::1) and solicited-node (FF02::1:FFxx:xxxx) multicast groups. The all-node group is used to communicate with all interfaces on the local link, and the solicited-nodes multicast group is required for link-layer address resolution. Routers also join a third multicast group, the all-routers group (FF02::2).

NEW QUESTION 399

- (Topic 1)
Which two protocols are supported on service-port interfaces? (Choose two.)

- A. RADIUS
- B. TACACS+
- C. SCP
- D. Telnet
- E. SSH


Answer: DE

Explanation:

https://www.cisco.com/c/en/us/td/docs/wireless/controller/7-5/configuration-guide/b_cg75/b_cg75_chapter_011110.html

NEW QUESTION 403

DRAG DROP - (Topic 1)
Drag and drop the SNMP manager and agent identifier commands from the left onto the functions on the right

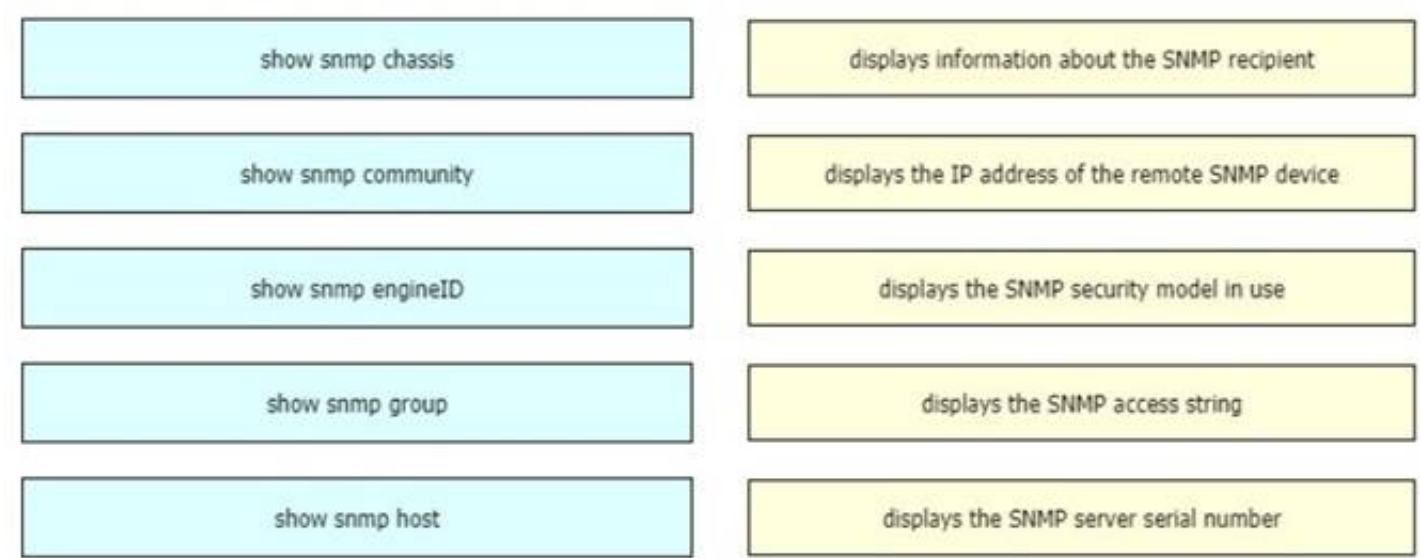

- A. Mastered
- B. Not Mastered

Answer: A


Explanation:

show snmp chassis	show snmp host
show snmp community	show snmp engineID
show snmp engineID	show snmp group
show snmp group	show snmp community
show snmp host	show snmp chassis

NEW QUESTION 406

- (Topic 1)

Refer to the exhibit.

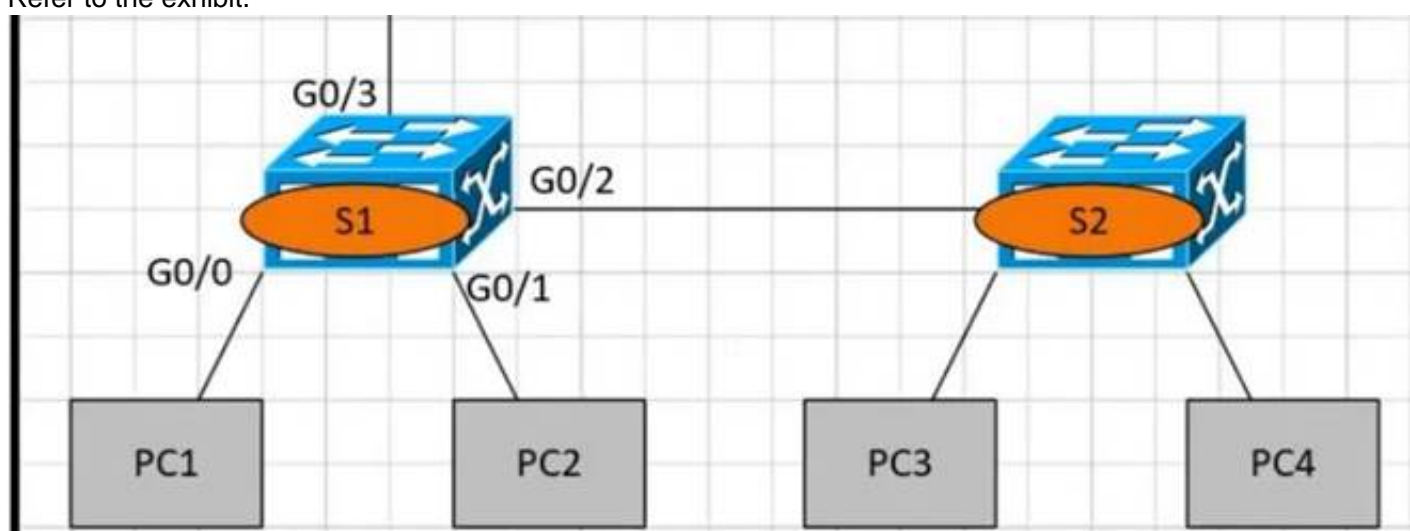

PC1 is trying to ping PC3 for the first time and sends out an ARP to S1 Which action is taken by S1?

- A. It forwards it out G0/3 only
- B. It is flooded out every port except G0/0.
- C. It drops the frame.
- D. It forwards it out interface G0/2 only.

Answer: B

NEW QUESTION 407

- (Topic 1)

Which configuration ensures that the switch is always the root for VLAN 750?

- A. Switch(config)#spanning-tree vlan 750 priority 38003685
- B. Switch(config)#spanning-tree vlan 750 root primary
- C. Switch(config)#spanning-tree vlan 750 priority 614440
- D. Switch(config)#spanning-tree vlan 750 priority 0

Answer: D

Explanation:

Although the spanning-tree vlan 10 root primary command will ensure a switch will have a bridge priority value lower than other bridges introduced to the network, the spanning-tree vlan 10 priority 0 command ensures the bridge priority takes precedence over all other priorities.

NEW QUESTION 410

- (Topic 1)

Which technology is used to improve web traffic performance by proxy caching?

- A. WSA
- B. Firepower
- C. ASA
- D. FireSIGHT

Answer: A

NEW QUESTION 415

- (Topic 1)

Which HTTP status code is returned after a successful REST API request?

- A. 200
- B. 301
- C. 404
- D. 500

Answer: A

NEW QUESTION 417

- (Topic 1)

What does physical access control regulate?


- A. access to specific networks based on business function
- B. access to servers to prevent malicious activity
- C. access to computer networks and file systems
- D. access to networking equipment and facilities

Answer: D

NEW QUESTION 418

- (Topic 1)

Refer to the exhibit.

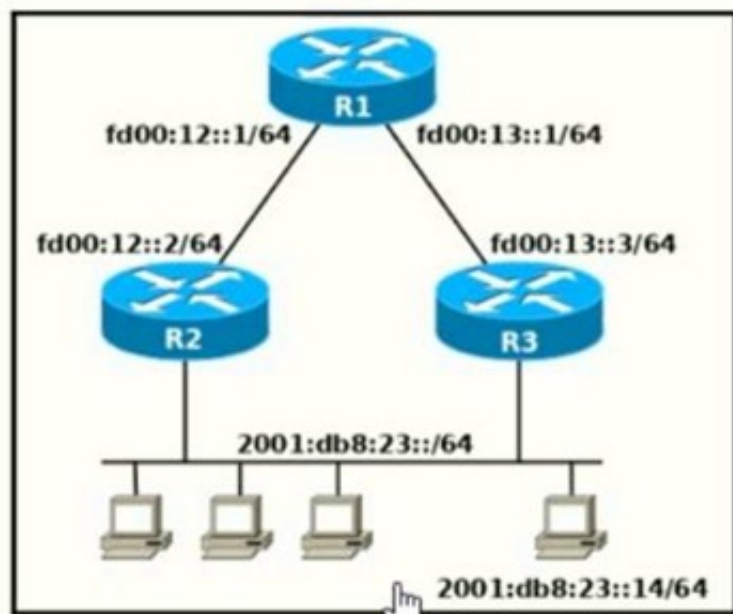

Which two commands, when configured on router R1, fulfill these requirements? (Choose two.)

Packets towards the entire network 2001:db8:23::/64 must be forwarded through router R2. Packets toward host 2001:db8:23::14 preferably must be forwarded through R3.

- A. ipv6 route 2001:db8:23::/128 fd00:12::2
- B. ipv6 route 2001:db8:23::14/128 fd00:13::3
- C. ipv6 route 2001:db8:23::14/64 fd00:12::2
- D. ipv6 route 2001:db8:23::/64 fd00:12::2
- E. ipv6 route 2001:db8:23::14/64 fd00:12::2 200

Answer: DE

NEW QUESTION 419

- (Topic 1)

When DHCP is configured on a router, which command must be entered so the default gateway is automatically distributed?

- A. default-router
- B. default-gateway
- C. ip helper-address
- D. dns-server

Answer: A

NEW QUESTION 423

- (Topic 1)

Where is the interface between the control plane and data plane within the software-defined architecture?

- A. control layer and the infrastructure layer
- B. application layer and the infrastructure layer
- C. control layer and the application layer
- D. application layer and the management layer

Answer: A

NEW QUESTION 424

- (Topic 1)

When a site-to-site VPN is configured, which IPsec mode provides encapsulation and encryption of the entire original P packet?

- A. IPsec tunnel mode with AH
- B. IPsec transport mode with AH
- C. IPsec tunnel mode with ESP
- D. IPsec transport mode with ESP

Answer: C

Explanation:

“Encapsulating Security Payload...Unlike Authentication Header (AH), ESP in transport mode does not provide integrity and authentication for the entire IP packet. However, in Tunnel Mode, where the entire original IP packet is encapsulated with a new packet header added, ESP protection is afforded to the whole inner IP packet (including the inner header) while the outer header (including any outer IPv4 options or IPv6 extension headers) remains unprotected.

NEW QUESTION 428

- (Topic 1)

A port security violation has occurred on a switch port due to the maximum MAC address count being exceeded. Which command must be configured to increment the security- violation count and forward an SNMP trap?

- A. switchport port-security violation access
- B. switchport port-security violation protect
- C. switchport port-security violation restrict
- D. switchport port-security violation shutdown

Answer: C

Explanation:

https://www.cisco.com/c/en/us/td/docs/switches/lan/catalyst4500/12-2/25ew/configuration/guide/conf/port_sec.html

NEW QUESTION 433

DRAG DROP - (Topic 1)

Drag and drop the 802.11 wireless standards from the left onto the matching statements on the right

802.11a	Operates in the 2.4 GHz and 5 GHz bands.
802.11ac	Operates in the 2.4 GHz band only and supports a maximum data rate of 54 Mbps.
802.11b	Operates in the 5 GHz band only and supports a maximum data rate that can exceed 100 Mbps.
802.11g	Supports a maximum data rate of 11 Mbps.
802.11n	Operates in the 5 GHz band only and supports a maximum data rate of 54 Mbps.

- A. Mastered
- B. Not Mastered

Answer: A


Explanation:

802.11a	802.11n
802.11ac	802.11g
802.11b	802.11ac
802.11g	802.11b
802.11n	802.11a

NEW QUESTION 438

- (Topic 1)

Refer to the exhibit.

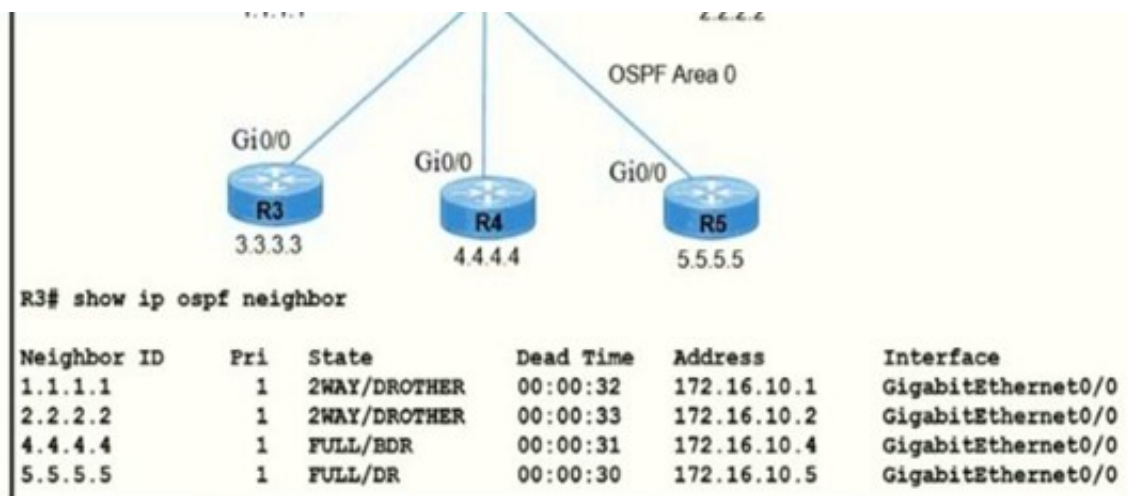

R5 is the current DR on the network, and R4 is the BDR. Their interfaces are flapping, so a network engineer wants the OSPF network to elect a different DR and BDR. Which set of configurations must the engineer implement?

A)

```

R4(config)#interface gi0/0
R4(config-if)#ip ospf priority 20

R5(config)#interface gi0/0
R5(config-if)#ip ospf priority 10
  
```

B)

```

R2(config)#interface gi0/0
R2(config-if)#ip ospf priority 259

R3(config)#interface gi0/0
R3(config-if)#ip ospf priority 256
  
```

C)

```

R5(config)#interface gi0/0
R5(config-if)#ip ospf priority 120

R4(config)#interface gi0/0
R4(config-if)#ip ospf priority 110
  
```

D)

```

R3(config)#interface gi0/0
R3(config-if)#ip ospf priority 255

R2(config)#interface gi0/0
R2(config-if)#ip ospf priority 240
  
```

- A. Option
- B. Option
- C. Option
- D. Option

Answer: D

NEW QUESTION 440

- (Topic 1)

Which two outcomes are predictable behaviors for HSRP? (Choose two.)

- A. The two routers synchronize configurations to provide consistent packet forwarding
- B. The two routers negotiate one router as the active router and the other as the standby router
- C. Each router has a different IP address, both routers act as the default gateway on the LAN, and traffic is load-balanced between them
- D. The two routers share a virtual IP address that is used as the default gateway for devices on the LAN
- E. The two routers share the same interface IP address and default gateway traffic is load- balanced between them

Answer: BD

NEW QUESTION 443

- (Topic 1)

What is a characteristic of a SOHO network?

- A. connects each switch to every other switch in the network
- B. enables multiple users to share a single broadband connection
- C. provides high throughput access for 1000 or more users
- D. includes at least three tiers of devices to provide load balancing and redundancy

Answer: B

NEW QUESTION 447

- (Topic 1)


What are two functions of an SDN controller? (Choose two)

- A. Layer 2 forwarding
- B. coordinating VTNs
- C. tracking hosts
- D. managing the topology
- E. protecting against DDoS attacks

Answer: BD

NEW QUESTION 450

- (Topic 1)

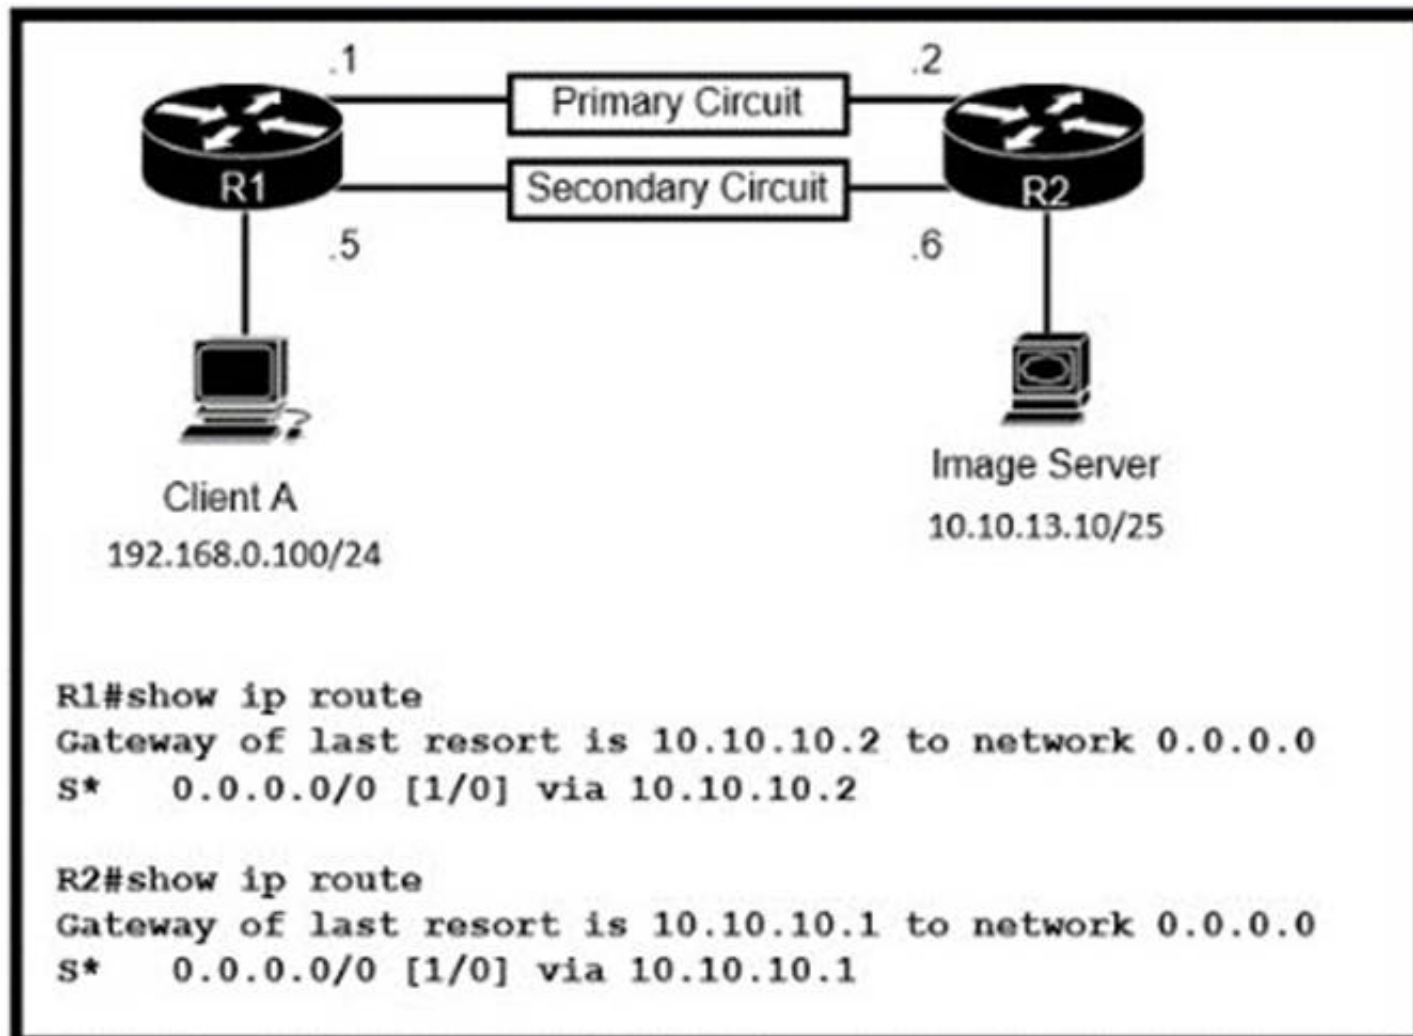

Refer to the exhibit Routers R1 and R2 have been configured with their respective LAN interfaces The two circuits are operational and reachable across WAN Which command set establishes failover redundancy if the primary circuit goes down?

- ☐ R1(config)#ip route 10.10.13.10 255.255.255.255 10.10.10.2
R2(config)#ip route 192.168.0.100 255.255.255.255 10.10.10.1
- ☒ R1(config)#ip route 0.0.0.0 0.0.0.0 10.10.10.6 2
R2(config)#ip route 0.0.0.0 0.0.0.0 10.10.10.5 2
- ☐ R1(config)#ip route 10.10.13.10 255.255.255.255 10.10.10.6
R2(config)#ip route 192.168.0.100 255.255.255.255 10.10.10.5
- ☐ R1(config)#ip route 0.0.0.0 0.0.0.0 10.10.10.6
R2(config)#ip route 0.0.0.0 0.0.0.0 10.10.10.5

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

NEW QUESTION 455

- (Topic 1)

Which type of address is the public IP address of a NAT device?

- A. outside global
- B. outsdwde local
- C. inside global
- D. insride local

- E. outside public
- F. inside public

Answer: C

Explanation:

NAT use four types of addresses: * Inside local address – The IP address assigned to a host on the inside network. The address is usually not an IP address assigned by the Internet Network Information Center (InterNIC) or service provider. This address is likely to be an RFC 1918 private address. * Inside global address – A legitimate IP address assigned by the InterNIC or service provider that represents one or more inside local IP addresses to the outside world. * Outside local address – The IP address of an outside host as it is known to the hosts on the inside network. * Outside global address – The IP address assigned to a host on the outside network. The owner of the host assigns this address.

NEW QUESTION 460

- (Topic 1)

Which two WAN architecture options help a business scalability and reliability for the network? (Choose two)

- A. asynchronous routing
- B. single-homed branches
- C. dual-homed branches
- D. static routing
- E. dynamic routing

Answer: AC

NEW QUESTION 461

- (Topic 1)

What is a similarity between OM3 and OM4 fiber optic cable?

- A. Both have a 50 micron core diameter
- B. Both have a 9 micron core diameter
- C. Both have a 62.5 micron core diameter
- D. Both have a 100 micron core diameter

Answer: A

NEW QUESTION 465

- (Topic 1)

Router R1 must send all traffic without a matching routing-table entry to 192.168.1.1. Which configuration accomplishes this task?

- ☐ R1#Config t
R1(config)#ip routing
R1(config)#ip route default-route 192.168.1.1
- ☐ R1#Config t
R1(config)#ip routing
R1(config)#ip route 192.168.1.1 0.0.0.0 0.0.0.0
- ☐ R1#Config t
R1(config)#ip routing
R1(config)#ip route 0.0.0.0 0.0.0.0 192.168.1.1
- ☐ R1#Config t
R1(config)#ip routing
R1(config)#ip default-gateway 192.168.1.1

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 468

- (Topic 1)

What facilitates a Telnet connection between devices by entering the device name?

- A. SNMP
- B. DNS lookup
- C. syslog
- D. NTP

Answer: B

NEW QUESTION 472

- (Topic 1)

When implementing a router as a DHCP server, which two features must be configured'? (Choose two)

- A. relay agent information
- B. database agent
- C. address pool
- D. smart-relay
- E. manual bindings

Answer: CE

NEW QUESTION 476

- (Topic 1)

What are two fundamentals of virtualization? (choose two)

- A. The environment must be configured with one hypervisor that serves solely as a network manager to monitor SNMP traffic
- B. It allows logical network devices to move traffic between virtual machines and the rest of the physical network
- C. It allows multiple operating systems and applications to run independently on one physical server.
- D. It allows a physical router to directly connect NICs from each virtual machine into the network
- E. It requires that some servers, virtual machines and network gear reside on the Internet

Answer: BC

NEW QUESTION 479

- (Topic 1)

Which command entered on a switch configured with Rapid PVST* listens and learns for a specific time period?

- A. switch(config)#spanning-tree vlan 1 max-age 6
- B. switch(config)#spanning-tree vlan 1 hello-time 10
- C. switch(config)#spanning-tree vlan 1 priority 4096
- D. switch(config)#spanning-tree vlan 1 forward-time 20

Answer: D

Explanation:

Forward time : Determines how long each of the listening and learning states last before the port begins forwarding.

Switch(config)# [no] spanning-tree vlan vlan_ID forward-time forward_timeConfigures the forward time of a VLAN. The forward_time value can be from 4 to 30 seconds. <https://www.cisco.com/c/en/us/td/docs/switches/lan/catalyst4500/12-2/15-02SG/configuration/guide/config/spantree.html#56177>

NEW QUESTION 481

- (Topic 1)

An organization has decided to start using cloud-provided services. Which cloud service allows the organization to install its own operating system on a virtual machine?

- A. platform-as-a-service
- B. software-as-a-service
- C. network-as-a-service
- D. infrastructure-as-a-service

Answer: B

Explanation:

Below are the 3 cloud supporting services cloud providers provide to customer:

+ SaaS (Software as a Service): SaaS uses the web to deliver applications that are managed by a thirdparty vendor and whose interface is accessed on the clients' side. Most SaaS applications can be run directly from a web browser without any downloads or installations required, although some require plugins.

+ PaaS (Platform as a Service): are used for applications, and other development, while providing cloud components to software. What developers gain with PaaS is a framework they can build upon to develop or customize applications. PaaS makes the development, testing, and deployment of applications quick, simple, and cost-effective. With this technology, enterprise operations, or a thirdparty provider, can manage Oses, virtualization, servers, storage, networking, and the PaaS software itself. Developers, however, manage the applications.

+ IaaS (Infrastructure as a Service): self-service models for accessing, monitoring, and managing remote datacenter infrastructures, such as compute (virtualized or bare metal), storage, networking, and networking services (e.g. firewalls). Instead of having to purchase hardware outright, users can purchase IaaS based on consumption, similar to electricity or other utility billing.

In general, IaaS provides hardware so that an organization can install their own operating system.

NEW QUESTION 486

- (Topic 1)

When a switch receives a frame for a known destination MAC address, how is the frame handed?

- A. sent to the port identified for the known MAC address
- B. broadcast to all ports
- C. forwarded to the first available port
- D. flooded to all ports except the one from which it originated

Answer: A

NEW QUESTION 491

- (Topic 1)

Refer to the exhibit.

```
interface GigabitEthernet0/1
ip address 192.168.1.2 255.255.255.0
ip access-group 2699 in
!
access-list 2699 deny icmp any 10.10.1.0 0.0.0.255 echo
access-list 2699 deny ip any 10.20.1.0 0.0.0.255
access-list 2699 permit ip any 10.10.1.0 0.0.0.255
access-list 2699 permit tcp any 10.20.1.0 0.0.0.127 eq 22
```

A network administrator must permit SSH access to remotely manage routers in a network. The operations team resides on the 10.20.1.0/25 network. Which command will accomplish this task?

- A. access-list 2699 permit udp 10.20.1.0 0.0.0.255
- B. no access-list 2699 deny tcp any 10.20.1.0 0.0.0.127 eq 22
- C. access-list 2699 permit tcp any 10.20.1.0 0.0.0.255 eq 22
- D. no access-list 2699 deny ip any 10.20.1.0 0.0.0.255

Answer: D

Explanation:

Note : Already a statement is there in last to allow SSH Traffic for network 10.20.1.0 0.0.0.127, but Second statement says deny ip any 10.20.1.0 0.0.0.255, so how it will work once it is denied. So the right answer is remove the --- no access-list 2699 deny ip any 10.20.1.0 0.0.0.255.

NEW QUESTION 493

- (Topic 1)

Which IPv6 address block sends packets to a group address rather than a single address?

- A. 2000::/3
- B. FC00::/7
- C. FE80::/10
- D. FF00::/8

Answer: D

Explanation:

FF00::/8 is used for IPv6 multicast and this is the IPv6 type of address the question wants to ask. FE80::/10 range is used for link-local addresses. Link-local addresses only used for communications within the local subnetwork (automatic address configuration, neighbor discovery, router discovery, and by many routing protocols). It is only valid on the current subnet. It is usually created dynamically using a link-local prefix of FE80::/10 and a 64-bit interface identifier (based on 48-bit MAC address).

NEW QUESTION 495

- (Topic 1)

What is the role of a firewall in an enterprise network?

- A. Forwards packets based on stateless packet inspection
- B. Processes unauthorized packets and allows passage to less secure segments of the network
- C. determines which packets are allowed to cross from unsecured to secured networks
- D. explicitly denies all packets from entering an administrative domain

Answer: C

NEW QUESTION 498

SIMULATION - (Topic 5)

Guidelines
Topology
Tasks

Guidelines


This is a lab item in which tasks will be performed on virtual devices.

- Refer to the **Tasks** tab to view the tasks for this lab item.
- Refer to the **Topology** tab to access the device console(s) and perform the tasks.
- Console access is available for all required devices by clicking the device icon or using the tab(s) above the console window.
- All necessary preconfigurations have been applied.
- Do not change the enable password or hostname for any device.
- Save your configurations** to NVRAM before moving to the next item.
- Click **Next** at the bottom of the screen to submit this lab and move to the next question.
- When **Next** is clicked, the lab closes and cannot be reopened.

Internet
172.20.20.128/25
10.10.254.0/24
10.10.13.0/24
10.10.12.128/25
10.10.12.0/25
10.10.31.0/24
10.10.1.1/32
192.168.0.1/24

Guidelines
Topology
Tasks

Internet
172.20.20.128/25
10.10.254.0/24
10.10.13.0/24
10.10.12.128/25
10.10.12.0/25
10.10.31.0/24
10.10.1.1/32
192.168.0.1/24

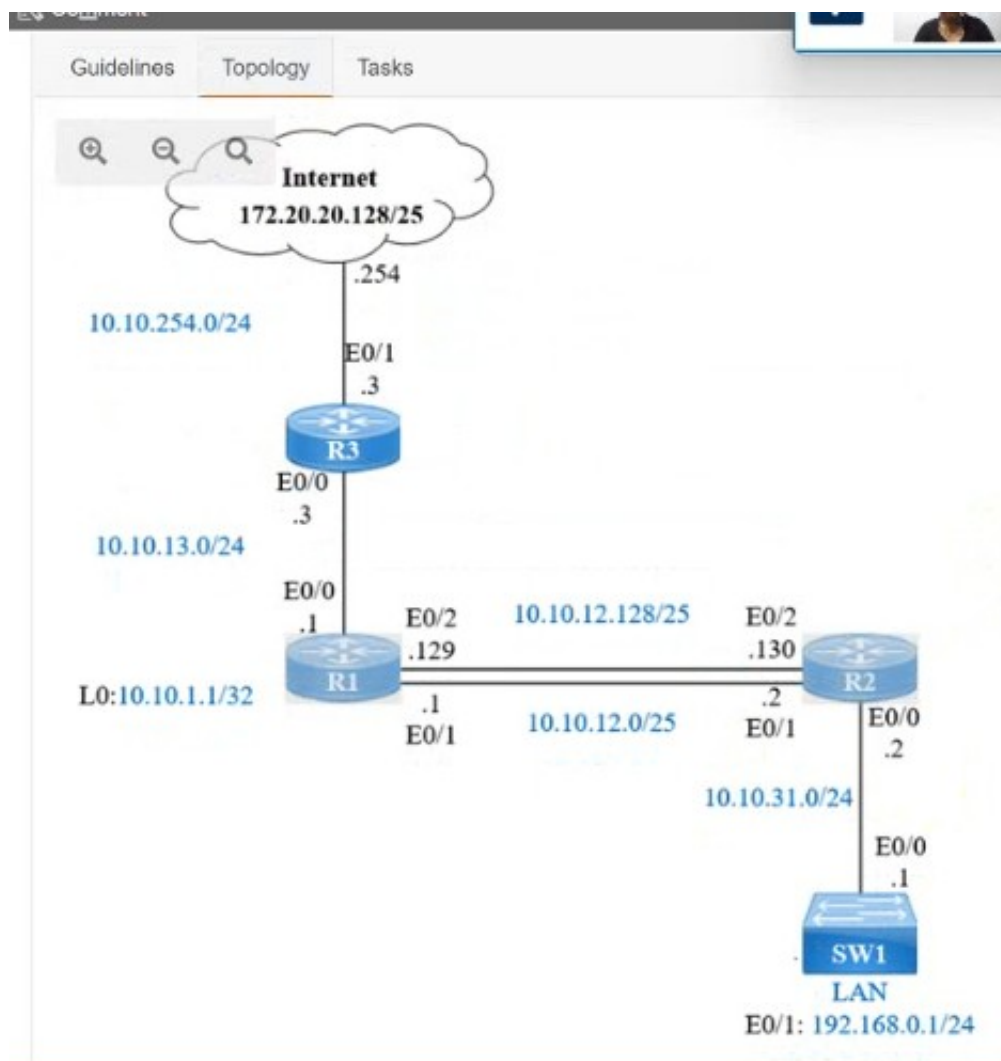

IP connectivity and OSPF are preconfigured on all devices where necessary. Do not make any changes to the IP addressing or OSPF. The company policy uses connected interfaces and next hops when configuring static routes except for load balancing or redundancy without floating static. Connectivity must be established between subnet 172.20.20.128/25 on the Internet and the LAN at 192.168.0.0/24 connected to SW1:

- * 1. Configure reachability to the switch SW1 LAN subnet in router R2.
- * 2. Configure default reachability to the Internet subnet in router R1.
- * 3. Configure a single static route in router R2 to reach to the Internet subnet considering both redundant links between routers R1 and R2. A default route is NOT allowed in router R2.
- * 4. Configure a static route in router R1 toward the switch SW1 LAN subnet where the primary link must be through Ethernet0/1. and the backup link must be through Ethernet0/2 using a floating route. Use the minimal administrative distance value when required.

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Answer as below configuration:

On R2:

Enable Conf t

Ip route 192.168.1.0 255.255.255.0 10.10.31.1

On R1:

Enable Conf t

Ip route 0.0.0.0 0.0.0.0 10.10.13.3

On R2

Ip route 172.20.20.128 255.255.255.128 e0/2

Ip route 172.20.20.128 255.255.255.128 e0/1

On R1

Ip route 192.168.0.0 255.255.255.0 e0/1

Ip route 192.168.0.0 255.255.255.0 10.10.12.2 3

Save all configurations after every router from anyone of these command Do wr

Or

Copy run start

NEW QUESTION 500

SIMULATION - (Topic 5)

All physical cabling is in place. A company plans to deploy 32 new sites. The sites will utilize both IPv4 and IPv6 networks.

- * 1 . Subnet 172.25.0.0/16 to meet the subnet requirements and maximize the number of hosts

Using the second subnet

- Assign the first usable IP address to e0/0 on Sw101
- Assign the last usable IP address to e0/0 on Sw102

- * 2. Subnet to meet the subnet requirements and maximize the number of hosts

c Using the second subnet


- Assign an IPv6 GUA using a unique 64-Bit interface identifier on e0/0 on Sw101
- Assign an IPv6 GUA using a unique 64-Bit interface identifier on e0/0 on swi02

Guidelines

This is a lab item in which tasks will be performed on virtual devices.

- Refer to the Tasks tab to view the tasks for this lab item.
- Refer to the Topology tab to access the device console(s) and perform the tasks.
- Console access is available for all required devices by clicking the device icon or using the tab(s) above the console window.
- All necessary preconfigurations have been applied.
- Do not change the enable password or hostname for any device.

- Save your configurations to NVRAM before moving to the next item.
- Click Next at the bottom of the screen to submit this lab and move to the next question.
- When Next is clicked, the lab closes and cannot be reopened.

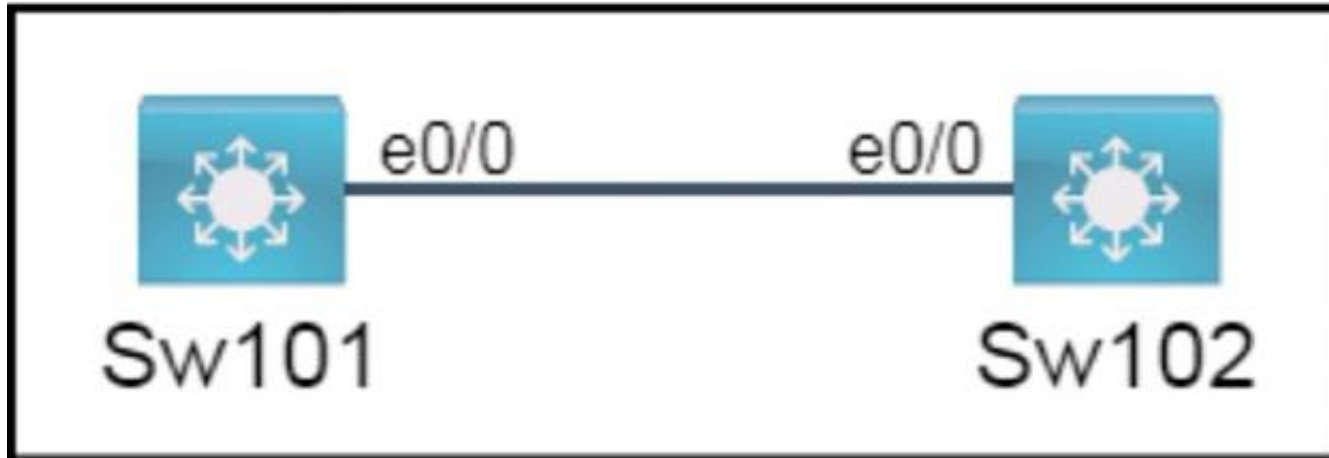

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

? To subnet 172.25.0.0/16 to meet the subnet requirements and maximize the number of hosts, you need to determine how many bits you need to borrow from the host portion of the address to create enough subnets for 32 sites. Since 32 is 2^5 , you need to borrow 5 bits, which means your new subnet mask will be /21 or 255.255.248.0. To find the second subnet, you need to add the value of the fifth bit (32) to the third octet of the network address (0), which gives you 172.25.32.0/21 as the second subnet. The first usable IP address in this subnet is 172.25.32.1, and the last usable IP address is 172.25.39.254.

? To assign the first usable IP address to e0/0 on Sw101, you need to enter the following commands on the device console:

```
Sw101#configure terminal Sw101(config)#interface e0/0 Sw101(config-if)#ip address 172.25.32.1 255.255.248.0 Sw101(config-if)#no shutdown Sw101(config-if)#end
```

? To assign the last usable IP address to e0/0 on Sw102, you need to enter the following commands on the device console:

```
Sw102#configure terminal Sw102(config)#interface e0/0 Sw102(config-if)#ip address 172.25.39.254 255.255.248.0 Sw102(config-if)#no shutdown Sw102(config-if)#end
```

? To subnet an IPv6 GUA to meet the subnet requirements and maximize the number of hosts, you need to determine how many bits you need to borrow from the interface identifier portion of the address to create enough subnets for 32 sites. Since 32 is 2^5 , you need to borrow 5 bits, which means your new prefix length will be /69 or ffff:ffff:ffff:fff8::/69 (assuming that your IPv6 GUA has a /64 prefix by default). To find the second subnet, you need to add the value of the fifth bit (32) to the fourth hextet of the network address (0000), which gives you xxxx:xxxx:xxxx:0020::/69 as the second subnet (where xxxx:xxxx:xxxx is your IPv6 GUA prefix). The first and last IPv6 addresses in this subnet are xxxx:xxxx:xxxx:0020::1 and xxxx:xxxx:xxxx:0027:ffff:ffff:ffff:fffe respectively.

? To assign an IPv6 GUA using a unique 64-bit interface identifier on e0/0 on

Sw101, you need to enter the following commands on the device console (assuming that your IPv6 GUA prefix is 2001:db8::/64):

```
Sw101#configure terminal Sw101(config)#interface e0/0 Sw101(config-if)#ipv6 address 2001:db8::20::1/69 Sw101(config-if)#no shutdown Sw101(config-if)#end
```

? To assign an IPv6 GUA using a unique 64-bit interface identifier on e0/0 on

Sw102, you need to enter the following commands on the device console (assuming that your IPv6 GUA prefix is 2001:db8::/64):

```
Sw102#configure terminal Sw102(config)#interface e0/0 Sw102(config-if)#ipv6 address 2001:db8::27::fffe/69 Sw102(config-if)#no shutdown Sw102(config-if)#end
```

NEW QUESTION 501

- (Topic 4)

A packet from a company's branch office is destined to host 172.31.0.1 at headquarters. The sending router has three possible matches in its routing table for the packet prefixes: 172.31.0.0/16, 172.31.0.0/24, and 172.31.0.0/25.

How does the router handle the packet?

- A. It sends the traffic via prefix 172.31.0.0/16
- B. It sends the traffic via the default gateway 0.0.0.0.
- C. It sends the traffic via prefix 172.31.0.0/24
- D. It sends the traffic via prefix 172.31.0.0/25

Answer: D

NEW QUESTION 504

- (Topic 4)

Which is a fact related to FTP?


- A. It uses block numbers to identify and mitigate data-transfer errors
- B. It always operates without user authentication
- C. It relies on the well-known UDP port 69.
- D. It uses two separate connections for control and data traffic

Answer: D

NEW QUESTION 509

DRAG DROP - (Topic 4)


Drag and drop the statements about networking from the left onto the corresponding networking types on the right

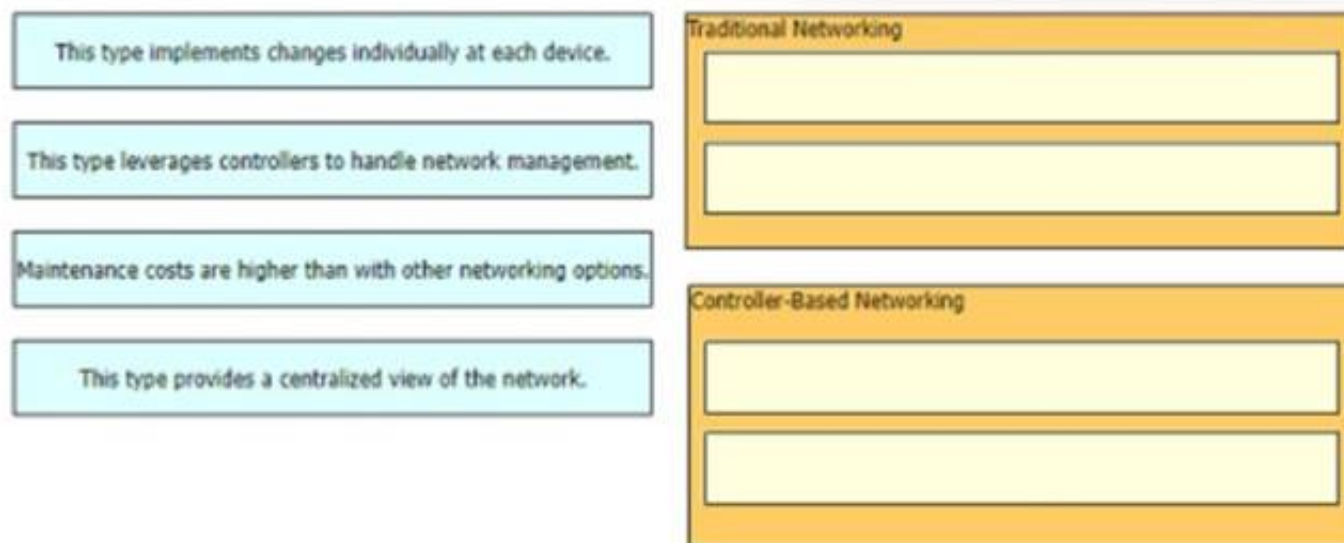

- A. Mastered
 B. Not Mastered

Answer: A


Explanation:

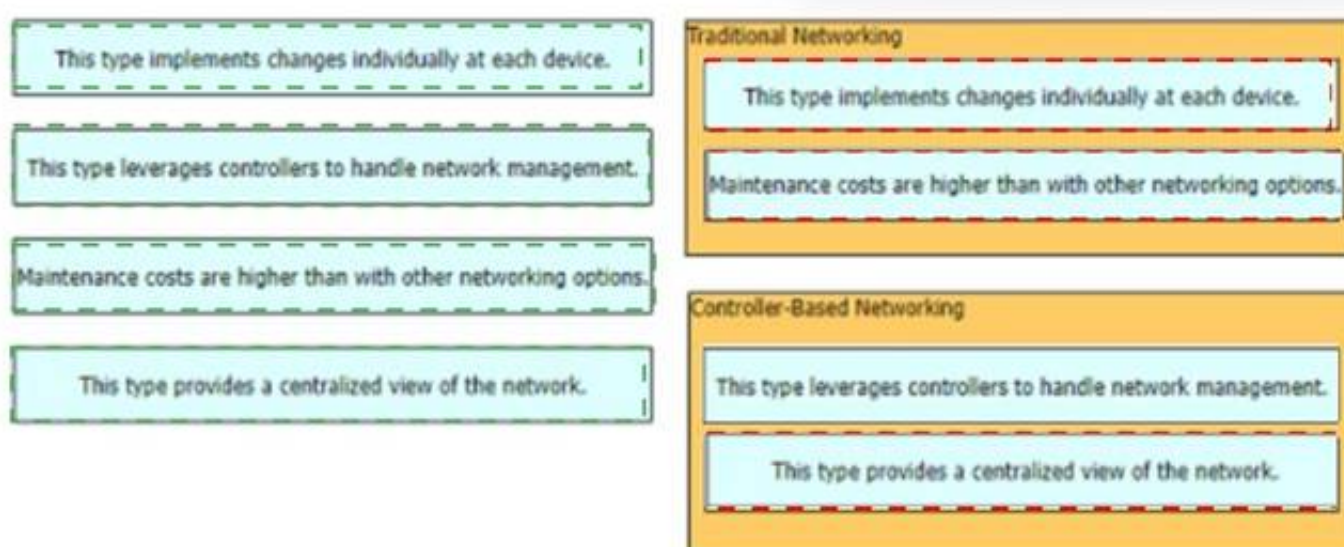

NEW QUESTION 513

- (Topic 4)

Refer to the exhibit.

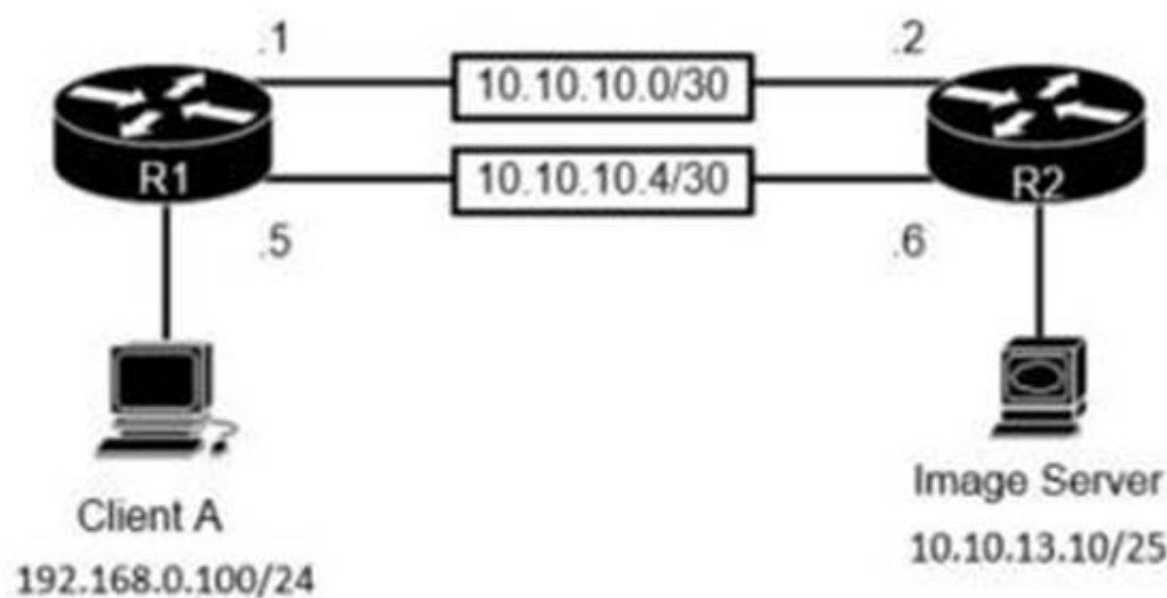

```
R1#show ip route
Gateway of last resort is 10.10.10.2 to network 0.0.0.0
S* 0.0.0.0/0 [1/0] via 10.10.10.2
```

```
R2#show ip route
Gateway of last resort is 10.10.10.1 to network 0.0.0.0
S* 0.0.0.0/0 [1/0] via 10.10.10.1
```

The image server and client A are running an application that transfers an extremely high volume of data between the two. An engineer is configuring a dedicated circuit between R1 and R2. Which set of commands must the engineer apply to the routers so that only traffic between the image server and client A is forced to use the new circuit?

- A. R1(config)#ip route 10.10.13.10 255.255.255.255 10.10.10.6R2(config)#ip route 192.168.0.100 255.255.255.255 10.10.10.5
- B. R1(config)#ip route 10.10.13.10 255.255.255.128 10.10.10.6R2(config)#ip route 192.168.0.100 255.255.255.0 10.10.10.5
- C. R1(config)#ip route 10.10.13.10 255.255.255.252 10.10.10.6R2(config)#ip route 192.168.0.100 255.255.255.252 10.10.10.5
- D. R1(config)#ip route 10.10.13.10 255.255.255.255 10.10.10.2R2(config)#ip route 192.168.0.100 255.255.255.255 10.10.10.1

Answer: D

NEW QUESTION 514

- (Topic 4)

What is a reason to implement IPv4 private addressing?

- A. Reduce the risk of a network security breach
- B. Comply with PCI regulations
- C. Comply with local law
- D. Reduce the size of the forwarding table on network routers

Answer: D

NEW QUESTION 515

- (Topic 4)

What is used as a solution for protecting an individual network endpoint from attack?


- A. Router
- B. Wireless controller
- C. Anti software
- D. Cisco DNA Center

Answer: C

NEW QUESTION 516

- (Topic 4)

Refer to the exhibit.

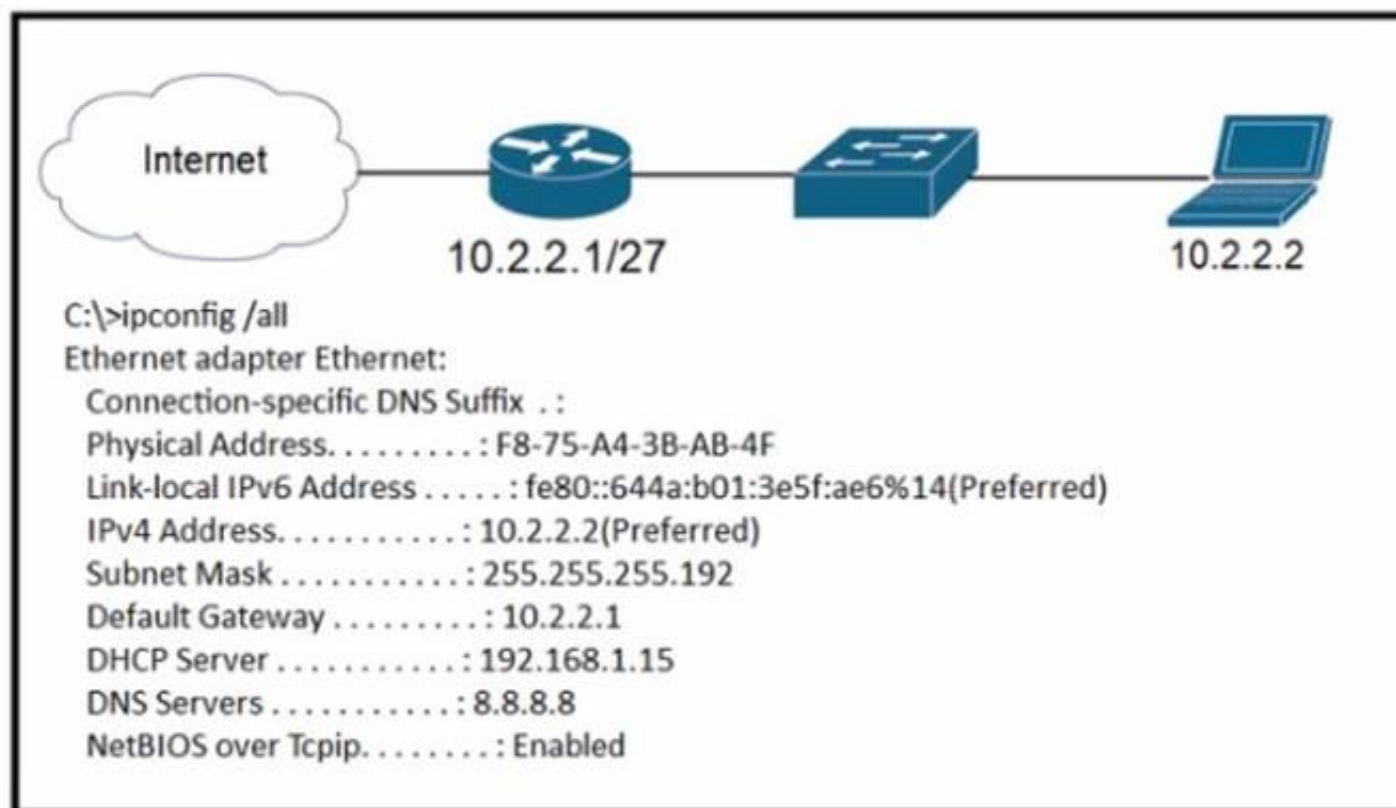


A newly configured PC fails to connect to the internet using TCP port 80 to www.cisco.com. Which setting must be modified for the connection to work?

- A. Subnet Mask
- B. DNS Servers
- C. Default Gateway
- D. DHCP Server

Answer: B

NEW QUESTION 517

- (Topic 4)

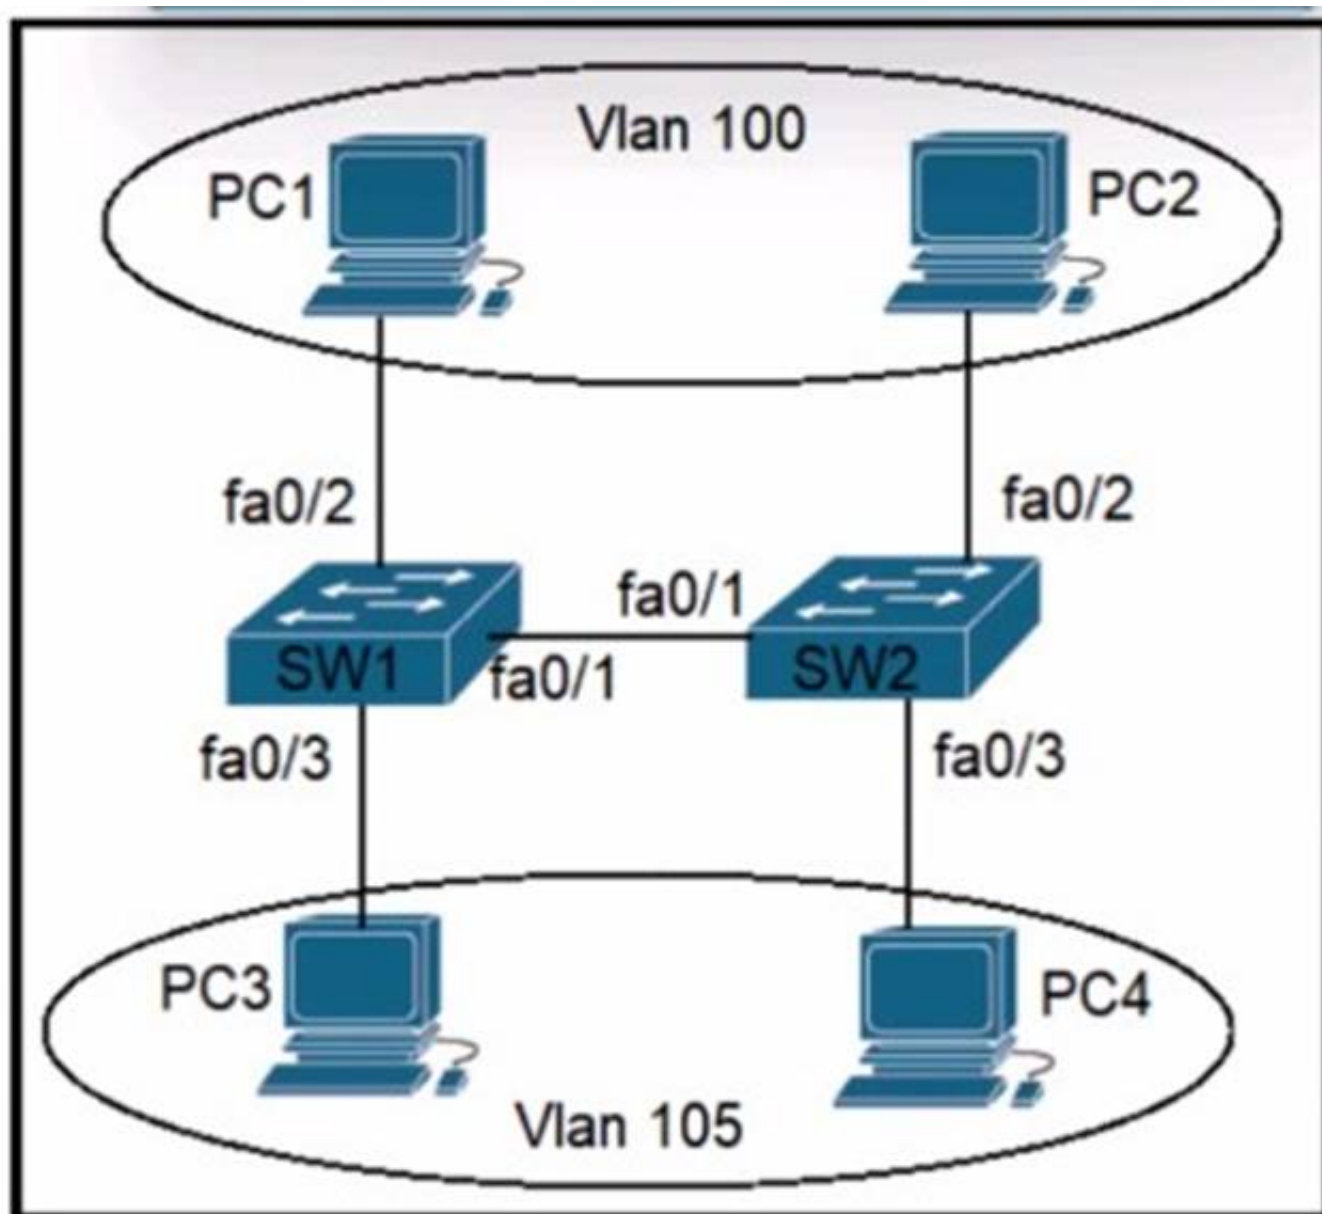

A)

```
Switch(config-if)#switchport mode dynamic
Switch(config-if)#switchport access vlan 100,105
Switch(config-if)#switchport trunk native vlan 1
```

B)

```
Switch(config-if)#switchport mode access
Switch(config-if)#switchport trunk encapsulation dot1q
Switch(config-if)#switchport access vlan 100,105
Switch(config-if)#switchport trunk native vlan 3
```

C)

```
Switch(config-if)#switchport mode trunk
Switch(config-if)#switchport trunk encapsulation lsl
Switch(config-if)#switchport trunk allowed vlan 100,105
Switch(config-if)#switchport trunk native vlan 1
```

D)

```
Switch(config-if)#switchport mode trunk
Switch(config-if)#switchport trunk encapsulation dot1q
Switch(config-if)#switchport trunk allowed vlan 100,105
Switch(config-if)#switchport trunk native vlan 3
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

NEW QUESTION 521

- (Topic 4)

Which cipher is supported for wireless encryption only with the WPA2 standard?

- A. AES256
- B. AES
- C. RC4

D. SHA

Answer: B

NEW QUESTION 526

- (Topic 4)


What is the definition of backdoor malware?

- A. malicious code that is installed onto a computer to allow access by an unauthorized user
- B. malicious code with the main purpose of downloading other malicious code
- C. malicious program that is used to launch other malicious programs
- D. malicious code that infects a user machine and then uses that machine to send spam

Answer: A

NEW QUESTION 527

- (Topic 4)

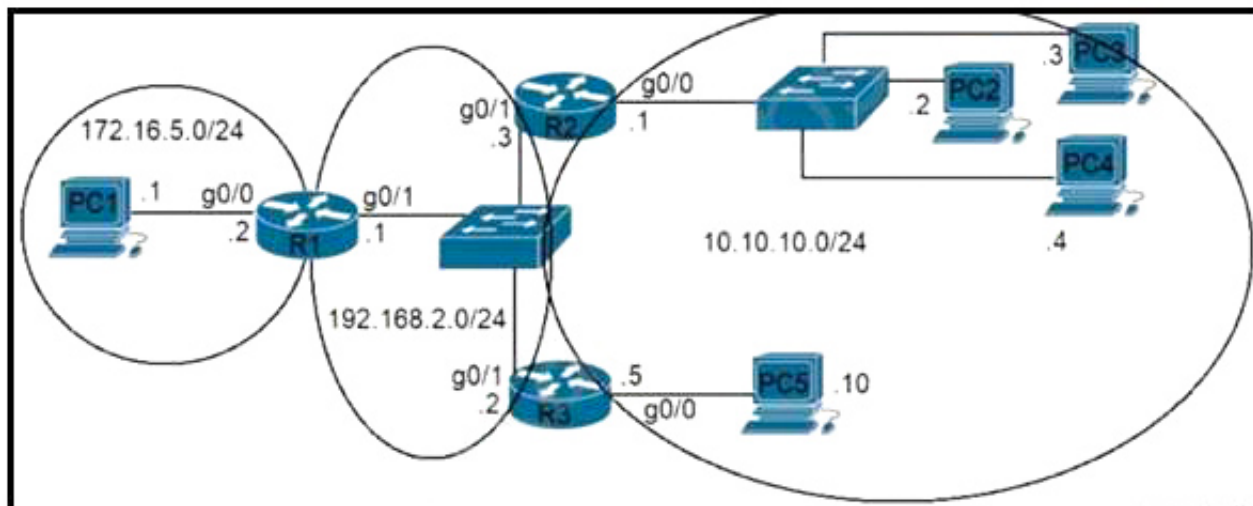

Refer to the exhibit. The router R1 is in the process of being configured. Routers R2 and R3 are configured correctly for the new environment. Which two commands must be configured on R1 for PC1 to communicate to all PCs on the 10.10.10.0/24 network? (Choose two.)


- A. ip route 10.10.10.0 255.255.255.0 192.168.2.3
- B. ip route 10.10.10.10 255.255.255.255 192.168.2.2
- C. ip route 10.10.10.10 255.255.255.255 g0/1
- D. ip route 10.10.10.8 255.255.255.248 g0/1
- E. ip route 10.10.10.0 255.255.255.248 192.168.2.2

Answer: AE

NEW QUESTION 529

- (Topic 4)

Refer to the exhibit.

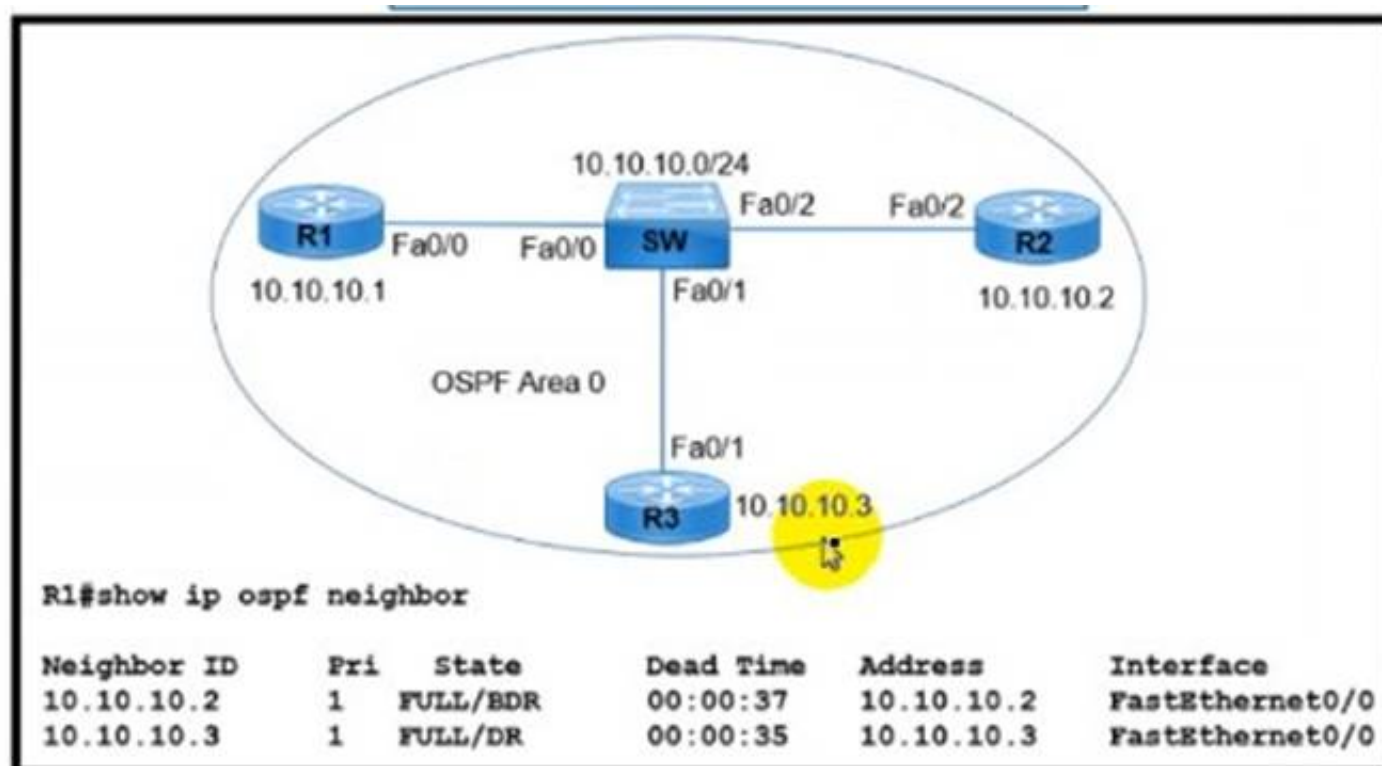

R1 has taken the DROTHER role in the OSPF DR/BDR election process. Which configuration must an engineer implement so that R1 is elected as the DR?

- ③ R1(config)#interface FastEthernet 0/0
R1(config-if)#ip ospf priority 1
R1#clear ip ospf process
- ③ R1(config)#interface FastEthernet 0/0
R1(config-if)#ip ospf priority 200
R1#clear ip ospf process
- ③ R3(config)#interface FastEthernet 0/1
R3(config-if)#ip ospf priority 200
R3#clear ip ospf process
- ③ R2(config)#interface FastEthernet 0/2
R2(config-if)#ip ospf priority 1
R2#clear ip ospf process

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

NEW QUESTION 533

- (Topic 4)

A router has two static routes to the same destination network under the same OSPF process. How does the router forward packets to the destination if the next-hop devices are different?


- A. The router chooses the route with the oldest age.
- B. The router load-balances traffic over all routes to the destination.
- C. The router chooses the next hop with the lowest MAC address.
- D. The router chooses the next hop with the lowest IP address.

Answer: B

NEW QUESTION 535

- (Topic 4)

Refer to the exhibit.

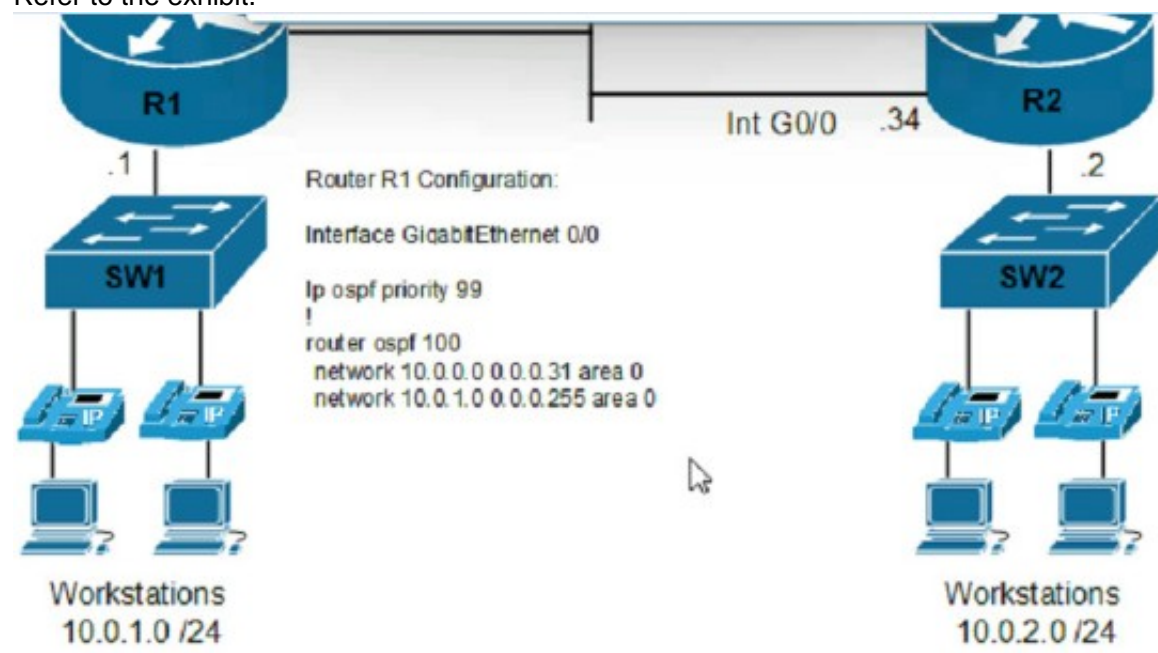

An engineer must configure router R2 so it is elected as the DR on the WAN subnet. Which command sequence must be configured?

A)

```

interface gigabitethernet0/0
ip address 10.0.0.34 255.255.255.224
ip ospf priority 100
  
```

B)

```

interface gigabitethernet0/0
ip address 10.0.1.1 255.255.255.224
ip ospf priority 98
  
```

C)

```
interface gigabitethernet0/0
ip address 10.0.0.34 255.255.255.248
ip ospf priority 0
```

D)

```
interface gigabitethernet0/0
ip address 10.0.1.1 255.255.255.0
ip ospf priority 255
```

- A. Option
- B. Option
- C. Option
- D. Option

Answer: A

NEW QUESTION 536

- (Topic 4)

What is the collapsed layer in collapsed core architectures?

- A. core and WAN
- B. access and WAN
- C. distribution and access
- D. core and distribution

Answer: D

NEW QUESTION 539

DRAG DROP - (Topic 4)

Drag and drop the TCP or UDP details from the left onto their corresponding protocols on the right.

transmitted based on data contained in the packet without the need for a data channel

provides best-effort service

requires the client and the server to establish a connection before sending the packet

supports reliable data transmission

TCP

UDP

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

transmitted based on data contained in the packet without the need for a data channel

provides best-effort service

requires the client and the server to establish a connection before sending the packet

supports reliable data transmission

TCP

requires the client and the server to establish a connection before sending the packet

supports reliable data transmission

UDP


transmitted based on data contained in the packet without the need for a data channel

provides best-effort service

NEW QUESTION 543

FILL IN THE BLANK - (Topic 4)

Refer to the exhibit.

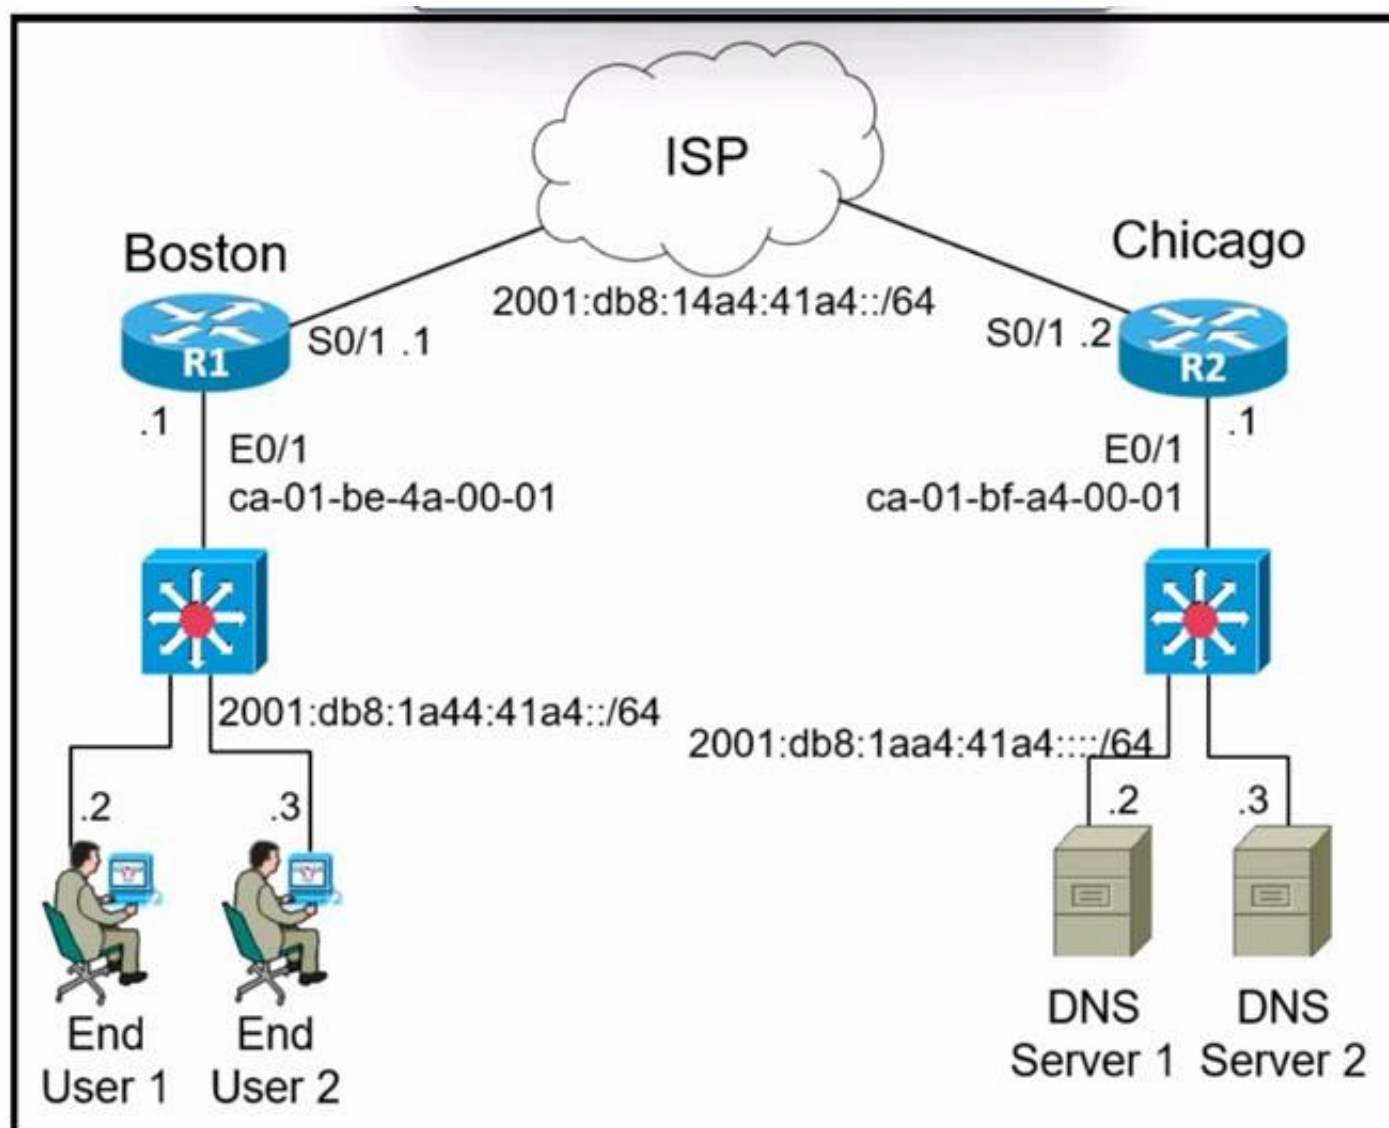

Refer to the exhibit. The IPv6 address for the LAN segment on router R1 must be configured using the EUI-64 format. When configured which ipv6 address is produced by the router?

- A. 2001:db8:1a44:41a4:C801:BEFF:FE4A:1
- B. 2001:db8:1a44:41a4:C081:BFFF:FE4A:1
- C. 2001:db8:1a44:41a4:4562:098F:FE36:1
- D. 2001:db8:1a44:41a4:C800:BAFE:FF00:1

Answer: B

NEW QUESTION 544

- (Topic 4)

Which port type does a lightweight AP use to connect to the wired network when it is configured in local mode?

- A. EtherChannel
- B. LAG
- C. trunk
- D. access

Answer: D

NEW QUESTION 545

- (Topic 4)

Refer to the exhibit.

```
MacOs$ ifconfig

en0: flags=8863<UP,BROADCAST,SMART,RUNNING,SIMPLEX,MULTICAST> mtu 1500
options=400<CHANNEL_IO>
ether f0:18:98:64:60:32
inet6 fe80::492:c09f:57cf:8c36%en0 prefixlen 64 secured scopeid 0x6
inet 10.8.138.14 netmask 0xffffe000 broadcast 10.8.159.255
nd6 options=201<PERFORMNUD,DAD>
media: autoselect
status: active
```

A network engineer must provide configured IP addressing details to investigate a firewall rule Issue. Which subnet and mask Identify what is configured on the en0 interface?

- A. 10.8.0.0/16
- B. 10.8.64.0/18
- C. 10.8.128.0/19
- D. 10.8.138.0/24

Answer: D

NEW QUESTION 546

- (Topic 4)

What is a benefit for external users who consume public cloud resources?


- A. implemented over a dedicated WAN
- B. located in the same data center as the users
- C. all hosted on physical servers
- D. accessed over the Internet

Answer: D

NEW QUESTION 547

- (Topic 4)

Refer to the exhibit.

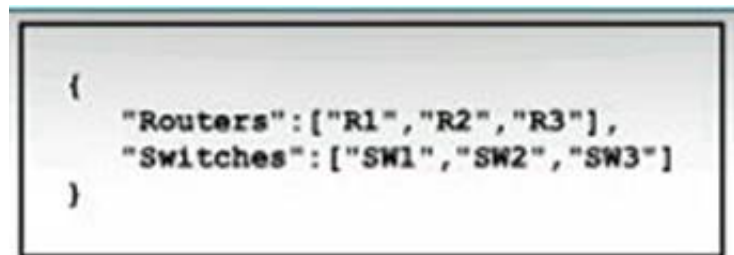

What is represented by "R1" and "SW1" within the JSON output?

- A. key
- B. array
- C. value
- D. object

Answer: C

NEW QUESTION 552

- (Topic 4)

What is the function of northbound API?

- A. It upgrades software and restores files.
- B. It relies on global provisioning and configuration.
- C. It supports distributed processing for configuration.
- D. It provides a path between an SDN controller and network applications.

Answer: D

NEW QUESTION 556

DRAG DROP - (Topic 4)

Drag and drop the statements about networking from the left onto the corresponding networking types on the right. Not all statements are used.

This type deploys a consistent configuration across multiple devices.	Controller-based Networking
A distributed control plane is needed.	
This type requires a distributed management plane.	
Southbound APIs are used to apply configurations.	Traditional Networking
Northbound APIs interact with end devices	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Controller-based Networking :- This type deploys a consistent configuration across multiple devices.– Southbound APIs are used to apply configurations.Traditional Networking :- A distributed control plane is needed.– This type requires a distributed management plane.

On a SND network the control plane is centralized on the the SND controller not distributed on the networking devices.

Northbound APIs do not interact with end devices. They allow the SND controller to interact with applications on the application plane

NEW QUESTION 561

- (Topic 4)

A network engineer must migrate a router loopback interface to the IPv6 address space. If the current IPv4 address of the interface is 10.54.73.1/32, and the engineer configures IPv6 address 0.0.0.0:ffff:a36:4901, which prefix length must be used?

- A. /64
- B. /96
- C. /124
- D. /128

Answer: D

NEW QUESTION 566

DRAG DROP - (Topic 4)

Drag and drop the characteristic from the left onto the IPv6 address type on the right.

enables aggregation of routing prefixes	Global Unicast Address
provides for one-to-one communication	
provides one-to-many communications	Multicast
sends packets to a group address rather than a single address	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

enables aggregation of routing prefixes	Global Unicast Address
provides for one-to-one communication	
provides one-to-many communications	Multicast
sends packets to a group address rather than a single address	

NEW QUESTION 570

- (Topic 4)

Which security method is used to prevent man-in-the-middle attack?

- A. authorization
- B. authentication
- C. anti-replay
- D. accounting

Answer: B

NEW QUESTION 575

- (Topic 4)

What provides connection redundancy increased bandwidth and load sharing between a wireless LAN controller and a Layer 2 switch?

- A. VLAN trunking
- B. tunneling
- C. first hop redundancy
- D. link aggregation

Answer: D

NEW QUESTION 578

- (Topic 4)

Refer to the exhibit. User traffic originating within site 0 is failing to reach an application hosted on IP address 192.168 0 10. Which is located within site A What is determined by the routing table?

- A. The default gateway for site B is configured incorrectly


- B. The lack of a default route prevents delivery of the traffic
- C. The traffic is blocked by an implicit deny in an ACL on router2
- D. The traffic to 192 168 010 requires a static route to be configured in router 1.

Answer: B

NEW QUESTION 582

- (Topic 4)

Refer to the exhibit An IPv6 address must be obtained automatically on the LAN interface on R1 Which command must be implemented to accomplish the task?

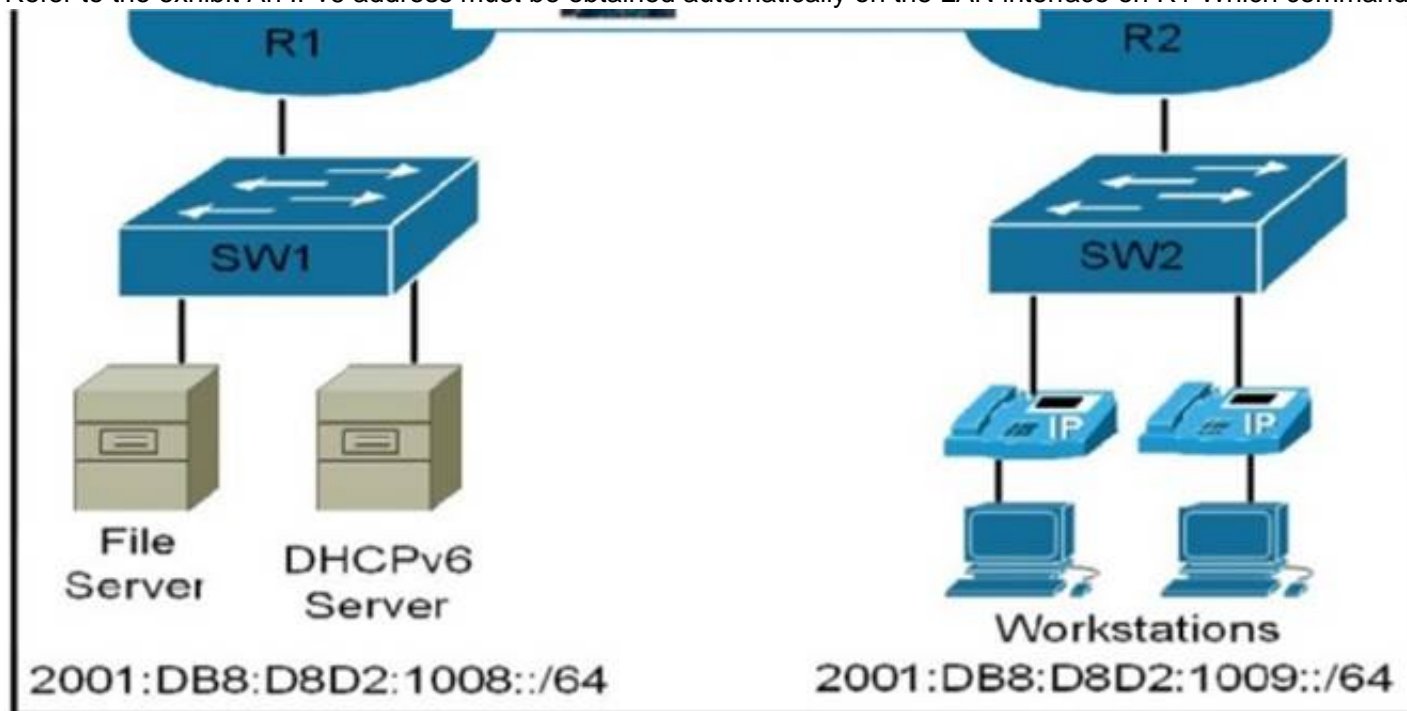

- A. Ipv6 address 2001:dbB:d8d2:1008:4343:61:0010::/64
- B. Ipv6 address autoconfig
- C. Ipv6 address fe80::/10
- D. Ipv6 address dhcp

Answer: B

NEW QUESTION 585

- (Topic 4)

The clients and OHCP server reside on different subnets. Which command must be used to forward requests and replies between clients on the 10.10.0.1/24 subnet and the DHCP server at 192.168.10.1?

- A. ip route 192.168.10.1
- B. ip default-gateway 192.168.10.1
- C. ip helper-address 192.168.10.1
- D. ip dhcp address 192.168.10.1

Answer: C

NEW QUESTION 590

- (Topic 4)

Refer to the exhibit.

```
SW1#show spanning-tree vlan 30

VLAN0030
Spanning tree enabled protocol rstp
Root ID    Priority          32798
           Address        0025.63e9.c800
           Cost          19
           Port          1 (FastEthernet 2/1)
           Hello Time     2 sec
           Max Age        30 sec
           Forward Delay  20 sec

[Output suppressed]
```

What are two conclusions about this configuration? {Choose two.}

- A. The spanning-tree mode is Rapid PVST+.
- B. This is a root bridge.


- C. The root port is FastEthernet 2/1.
- D. The designated port is FastEthernet 2/1.
- E. The spanning-tree mode is PVST+.

Answer: A

NEW QUESTION 593

- (Topic 4)

Refer to the exhibit.

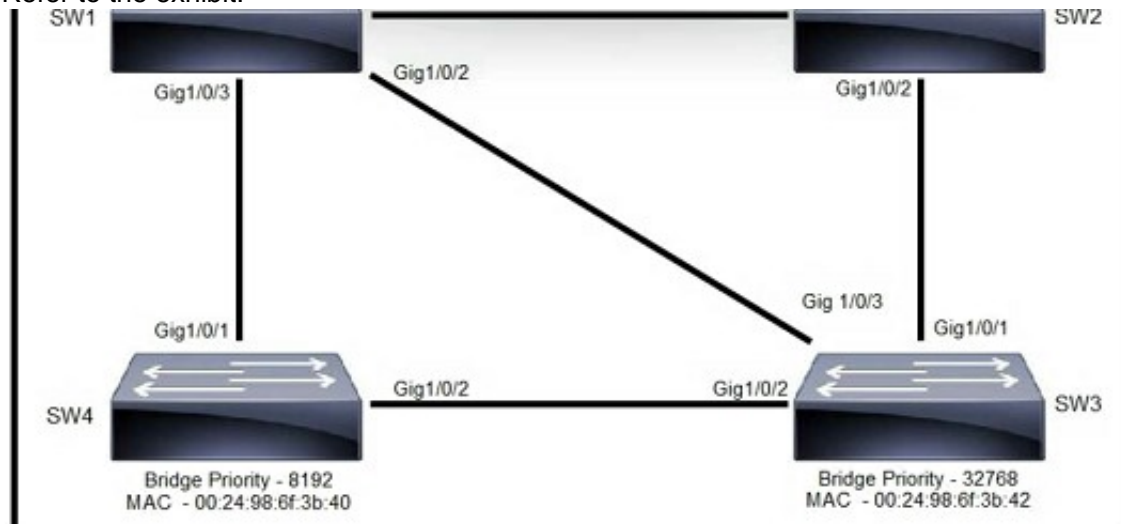

Rapid PVST+ mode is on the same VLAN on each switch. Which switch becomes the root bridge and why?

- A. SW2, because its MAC address is the highest
- B. SW3, because its priority is the highest
- C. SW4, because its priority is highest and its MAC address is lower
- D. SW1, because its priority is the lowest and its MAC address is higher

Answer: B

NEW QUESTION 598

- (Topic 4)

When an access point is seeking to join wireless LAN controller, which message is sent to the AP- Manager interface?

- A. Discovery response
- B. DHCP request
- C. DHCP discover
- D. Discovery request

Answer: D

NEW QUESTION 603

- (Topic 4)

Which benefit does Cisco ONA Center provide over traditional campus management?

- A. Cisco DNA Center leverages SNMPv3 for encrypted management, and traditional campus management uses SNMPv2.
- B. Cisco DNA Center automates HTTPS for secure web access, and traditional campus management uses HTTP.
- C. Cisco DNA Center leverages APIs, and traditional campus management requires manual data gathering.
- D. Cisco DNA Center automates SSH access for encrypted entry, and SSH is absent from traditional campus management.

Answer: B

NEW QUESTION 604

- (Topic 4)

What determines the sequence in which materials are planned during the material requirements planning (MRP) run?


- A. The control parameters of the MRP run
- B. The creation date of the materials
- C. The low-level code of the materials
- D. The replenishment lead time of the materials

Answer: C

NEW QUESTION 609

DRAG DROP - (Topic 4)


Drag and drop the IPv6 address details from the left onto the corresponding types on the right.

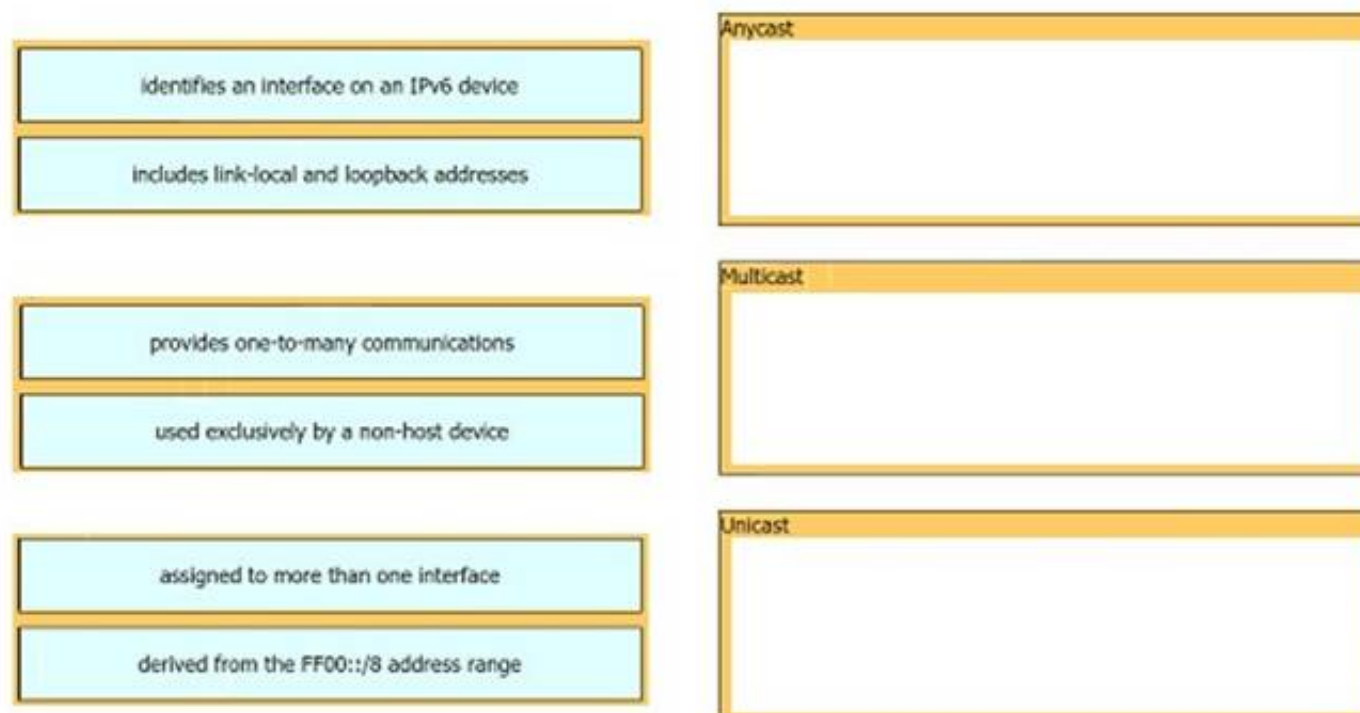

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

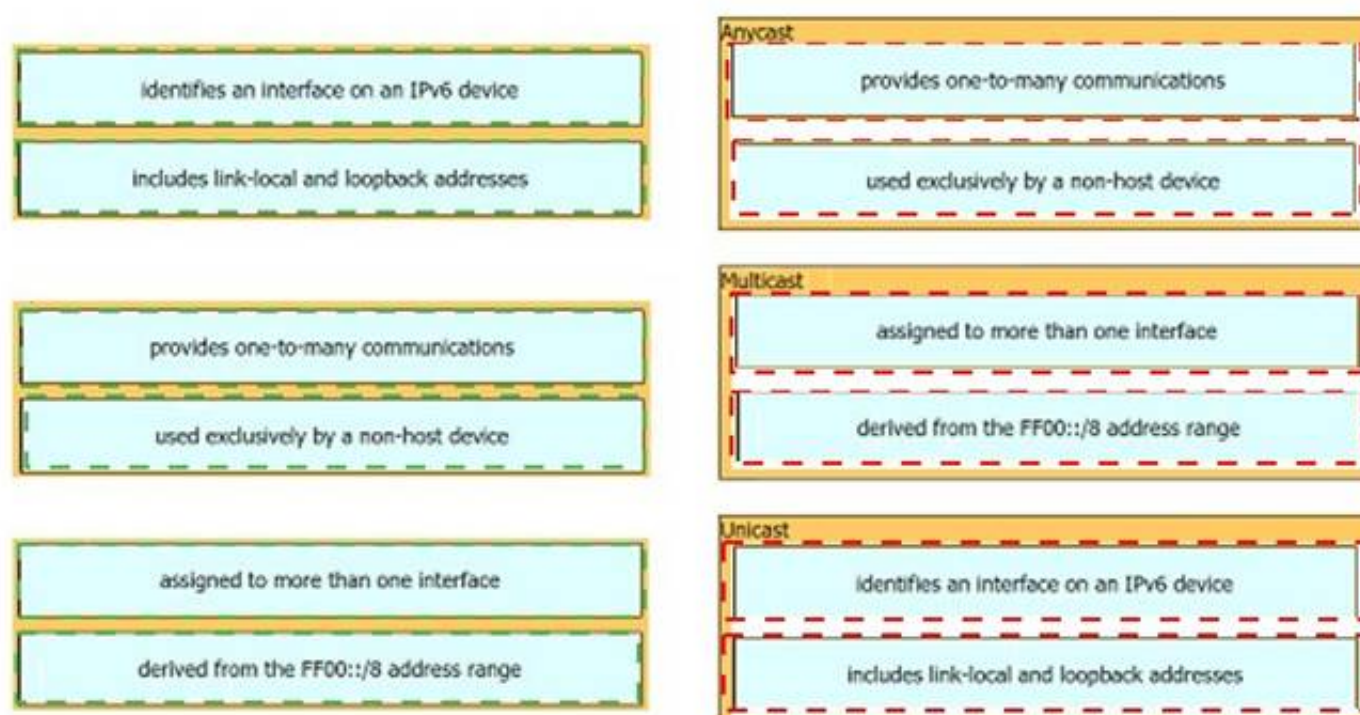

NEW QUESTION 610

- (Topic 4)

What is the operating mode and role of a backup port on a shared LAN segment in Rapid PVST+?

- A. forwarding mode and provides the lowest-cost path to the root bridge for each VLAN
B. learning mode and provides the shortest path toward the root bridge handling traffic away from the LAN
C. blocking mode and provides an alternate path toward the designated bridge
D. listening mode and provides an alternate path toward the root bridge

Answer: C

NEW QUESTION 615

- (Topic 4)

An engineer is configuring a switch port that is connected to a VoIP handset. Which command must the engineer configure to enable port security with a manually assigned MAC address of abcd-bod on voice VLAN 4?

- A. switchport port-security mac-address abcd.abcd.abcd
B. switchport port-security mac-address abed.abed.abed vlan 4
C. switchport port-security mac-address sticky abcd.abcd.abcd vlan 4
D. switchport port-security mac-address abcd.abcd.abcd vlan voice

Answer: A

NEW QUESTION 616

- (Topic 4)

Which function generally performed by a traditional network device is replaced by a software-defined controller?

- A. encryption and decryption for VPN link processing
- B. building route tables and updating the forwarding table
- C. changing the source or destination address during NAT operations
- D. encapsulation and decapsulation of packets in a data-link frame

Answer: B

NEW QUESTION 620

- (Topic 4)

Refer to the exhibit.

How does router R1 handle traffic to the 172.16.1.4/30 subnet?

- A. It sends all traffic over the path via 172.16.9.5 using 172.16.4.4 as a backup.
- B. It sends all traffic over the path via 10.0.1.100.
- C. It load-balances traffic over 172.16.9.5 and 172.16.4.4.
- D. It sends all traffic over the path via 172.16.4.4.

Answer: C

NEW QUESTION 624

- (Topic 4)

Refer to the exhibit.

```
Media State . . . . . : Media disconnected
Connection-specific DNS Suffix  : 
Description . . . . . : Realtek PCIe GBE Family
Controller
Physical Address. . . . . : 3C-52-82-33-F3-8F
DHCP Enabled. . . . . : Yes
Autoconfiguration Enabled . . . : Yes

Wireless LAN adapter Wi-Fi:
Connection-specific DNS Suffix  : arcep.se
Description . . . . . : Intel(R) Dual Band
Wireless-AC 7265
Physical Address. . . . . : C8-21-58-B4-F3-EF
DHCP Enabled. . . . . : Yes
Autoconfiguration Enabled . . . : Yes
Link-local IPv6 Address . . . . : fe80::45a1:b3fa:2f37:bf37%2 (Preferred)
IPv4 Address. . . . . : 192.168.1.226 (Preferred)
Subnet Mask . . . . . : 255.255.255.0
Lease Obtained. . . . . : October 3, 2019 12:28:08 PM
Lease Expires . . . . . : October 3, 2019 7:18:37 PM
Default Gateway . . . . . : 192.168.1.100
DHCP Server . . . . . : 192.168.1.254
DHCPv6 IAID . . . . . : 46670168
DHCPv6 Client DUID. . . . . : 00-01-00-01-20-FF-05-55-3C-52-82-33-D3-84
DNS Servers . . . . . : 192.168.1.253
NetBIOS over Tcpip. . . . . : Enabled
Connection-specific DNS Suffix Search List :
arcep.se
```

The given Windows PC is requesting the IP address of the host at www.cisco.com. To which IP address is the request sent?

- A. 192.168.1.226
- B. 192.168.1.100
- C. 192.168.1.254
- D. 192.168.1.253

Answer: D

NEW QUESTION 625

- (Topic 4)

Refer to the exhibit.


```
SW1#show run
Building configuration...
!
hostname SW1
!
ip domain-name CCNA-test
!
username CCNA privilege 1 password 0 cisco123
!
interface FastEthernet0/1
  switchport access vlan 10
!
interface Vlan10
  ip address 192.168.1.2 255.255.255.0
!
line vty 0 4
  login local
  transport input telnet
line vty 5 15
  login local
  transport input telnet

SW1#show crypto key mypubkey rsa
% Key pair was generated at: 0:1:23 UTC Mar 1 2020
Key name: SW1.CCNA-test
```

An engineer is updating the management access configuration of switch SW1 to allow secured, encrypted remote configuration. Which two commands or command sequences must the engineer apply to the switch? (Choose two.)

- A. SW1(config)#enable secret cnaTest123
- B. SW1(config)#username NEW secret R3mote123
- C. SW1(config)#line vty 0 15 SW1(config-line)#transport input ssh
- D. SW1(config)# crypto key generate rsa
- E. SW1(config)# interface f0/1 SW1(config-if)# switchport mode trunk

Answer: CD

NEW QUESTION 629

- (Topic 4)

What is a reason why an administrator would choose to implement an automated network management approach?


- A. Reduce inconsistencies in the network configuration.
- B. Enable "box by box" configuration and deployment.
- C. Decipher simple password policies.
- D. Increase recurrent management costs.

Answer: A

NEW QUESTION 630

- (Topic 4)

Refer to the exhibit.

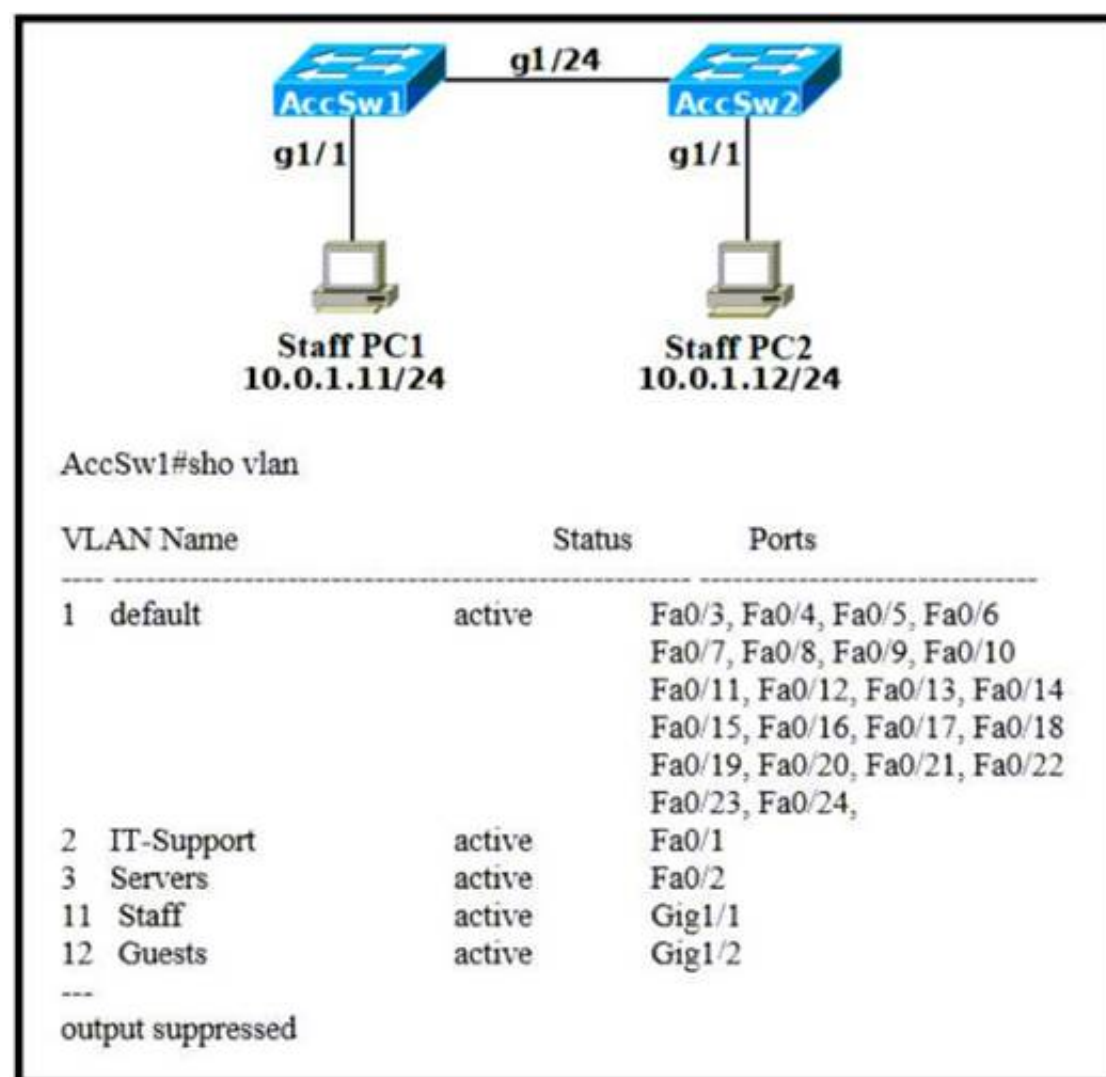

Switch AccSw2 has just been added to the network along with PC2. All VLANs have been implemented on AccSw2. How must the ports on AccSw2 be configured to establish Layer 2 connectivity between PC1 and PC2?

A.

```

interface GigabitEthernet1/1
switchport mode access
switchport access vlan 11
!
interface GigabitEthernet1/24
switchport mode trunk
  
```

B.

```

interface GigabitEthernet1/2
switchport mode access
switchport access vlan 12
!
interface GigabitEthernet1/24
switchport mode trunk
switchport trunk allowed vlan 11,12
  
```

C.

```

interface GigabitEthernet1/24
switchport mode trunk
switchport trunk allowed vlan 11,12
!
interface GigabitEthernet1/1
switchport access vlan 11
  
```

D.

```

interface GigabitEthernet1/2
switchport mode access
switchport access vlan 2
!
interface GigabitEthernet1/24
switchport mode trunk
  
```

A.

Answer: A

NEW QUESTION 632

DRAG DROP - (Topic 4)

Drag and drop the characteristics of device-management technologies from the left onto the corresponding deployment types on the right.

orchestrates background device configuration

provides greater flexibility for custom and non-standard configurations

relies on per-device management

supports centralized software management

supports open APIs

uses individual software management

Cisco DNA Center

Traditional

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

orchestrates background device configuration

provides greater flexibility for custom and non-standard configurations

relies on per-device management

supports centralized software management

supports open APIs

uses individual software management

Cisco DNA Center

supports centralized software management

orchestrates background device configuration

relies on per-device management

Traditional

provides greater flexibility for custom and non-standard configurations

uses individual software management

supports open APIs

NEW QUESTION 636
DRAG DROP - (Topic 4)

2001:db8:600d:cafe::123

fcba:926a:e8e:7a25:b1:c6d2:1a76:8fdc

fe80::a00:27ff:feeb:89aa

ff05::1:3

Global Unicast

Link-Local Unicast


Multicast

Unique Local

- A. Mastered
- B. Not Mastered

Answer: A


Explanation:

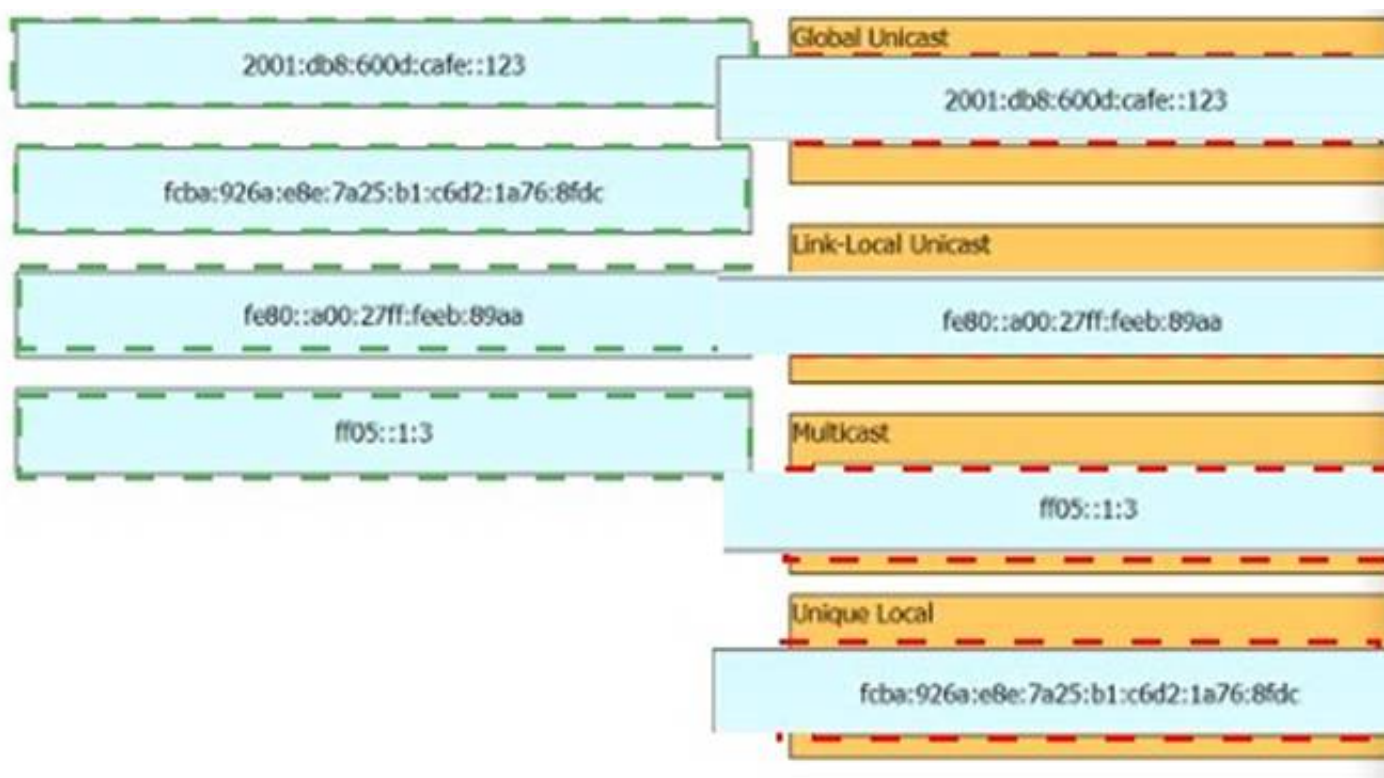

NEW QUESTION 637

- (Topic 4)

Refer to the exhibit.

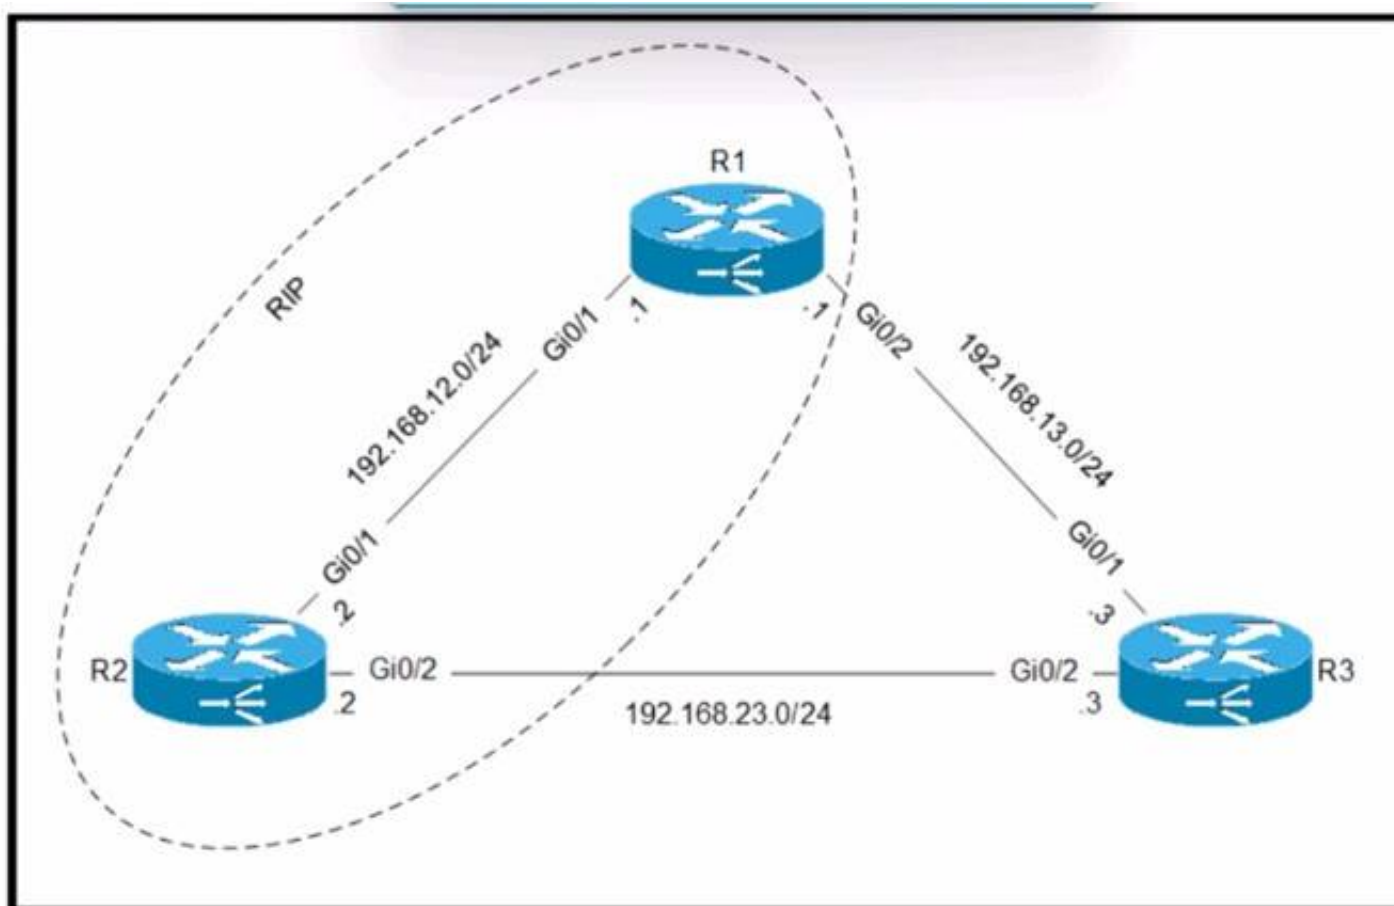

Routers R1 and R2 are configured with RIP as the dynamic routing protocol. A network engineer must configure R1 with a floating static route to serve as a backup route to network 192.168.23. Which command must the engineer configure on R1?

- A. ip route 192.168.23.0 255.255.255.0 192.168.13.3 100
- B. ip route 192.168.23.0 255.255.255.0 192.168.13.3 121
- C. ip route 192.168.23.0 255.255.255.255 192.168.13.3 121
- D. ip route 192.168.23.0 255.255.255.0 192.168.13.3

Answer: B

NEW QUESTION 641

- (Topic 4)

Refer to the exhibit.

```
GigabitEthernet1 is up, line protocol is up
Hardware is CSR vNIC, address is 5000.0004.0000 (bia 5000.0004.0000)
Internet address is 192.168.1.1/24
MTU 1500 bytes, BW 1000000 Kbit/sec, DLY 10 usec,
    reliability 255/255, txload 1/255, rxload 1/255
Encapsulation ARPA, loopback not set
Keepalive set (10 sec)
Full Duplex, 1000Mbps, link type is auto, media type is RJ45
```

Which format matches the Modified EUI-64 IPv6 interface address for the network 2001::/64?


- A. 2001::db8::5000:0004:5678:0090/64
- B. 2001::db8:4425:5400:77ff:fe07:/64
- C. 2001::db8::5000:00ff:fe04 0000/64
- D. 2001::db8::5200:00ff:fe04:0000/64

Answer: C

NEW QUESTION 643

- (Topic 4)

Refer to the exhibit.

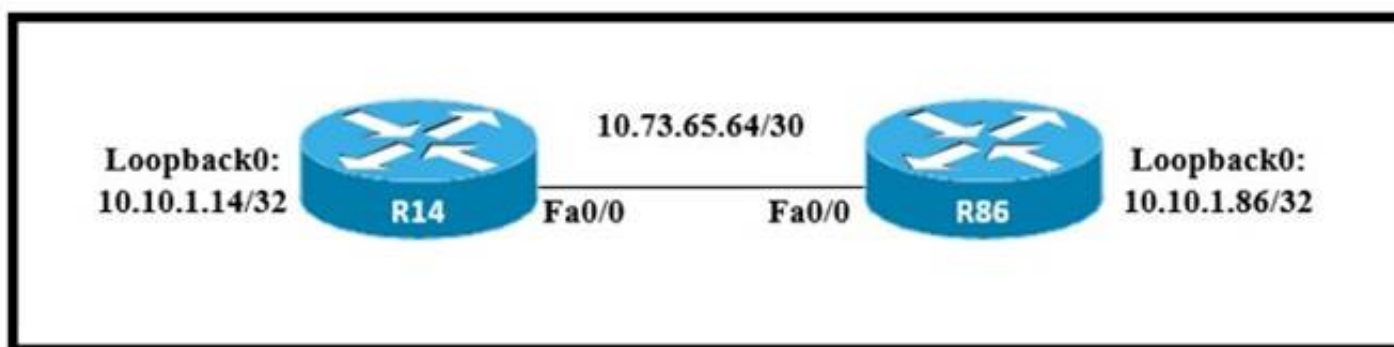

All interfaces are configured with duplex auto and ip ospf network broadcast. Which configuration allows routers R14 and R86 to form an OSPFv2 adjacency and act as a central point for exchanging OSPF information between routers?

☐ R14#
interface FastEthernet0/0
ip address 10.73.65.65 255.255.255.252
ip ospf priority 0
ip mtu 1500

router ospf 10
router-id 10.10.1.14
network 10.10.1.14 0.0.0.0 area 0
network 10.73.65.64 0.0.0.3 area 0

R86#
interface FastEthernet0/0
ip address 10.73.65.66 255.255.255.252
ip mtu 1500

router ospf 10
router-id 10.10.1.86
network 10.10.1.86 0.0.0.0 area 0
network 10.73.65.64 0.0.0.3 area 0

☐ R14#
interface Loopback0
ip ospf 10 area 0

interface FastEthernet0/0
ip address 10.73.65.65 255.255.255.252
ip ospf priority 255
ip ospf 10 area 0
ip mtu 1500

router ospf 10
router-id 10.10.1.14

R86#
interface Loopback0
ip ospf 10 area 0

interface FastEthernet0/0
ip address 10.73.65.66 255.255.255.252
ip ospf 10 area 0
ip mtu 1500

router ospf 10
router-id 10.10.1.86

R14#
interface FastEthernet0/0
ip address 10.73.65.65 255.255.255.252
ip ospf priority 255
ip mtu 1500

router ospf 10
router-id 10.10.1.14
network 10.10.1.14 0.0.0.0 area 0
network 10.73.65.64 0.0.0.3 area 0
R86#
interface FastEthernet0/0
ip address 10.73.65.66 255.255.255.252
ip mtu 1400

router ospf 10
router-id 10.10.1.86
network 10.10.1.86 0.0.0.0 area 0
network 10.73.65.64 0.0.0.3 area 0

R14#
interface Loopback0
ip ospf 10 area 0

interface FastEthernet0/0
ip address 10.73.65.65 255.255.255.252
ip ospf 10 area 0
ip mtu 1500

router ospf 10
ip ospf priority 255
router-id 10.10.1.14
R86#
interface Loopback0
ip ospf 10 area 0

interface FastEthernet0/0
ip address 10.73.65.66 255.255.255.252
ip ospf 10 area 0
ip mtu 1500

router ospf 10
router-id 10.10.1.86

- A. Option A
- B. Option B
- C. Option C
- D. option D

Answer: B

NEW QUESTION 646

- (Topic 4)

In a cloud-computing environment what is rapid elasticity?

- A. control and monitoring of resource consumption by the tenant
- B. automatic adjustment of capacity based on need
- C. pooling resources in a multitenant model based on need
- D. self-service of computing resources by the tenant

Answer: B

NEW QUESTION 648

- (Topic 4)

What is a zero-day exploit?

- A. It is when a new network vulnerability is discovered before a fix is available
- B. It is when the perpetrator inserts itself in a conversation between two parties and captures or alters data.

- C. It is when the network is saturated with malicious traffic that overloads resources and bandwidth
- D. It is when an attacker inserts malicious code into a SOL server.

Answer: A

Explanation:

<https://www.kaspersky.com/resource-center/definitions/zero-day-exploit>

NEW QUESTION 650

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 200-301 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 200-301 Product From:

<https://www.2passeasy.com/dumps/200-301/>

Money Back Guarantee

200-301 Practice Exam Features:

- * 200-301 Questions and Answers Updated Frequently
- * 200-301 Practice Questions Verified by Expert Senior Certified Staff
- * 200-301 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 200-301 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year