

EC-Council

Exam Questions 312-50v11

Certified Ethical Hacker Exam (CEH v11)



NEW QUESTION 1

Which of the following allows attackers to draw a map or outline the target organization's network infrastructure to know about the actual environment that they are going to hack.

- A. Enumeration
- B. Vulnerability analysis
- C. Malware analysis
- D. Scanning networks

Answer: D

NEW QUESTION 2

Jane, an ethical hacker, is testing a target organization's web server and website to identify security loopholes. In this process, she copied the entire website and its content on a local drive to view the complete profile of the site's directory structure, file structure, external links, images, web pages, and so on. This information helps Jane map the website's directories and gain valuable information. What is the attack technique employed by Jane in the above scenario?

- A. website mirroring
- B. Session hijacking
- C. Web cache poisoning
- D. Website defacement

Answer: A

Explanation:

A mirror site may be a website or set of files on a computer server that has been copied to a different computer server in order that the location or files are available from quite one place. A mirror site has its own URL, but is otherwise just like the principal site. Load-balancing devices allow high-volume sites to scale easily, dividing the work between multiple mirror sites. A mirror site is typically updated frequently to make sure it reflects the contents of the first site. In some cases, the first site may arrange for a mirror site at a bigger location with a better speed connection and, perhaps, a better proximity to an outsized audience. If the first site generates an excessive amount of traffic, a mirror site can ensure better availability of the web site or files. For websites that provide copies or updates of widely used software, a mirror site allows the location to handle larger demands and enables the downloaded files to arrive more quickly. Microsoft, Sun Microsystems and other companies have mirror sites from which their browser software are often downloaded. Mirror sites are used to make site access faster when the first site could also be geographically distant from those accessing it. A mirrored web server is usually located on a special continent from the principal site, allowing users on the brink of the mirror site to urge faster and more reliable access. Mirroring an internet site also can be done to make sure that information are often made available to places where access could also be unreliable or censored. In 2013, when Chinese authorities blocked access to foreign media outlets just like the Wall Street Journal and Reuters, site mirroring was used to restore access and circumvent government censorship.

NEW QUESTION 3

A network administrator discovers several unknown files in the root directory of his Linux FTP server. One of the files is a tarball, two are shell script files, and the third is a binary file named "nc." The FTP server's access logs show that the anonymous user account logged in to the server, uploaded the files, and extracted the contents of the tarball and ran the script using a function provided by the FTP server's software. The "ps" command shows that the "nc" file is running as process, and the netstat command shows the "nc" process is listening on a network port.

What kind of vulnerability must be present to make this remote attack possible?

- A. File system permissions
- B. Privilege escalation
- C. Directory traversal
- D. Brute force login

Answer: A

NEW QUESTION 4

What is the proper response for a NULL scan if the port is open?

- A. SYN
- B. ACK
- C. FIN
- D. PSH
- E. RST
- F. No response

Answer: F

NEW QUESTION 5

An attacker is trying to redirect the traffic of a small office. That office is using their own mail server, DNS server and NTP server because of the importance of their job. The attacker gains access to the DNS server and redirects the direction www.google.com to his own IP address. Now when the employees of the office want to go to Google they are being redirected to the attacker machine. What is the name of this kind of attack?

- A. MAC Flooding
- B. Smurf Attack
- C. DNS spoofing
- D. ARP Poisoning

Answer: C

NEW QUESTION 6

An incident investigator asks to receive a copy of the event logs from all firewalls, proxy servers, and Intrusion Detection Systems (IDS) on the network of an

organization that has experienced a possible breach of security. When the investigator attempts to correlate the information in all of the logs, the sequence of many of the logged events do not match up.
What is the most likely cause?

- A. The network devices are not all synchronized.
- B. Proper chain of custody was not observed while collecting the logs.
- C. The attacker altered or erased events from the logs.
- D. The security breach was a false positive.

Answer: A

NEW QUESTION 7

Which of the following incident handling process phases is responsible for defining rules, collaborating human workforce, creating a back-up plan, and testing the plans for an organization?

- A. Preparation phase
- B. Containment phase
- C. Identification phase
- D. Recovery phase

Answer: A

NEW QUESTION 8

Gavin owns a white-hat firm and is performing a website security audit for one of his clients. He begins by running a scan which looks for common misconfigurations and outdated software versions. Which of the following tools is he most likely using?

- A. Nikto
- B. Nmap
- C. Metasploit
- D. Armitage

Answer: B

NEW QUESTION 9

Which of the following is the BEST way to defend against network sniffing?

- A. Using encryption protocols to secure network communications
- B. Register all machines MAC Address in a Centralized Database
- C. Use Static IP Address
- D. Restrict Physical Access to Server Rooms hosting Critical Servers

Answer: A

NEW QUESTION 10

You are a penetration tester tasked with testing the wireless network of your client Brakeme SA. You are attempting to break into the wireless network with the SSID "Brakeme-Internal." You realize that this network uses WPA3 encryption, which of the following vulnerabilities is the promising to exploit?

- A. Dragonblood
- B. Cross-site request forgery
- C. Key reinstallation attack
- D. AP Myconfiguration

Answer: A

Explanation:

Dragonblood allows an attacker in range of a password-protected Wi-Fi network to get the password and gain access to sensitive information like user credentials, emails and mastercard numbers. consistent with the published report: "The WPA3 certification aims to secure Wi-Fi networks, and provides several advantages over its predecessor WPA2, like protection against offline dictionary attacks and forward secrecy. Unfortunately, we show that WPA3 is suffering from several design flaws, and analyze these flaws both theoretically and practically. Most prominently, we show that WPA3's Simultaneous Authentication of Equals (SAE) handshake, commonly referred to as Dragonfly, is suffering from password partitioning attacks." Our Wi-Fi researchers at WatchGuard are educating businesses globally that WPA3 alone won't stop the Wi-Fi hacks that allow attackers to steal information over the air (learn more in our recent blog post on the topic). These Dragonblood vulnerabilities impact a little amount of devices that were released with WPA3 support, and makers are currently making patches available. one among the most important takeaways for businesses of all sizes is to know that a long-term fix might not be technically feasible for devices with lightweight processing capabilities like IoT and embedded systems. Businesses got to consider adding products that enable a Trusted Wireless Environment for all kinds of devices and users alike. Recognizing that vulnerabilities like KRACK and Dragonblood require attackers to initiate these attacks by bringing an "Evil Twin" Access Point or a Rogue Access Point into a Wi-Fi environment, we've been that specialize in developing Wi-Fi security solutions that neutralize these threats in order that these attacks can never occur. The Trusted Wireless Environment framework protects against the "Evil Twin" Access Point and Rogue Access Point. one among these hacks is required to initiate the 2 downgrade or side-channel attacks referenced in Dragonblood. What's next? WPA3 is an improvement over WPA2 Wi-Fi encryption protocol, however, as we predicted, it still doesn't provide protection from the six known Wi-Fi threat categories. It's highly likely that we'll see more WPA3 vulnerabilities announced within the near future. To help reduce Wi-Fi vulnerabilities, we're asking all of you to hitch the Trusted Wireless Environment movement and advocate for a worldwide security standard for Wi-Fi.

NEW QUESTION 10

Which results will be returned with the following Google search query?
site:target.com – site:Marketing.target.com accounting

- A. Results from matches on the site marketing.target.com that are in the domain target.com but do not include the word accounting.
- B. Results matching all words in the query.

- C. Results for matches on target.com and Marketing.target.com that include the word "accounting"
- D. Results matching "accounting" in domain target.com but not on the site Marketing.target.com

Answer: D

NEW QUESTION 12

The security team of Debry Inc. decided to upgrade Wi-Fi security to thwart attacks such as dictionary attacks and key recovery attacks. For this purpose, the security team started implementing cutting-edge technology that uses a modern key establishment protocol called the simultaneous authentication of equals (SAE), also known as dragonfly key exchange, which replaces the PSK concept. What is the Wi-Fi encryption technology implemented by Debry Inc.?

- A. WEP
- B. WPA
- C. WPA2
- D. WPA3

Answer: C

NEW QUESTION 13

Gerard, a disgruntled ex-employee of Sunglass IT Solutions, targets this organization to perform sophisticated attacks and bring down its reputation in the market. To launch the attacks process, he performed DNS footprinting to gather information about DNS servers and to identify the hosts connected in the target network. He used an automated tool that can retrieve information about DNS zone data including DNS domain names, computer names, IP addresses, DNS records, and network Who is records. He further exploited this information to launch other sophisticated attacks. What is the tool employed by Gerard in the above scenario?

- A. Knative
- B. zANTI
- C. Towelroot
- D. Bluto

Answer: D

Explanation:

<https://www.darknet.org.uk/2017/07/bluto-dns-recon-zone-transfer-brute-forcer/>

"Attackers also use DNS lookup tools such as DNSdumpster.com, Bluto, and Domain Dossier to retrieve DNS records for a specified domain or hostname. These tools retrieve information such as domains and IP addresses, domain Whois records, DNS records, and network Whois records." CEH Module 02 Page 138

NEW QUESTION 18

The Payment Card Industry Data Security Standard (PCI DSS) contains six different categories of control objectives. Each objective contains one or more requirements, which must be followed in order to achieve compliance. Which of the following requirements would best fit under the objective, "Implement strong access control measures"?

- A. Regularly test security systems and processes.
- B. Encrypt transmission of cardholder data across open, public networks.
- C. Assign a unique ID to each person with computer access.
- D. Use and regularly update anti-virus software on all systems commonly affected by malware.

Answer: C

NEW QUESTION 20

A technician is resolving an issue where a computer is unable to connect to the Internet using a wireless access point. The computer is able to transfer files locally to other machines, but cannot successfully reach the Internet. When the technician examines the IP address and default gateway they are both on the 192.168.1.0/24. Which of the following has occurred?

- A. The computer is not using a private IP address.
- B. The gateway is not routing to a public IP address.
- C. The gateway and the computer are not on the same network.
- D. The computer is using an invalid IP address.

Answer: B

NEW QUESTION 23

Internet Protocol Security IPsec is actually a suite of protocols. Each protocol within the suite provides different functionality. Collective IPsec does everything except.

- A. Protect the payload and the headers
- B. Encrypt
- C. Work at the Data Link Layer
- D. Authenticate

Answer: C

Explanation:

<https://en.wikipedia.org/wiki/IPsec> Usage of IPsec Authentication Header format in Tunnel and Transport modes

NEW QUESTION 24

This type of injection attack does not show any error message. It is difficult to exploit as it returns information when the application is given SQL payloads that elicit a true or false response from the server. By observing the response, an attacker can extract sensitive information. What type of attack is this?

- A. Time-based SQL injection
- B. Union SQL injection
- C. Error-based SQL injection
- D. Blind SQL injection

Answer: D

NEW QUESTION 27

Harry, a professional hacker, targets the IT infrastructure of an organization. After preparing for the attack, he attempts to enter the target network using techniques such as sending spear-phishing emails and exploiting vulnerabilities on publicly available servers. Using these techniques, he successfully deployed malware on the target system to establish an outbound connection. What is the APT lifecycle phase that Harry is currently executing?

- A. Preparation
- B. Cleanup
- C. Persistence
- D. initial intrusion

Answer: D

Explanation:

After the attacker completes preparations, subsequent step is an effort to realize an edge within the target's environment. a particularly common entry tactic is that the use of spearphishing emails containing an internet link or attachment. Email links usually cause sites where the target's browser and related software are subjected to varied exploit techniques or where the APT actors plan to social engineer information from the victim which will be used later. If a successful exploit takes place, it installs an initial malware payload on the victim's computer. Figure 2 illustrates an example of a spearphishing email that contains an attachment. Attachments are usually executable malware, a zipper or other archive containing malware, or a malicious Office or Adobe PDF (Portable Document Format) document that exploits vulnerabilities within the victim's applications to ultimately execute malware on the victim's computer. Once the user has opened a malicious file using vulnerable software, malware is executing on the target system. These phishing emails are often very convincing and difficult to differentiate from legitimate email messages. Tactics to extend their believability include modifying legitimate documents from or associated with the organization. Documents are sometimes stolen from the organization or their collaborators during previous exploitation operations. Actors modify the documents by adding exploits and malicious code then send them to the victims. Phishing emails are commonly sent through previously compromised email servers, email accounts at organizations associated with the target or public email services. Emails also can be sent through mail relays with modified email headers to form the messages appear to possess originated from legitimate sources. Exploitation of vulnerabilities on public-facing servers is another favorite technique of some APT groups. Though this will be accomplished using exploits for known vulnerabilities, 0-days are often developed or purchased to be used in intrusions as required .

Gaining an edge within the target environment is that the primary goal of the initial intrusion. Once a system is exploited, the attacker usually places malware on the compromised system and uses it as a jump point or proxy for further actions. Malware placed during the initial intrusion phase is usually an easy downloader, basic Remote Access Trojan or an easy shell. Figure 3 illustrates a newly infected system initiating an outbound connection to notify the APT actor that the initial intrusion attempt was successful which it's able to accept commands.



Figure 2. APT actor sends spearphishing email to target with malicious content

NEW QUESTION 30

Which of the following DoS tools is used to attack target web applications by starvation of available sessions on the web server? The tool keeps sessions at halt using never-ending POST transmissions and sending an arbitrarily large content-length header value.

- A. My Doom
- B. Astacheldraht
- C. R-U-Dead-Yet?(RUDY)
- D. LOIC

Answer: C

NEW QUESTION 35

When discussing passwords, what is considered a brute force attack?

- A. You attempt every single possibility until you exhaust all possible combinations or discover the password
- B. You threaten to use the rubber hose on someone unless they reveal their password
- C. You load a dictionary of words into your cracking program
- D. You create hashes of a large number of words and compare it with the encrypted passwords
- E. You wait until the password expires

Answer: A

NEW QUESTION 39

Which of the following represents the initial two commands that an IRC client sends to join an IRC network?

- A. USER, NICK
- B. LOGIN, NICK
- C. USER, PASS

D. LOGIN, USER

Answer: A

NEW QUESTION 43

If a tester is attempting to ping a target that exists but receives no response or a response that states the destination is unreachable, ICMP may be disabled and the network may be using TCP. Which other option could the tester use to get a response from a host using TCP?

- A. Traceroute
- B. Hping
- C. TCP ping
- D. Broadcast ping

Answer: B

Explanation:

<https://tools.kali.org/information-gathering/hping3>

NEW QUESTION 46

While performing an Nmap scan against a host, Paola determines the existence of a firewall. In an attempt to determine whether the firewall is stateful or stateless, which of the following options would be best to use?

- A. -sA
- B. -sX
- C. -sT
- D. -sF

Answer: A

NEW QUESTION 48

Which among the following is the best example of the hacking concept called "clearing tracks"?

- A. After a system is breached, a hacker creates a backdoor to allow re-entry into a system.
- B. During a cyberattack, a hacker injects a rootkit into a server.
- C. An attacker gains access to a server through an exploitable vulnerability.
- D. During a cyberattack, a hacker corrupts the event logs on all machines.

Answer: D

NEW QUESTION 50

You are attempting to run an Nmap port scan on a web server. Which of the following commands would result in a scan of common ports with the least amount of noise in order to evade IDS?

- A. nmap -A -Pn
- B. nmap -sP -p-65535 -T5
- C. nmap -sT -O -T0
- D. nmap -A --host-timeout 99 -T1

Answer: C

NEW QUESTION 51

Robin, a professional hacker, targeted an organization's network to sniff all the traffic. During this process, Robin plugged in a rogue switch to an unused port in the LAN with a priority lower than any other switch in the network so that he could make it a root bridge that will later allow him to sniff all the traffic in the network.

What is the attack performed by Robin in the above scenario?

- A. ARP spoofing attack
- B. VLAN hopping attack
- C. DNS poisoning attack
- D. STP attack


Answer: D

Explanation:

STP prevents bridging loops in a redundant switched network environment. By avoiding loops, you can ensure that broadcast traffic does not become a traffic storm.

STP is a hierarchical tree-like topology with a "root" switch at the top. A switch is elected as root based on the lowest configured priority of any switch (0 through 65,535). When a switch boots up, it begins a process of identifying other switches and determining the root bridge. After a root bridge is elected, the topology is established from its perspective of the connectivity. The switches determine the path to the root bridge, and all redundant paths are blocked. STP sends configuration and topology change notifications and acknowledgments (TCN/TCA) using bridge protocol data units (BPDU).

An STP attack involves an attacker spoofing the root bridge in the topology. The attacker broadcasts out an STP configuration/topology change BPDU in an attempt to force an STP recalculation. The BPDU sent out announces that the attacker's system has a lower bridge priority. The attacker can then see a variety of frames forwarded from other switches to it. STP recalculation may also cause a denial-of-service (DoS) condition on the network by causing an interruption of 30 to 45 seconds each time the root bridge changes. An attacker using STP network topology changes to force its host to be elected as the root bridge.

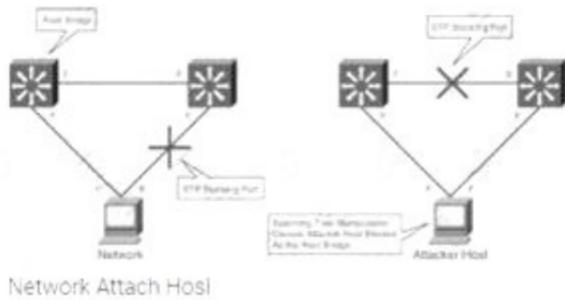

switch

NEW QUESTION 53

The network users are complaining because their system are slowing down. Further, every time they attempt to go a website, they receive a series of pop-ups with advertisements. What types of malware have the system been infected with?

- A. Virus
- B. Spyware
- C. Trojan
- D. Adware

Answer: D

Explanation:

Adware, or advertising supported computer code, is computer code that displays unwanted advertisements on your pc. Adware programs can tend to serve you pop-up ads, will modification your browser's homepage, add spyware and simply bombard your device with advertisements. Adware may be a additional summary name for doubtless unwanted programs. It's roughly a virulent disease and it's going to not be as clearly malicious as a great deal of different problematic code floating around on the net. create no mistake concerning it, though, that adware has to return off of no matter machine it's on. Not solely will adware be extremely annoying whenever you utilize your machine, it might additionally cause semipermanent problems for your device.

Adware a network users the browser to gather your internet browsing history so as to 'target' advertisements that appear tailored to your interests. At their most innocuous, adware infections square measure simply annoying. as an example, adware barrages you with pop-up ads that may create your net expertise markedly slower and additional labor intensive.

NEW QUESTION 56

Bill is a network administrator. He wants to eliminate unencrypted traffic inside his company's network. He decides to setup a SPAN port and capture all traffic to the datacenter. He immediately discovers unencrypted traffic in port UDP 161. what protocol is this port using and how can he secure that traffic?

- A. it is not necessary to perform any actions, as SNMP is not carrying important information.
- B. SNMP and he should change it to SNMP V3
- C. RPC and the best practice is to disable RPC completely
- D. SNMP and he should change it to SNMP v2, which is encrypted

Answer: B

Explanation:

We have various articles already in our documentation for setting up SNMPv2 trap handling in Opsview, but SNMPv3 traps are a whole new ballgame. They can be quite confusing and complicated to set up the first time you go through the process, but when you understand what is going on, everything should make more sense.

SNMP has gone through several revisions to improve performance and security (version 1, 2c and 3). By default, it is a UDP port based protocol where communication is based on a 'fire and forget' methodology in which network packets are sent to another device, but there is no check for receipt of that packet (versus TCP port when a network packet must be acknowledged by the other end of the communication link).

There are two modes of operation with SNMP – get requests (or polling) where one device requests information from an SNMP enabled device on a regular basis (normally using UDP port 161), and traps where the SNMP enabled device sends a message to another device when an event occurs (normally using UDP port 162). The latter includes instances such as someone logging on, the device powering up or down, or a wide variety of other problems that would need this type of investigation.

This blog covers SNMPv3 traps, as polling and version 2c traps are covered elsewhere in our documentation. SNMP traps Since SNMP is primarily a UDP port based system, traps may be 'lost' when sending between devices; the sending device does not wait to see if the receiver got the trap. This means if the configuration on the sending device is wrong (using the wrong receiver IP address or port) or the receiver isn't listening for traps or rejecting them out of hand due to misconfiguration, the sender will never know.

The SNMP v2c specification introduced the idea of splitting traps into two types; the original 'hope it gets there' trap and the newer 'INFORM' traps. Upon receipt of an INFORM, the receiver must send an acknowledgement back. If the sender doesn't get the acknowledgement back, then it knows there is an existing problem and can log it for sysadmins to find when they interrogate the device.

NEW QUESTION 57

As a securing consultant, what are some of the things you would recommend to a company to ensure DNS security?

- A. Use the same machines for DNS and other applications
- B. Harden DNS servers
- C. Use split-horizon operation for DNS servers
- D. Restrict Zone transfers
- E. Have subnet diversity between DNS servers

Answer: BCDE

NEW QUESTION 60

You are the Network Admin, and you get a complaint that some of the websites are no longer accessible. You try to ping the servers and find them to be reachable. Then you type the IP address and then you try on the browser, and find it to be accessible. But they are not accessible when you try using the URL. What may be the problem?

- A. Traffic is Blocked on UDP Port 53
- B. Traffic is Blocked on TCP Port 80
- C. Traffic is Blocked on TCP Port 54
- D. Traffic is Blocked on UDP Port 80

Answer: A

NEW QUESTION 65

What is the proper response for a NULL scan if the port is closed?

- A. SYN
- B. ACK
- C. FIN
- D. PSH
- E. RST
- F. No response

Answer: E

NEW QUESTION 68

Mary found a high vulnerability during a vulnerability scan and notified her server team. After analysis, they sent her proof that a fix to that issue had already been applied. The vulnerability that Mary found is called what?

- A. False-negative
- B. False-positive
- C. Brute force attack
- D. Backdoor

Answer: B

NEW QUESTION 73

While examining audit logs, you discover that people are able to telnet into the SMTP server on port 25. You would like to block this, though you do not see any evidence of an attack or other wrong doing. However, you are concerned about affecting the normal functionality of the email server. From the following options choose how best you can achieve this objective?

- A. Block port 25 at the firewall.
- B. Shut off the SMTP service on the server.
- C. Force all connections to use a username and password.
- D. Switch from Windows Exchange to UNIX Sendmail.
- E. None of the above.

Answer: E

NEW QUESTION 78

Lewis, a professional hacker, targeted the IoT cameras and devices used by a target venture-capital firm. He used an information-gathering tool to collect information about the IoT devices connected to a network, open ports and services, and the attack surface area. Using this tool, he also generated statistical reports on broad usage patterns and trends. This tool helped Lewis continually monitor every reachable server and device on the Internet, further allowing him to exploit these devices in the network. Which of the following tools was employed by Lewis in the above scenario?

- A. Censys
- B. Wapiti
- C. NeuVector
- D. Lacework

Answer: A

Explanation:

Censys scans help the scientific community accurately study the Internet. The data is sometimes used to detect security problems and to inform operators of vulnerable systems so that they can fixed

NEW QUESTION 79

Shiela is an information security analyst working at HiTech Security Solutions. She is performing service version discovery using Nmap to obtain information about the running services and their versions on a target system.

Which of the following Nmap options must she use to perform service version discovery on the target host?

- A. -SN
- B. -SX
- C. -sV
- D. -SF

Answer: C

NEW QUESTION 81

During the process of encryption and decryption, what keys are shared?

- A. Private keys
- B. User passwords

- C. Public keys
- D. Public and private keys

Answer: C

NEW QUESTION 82

Bob, a system administrator at TPNQM SA, concluded one day that a DMZ is not needed if he properly configures the firewall to allow access just to servers/ports, which can have direct internet access, and block the access to workstations.

Bob also concluded that DMZ makes sense just when a stateful firewall is available, which is not the case of TPNQM SA.

In this context, what can you say?

- A. Bob can be right since DMZ does not make sense when combined with stateless firewalls
- B. Bob is partially right
- C. He does not need to separate networks if he can create rules by destination IPs, one by one
- D. Bob is totally wrong
- E. DMZ is always relevant when the company has internet servers and workstations
- F. Bob is partially right
- G. DMZ does not make sense when a stateless firewall is available

Answer: C

NEW QUESTION 87

Bob, your senior colleague, has sent you a mail regarding a deal with one of the clients. You are requested to accept the offer and you oblige. After 2 days, Bob denies that he had ever sent a mail. What do you want to “know” to prove yourself that it was Bob who had sent a mail?

- A. Non-Repudiation
- B. Integrity
- C. Authentication
- D. Confidentiality

Answer: A

NEW QUESTION 89

Mirai malware targets IoT devices. After infiltration, it uses them to propagate and create botnets that then used to launch which types of attack?

- A. MITM attack
- B. Birthday attack
- C. DDoS attack
- D. Password attack

Answer: C

NEW QUESTION 94

Bob received this text message on his mobile phone: “Hello, this is Scott Smelby from the Yahoo Bank. Kindly contact me for a vital transaction on: scottsmelby@yahoo.com”. Which statement below is true?

- A. This is a scam as everybody can get a @yahoo address, not the Yahoo customer service employees.
- B. This is a scam because Bob does not know Scott.
- C. Bob should write to scottsmelby@yahoo.com to verify the identity of Scott.
- D. This is probably a legitimate message as it comes from a respectable organization.

Answer: A

NEW QUESTION 95

You are analysing traffic on the network with Wireshark. You want to routinely run a cron job which will run the capture against a specific set of IPs - 192.168.8.0/24. What command you would use?

- A. wireshark --fetch "192.168.8*"
- B. wireshark --capture --local masked 192.168.8.0 ---range 24
- C. tshark -net 192.255.255.255 mask 192.168.8.0
- D. sudo tshark -f"net 192 .68.8.0/24"

Answer: D

NEW QUESTION 96

Which command can be used to show the current TCP/IP connections?

- A. Netsh
- B. Netstat
- C. Net use connection
- D. Net use

Answer: A

NEW QUESTION 100

infecting a system with malware and using phishing to gain credentials to a system or web application are examples of which phase of the ethical hacking methodology?

- A. Reconnaissance
- B. Maintaining access
- C. Scanning
- D. Gaining access

Answer: D

Explanation:

This phase having the hacker uses different techniques and tools to realize maximum data from the system. they're → Password cracking – Methods like Bruteforce, dictionary attack, rule-based attack, rainbow table a used. Bruteforce is trying all combinations of the password. Dictionary attack is trying an inventory of meaningful words until the password matches. Rainbow table takes the hash value of the password and compares with pre-computed hash values until a match is discovered. • Password attacks – Passive attacks like wire sniffing, replay attack. Active online attack like Trojans, keyloggers, hash injection, phishing. Offline attacks like pre-computed hash, distributed network and rainbow. Non electronic attack like shoulder surfing, social engineering and dumpster diving.

NEW QUESTION 105

Your company performs penetration tests and security assessments for small and medium-sized business in the local area. During a routine security assessment, you discover information that suggests your client is involved with human trafficking. What should you do?

- A. Confront the client in a respectful manner and ask her about the data.
- B. Copy the data to removable media and keep it in case you need it.
- C. Ignore the data and continue the assessment until completed as agreed.
- D. Immediately stop work and contact the proper legal authorities.

Answer: D

NEW QUESTION 108

which of the following protocols can be used to secure an LDAP service against anonymous queries?

- A. SSO
- B. RADIUS
- C. WPA
- D. NTLM

Answer: D

Explanation:

In a Windows network, nongovernmental organization (New Technology) local area network Manager (NTLM) could be a suite of Microsoft security protocols supposed to produce authentication, integrity, and confidentiality to users. NTLM is that the successor to the authentication protocol in Microsoft local area network Manager (LANMAN), Associate in Nursing older Microsoft product. The NTLM protocol suite is enforced in an exceedingly Security Support supplier, which mixes the local area network Manager authentication protocol, NTLMv1, NTLMv2 and NTLM2 Session protocols in an exceedingly single package. whether or not these protocols area unit used or will be used on a system is ruled by cluster Policy settings, that totally different{completely different} versions of Windows have different default settings. NTLM passwords area unit thought-about weak as a result of they will be brute-forced very simply with fashionable hardware.

NTLM could be a challenge-response authentication protocol that uses 3 messages to authenticate a consumer in an exceedingly affiliation orientating setting (connectionless is similar), and a fourth extra message if integrity is desired.

- > First, the consumer establishes a network path to the server and sends a NEGOTIATE_MESSAGE advertising its capabilities.
- > Next, the server responds with CHALLENGE_MESSAGE that is employed to determine the identity of the consumer.
- > Finally, the consumer responds to the challenge with Associate in Nursing AUTHENTICATE_MESSAGE.

The NTLM protocol uses one or each of 2 hashed word values, each of that are keep on the server (or domain controller), and that through a scarcity of seasoning area unit word equivalent, that means that if you grab the hash price from the server, you'll evidence while not knowing the particular word. the 2 area unit the lm Hash (a DES-based operate applied to the primary fourteen chars of the word born-again to the standard eight bit laptop charset for the language), and also the nt Hash (MD4 of the insufficient endian UTF-16 Unicode password). each hash values area unit sixteen bytes (128 bits) every.

The NTLM protocol additionally uses one among 2 a method functions, looking on the NTLM version. National Trust LanMan and NTLM version one use the DES primarily based LanMan a method operate (LMOWF), whereas National TrustLMv2 uses the NT MD4 primarily based a method operate (NTOWF).

NEW QUESTION 110

Abel, a cloud architect, uses container technology to deploy applications/software including all its dependencies, such as libraries and configuration files, binaries, and other resources that run independently from other processes in the cloud environment. For the containerization of applications, he follows the five-tier container technology architecture. Currently, Abel is verifying and validating image contents, signing images, and sending them to the registries. Which of the following tiers of the container technology architecture is Abel currently working in?

- A. Tier-1: Developer machines
- B. Tier-4: Orchestrators
- C. Tier-3: Registries
- D. Tier-2: Testing and accreditation systems

Answer: D

Explanation:

The official management decision given by a senior agency official to authorize operation of an information system and to explicitly accept the risk to agency operations (including mission, functions, image, or reputation), agency assets, or individuals, based on the implementation of an agreed-upon set of security controls.

formal declaration by a designated accrediting authority (DAA) or principal accrediting authority (PAA) that an information system is approved to operate at an acceptable level of risk, based on the implementation of an approved set of technical, managerial, and procedural safeguards. See authorization to operate (ATO).

Rationale: The Risk Management Framework uses a new term to refer to this concept, and it is called authorization.

Identifies the information resources covered by an accreditation decision, as distinguished from separately accredited information resources that are

interconnected or with which information is exchanged via messaging. Synonymous with Security Perimeter.

For the purposes of identifying the Protection Level for confidentiality of a system to be accredited, the system has a conceptual boundary that extends to all intended users of the system, both directly and indirectly connected, who receive output from the system. See authorization boundary. Rationale: The Risk Management Framework uses a new term to refer to the concept of accreditation, and it is called authorization. Extrapolating, the accreditation boundary would then be referred to as the authorization boundary.

NEW QUESTION 113

What would be the fastest way to perform content enumeration on a given web server by using the Gobuster tool?

- A. Performing content enumeration using the bruteforce mode and 10 threads
- B. Shipping SSL certificate verification
- C. Performing content enumeration using a wordlist
- D. Performing content enumeration using the bruteforce mode and random file extensions

Answer: A

NEW QUESTION 117

Some clients of TPNQM SA were redirected to a malicious site when they tried to access the TPNQM main site. Bob, a system administrator at TPNQM SA, found that they were victims of DNS Cache Poisoning. What should Bob recommend to deal with such a threat?

- A. The use of security agents in clients' computers
- B. The use of DNSSEC
- C. The use of double-factor authentication
- D. Client awareness

Answer: B

NEW QUESTION 120

Under what conditions does a secondary name server request a zone transfer from a primary name server?

- A. When a primary SOA is higher than a secondary SOA
- B. When a secondary SOA is higher than a primary SOA
- C. When a primary name server has had its service restarted
- D. When a secondary name server has had its service restarted
- E. When the TTL falls to zero

Answer: A

NEW QUESTION 122

Chandler works as a pen-tester in an IT-firm in New York. As a part of detecting viruses in the systems, he uses a detection method where the anti-virus executes the malicious codes on a virtual machine to simulate CPU and memory activities. Which type of virus detection method did Chandler use in this context?

- A. Heuristic Analysis
- B. Code Emulation
- C. Scanning
- D. Integrity checking

Answer: B

NEW QUESTION 124

A security analyst is performing an audit on the network to determine if there are any deviations from the security policies in place. The analyst discovers that a user from the IT department had a dial-out modem installed.

Which security policy must the security analyst check to see if dial-out modems are allowed?

- A. Firewall-management policy
- B. Acceptable-use policy
- C. Permissive policy
- D. Remote-access policy

Answer: D

NEW QUESTION 127

An attacker scans a host with the below command. Which three flags are set?

```
# nmap -sX host.domain.com
```

- A. This is SYN sca
- B. SYN flag is set.
- C. This is Xmas sca
- D. URG, PUSH and FIN are set.
- E. This is ACK sca
- F. ACK flag is set.
- G. This is Xmas sca
- H. SYN and ACK flags are set.

Answer: B

NEW QUESTION 132

Which protocol is used for setting up secure channels between two devices, typically in VPNs?

- A. PEM
- B. ppp
- C. IPSEC
- D. SET

Answer: C

NEW QUESTION 134

A hacker is an intelligent individual with excellent computer skills and the ability to explore a computer's software and hardware without the owner's permission. Their intention can either be to simply gain knowledge or to illegally make changes.

Which of the following class of hacker refers to an individual who works both offensively and defensively at various times?

- A. White Hat
- B. Suicide Hacker
- C. Gray Hat
- D. Black Hat

Answer: C

NEW QUESTION 138

The tools which receive event logs from servers, network equipment, and applications, and perform analysis and correlation on those logs, and can generate alarms for security relevant issues, are known as what?

- A. network Sniffer
- B. Vulnerability Scanner
- C. Intrusion prevention Server
- D. Security incident and event Monitoring

Answer: D

NEW QUESTION 141

You went to great lengths to install all the necessary technologies to prevent hacking attacks, such as expensive firewalls, antivirus software, anti-spam systems and intrusion detection/prevention tools in your company's network. You have configured the most secure policies and tightened every device on your network. You are confident that hackers will never be able to gain access to your network with complex security system in place.

Your peer, Peter Smith who works at the same department disagrees with you.

He says even the best network security technologies cannot prevent hackers gaining access to the network because of presence of "weakest link" in the security chain.

What is Peter Smith talking about?

- A. Untrained staff or ignorant computer users who inadvertently become the weakest link in your security chain
- B. "zero-day" exploits are the weakest link in the security chain since the IDS will not be able to detect these attacks
- C. "Polymorphic viruses" are the weakest link in the security chain since the Anti-Virus scanners will not be able to detect these attacks
- D. Continuous Spam e-mails cannot be blocked by your security system since spammers use different techniques to bypass the filters in your gateway

Answer: A

NEW QUESTION 146

What hacking attack is challenge/response authentication used to prevent?

- A. Replay attacks
- B. Scanning attacks
- C. Session hijacking attacks
- D. Password cracking attacks

Answer: A

NEW QUESTION 151

By performing a penetration test, you gained access under a user account. During the test, you established a connection with your own machine via the SMB service and occasionally entered your login and password in plaintext.

Which file do you have to clean to clear the password?

- A. .X session-log
- B. .bashrc
- C. .profile
- D. .bash_history

Answer: D

Explanation:

File created by Bash, a Unix-based shell program commonly used on Mac OS X and Linux operating systems; stores a history of user commands entered at the command prompt; used for viewing old commands that are executed. BASH_HISTORY files are hidden files with no filename prefix. They always use the filename .bash_history. NOTE: Bash is the shell program employed by Apple Terminal. Our goal is to assist you understand what a file with a *.bash_history suffix is and the way to open it. The Bash History file type, file format description, and Mac and Linux programs listed on this page are individually researched and verified by the FileInfo team. We attempt for 100% accuracy and only publish information about file formats that we've tested and validated.

NEW QUESTION 156

Identify the correct terminology that defines the above statement.

"Testing the network using the same methodologies and tools employed by attackers"

- A. Vulnerability Scanning
- B. Penetration Testing
- C. Security Policy Implementation
- D. Designing Network Security

Answer: B

NEW QUESTION 159

You are a penetration tester and are about to perform a scan on a specific server. The agreement that you signed with the client contains the following specific condition for the scan: "The attacker must scan every port on the server several times using a set of spoofed sources IP addresses." Suppose that you are using Nmap to perform this scan. What flag will you use to satisfy this requirement?

- A. The -A flag
- B. The -g flag
- C. The -f flag
- D. The -D flag

Answer: D

Explanation:

flags `-source-port` and `-g` are equivalent and instruct nmap to send packets through a selected port. this option is used to try to cheat firewalls whitelisting traffic from specific ports. the following example can scan the target from the port twenty to ports eighty, 22, 21,23 and 25 sending fragmented packets to LinuxHint.

NEW QUESTION 161

Harper, a software engineer, is developing an email application. To ensure the confidentiality of email messages. Harper uses a symmetric-key block cipher having a classical 12- or 16-round Feistel network with a block size of 64 bits for encryption, which includes large 8 x 32-bit S-boxes (S1, S2, S3, S4) based on bent functions, modular addition and subtraction, key-dependent rotation, and XOR operations. This cipher also uses a masking key(Km1)and a rotation key (Kr1) for performing its functions. What is the algorithm employed by Harper to secure the email messages?

- A. CAST-128
- B. AES
- C. GOST block cipher
- D. DES

Answer: A

NEW QUESTION 163

Which of the following viruses tries to hide from anti-virus programs by actively altering and corrupting the chosen service call interruptions when they are being run?

- A. Macro virus
- B. Stealth/Tunneling virus
- C. Cavity virus
- D. Polymorphic virus

Answer: B

NEW QUESTION 168

Sam, a professional hacker. targeted an organization with intention of compromising AWS IAM credentials. He attempted to lure one of the employees of the organization by initiating fake calls while posing as a legitimate employee. Moreover, he sent phishing emails to steal the AWS IAM credentials and further compromise the employee's account. What is the technique used by Sam to compromise the AWS IAM credentials?

- A. Social engineering
- B. insider threat
- C. Password reuse
- D. Reverse engineering

Answer: A

Explanation:

Just like any other service that accepts usernames and passwords for logging in, AWS users are vulnerable to social engineering attacks from attackers. fake emails, calls, or any other method of social engineering, may find yourself with an AWS users' credentials within the hands of an attacker.

If a user only uses API keys for accessing AWS, general phishing techniques could still use to gain access to other accounts or their pc itself, where the attacker may then pull the API keys for aforementioned AWS user.

With basic opensource intelligence (OSINT), it's usually simple to collect a list of workers of an organization that use AWS on a regular basis. This list will then be targeted with spear phishing to do and gather credentials. an easy technique may include an email that says your bill has spiked 500th within the past 24 hours, "click here for additional information", and when they click the link, they're forwarded to a malicious copy of the AWS login page designed to steal their credentials.

An example of such an email will be seen within the screenshot below. it's exactly like an email that AWS would send to you if you were to exceed the free tier limits, except for a few little changes. If you clicked on any of the highlighted regions within the screenshot, you'd not be taken to the official AWS web site and you'd instead be forwarded to a pretend login page setup to steal your credentials.

These emails will get even more specific by playing a touch bit additional OSINT before causing them out. If an attacker was ready to discover your AWS account

ID on-line somewhere, they could use methods we at rhino have free previously to enumerate what users and roles exist in your account with none logs contact on your side. they could use this list to more refine their target list, further as their emails to reference services they will know that you often use. For reference, the journal post for using AWS account IDs for role enumeration will be found here and the journal post for using AWS account IDs for user enumeration will be found here. During engagements at rhino, we find that phishing is one in all the fastest ways for us to achieve access to an AWS environment.

NEW QUESTION 170

What is the way to decide how a packet will move from an untrusted outside host to a protected inside that is behind a firewall, which permits the hacker to determine which ports are open and if the packets can pass through the packet-filtering of the firewall?

- A. Session hijacking
- B. Firewalking
- C. Man-in-the middle attack
- D. Network sniffing

Answer: B

NEW QUESTION 173

When purchasing a biometric system, one of the considerations that should be reviewed is the processing speed. Which of the following best describes what it is meant by processing?

- A. The amount of time and resources that are necessary to maintain a biometric system
- B. How long it takes to setup individual user accounts
- C. The amount of time it takes to be either accepted or rejected from when an individual provides identification and authentication information
- D. The amount of time it takes to convert biometric data into a template on a smart card

Answer: C

NEW QUESTION 175

Bob, an attacker, has managed to access a target IoT device. He employed an online tool to gather information related to the model of the IoT device and the certifications granted to it. Which of the following tools did Bob employ to gather the above Information?

- A. search.com
- B. EarthExplorer
- C. Google image search
- D. FCC ID search

Answer: D

Explanation:

Footprinting techniques are used to collect basic information about the target IoT and OT platforms to exploit them. Information collected through footprinting techniques includes IP address, hostname, ISP, device location, banner of the target IoT device, FCC ID information, certification granted to the device, etc. pg. 5052
ECHv11 manual

NEW QUESTION 177

Jason, an attacker, targeted an organization to perform an attack on its Internet-facing web server with the intention of gaining access to backend servers, which are protected by a firewall. In this process, he used a URL `https://xyz.com/feed.php?url:externalsile.com/feed/to` to obtain a remote feed and altered the URL input to the local host to view all the local resources on the target server. What is the type of attack Jason performed In the above scenario?

- A. website defacement
- B. Server-side request forgery (SSRF) attack
- C. Web server misconfiguration
- D. web cache poisoning attack

Answer: B

Explanation:

Server-side request forgery (also called SSRF) is a net security vulnerability that allows an assaulter to induce the server-side application to make http requests to associate arbitrary domain of the attacker's choosing.

In typical SSRF examples, the attacker might cause the server to make a connection back to itself, or to other web-based services among the organization's infrastructure, or to external third-party systems.

Another type of trust relationship that often arises with server-side request forgery is where the application server is able to interact with different back-end systems that aren't directly reachable by users. These systems typically have non-routable private informatics addresses. Since the back-end systems normally ordinarily protected by the topology, they typically have a weaker security posture. In several cases, internal back-end systems contain sensitive functionality that may be accessed while not authentication by anyone who is able to act with the systems.

In the preceding example, suppose there's an body interface at the back-end url `https://192.168.0.68/admin`. Here, an attacker will exploit the SSRF vulnerability to access the executive interface by submitting the following request:

```
POST /product/stock HTTP/1.0
```

```
Content-Type: application/x-www-form-urlencoded Content-Length: 118 stockApi=http://192.168.0.68/admin
```

NEW QUESTION 180

One of your team members has asked you to analyze the following SOA record. What is the version? Rutgers.edu.SOA NS1.Rutgers.edu ipad.college.edu (200302028 3600 3600 604800 2400.) (Choose four.)

- A. 200303028
- B. 3600
- C. 604800

- D. 2400
- E. 60
- F. 4800

Answer: A

NEW QUESTION 183

Session splicing is an IDS evasion technique in which an attacker delivers data in multiple, small sized packets to the target computer, making it very difficult for an IDS to detect the attack signatures. Which tool can be used to perform session splicing attacks?

- A. tcpsplice
- B. Burp
- C. Hydra
- D. Whisker

Answer: D

NEW QUESTION 188

Calvin, a grey-hat hacker, targets a web application that has design flaws in its authentication mechanism. He enumerates usernames from the login form of the web application, which requests users to feed data and specifies the incorrect field in case of invalid credentials. Later, Calvin uses this information to perform social engineering.

Which of the following design flaws in the authentication mechanism is exploited by Calvin?

- A. Insecure transmission of credentials
- B. Verbose failure messages
- C. User impersonation
- D. Password reset mechanism

Answer: D

NEW QUESTION 189

The company ABC recently contracts a new accountant. The accountant will be working with the financial statements. Those financial statements need to be approved by the CFO and then they will be sent to the accountant but the CFO is worried because he wants to be sure that the information sent to the accountant was not modified once he approved it. Which of the following options can be useful to ensure the integrity of the data?

- A. The CFO can use a hash algorithm in the document once he approved the financial statements
- B. The CFO can use an excel file with a password
- C. The financial statements can be sent twice, one by email and the other delivered in USB and the accountant can compare both to be sure is the same document
- D. The document can be sent to the accountant using an exclusive USB for that document

Answer: A

NEW QUESTION 194

Andrew is an Ethical Hacker who was assigned the task of discovering all the active devices hidden by a restrictive firewall in the IPv4 range in a given target network.

Which of the following host discovery techniques must he use to perform the given task?

- A. UDP scan
- B. TCP Maimon scan
- C. arp ping scan
- D. ACK flag probe scan


Answer: C

Explanation:

One of the most common Nmap usage scenarios is scanning an Ethernet LAN. Most LANs, especially those that use the private address range granted by RFC 1918, do not always use the overwhelming majority of IP addresses. When Nmap attempts to send a raw IP packet, such as an ICMP echo request, the OS must determine a destination hardware (ARP) address, such as the target IP, so that the Ethernet frame can be properly addressed. .. This is required to issue a series of ARP requests. This is best illustrated by an example where a ping scan is attempted against an Area Ethernet host. The `--send-ip` option tells Nmap to send IP-level packets (rather than raw Ethernet), even on area networks. The Wireshark output of the three ARP requests and their timing have been pasted into the session.

Raw IP ping scan example for offline targets This example took quite a couple of seconds to finish because the (Linux) OS sent three ARP requests at 1 second intervals before abandoning the host. Waiting for a few seconds is excessive, as long as the ARP response usually arrives within a few milliseconds. Reducing this timeout period is not a priority for OS vendors, as the overwhelming majority of packets are sent to the host that actually exists. Nmap, on the other hand, needs to send packets to 16 million IP s given a target like 10.0.0.0/8. Many targets are pinged in parallel, but waiting 2 seconds each is very delayed.

There is another problem with raw IP ping scans on the LAN. If the destination host turns out to be unresponsive, as in the previous example, the source host usually adds an incomplete entry for that destination IP to the kernel ARP table. ARP tablespaces are finite and some operating systems become unresponsive when full. If Nmap is used in rawIP mode (`--send-ip`), Nmap may have to wait a few minutes for the ARP cache entry to expire before continuing host discovery. ARP scans solve both problems by giving Nmap the highest priority. Nmap issues raw ARP requests and handles retransmissions and timeout periods in its sole discretion. The system ARP cache is bypassed. The example shows the difference. This ARP scan takes just over a tenth of the time it takes for an equivalent IP. Example b ARP ping scan of offline target



In example b, neither the `-PR` option nor the `--send-eth` option has any effect. This is often because ARP has a default scan type on the Area Ethernet network when scanning Ethernet hosts that Nmap discovers. This includes traditional wired Ethernet as 802.11 wireless networks. As mentioned above, ARP scanning is not only more efficient, but also more accurate. Hosts frequently block IP-based ping packets, but usually cannot block ARP requests or responses and

communicate over the network. Nmap uses ARP instead of all targets on equivalent targets, even if different ping types (such as -PE and -PS) are specified. LAN.. If you do not need to attempt an ARP scan at all, specify --send-ip as shown in Example a "Raw IP Ping Scan for Offline Targets". If you give Nmap control to send raw Ethernet frames, Nmap can also adjust the source MAC address. If you have the only PowerBook in your security conference room and a large ARP scan is initiated from an Apple-registered MAC address, your head may turn to you. Use the --spoof-mac option to spoof the MAC address as described in the MAC Address Spoofing section.

NEW QUESTION 196

Eve is spending her day scanning the library computers. She notices that Alice is using a computer whose port 445 is active and listening. Eve uses the ENUM tool to enumerate Alice machine. From the command prompt, she types the following command.

```
For /f "tokens=1 %%a in (hackfile.txt) do net use * \\10.1.2.3\c$ /user:"Administrator" %%a
```

What is Eve trying to do?

- A. Eve is trying to connect as a user with Administrator privileges
- B. Eve is trying to enumerate all users with Administrative privileges
- C. Eve is trying to carry out a password crack for user Administrator
- D. Eve is trying to escalate privilege of the null user to that of Administrator

Answer: C

NEW QUESTION 201

During a recent security assessment, you discover the organization has one Domain Name Server (DNS) in a Demilitarized Zone (DMZ) and a second DNS server on the internal network.

What is this type of DNS configuration commonly called?

- A. DynDNS
- B. DNS Scheme
- C. DNSSEC
- D. Split DNS

Answer: D

NEW QUESTION 204

Widespread fraud at Enron, WorldCom, and Tyco led to the creation of a law that was designed to improve the accuracy and accountability of corporate disclosures. It covers accounting firms and third parties that provide financial services to some organizations and came into effect in 2002. This law is known by what acronym?

- A. Fed RAMP
- B. PCIDSS
- C. SOX
- D. HIPAA

Answer: C

Explanation:

The Sarbanes-Oxley Act of 2002 could be a law the U.S. Congress passed on July thirty of that year to assist defend investors from fallacious money coverage by companies. Also called the SOX Act of 2002 and also the company Responsibility Act of 2002, it mandated strict reforms to existing securities rules and obligatory powerful new penalties on law breakers.

The Sarbanes-Oxley law Act of 2002 came in response to money scandals within the early 2000s involving in public listed corporations like Enron Corporation, Tyco International plc, and WorldCom. The high-profile frauds cask capitalist confidence within the trustiness of company money statements Associate in Nursing light-emitting diode several to demand an overhaul of decades-old restrictive standards.

NEW QUESTION 207

On performing a risk assessment, you need to determine the potential impacts when some of the critical business processes of the company interrupt its service. What is the name of the process by which you can determine those critical businesses?

- A. Emergency Plan Response (EPR)
- B. Business Impact Analysis (BIA)
- C. Risk Mitigation
- D. Disaster Recovery Planning (DRP)

Answer: B

NEW QUESTION 212

The network in ABC company is using the network address 192.168.1.64 with mask 255.255.255.192. In the network the servers are in the addresses 192.168.1.122, 192.168.1.123 and 192.168.1.124. An attacker is trying to find those servers but he cannot see them in his scanning. The command he is using is: nmap 192.168.1.64/28.

Why he cannot see the servers?

- A. He needs to add the command ""ip address"" just before the IP address
- B. He needs to change the address to 192.168.1.0 with the same mask
- C. He is scanning from 192.168.1.64 to 192.168.1.78 because of the mask /28 and the servers are not in that range
- D. The network must be down and the nmap command and IP address are ok

Answer: C

NEW QUESTION 216

which of the following Bluetooth hacking techniques refers to the theft of information from a wireless device through Bluetooth?

- A. Bluesmacking
- B. Bluebugging
- C. Bluejacking
- D. Bluesnarfing

Answer: D

Explanation:

Bluesnarfing is the unauthorized access of information from a wireless device through Bluetooth connection, often between phones, desktops, laptops, and PDAs (personal digital assistant).

NEW QUESTION 220

Alex, a cloud security engineer working in Eyecloud Inc. is tasked with isolating applications from the underlying infrastructure and stimulating communication via well-defined channels. For this purpose, he used an open-source technology that helped him in developing, packaging, and running applications; further, the technology provides PaaS through OS-level visualization, delivers containerized software packages, and promotes fast software delivery. What is the cloud technology employed by Alex in the above scenario?

- A. Virtual machine
- B. Serverless computing
- C. Docker
- D. Zero trust network

Answer: C

NEW QUESTION 223

A company's Web development team has become aware of a certain type of security vulnerability in their Web software. To mitigate the possibility of this vulnerability being exploited, the team wants to modify the software requirements to disallow users from entering HTML as input into their Web application. What kind of Web application vulnerability likely exists in their software?

- A. Cross-site scripting vulnerability
- B. SQL injection vulnerability
- C. Web site defacement vulnerability
- D. Cross-site Request Forgery vulnerability

Answer: A

NEW QUESTION 228

An attacker changes the profile information of a particular user (victim) on the target website. The attacker uses this string to update the victim's profile to a text file and then submit the data to the attacker's database.

```
<
iframe src=""http://www.vulnweb.com/updateif.php"" style=""display:none""
> < /iframe >
```

What is this type of attack (that can use either HTTP GET or HTTP POST) called?

- A. Browser Hacking
- B. Cross-Site Scripting
- C. SQL Injection
- D. Cross-Site Request Forgery

Answer: D

NEW QUESTION 231

Clark, a professional hacker, was hired by an organization to gather sensitive information about its competitors surreptitiously. Clark gathers the server IP address of the target organization using Whois footprinting. Further, he entered the server IP address as an input to an online tool to retrieve information such as the network range of the target organization and to identify the network topology and operating system used in the network. What is the online tool employed by Clark in the above scenario?

- A. AOL
- B. ARIN
- C. DuckDuckGo
- D. Baidu

Answer: B

Explanation:

<https://search.arin.net/rdap/?query=199.43.0.43>

NEW QUESTION 236

Gilbert, a web developer, uses a centralized web API to reduce complexity and increase the integrity of updating and changing data. For this purpose, he uses a web service that uses HTTP methods such as PUT, POST, GET, and DELETE and can improve the overall performance, visibility, scalability, reliability, and portability of an application. What is the type of web-service API mentioned in the above scenario?

- A. JSON-RPC
- B. SOAP API

- C. RESTful API
- D. REST API

Answer: C

Explanation:

*REST is not a specification, tool, or framework, but instead is an architectural style for web services that serves as a communication medium between various systems on the web. *RESTful APIs, which are also known as RESTful services, are designed using REST principles and HTTP communication protocols RESTful is a collection of resources that use HTTP methods such as PUT, POST, GET, and DELETE

RESTful API: RESTful API is a RESTful service that is designed using REST principles and HTTP communication protocols. RESTful is a collection of resources that use HTTP methods such as PUT, POST, GET, and DELETE. RESTful API is also designed to make applications independent to improve the overall performance, visibility, scalability, reliability, and portability of an application. APIs with the following features can be referred to as RESTful APIs: o Stateless: The client end stores the state of the session; the server is restricted to save data during the request processing o Cacheable: The client should save responses (representations) in the cache. This feature can enhance API performance pg. 1920 CEHv11 manual.

<https://cloud.google.com/files/apigee/apigee-web-api-design-the-missing-link-ebook.pdf>

The HTTP methods GET, POST, PUT or PATCH, and DELETE can be used with these templates to read, create, update, and delete description resources for dogs and their owners. This API style has become popular for many reasons. It is straightforward and intuitive, and learning this pattern is similar to learning a programming language API. APIs like this one are commonly called RESTful APIs, although they do not display all of the characteristics that define REST (more on REST later).

NEW QUESTION 238

in this form of encryption algorithm, every Individual block contains 64-bit data, and three keys are used, where each key consists of 56 bits. Which is this encryption algorithm?

- A. IDEA
- B. Triple Data Encryption standard
- C. MDS encryption algorithm
- D. AES

Answer: B

Explanation:

Triple DES is another mode of DES operation. It takes three 64-bit keys, for an overall key length of 192 bits. In Stealth, you merely type within the entire 192-bit (24 character) key instead of entering each of the three keys individually. The Triple DES DLL then breaks the user-provided key into three subkeys, padding the keys if necessary in order that they are each 64 bits long. The procedure for encryption is strictly an equivalent as regular DES, but it's repeated 3 times, hence the name Triple DES. the info is encrypted with the primary key, decrypted with the second key, and eventually encrypted again with the third key. Triple DES runs 3 times slower than DES, but is far safer if used properly. The procedure for decrypting something is that the same because the procedure for encryption, except it's executed in reverse. Like DES, data is encrypted and decrypted in 64-bit chunks. Although the input key for DES is 64 bits long, the particular key employed by DES is merely 56 bits long. the smallest amount significant (right-most) bit in each byte may be a parity, and will be set in order that there are always an odd number of 1s in every byte. These parity bits are ignored, so only the seven most vital bits of every byte are used, leading to a key length of 56 bits. this suggests that the effective key strength for Triple DES is really 168 bits because each of the three keys contains 8 parity bits that aren't used during the encryption process. Triple DES Modes Triple ECB (Electronic Code Book) • This variant of Triple DES works precisely the same way because the ECB mode of DES. • this is often the foremost commonly used mode of operation. Triple CBC (Cipher Block Chaining) • This method is extremely almost like the quality DES CBC mode. • like Triple ECB, the effective key length is 168 bits and keys are utilized in an equivalent manner, as described above, but the chaining features of CBC mode also are employed. • the primary 64-bit key acts because the Initialization Vector to DES. • Triple ECB is then executed for one 64-bit block of plaintext. • The resulting ciphertext is then XORed with subsequent plaintext block to be encrypted, and therefore the procedure is repeated. • This method adds an additional layer of security to Triple DES and is therefore safer than Triple ECB, although it's not used as widely as Triple ECB.

NEW QUESTION 240

Which method of password cracking takes the most time and effort?

- A. Dictionary attack
- B. Shoulder surfing
- C. Rainbow tables
- D. Brute force

Answer: D

NEW QUESTION 241

What useful information is gathered during a successful Simple Mail Transfer Protocol (SMTP) enumeration?

- A. The two internal commands VRFY and EXPN provide a confirmation of valid users, email addresses, aliases, and mailing lists.
- B. Reveals the daily outgoing message limits before mailboxes are locked
- C. The internal command RCPT provides a list of ports open to message traffic.
- D. A list of all mail proxy server addresses used by the targeted host

Answer: A

NEW QUESTION 243

Which of the following is not a Bluetooth attack?

- A. Bluedriving
- B. Bluesmacking
- C. Bluejacking
- D. Bluesnarfing

Answer: A

NEW QUESTION 246

An attacker can employ many methods to perform social engineering against unsuspecting employees, including scareware. What is the best example of a scareware attack?

- A. A pop-up appears to a user stating, "You have won a free cruise! Click here to claim your prize!"
- B. A banner appears to a user stating, "Your account has been locked."
- C. Click here to reset your password and unlock your account."
- D. A banner appears to a user stating, "Your Amazon order has been delayed."
- E. Click here to find out your new delivery date."
- F. A pop-up appears to a user stating, "Your computer may have been infected with spyware."
- G. Click here to install an anti-spyware tool to resolve this issue."

Answer: D

NEW QUESTION 251

CyberTech Inc. recently experienced SQL injection attacks on its official website. The company appointed Bob, a security professional, to build and incorporate defensive strategies against such attacks. Bob adopted a practice whereby only a list of entities such as the data type, range, size, and value, which have been approved for secured access, is accepted. What is the defensive technique employed by Bob in the above scenario?

- A. Output encoding
- B. Enforce least privileges
- C. Whitelist validation
- D. Blacklist validation

Answer: C

NEW QUESTION 254

You are attempting to crack LM Manager hashed from Windows 2000 SAM file. You will be using LM Brute force hacking tool for decryption. What encryption algorithm will you be decrypting?

- A. MD4
- B. DES
- C. SHA
- D. SSL

Answer: B

NEW QUESTION 259

The Heartbleed bug was discovered in 2014 and is widely referred to under MITRE's Common Vulnerabilities and Exposures (CVE) as CVE-2014-0160. This bug affects the OpenSSL implementation of the Transport Layer Security (TLS) protocols defined in RFC6520.

What type of key does this bug leave exposed to the Internet making exploitation of any compromised system very easy?

- A. Public
- B. Private
- C. Shared
- D. Root

Answer: B

NEW QUESTION 263

Which address translation scheme would allow a single public IP address to always correspond to a single machine on an internal network, allowing "server publishing"?

- A. Overloading Port Address Translation
- B. Dynamic Port Address Translation
- C. Dynamic Network Address Translation
- D. Static Network Address Translation

Answer: D

NEW QUESTION 264

Bella, a security professional working at an IT firm, finds that a security breach has occurred while transferring important files. Sensitive data, employee usernames, and passwords are shared in plaintext, paving the way for hackers to perform successful session hijacking. To address this situation, Bella implemented a protocol that sends data using encryption and digital certificates. Which of the following protocols is used by Bella?

- A. FTP
- B. HTTPS
- C. FTPS
- D. IP

Answer: C

Explanation:

The File Transfer Protocol (FTP) is a standard organization convention utilized for the exchange of PC records from a worker to a customer on a PC organization. FTP is based on a customer worker model engineering utilizing separate control and information associations between the customer and the server.[1] FTP clients may validate themselves with an unmistakable book sign-in convention, ordinarily as a username and secret key, however can interface namelessly if the worker is designed to permit it. For secure transmission that ensures the username and secret phrase, and scrambles the substance, FTP is frequently made sure about with SSL/TLS (FTPS) or supplanted with SSH File Transfer Protocol (SFTP).

The primary FTP customer applications were order line programs created prior to working frameworks had graphical UIs, are as yet dispatched with most Windows, Unix, and Linux working systems.[2][3] Many FTP customers and mechanization utilities have since been created for working areas, workers, cell phones, and equipment, and FTP has been fused into profitability applications, for example, HTML editors.

NEW QUESTION 267

A pen tester is configuring a Windows laptop for a test. In setting up Wireshark, what driver and library are required to allow the NIC to work in promiscuous mode?

- A. Libpcap
- B. Awinpcap
- C. Winprom
- D. Winpcap

Answer: D

NEW QUESTION 271

Steve, an attacker, created a fake profile on a social media website and sent a request to Stella. Stella was enthralled by Steve's profile picture and the description given for his profile, and she initiated a conversation with him soon after accepting the request. After a few days, Steve started asking about her company details and eventually gathered all the essential information regarding her company. What is the social engineering technique Steve employed in the above scenario?

- A. Diversion theft
- B. Baiting
- C. Honey trap
- D. Piggybacking

Answer: C

Explanation:

The honey trap is a technique where an attacker targets a person online by pretending to be an attractive person and then begins a fake online relationship to obtain confidential information about the target company. In this technique, the victim is an insider who possesses critical information about the target organization.

Baiting is a technique in which attackers offer end users something alluring in exchange for important information such as login details and other sensitive data. This technique relies on the curiosity and greed of the end-users. Attackers perform this technique by leaving a physical device such as a USB flash drive containing malicious files in locations where people can easily find them, such as parking lots, elevators, and bathrooms. This physical device is labeled with a legitimate company's logo, thereby tricking end-users into trusting it and opening it on their systems. Once the victim connects and opens the device, a malicious file downloads. It infects the system and allows the attacker to take control.

For example, an attacker leaves some bait in the form of a USB drive in the elevator with the label "Employee Salary Information 2019" and a legitimate company's logo. Out of curiosity and greed, the victim picks up the device and opens it up on their system, which downloads the bait. Once the bait is downloaded, a piece of malicious software installs on the victim's system, giving the attacker access.

NEW QUESTION 275

During the enumeration phase, Lawrence performs banner grabbing to obtain information such as OS details and versions of services running. The service that he enumerated runs directly on TCP port 445.

Which of the following services is enumerated by Lawrence in this scenario?

- A. Server Message Block (SMB)
- B. Network File System (NFS)
- C. Remote procedure call (RPC)
- D. Telnet

Answer: A

Explanation:

Worker Message Block (SMB) is an organization document sharing and information texture convention. SMB is utilized by billions of gadgets in a different arrangement of working frameworks, including Windows, MacOS, iOS, Linux, and Android. Customers use SMB to get to information on workers. This permits sharing of records, unified information the board, and brought down capacity limit needs for cell phones. Workers additionally use SMB as a feature of the Software-characterized Data Center for outstanding burdens like grouping and replication.

Since SMB is a far off record framework, it requires security from assaults where a Windows PC may be fooled into reaching a pernicious worker running inside a confided in organization or to a far off worker outside the organization edge. Firewall best practices and arrangements can upgrade security keeping malevolent traffic from leaving the PC or its organization.

For Windows customers and workers that don't have SMB shares, you can obstruct all inbound SMB traffic utilizing the Windows Defender Firewall to keep far off associations from malignant or bargained gadgets. In the Windows Defender Firewall, this incorporates the accompanying inbound principles.

Name	Profile	Enabled
File and Printer Sharing (SMB-In)	All	No
Netlogon Service (NP-In)	All	No
Remote Event Log Management (NP-In)	All	Yes
Remote Service Management (NP-In)	All	No

You should also create a new blocking rule to override any other inbound firewall rules. Use the following suggested settings for any Windows clients or servers that do not host SMB Shares:

- > Name: Block all inbound SMB 445
- > Description: Blocks all inbound SMB TCP 445 traffic. Not to be applied to domain controllers or computers that host SMB shares.
- > Action: Block the connection
- > Programs: All
- > Remote Computers: Any
- > Protocol Type: TCP
- > Local Port: 445

- > Remote Port: Any
- > Profiles: All
- > Scope (Local IP Address): Any
- > Scope (Remote IP Address): Any
- > Edge Traversal: Block edge traversal

You must not globally block inbound SMB traffic to domain controllers or file servers. However, you can restrict access to them from trusted IP ranges and devices to lower their attack surface. They should also be restricted to Domain or Private firewall profiles and not allow Guest/Public traffic.

NEW QUESTION 278

Mr. Omkar performed tool-based vulnerability assessment and found two vulnerabilities. During analysis, he found that these issues are not true vulnerabilities. What will you call these issues?

- A. False positives
- B. True negatives
- C. True positives
- D. False negatives

Answer: A

NEW QUESTION 283

Miley, a professional hacker, decided to attack a target organization's network. To perform the attack, she used a tool to send fake ARP messages over the target network to link her MAC address with the target system's IP address. By performing this, Miley received messages directed to the victim's MAC address and further used the tool to intercept, steal, modify, and block sensitive communication to the target system. What is the tool employed by Miley to perform the above attack?

- A. Gobbler
- B. KDerpNSpoof
- C. BetterCAP
- D. Wireshark

Answer: C

NEW QUESTION 285

In an attempt to damage the reputation of a competitor organization, Hailey, a professional hacker, gathers a list of employee and client email addresses and other related information by using various search engines, social networking sites, and web spidering tools. In this process, she also uses an automated tool to gather a list of words from the target website to further perform a brute-force attack on the previously gathered email addresses. What is the tool used by Hailey for gathering a list of words from the target website?

- A. Shadowsocks
- B. CeWL
- C. Psiphon
- D. Orbot

Answer: B

NEW QUESTION 290

Matthew, a black hat, has managed to open a meterpreter session to one of the kiosk machines in Evil Corp's lobby. He checks his current SID, which is S-1-5-21-1223352397-1872883824-861252104-501. What needs to happen before Matthew has full administrator access?

- A. He must perform privilege escalation.
- B. He needs to disable antivirus protection.
- C. He needs to gain physical access.
- D. He already has admin privileges, as shown by the "501" at the end of the SID.

Answer: A

NEW QUESTION 294

Roma is a member of a security team. She was tasked with protecting the internal network of an organization from imminent threats. To accomplish this task, Roma fed threat intelligence into the security devices in a digital format to block and identify inbound and outbound malicious traffic entering the organization's network.

Which type of threat intelligence is used by Roma to secure the internal network?

- A. Technical threat intelligence
- B. Operational threat intelligence
- C. Tactical threat intelligence
- D. Strategic threat intelligence

Answer: A

NEW QUESTION 297

What is the least important information when you analyze a public IP address in a security alert?

- A. DNS
- B. Whois
- C. Geolocation

D. ARP

Answer: D

NEW QUESTION 299

What port number is used by LDAP protocol?

- A. 110
- B. 389
- C. 464
- D. 445

Answer: B

NEW QUESTION 302

Take a look at the following attack on a Web Server using obstructed URL:

```
http://www.certifiedhacker.com/script.ext?  
template=%2e%2e%2f%2e%2e%2f%2e%2e%2f%65%74%63%2f%70%61%73%73%77%64  
This request is made up of:  
%2e%2e%2f%2e%2e%2f = ../ ../ ../  
%65%74%63 = etc  
%2f = /  
%70%61%73%73%77%64 = passwd
```

How would you protect from these attacks?

- A. Configure the Web Server to deny requests involving "hex encoded" characters
- B. Create rules in IDS to alert on strange Unicode requests
- C. Use SSL authentication on Web Servers
- D. Enable Active Scripts Detection at the firewall and routers

Answer: B

NEW QUESTION 307

Which of the following are well known password-cracking programs?

- A. L0phtcrack
- B. NetCat
- C. Jack the Ripper
- D. Netbus
- E. John the Ripper

Answer: AE

NEW QUESTION 311

Which mode of IPSec should you use to assure security and confidentiality of data within the same LAN?

- A. ESP transport mode
- B. ESP confidential
- C. AH permiscuous
- D. AH Tunnel mode

Answer: A

NEW QUESTION 314

Kate dropped her phone and subsequently encountered an issue with the phone's internal speaker. Thus, she is using the phone's loudspeaker for phone calls and other activities. Bob, an attacker, takes advantage of this vulnerability and secretly exploits the hardware of Kate's phone so that he can monitor the loudspeaker's output from data sources such as voice assistants, multimedia messages, and audio files by using a malicious app to breach speech privacy. What is the type of attack Bob performed on Kate in the above scenario?

- A. Man-in-the-disk attack
- B. aLTER attack
- C. SIM card attack
- D. Spearphone attack

Answer: D

NEW QUESTION 318

A zone file consists of which of the following Resource Records (RRs)?

- A. DNS, NS, AXFR, and MX records
- B. DNS, NS, PTR, and MX records
- C. SOA, NS, AXFR, and MX records
- D. SOA, NS, A, and MX records

Answer: D

NEW QUESTION 322

SQL injection (SQLi) attacks attempt to inject SQL syntax into web requests, which may Bypass authentication and allow attackers to access and/or modify data attached to a web application.

Which of the following SQLi types leverages a database server's ability to make DNS requests to pass data to an attacker?

- A. Union-based SQLi
- B. Out-of-band SQLi
- C. In-band SQLi
- D. Time-based blind SQLi

Answer: B

Explanation:

Out-of-band SQL injection occurs when an attacker is unable to use an equivalent channel to launch the attack and gather results. ... Out-of-band SQLi techniques would believe the database server's ability to form DNS or HTTP requests to deliver data to an attacker. Out-of-band SQL injection is not very common, mostly because it depends on features being enabled on the database server being used by the web application.

Out-of-band SQL injection occurs when an attacker is unable to use the same channel to launch the attack and gather results.

Out-of-band techniques, offer an attacker an alternative to inferential time-based techniques, especially if the server responses are not very stable (making an inferential time-based attack unreliable).

Out-of-band SQLi techniques would rely on the database server's ability to make DNS or HTTP requests to deliver data to an attacker. Such is the case with Microsoft SQL Server's xp_dirtree command, which can be used to make DNS requests to a server an attacker controls; as well as Oracle Database's UTL_HTTP

package, which can be used to send HTTP requests from SQL and PL/SQL to a server an attacker controls.

NEW QUESTION 327

CompanyXYZ has asked you to assess the security of their perimeter email gateway. From your office in New York, you craft a specially formatted email message and send it across the Internet to an employee of CompanyXYZ. The employee of CompanyXYZ is aware of your test. Your email message looks like this:

From: jim_miller@companyxyz.com

To: michelle_saunders@companyxyz.com Subject: Test message Date: 4/3/2017 14:37

The employee of CompanyXYZ receives your email message.

This proves that CompanyXYZ's email gateway doesn't prevent what?

- A. Email Masquerading
- B. Email Harvesting
- C. Email Phishing
- D. Email Spoofing

Answer: D

NEW QUESTION 329

Which of the following is an extremely common IDS evasion technique in the web world?

- A. Spyware
- B. Subnetting
- C. Unicode Characters
- D. Port Knocking

Answer: C

NEW QUESTION 333

Your organization has signed an agreement with a web hosting provider that requires you to take full responsibility of the maintenance of the cloud-based resources. Which of the following models covers this?

- A. Platform as a service
- B. Software as a service
- C. Functions as a
- D. service Infrastructure as a service

Answer: C

NEW QUESTION 337

Which wireless security protocol replaces the personal pre-shared key (PSK) authentication with Simultaneous Authentication of Equals (SAE) and is therefore resistant to offline dictionary attacks?

- A. WPA3-Personal
- B. WPA2-Enterprise
- C. Bluetooth
- D. ZigBee

Answer: A

NEW QUESTION 338

Your company was hired by a small healthcare provider to perform a technical assessment on the network. What is the best approach for discovering vulnerabilities on a Windows-based computer?

- A. Use the built-in Windows Update tool
- B. Use a scan tool like Nessus
- C. Check MITRE.org for the latest list of CVE findings
- D. Create a disk image of a clean Windows installation

Answer: B

NEW QUESTION 341

At what stage of the cyber kill chain theory model does data exfiltration occur?

- A. Actions on objectives
- B. Weaponization
- C. installation
- D. Command and control

Answer: A

Explanation:

The longer an adversary has this level of access, the greater the impact. Defenders must detect this stage as quickly as possible and deploy tools which can enable them to gather forensic evidence. One example would come with network packet captures, for damage assessment. Only now, after progressing through the primary six phases, can intruders take actions to realize their original objectives. Typically, the target of knowledge exfiltration involves collecting, encrypting and extracting information from the victim(s) environment; violations of knowledge integrity or availability are potential objectives also. Alternatively, and most ordinarily, the intruder may only desire access to the initial victim box to be used as a hop point to compromise additional systems and move laterally inside the network. Once this stage is identified within an environment, the implementation of prepared reaction plans must be initiated. At a minimum, the plan should include a comprehensive communication plan, detailed evidence must be elevated to the very best ranking official or board, the deployment of end-point security tools to dam data loss and preparation for briefing a CIRT Team. Having these resources well established beforehand may be a "MUST" in today's quickly evolving landscape of cybersecurity threats

NEW QUESTION 343

Peter is surfing the internet looking for information about DX Company. Which hacking process is Peter doing?

- A. Scanning
- B. Footprinting
- C. Enumeration
- D. System Hacking

Answer: B

NEW QUESTION 346

What is one of the advantages of using both symmetric and asymmetric cryptography in SSL/TLS?

- A. Symmetric algorithms such as AES provide a failsafe when asymmetric methods fail.
- B. Asymmetric cryptography is computationally expensive in compariso
- C. However, it is well-suited to securely negotiate keys for use with symmetric cryptography.
- D. Symmetric encryption allows the server to securely transmit the session keys out-of-band.
- E. Supporting both types of algorithms allows less-powerful devices such as mobile phones to use symmetric encryption instead.

Answer: D

NEW QUESTION 351

Bob was recently hired by a medical company after it experienced a major cyber security breach. Many patients are complaining that their personal medical records are fully exposed on the Internet and someone can find them with a simple Google search. Bob's boss is very worried because of regulations that protect those data. Which of the following regulations is mostly violated?

- A. HIPPA/PHI
- B. PII
- C. PCIDSS
- D. ISO 2002

Answer: A

Explanation:

PHI stands for Protected Health info. The HIPAA Privacy Rule provides federal protections for private health info held by lined entities and provides patients an array of rights with regard to that info. under HIPAA phi is considered to be any identifiable health info that's used, maintained, stored, or transmitted by a HIPAA-covered entity – a healthcare provider, health plan or health insurer, or a aid clearinghouse – or a business associate of a HIPAA-covered entity, in relation to the availability of aid or payment for aid services.

It is not only past and current medical info that's considered letter under HIPAA Rules, however also future info concerning medical conditions or physical and mental health related to the provision of care or payment for care. phi is health info in any kind, together with physical records, electronic records, or spoken info. Therefore, letter includes health records, medical histories, lab check results, and medical bills. basically, all health info is considered letter once it includes individual identifiers. Demographic info is additionally thought of phi underneath HIPAA Rules, as square measure several common identifiers like patient names, Social Security numbers, Driver's license numbers, insurance details, and birth dates, once they square measure connected with health info.

The eighteen identifiers that create health info letter are:

- > Names
- > Dates, except year
- > phonephone numbers
- > Geographic information
- > FAX numbers

- Social Security numbers
- Email addresses
- case history numbers
- Account numbers
- Health arrange beneficiary numbers
- Certificate/license numbers
- Vehicle identifiers and serial numbers together with license plates
- Web URLs
- Device identifiers and serial numbers
- net protocol addresses
- Full face photos and comparable pictures
- Biometric identifiers (i.e. retinal scan, fingerprints)
- Any distinctive identifying variety or code

One or a lot of those identifiers turns health info into letter, and phi HIPAA Privacy Rule restrictions can then apply that limit uses and disclosures of the data. HIPAA lined entities and their business associates will ought to guarantee applicable technical, physical, and body safeguards are enforced to make sure the confidentiality, integrity, and availability of phi as stipulated within the HIPAA Security Rule.

NEW QUESTION 354

Elliot is in the process of exploiting a web application that uses SQL as a back-end database. He's determined that the application is vulnerable to SQL injection, and has introduced conditional timing delays into injected queries to determine whether they are successful. What type of SQL injection is Elliot most likely performing?

- A. Error-based SQL injection
- B. Blind SQL injection
- C. Union-based SQL injection
- D. NoSQL injection

Answer: B

NEW QUESTION 355

Louis, a professional hacker, had used specialized tools or search engines to encrypt all his browsing activity and navigate anonymously to obtain sensitive/hidden information about official government or federal databases. After gathering the Information, he successfully performed an attack on the target government organization without being traced. Which of the following techniques is described in the above scenario?

- A. Dark web footprinting
- B. VoIP footpnrting
- C. VPN footprinting
- D. website footprinting

Answer: A

Explanation:

The deep web is the layer of the online cyberspace that consists of web pages and content that are hidden and unindexed.

NEW QUESTION 356

When a security analyst prepares for the formal security assessment - what of the following should be done in order to determine inconsistencies in the secure assets database and verify that system is compliant to the minimum security baseline?

- A. Data items and vulnerability scanning
- B. Interviewing employees and network engineers
- C. Reviewing the firewalls configuration
- D. Source code review

Answer: A

NEW QUESTION 360

Ben purchased a new smartphone and received some updates on it through the OTA method. He received two messages: one with a PIN from the network operator and another asking him to enter the PIN received from the operator. As soon as he entered the PIN, the smartphone started functioning in an abnormal manner. What is the type of attack performed on Ben in the above scenario?

- A. Advanced SMS phishing
- B. Bypass SSL pinning
- C. Phishing
- D. Tap 'n ghost attack

Answer: A

NEW QUESTION 362

in an attempt to increase the security of your network, you Implement a solution that will help keep your wireless network undiscoverable and accessible only to those that know It. How do you accomplish this?

- A. Delete the wireless network
- B. Remove all passwords

- C. Lock all users
- D. Disable SSID broadcasting

Answer: D

NEW QUESTION 365

Todd has been asked by the security officer to purchase a counter-based authentication system. Which of the following best describes this type of system?

- A. A biometric system that bases authentication decisions on behavioral attributes.
- B. A biometric system that bases authentication decisions on physical attributes.
- C. An authentication system that creates one-time passwords that are encrypted with secret keys.
- D. An authentication system that uses passphrases that are converted into virtual passwords.

Answer: C

NEW QUESTION 366

Richard, an attacker, aimed to hack IoT devices connected to a target network. In this process, Richard recorded the frequency required to share information between connected devices. After obtaining the frequency, he captured the original data when commands were initiated by the connected devices. Once the original data were collected, he used free tools such as URH to segregate the command sequence. Subsequently, he started injecting the segregated command sequence on the same frequency into the IoT network, which repeats the captured signals of the devices. What is the type of attack performed by Richard in the above scenario?

- A. Side-channel attack
- B. Replay attack
- C. Cryptanalysis attack
- D. Reconnaissance attack

Answer: B

Explanation:

Replay Attack could be a variety of security attack to the info sent over a network. In this attack, the hacker or a person with unauthorized access, captures the traffic and sends communication to its original destination, acting because the original sender. The receiver feels that it's Associate in Nursing genuine message however it's really the message sent by the aggressor. The most feature of the Replay Attack is that the consumer would receive the message double, hence the name, Replay Attack.

Prevention from Replay Attack : 1. Timestamp technique –Prevention from such attackers is feasible, if timestamp is employed at the side of the info. Supposedly, the timestamp on an information is over a precise limit, it may be discarded, and sender may be asked to send the info once more. 2. Session key technique –Another way of hindrance, is by victimisation session key. This key may be used one time (by sender and receiver) per dealing, and can't be reused.

NEW QUESTION 368

Suppose that you test an application for the SQL injection vulnerability. You know that the backend database is based on Microsoft SQL Server. In the login/password form, you enter the following credentials: Username: attack' or 1=1 Password: 123456

Based on the above credentials, which of the following SQL commands are you expecting to be executed by the server, if there is indeed an SQL injection vulnerability?

- A. `select * from Users where UserName = 'attack' or 1=1 -- and UserPassword = '123456'`
- B. `select * from Users where UserName = 'attack' or 1=1 -- and UserPassword = '123456'`
- C. `select * from Users where UserName = 'attack or 1=1 -- and UserPassword = '123456'`
- D. `select * from Users where UserName = 'attack' or 1=1 --' and UserPassword = '123456'`

Answer: A

NEW QUESTION 370

Allen, a professional pen tester, was hired by xpertTech solutions to perform an attack simulation on the organization's network resources. To perform the attack, he took advantage of the NetBIOS API and targeted the NetBIOS service. By enumerating NetBIOS, he found that port 139 was open and could see the resources that could be accessed or viewed on a remote system. He came across many NetBIOS codes during enumeration.

Identify the NetBIOS code used for obtaining the messenger service running for the logged-in user?

- A. <1B>
- B. <00>
- C. <03>
- D. <20>

Answer: C

Explanation:

<03>Windows Messenger administration Courier administration is an organization based framework notice Windows administration by Microsoft that was remembered for some prior forms of Microsoft Windows.

This resigned innovation, despite the fact that it has a comparable name, isn't connected in any capacity to the later, Internet-based Microsoft Messenger administration for texting or to Windows Messenger and Windows Live Messenger (earlier named MSN Messenger) customer programming.

The Messenger Service was initially intended for use by framework managers to tell Windows clients about their networks.[1] It has been utilized malevolently to introduce spring up commercials to clients over the Internet (by utilizing mass-informing frameworks which sent an ideal message to a predetermined scope of IP addresses). Despite the fact that Windows XP incorporates a firewall, it isn't empowered naturally. Along these lines, numerous clients got such messages. Because of this maltreatment, the Messenger Service has been debilitated as a matter of course in Windows XP Service Pack 2.

NEW QUESTION 371

Harris is attempting to identify the OS running on his target machine. He inspected the initial TTL in the IP header and the related TCP window size and obtained the following results:

TTL: 64 Window Size: 5840

What is the OS running on the target machine?

- A. Solaris OS
- B. Windows OS
- C. Mac OS
- D. Linux OS

Answer: D

NEW QUESTION 376

Given below are different steps involved in the vulnerability-management life cycle.

- 1) Remediation
- 2) Identify assets and create a baseline
- 3) Verification
- 4) Monitor
- 5) Vulnerability scan
- 6) Risk assessment


Identify the correct sequence of steps involved in vulnerability management.

- A. 2-->5-->6-->1-->3-->4
- B. 2-->1-->5-->6-->4-->3
- C. 2-->4-->5-->3-->6--> 1
- D. 1-->2-->3-->4-->5-->6

Answer: A

NEW QUESTION 380

Which type of sniffing technique is generally referred as MiTM attack?

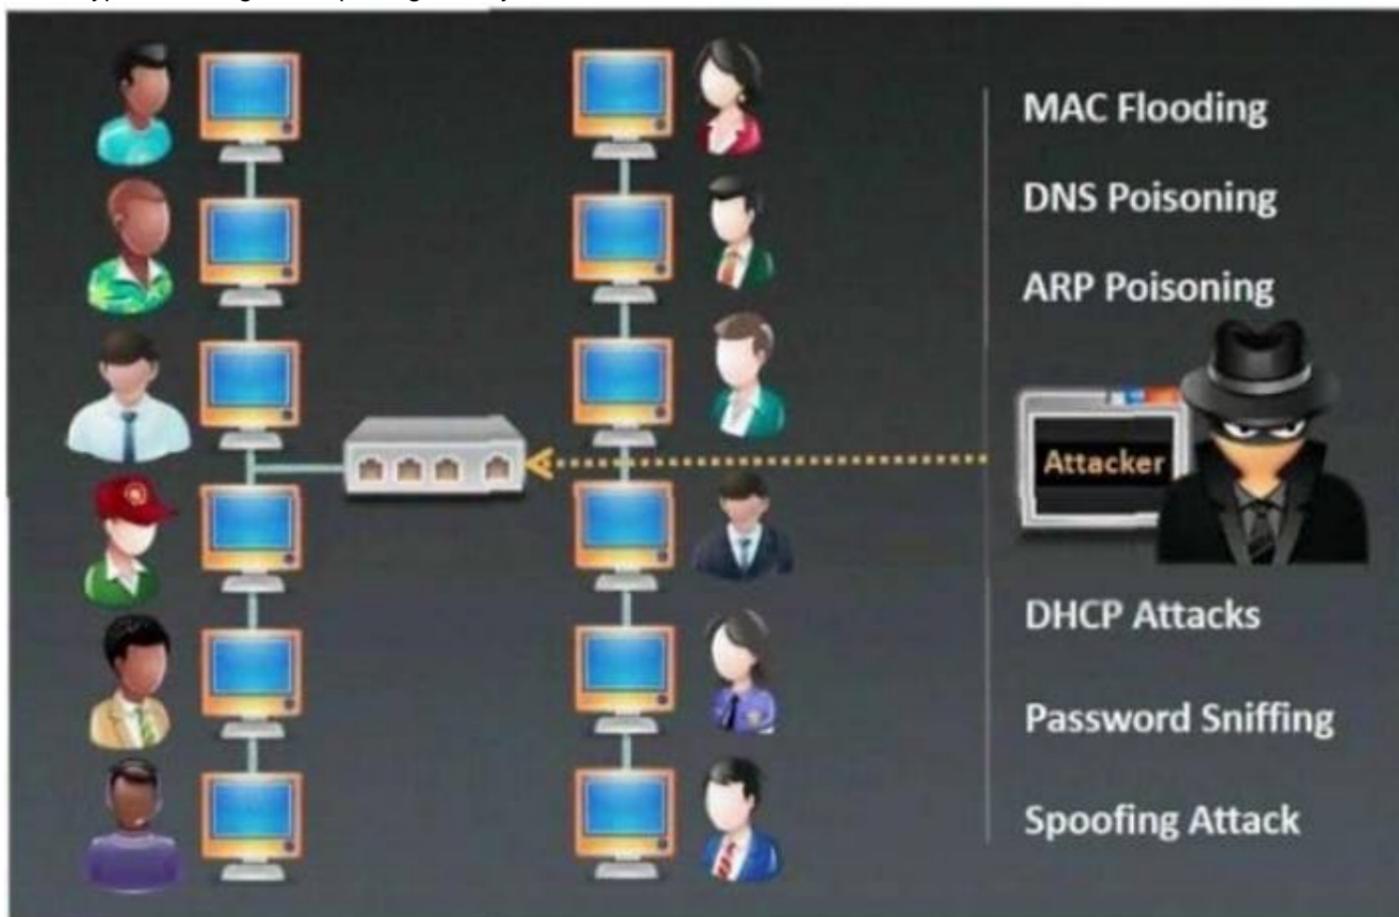

- A. Password Sniffing
- B. ARP Poisoning
- C. Mac Flooding
- D. DHCP Sniffing

Answer: B

NEW QUESTION 382

If a token and 4-digit personal identification number (PIN) are used to access a computer system and the token performs off-line checking for the correct PIN, what type of attack is possible?

- A. Birthday
- B. Brute force
- C. Man-in-the-middle
- D. Smurf

Answer: B

NEW QUESTION 387

In the field of cryptanalysis, what is meant by a "rubber-hose" attack?

- A. Attempting to decrypt cipher text by making logical assumptions about the contents of the original plain text.
- B. Extraction of cryptographic secrets through coercion or torture.
- C. Forcing the targeted key stream through a hardware-accelerated device such as an ASIC.
- D. A backdoor placed into a cryptographic algorithm by its creator.

Answer: B

NEW QUESTION 390

When you are testing a web application, it is very useful to employ a proxy tool to save every request and response. You can manually test every request and analyze the response to find vulnerabilities. You can test parameter and headers manually to get more precise results than if using web vulnerability scanners. What proxy tool will help you find web vulnerabilities?

- A. Maskgen
- B. Dimitry
- C. Burpsuite
- D. Proxychains

Answer: C

NEW QUESTION 391

You are a penetration tester working to test the user awareness of the employees of the client xyz. You harvested two employees' emails from some public sources and are creating a client-side backdoor to send it to the employees via email. Which stage of the cyber kill chain are you at?

- A. Reconnaissance
- B. Command and control
- C. Weaponization
- D. Exploitation

Answer: C

Explanation:

Weaponization

The adversary analyzes the data collected in the previous stage to identify the vulnerabilities and techniques that can exploit and gain unauthorized access to the target organization. Based on the vulnerabilities identified during analysis, the adversary selects or creates a tailored deliverable malicious payload (remote-access malware weapon) using an exploit and a backdoor to send it to the victim. An adversary may target specific network devices, operating systems, endpoint devices, or even individuals within the organization to carry out their attack. For example, the adversary may send a phishing email to an employee of the target organization, which may include a malicious attachment such as a virus or worm that, when downloaded, installs a backdoor on the system that allows remote access to the adversary. The following are the activities of the adversary:

- o Identifying appropriate malware payload based on the analysis
- o Creating a new malware payload or selecting, reusing, modifying the available malware payloads based on the identified vulnerability
- o Creating a phishing email campaign
- o Leveraging exploit kits and botnets

NEW QUESTION 395

An organization decided to harden its security against web-application and web-server attacks. John, a security personnel in the organization, employed a security scanner to automate web-application security testing and to guard the organization's web infrastructure against web-application threats. Using that tool, he also wants to detect XSS, directory transversal problems, fault injection, SQL injection, attempts to execute commands, and several other attacks. Which of the following security scanners will help John perform the above task?

- A. AlienVault@OSSIM™
- B. Syhunt Hybrid
- C. Saleae Logic Analyzer
- D. Cisco ASA

Answer: B

NEW QUESTION 399

In the field of cryptanalysis, what is meant by a "rubber-hose" attack?

- A. Forcing the targeted keystream through a hardware-accelerated device such as an ASIC.
- B. A backdoor placed into a cryptographic algorithm by its creator.
- C. Extraction of cryptographic secrets through coercion or torture.
- D. Attempting to decrypt ciphertext by making logical assumptions about the contents of the original plaintext.

Answer: C

NEW QUESTION 400

You are tasked to configure the DHCP server to lease the last 100 usable IP addresses in subnet to. 1.4.0/23. Which of the following IP addresses could be teased as a result of the new configuration?

- A. 210.1.55.200
- B. 10.1.4.254
- C. 10.1.5.200
- D. 10.1.4.156

Answer: C

NEW QUESTION 404

Which of the following describes the characteristics of a Boot Sector Virus?

- A. Modifies directory table entries so that directory entries point to the virus code instead of the actual program.
- B. Moves the MBR to another location on the RAM and copies itself to the original location of the MBR.
- C. Moves the MBR to another location on the hard disk and copies itself to the original location of the MBR.
- D. Overwrites the original MBR and only executes the new virus code.

Answer: C

NEW QUESTION 406

Juliet, a security researcher in an organization, was tasked with checking for the authenticity of images to be used in the organization's magazines. She used these images as a search query and tracked the original source and details of the images, which included photographs, profile pictures, and memes. Which of the following footprinting techniques did Rachel use to finish her task?

- A. Reverse image search
- B. Meta search engines
- C. Advanced image search
- D. Google advanced search

Answer: C

NEW QUESTION 408

The configuration allows a wired or wireless network interface controller to pass all traffic it receives to the Central Processing Unit (CPU), rather than passing only the frames that the controller is intended to receive. Which of the following is being described?

- A. Multi-cast mode
- B. Promiscuous mode
- C. WEM
- D. Port forwarding

Answer: B

NEW QUESTION 410

Shellshock allowed an unauthorized user to gain access to a server. It affected many Internet-facing services, which OS did it not directly affect?

- A. Linux
- B. Unix
- C. OS X
- D. Windows

Answer: D

NEW QUESTION 413

Which of these is capable of searching for and locating rogue access points?

- A. HIDS
- B. WISS
- C. WIPS
- D. NIDS

Answer: C

NEW QUESTION 416

An attacker redirects the victim to malicious websites by sending them a malicious link by email. The link appears authentic but redirects the victim to a malicious web page, which allows the attacker to steal the victim's data. What type of attack is this?

- A. Phishing
- B. Vishing
- C. Spoofing
- D. DDoS

Answer: A

NEW QUESTION 418

what are common files on a web server that can be misconfigured and provide useful information for a hacker such as verbose error messages?

- A. httpd.conf
- B. administration.config
- C. idq.dll
- D. php.ini

Answer: D

Explanation:

The php.ini file may be a special file for PHP. it's where you declare changes to your PHP settings. The server is already configured with standard settings for

PHP, which your site will use by default. Unless you would like to vary one or more settings, there's no got to create or modify a php.ini file. If you'd wish to make any changes to settings, please do so through the MultiPHP INI Editor.

NEW QUESTION 419

Peter, a system administrator working at a reputed IT firm, decided to work from his home and login remotely. Later, he anticipated that the remote connection could be exposed to session hijacking. To curb this possibility, he implemented a technique that creates a safe and encrypted tunnel over a public network to securely send and receive sensitive information and prevent hackers from decrypting the data flow between the endpoints. What is the technique followed by Peter to send files securely through a remote connection?

- A. DMZ
- B. SMB signing
- C. VPN
- D. Switch network

Answer: C

NEW QUESTION 424

What is the most common method to exploit the "Bash Bug" or "Shellshock" vulnerability?

- A. SYN Flood
- B. SSH
- C. Through Web servers utilizing CGI (Common Gateway Interface) to send a malformed environment variable to a vulnerable Web server
- D. Manipulate format strings in text fields

Answer: C

NEW QUESTION 425

There have been concerns in your network that the wireless network component is not sufficiently secure. You perform a vulnerability scan of the wireless network and find that it is using an old encryption protocol that was designed to mimic wired encryption, what encryption protocol is being used?

- A. WEP
- B. RADIUS
- C. WPA
- D. WPA3

Answer: A

Explanation:

Wired Equivalent Privacy (WEP) may be a security protocol, laid out in the IEEE wireless local area network (Wi-Fi) standard, 802.11b, that's designed to supply a wireless local area network (WLAN) with A level of security and privacy like what's usually expected of a wired LAN. A wired local area network (LAN) is usually protected by physical security mechanisms (controlled access to a building, for example) that are effective for a controlled physical environment, but could also be ineffective for WLANs because radio waves aren't necessarily bound by the walls containing the network. WEP seeks to determine similar protection thereto offered by the wired network's physical security measures by encrypting data transmitted over the WLAN. encoding protects the vulnerable wireless link between clients and access points; once this measure has been taken, other typical LAN security mechanisms like password protection, end-to-end encryption, virtual private networks (VPNs), and authentication are often put in situ to make sure privacy. A research group from the University of California at Berkeley recently published a report citing "major security flaws" in WEP that left WLANs using the protocol susceptible to attacks (called wireless equivalent privacy attacks). within the course of the group's examination of the technology, they were ready to intercept and modify transmissions and gain access to restricted networks. The Wireless Ethernet Compatibility Alliance (WECA) claims that WEP – which is included in many networking products – was never intended to be the only security mechanism for a WLAN, and that, in conjunction with traditional security practices, it's very effective.

NEW QUESTION 430

Sam, a web developer, was instructed to incorporate a hybrid encryption software program into a web application to secure email messages. Sam used an encryption software, which is a free implementation of the OpenPGP standard that uses both symmetric-key cryptography and asymmetric-key cryptography for improved speed and secure key exchange. What is the encryption software employed by Sam for securing the email messages?

- A. PGP
- B. S/MIME
- C. SMTP
- D. GPG

Answer: A

NEW QUESTION 432

Let's imagine three companies (A, B and C), all competing in a challenging global environment. Company A and B are working together in developing a product that will generate a major competitive advantage for them. Company A has a secure DNS server while company B has a DNS server vulnerable to spoofing. With a spoofing attack on the DNS server of company B, company C gains access to outgoing e-mails from company

- A. How do you prevent DNS spoofing?
- B. Install DNS logger and track vulnerable packets
- C. Disable DNS timeouts
- D. Install DNS Anti-spoofing
- E. Disable DNS Zone Transfer

Answer: C

NEW QUESTION 437

The collection of potentially actionable, overt, and publicly available information is known as

- A. Open-source intelligence
- B. Real intelligence
- C. Social intelligence
- D. Human intelligence

Answer: A

NEW QUESTION 441

in the Common Vulnerability Scoring System (CVSS) v3.1 severity ratings, what range does medium vulnerability fall in?

- A. 3.0-6.9
- B. 4.0-6.0
- C. 4.0-6.9
- D. 3.9-6.9

Answer: C

Explanation:

CVSS v2.0 Ratings

CVSS v3.0 Ratings

Severity	Base Score Range	Severity	Base Score Range
		None	0.0
Low	0.0-3.9	Low	0.1-3.9
Medium	4.0-6.9	Medium	4.0-6.9
High	7.0-10.0	High	7.0-8.9
		Critical	9.0-10.0

NEW QUESTION 445

DNS cache snooping is a process of determining if the specified resource address is present in the DNS cache records. It may be useful during the examination of the network to determine what software update resources are used, thus discovering what software is installed.

What command is used to determine if the entry is present in DNS cache?

- A. nslookup -fullrecursive update.antivirus.com
- B. dnsnooping -rt update.antivirus.com
- C. nslookup -norecursive update.antivirus.com
- D. dns --snoop update.antivirus.com

Answer: C

NEW QUESTION 449

John, a disgruntled ex-employee of an organization, contacted a professional hacker to exploit the organization. In the attack process, the professional hacker installed a scanner on a machine belonging to one of the vktims and scanned several machines on the same network to identify vulnerabilities to perform further exploitation. What is the type of vulnerability assessment tool employed by John in the above scenario?

- A. Proxy scanner
- B. Agent-based scanner
- C. Network-based scanner
- D. Cluster scanner

Answer: B

Explanation:

Knowing when to include agents into your vulnerability management processes isn't an easy decision. Below are common use cases for agent-based vulnerability scanning to assist you build out your combined scanning strategy.

➤ Intermittent or Irregular Connectivity: Vulnerability management teams are now tasked with scanning devices that access the company network remotely using public or home-based Wi-Fi connections. These connections are often unreliable and intermittent leading to missed network-based scans. Fortunately, the scanning frequency of agents doesn't require a network connection. The agent detects when the device is back online, sending scan data when it's ready to communicate with the VM platform.

➤ Connecting Non-Corporate Devices to Corporate Networks: With the increased use of private devices, company networks are more exposed to malware and infections thanks to limited IT and security teams' control and visibility. Agent-based scanning gives security teams insight into weaknesses on non-corporate endpoints, keeping them informed about professional hacker is potential attack vectors in order that they can take appropriate action.

➤ Endpoints Residing Outside of Company Networks: Whether company-issued or BYOD, remote assets frequently hook up with the web outside of traditional network bounds. An agent that resides on remote endpoints conducts regular, authenticated scans checking out system changes and unpatched software. The results are then sent back to the VM platform and combined with other scan results for review, prioritization, and mitigation planning.

Agent-Based Scanner: Agent-based scanners reside on a single machine but can scan several machines on the same network.

NEW QUESTION 454

Due to a slowdown of normal network operations, the IT department decided to monitor internet traffic for all of the employees. From a legal standpoint, what

would be troublesome to take this kind of measure?

- A. All of the employees would stop normal work activities
- B. IT department would be telling employees who the boss is
- C. Not informing the employees that they are going to be monitored could be an invasion of privacy.
- D. The network could still experience traffic slow down.

Answer: C

NEW QUESTION 458

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

312-50v11 Practice Exam Features:

- * 312-50v11 Questions and Answers Updated Frequently
- * 312-50v11 Practice Questions Verified by Expert Senior Certified Staff
- * 312-50v11 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 312-50v11 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 312-50v11 Practice Test Here](#)