

## NSE5\_FAZ-7.2 Dumps

### Fortinet NSE 5 - FortiAnalyzer 7.2

[https://www.certleader.com/NSE5\\_FAZ-7.2-dumps.html](https://www.certleader.com/NSE5_FAZ-7.2-dumps.html)



**NEW QUESTION 1**

What FortiView tool can you use to automatically build a dataset and chart based on a filtered search result?

- A. Chart Builder
- B. Export to Report Chart
- C. Dataset Library
- D. Custom View

**Answer: B**

**NEW QUESTION 2**

When working with FortiAnalyzer reports, what is the purpose of a dataset?

- A. To provide the layout used for reports
- B. To define the chart type to be used
- C. To retrieve data from the database
- D. To set the data included in templates

**Answer: C**

**NEW QUESTION 3**

What is the purpose of using prefilters when configuring event handlers?

- A. They limit which logs are checked for matches by the other filters.
- B. They can filter the logs before they are processed by FortiAnalyzer
- C. They download new filters to be used in event handlers.
- D. They are common filters applied simultaneously to all event handlers.

**Answer: A**

**NEW QUESTION 4**

FortiAnalyzer uses the Optimized Fabric Transfer Protocok (OFTP) over SSL for what purpose?

- A. To upload logs to an SFTP server
- B. To prevent log modification during backup
- C. To send an identical set of logs to a second logging server
- D. To encrypt log communication between devices

**Answer: D**

**NEW QUESTION 5**

Which statements are true regarding securing communications between FortiAnalyzer and FortiGate with SSL? (Choose two.)

- A. SSL is the default setting.
- B. SSL communications are auto-negotiated between the two devices.
- C. SSL can send logs in real-time only.
- D. SSL encryption levels are globally set on FortiAnalyzer.
- E. FortiAnalyzer encryption level must be equal to, or higher than, FortiGate.

**Answer: AD**

**NEW QUESTION 6**

What must you consider when using log fetching? (Choose two.)

- A. The fetch client can retrieve logs from devices that are not added to its local Device Manager
- B. You can use filters to include only logs from a single device.
- C. The fetching profile must include a user with the Super\_User profile.
- D. The archive logs retrieved from the server become archive logs in the client.

**Answer: BC**

**NEW QUESTION 7**

What must you configure on FortiAnalyzer to upload a FortiAnalyzer report to a supported external server? (Choose two.)

- A. SFTP, FTP, or SCP server
- B. Mail server
- C. Output profile
- D. Report scheduling

**Answer: AC**

**Explanation:**

<https://docs.fortinet.com/document/fortianalyzer/6.0.2/administration-guide/598322/creating-output-profiles>

**NEW QUESTION 8**

An administrator has moved FortiGate A from the root ADOM to ADOM1. Which two statements are true regarding logs? (Choose two.)

- A. Analytics logs will be moved to ADOM1 from the root ADOM automatically.
- B. Archived logs will be moved to ADOM1 from the root ADOM automatically.
- C. Logs will be presented in both ADOMs immediately after the move.
- D. Analytics logs will be moved to ADOM1 from the root ADOM after you rebuild the ADOM1 SQL database.

**Answer:** BD

**NEW QUESTION 9**

Which two statements are true regarding the outbreak detection service? (Choose two.)

- A. New alerts are received by email.
- B. Outbreak alerts are available on the root ADOM only.
- C. An additional license is required.
- D. It automatically downloads new event handlers and reports.

**Answer:** CD

**NEW QUESTION 10**

By default, what happens when a log file reaches its maximum file size?

- A. FortiAnalyzer overwrites the log files.
- B. FortiAnalyzer stops logging.
- C. FortiAnalyzer rolls the active log by renaming the file.
- D. FortiAnalyzer forwards logs to syslog.

**Answer:** C

**NEW QUESTION 10**

After generating a report, you notice the information you were expecting to see is not included in it. What are two possible reasons for this scenario? (Choose two.)

- A. You enabled auto-cache with extended log filtering.
- B. The logfiled service has not indexed all the expected logs.
- C. The logs were overwritten by the data retention policy.
- D. The time frame selected in the report is wrong.

**Answer:** BC

**NEW QUESTION 11**

Which statements are true regarding securing communications between FortiAnalyzer and FortiGate with IPsec? (Choose two.)

- A. Must configure the FortiAnalyzer end of the tunnel only--the FortiGate end is auto-negotiated.
- B. Must establish an IPsec tunnel ID and pre-shared key.
- C. IPsec cannot be enabled if SSL is enabled as well.
- D. IPsec is only enabled through the CLI on FortiAnalyzer.

**Answer:** BD

**Explanation:**

Option B is correct because you must establish an IPsec tunnel ID and pre-shared key to secure the communication between FortiAnalyzer and FortiGate with IPsec12. The tunnel ID is a unique identifier for each tunnel and the pre-shared key is a secret passphrase that authenticates the peers.

Option D is correct because IPsec is only enabled through the CLI on FortiAnalyzer1. You cannot configure IPsec settings through the GUI on FortiAnalyzer.

**NEW QUESTION 15**

What happens when a log file saved on FortiAnalyzer disks reaches the size specified in the device log settings?

- A. The log file is stored as a raw log and is available for analytic support.
- B. The log file rolls over and is archived.
- C. The log file is purged from the database.
- D. The log file is overwritten.

**Answer:** B

**NEW QUESTION 17**

Which two methods are the most common methods to control and restrict administrative access on FortiAnalyzer? (Choose two.)

- A. Virtual domains
- B. Administrative access profiles
- C. Trusted hosts
- D. Security Fabric

**Answer:** BC

**NEW QUESTION 19**

Which two statements are true regarding ADOM modes? (Choose two.)

- A. You can only change ADOM modes through CLI.
- B. In normal mode, the disk quota of the ADOM is fixed and cannot be modified, but in advance mode, the disk quota of the ADOM is flexible because new devices are added to the ADOM.
- C. In an advanced mode ADO
- D. you can assign FortiGate VDOMs from a single FortiGate device to multiple FortiAnalyzer ADOMs.
- E. Normal mode is the default ADOM mode.

**Answer:** CD

**NEW QUESTION 22**

Which two statements are true regarding FortiAnalyzer operating modes? (Choose two.)

- A. When in collector mode, FortiAnalyzer collects logs from multiple devices and forwards these logs in the original binary format.
- B. Collector mode is the default operating mode.
- C. When in collector mod
- D. FortiAnalyzer supports event management and reporting features.
- E. By deploying different FortiAnalyzer devices with collector and analyzer mode in a network, you can improve the overall performance of log receiving, analysis, and reporting

**Answer:** AD

**NEW QUESTION 23**

On FortiAnalyzer, what is a wildcard administrator account?

- A. An account that permits access to members of an LDAP group
- B. An account that allows guest access with read-only privileges
- C. An account that requires two-factor authentication
- D. An account that validates against any user account on a FortiAuthenticator

**Answer:** A

**Explanation:**

<https://docs.fortinet.com/document/fortigate/6.2.0/cookbook/747268/configuring-wildcard-admin-accounts>

**NEW QUESTION 26**

Logs are being deleted from one of your ADOMs earlier than the configured setting for archiving in your data policy. What is the most likely problem?

- A. The total disk space is insufficient and you need to add other disk.
- B. CPU resources are too high.
- C. The ADOM disk quota is set too low based on log rates.
- D. Logs in that ADOM are being forwarded in real-time to another FortiAnalyzer device.

**Answer:** C

**Explanation:**

[https://help.fortinet.com/fmgr/50hlp/56/5-6-1/FMG\\_FAZ/1100\\_Storage/0017\\_Deleted%20device%20logs.htm](https://help.fortinet.com/fmgr/50hlp/56/5-6-1/FMG_FAZ/1100_Storage/0017_Deleted%20device%20logs.htm)

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/87802/automatic-deletion>

**NEW QUESTION 28**

Which two statements about log forwarding are true? (Choose two.)

- A. Forwarded logs cannot be filtered to match specific criteria.
- B. Logs are forwarded in real-time only.
- C. The client retains a local copy of the logs after forwarding.
- D. You can use aggregation mode only with another FortiAnalyzer.

**Answer:** CD

**Explanation:**

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/420493/modes> <https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/621804/log-forwarding>

**NEW QUESTION 33**

What is the purpose of trigger variables?

- A. To display statistics about the playbook runtime
- B. To use information from the trigger to filter the action in a task
- C. To provide the trigger information to make the playbook start running
- D. To store the start times of playbooks with On\_Schedule triggers

**Answer:** B

**NEW QUESTION 35**

What remote authentication servers can you configure to validate your FortiAnalyzer administrator logons? (Choose three)

- A. RADIUS
- B. Local
- C. LDAP
- D. PKI
- E. TACACS+

**Answer:** ACE

#### NEW QUESTION 40

What is the purpose of a dataset query in FortiAnalyzer?

- A. It sorts log data into tables
- B. It extracts the database schema
- C. It retrieves log data from the database
- D. It injects log data into the database

**Answer:** C

#### NEW QUESTION 45

Logs are being deleted from one of the ADOMs earlier than the configured setting for archiving in the data policy. What is the most likely problem?

- A. CPU resources are too high
- B. Logs in that ADOM are being forwarded, in real-time, to another FortiAnalyzer device
- C. The total disk space is insufficient and you need to add other disk
- D. The ADOM disk quota is set too low, based on log rates

**Answer:** D

#### NEW QUESTION 48

How can you attach a report to an incident?

- A. By attaching it to an event handler alert
- B. By editing the settings of the desired report
- C. From the properties of an existing incident
- D. Saving it in JSON format, and then importing it

**Answer:** C

#### NEW QUESTION 50

Which statement is true about sending notifications with incident updates?

- A. Notifications can be sent only when an incident is updated or deleted.
- B. If you use multiple fabric connectors, all connectors must have the same notification settings
- C. Notifications can be sent only by email.
- D. You can send notifications to multiple external platforms

**Answer:** D

#### Explanation:

You can add more than one fabric connector, each with the same or different notification settings. The receiving side of the connector must be configured for the notifications to be sent successfully.

FortiAnalyzer\_7.0\_Study\_Guide-Online.pdf page 34: Fabric connectors also enable FortiAnalyzer to send notifications to ITSM platforms when a new incident is created or for any subsequent updates.

#### NEW QUESTION 54

What happens when the IOC breach detection engine on FortiAnalyzer finds web logs that match a blocklisted IP address?

- A. The endpoint is marked as Compromised and
- B. optionally, can be put in quarantine.
- C. FortiAnalyzer flags the associated host for further analysis.
- D. A new Infected entry is added for the corresponding endpoint.
- E. The detection engine classifies those logs as Suspicious

**Answer:** A

#### NEW QUESTION 59

What is the purpose of employing RAID with FortiAnalyzer?

- A. To introduce redundancy to your log data
- B. To provide data separation between ADOMs
- C. To separate analytical and archive data
- D. To back up your logs

**Answer:**

A

**Explanation:**

[https://en.wikipedia.org/wiki/RAID#:~:text=RAID%20\(%22Redundant%20Array%20of%20Inexpensive,%2C%](https://en.wikipedia.org/wiki/RAID#:~:text=RAID%20(%22Redundant%20Array%20of%20Inexpensive,%2C%)

**NEW QUESTION 64**

Which two statements are true regarding log fetching on FortiAnalyzer? (Choose two.)

- A. A FortiAnalyzer device can perform either the fetch server or client role, and it can perform two roles at the same time with the same FortiAnalyzer devices at the other end.
- B. Log fetching can be done only on two FortiAnalyzer devices that are running the same firmware version.
- C. Log fetching allows the administrator to fetch analytics logs from another FortiAnalyzer for redundancy.
- D. Log fetching allows the administrator to run queries and reports against historical data by retrieving archived logs from one FortiAnalyzer device and sending them to another FortiAnalyzer device.

**Answer:** BD

**NEW QUESTION 69**

What is the purpose of a predefined template on the FortiAnalyzer?


- A. It can be edited and modified as required
- B. It specifies the report layout which contains predefined texts, charts, and macros
- C. It specifies report settings which contains time period, device selection, and schedule
- D. It contains predefined data to generate mock reports

**Answer:** B

**NEW QUESTION 72**

View the exhibit.

**Insert Rate vs Receive Rate - Last 1 hour**

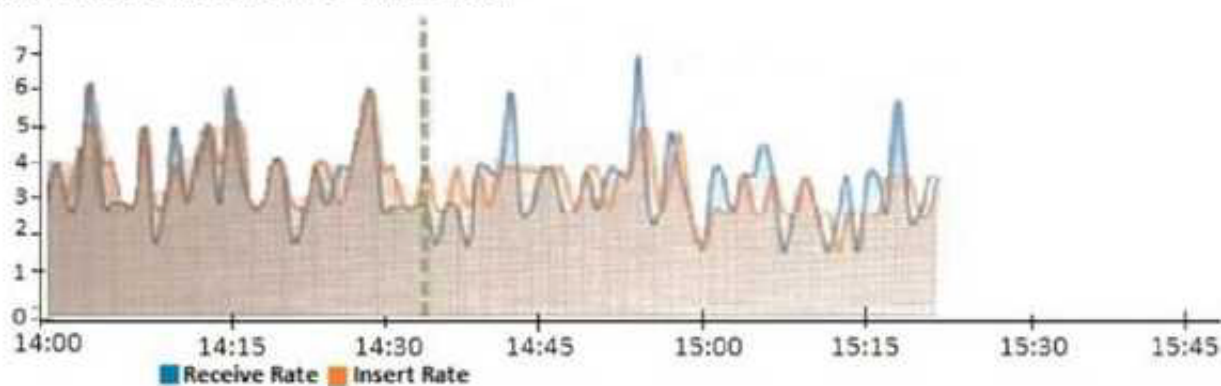

What does the data point at 14:35 tell you?

- A. FortiAnalyzer is dropping logs.
- B. FortiAnalyzer is indexing logs faster than logs are being received.
- C. FortiAnalyzer has temporarily stopped receiving logs so older logs' can be indexed.
- D. The sqlplugind daemon is ahead in indexing by one log.

**Answer:** B

**Explanation:**

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/47690/insert-rate-vs-receive-rate-wi>

**NEW QUESTION 77**

Which two settings must you configure on FortiAnalyzer to allow non-local administrators to authenticate to FortiAnalyzer with any user account in a single LDAP group? (Choose two.)

- A. A local wildcard administrator account
- B. A remote LDAP server
- C. A trusted host profile that restricts access to the LDAP group
- D. An administrator group

**Answer:** AB

**NEW QUESTION 80**

A playbook contains five tasks in total. An administrator runs the playbook and four out of five tasks finish successfully, but one task fails. What will be the status of the playbook after it is run?

- A. Running
- B. Failed
- C. Upstream\_failed
- D. Success

**Answer:** B

**NEW QUESTION 85**

If you upgrade the FortiAnalyzer firmware, which report element can be affected?



- A. Custom datasets
- B. Report scheduling
- C. Report settings
- D. Output profiles

**Answer:** A

**Explanation:**

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/upgrade-guide/669300/checking-reports>

**NEW QUESTION 89**

Which statement about the FortiSIEM management extension is correct?

- A. Allows you to manage the entire life cycle of a threat or breach.
- B. Its use of the available disk space is capped at 50%.
- C. It requires a licensed FortiSIEM supervisor.
- D. It can be installed as a dedicated VM.

**Answer:** A

**NEW QUESTION 91**

Which two elements are contained in a system backup created on FortiAnalyzer? (Choose two.)

- A. System information
- B. Logs from registered devices
- C. Report information
- D. Database snapshot

**Answer:** AC

**Explanation:**

What does the System Configuration backup include?

System information, such as the device IP address and administrative user information. Device list, such as any devices you configured to allow log access.

Report information, such as any configured report settings, as well as all your custom report details. These are not the actual reports.

FortiAnalyzer\_7.0\_Study\_Guide-Online pag. 29

FortiAnalyzer\_7.0\_Study\_Guide-Online.pdf page 29: What does the System Configuration backup include?

- System information, such as the device IP address and administrative user information
- Device list, such as any devices you configured to allow log access
- Report information, such as any configured report settings, as well as all your custom report details. These are not the actual reports.

**NEW QUESTION 96**

Which two methods can you use to send event notifications when an event occurs that matches a configured event handler? (Choose two.)

- A. SMS
- B. Email
- C. SNMP
- D. IM

**Answer:** BC

**NEW QUESTION 101**

An administrator has moved FortiGate A from the root ADOM to ADOM1. However, the administrator is not able to generate reports for FortiGate A in ADOM1.

What should the administrator do to solve this issue?

- A. Use the execute sql-local rebuild-db command to rebuild all ADOM databases.
- B. Use the execute sql-local rebuild-adom ADOM1 command to rebuild the ADOM database.
- C. Use the execute sql-report run ADOM1 command to run a report.
- D. Use the execute sql-local rebuild-adom root command to rebuild the ADOM database.

**Answer:** B

**NEW QUESTION 105**

What is the recommended method of expanding disk space on a FortiAnalyzer VM?

- A. From the VM host manager, add an additional virtual disk and use the #execute lvm extend <disk number> command to expand the storage
- B. From the VM host manager, expand the size of the existing virtual disk
- C. From the VM host manager, expand the size of the existing virtual disk and use the # execute format disk command to reformat the disk
- D. From the VM host manager, add an additional virtual disk and rebuild your RAID array

**Answer:** A

**Explanation:**

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD40848>

**NEW QUESTION 107**

What FortiGate process caches logs when FortiAnalyzer is not reachable?

- A. logfiled
- B. sqlplugind
- C. oftpd
- D. miglogd

**Answer:** D

**NEW QUESTION 108**

Refer to the exhibit.

Event	Event Status	Event Type	Count	Severity
✓ 151.101.54.62 (1)				
Insecure SSL Connection blocked from 10.0.3.20	Mitigated	⚙ SSL	1	● Low

Which statement is correct regarding the event displayed?

- A. The security risk was blocked or dropped.
- B. The security event risk is considered open.
- C. An incident was created from this event.
- D. The risk source is isolated.

**Answer:** A

**Explanation:**

Events in FortiAnalyzer will be in one of four statuses. The current status will determine if more actions need to be taken by the security team or not.

The possible statuses are:

Unhandled: The security event risk is not mitigated or contained, so it is considered open. Contained: The risk source is isolated.

Mitigated: The security risk is mitigated by being blocked or dropped. (Blank): Other scenarios.

FortiAnalyzer\_7.0\_Study\_Guide-Online pag. 206

**NEW QUESTION 110**

When you perform a system backup, what does the backup configuration contain? (Choose two.)

- A. Generated reports
- B. Device list
- C. Authorized devices logs
- D. System information

**Answer:** BD

**Explanation:**

[https://help.fortinet.com/fa/cli-olh/5-6-5/Content/Document/1400\\_execute/backup.htm](https://help.fortinet.com/fa/cli-olh/5-6-5/Content/Document/1400_execute/backup.htm)

**NEW QUESTION 115**

What purposes does the auto-cache setting on reports serve? (Choose two.)

- A. To reduce report generation time
- B. To automatically update the hcache when new logs arrive
- C. To reduce the log insert lag rate
- D. To provide diagnostics on report generation time

**Answer:** AB

**NEW QUESTION 118**

What does the disk status Degraded mean for RAID management?

- A. One or more drives are missing from the FortiAnalyzer uni
- B. The drive is no longer available to the operating system.
- C. The FortiAnalyzer device is writing to all the hard drives on the device in order to make the array fault tolerant.
- D. The FortiAnalyzer device is writing data to a newly added hard drive in order to restore the hard drive to an optimal state.
- E. The hard drive is no longer being used by the RAID controller

**Answer:** D

**NEW QUESTION 121**

Refer to the exhibit.





What does the data point at 12:20 indicate?

- A. The performance of FortiAnalyzer is below the baseline.
- B. FortiAnalyzer is using its cache to avoid dropping logs.
- C. The log insert lag time is increasing.
- D. The sqlplugind service is caught up with new logs.

**Answer: C**

#### NEW QUESTION 126

Which two statements express the advantages of grouping similar reports? (Choose two.)

- A. Improve report completion time.
- B. Conserve disk space on FortiAnalyzer by grouping multiple similar reports.
- C. Reduce the number of hcache tables and improve auto-hcache completion time.
- D. Provides a better summary of reports.

**Answer: AC**

#### NEW QUESTION 127

FortiAnalyzer reports are dropping analytical data from 15 days ago, even though the data policy setting for analytics logs is 60 days. What is the most likely problem?

- A. Quota enforcement is acting on analytical data before a report is complete
- B. Logs are rolling before the report is run
- C. CPU resources are too high
- D. Disk utilization for archive logs is set for 15 days

**Answer: B**

#### NEW QUESTION 130

In FortiAnalyzer's FormView, source and destination IP addresses from FortiGate devices are not resolving to a hostname. How can you resolve the source and destination IPs, without introducing any additional performance impact to FortiAnalyzer?


- A. Configure local DNS servers on FortiAnalyzer
- B. Resolve IPs on FortiGate
- C. Configure # set resolve-ip enable in the system FortiView settings
- D. Resolve IPs on a per-ADOM basis to reduce delay on FortiView while IPs resolve

**Answer: B**

#### NEW QUESTION 131

Refer to the exhibits.

Event	Event Status	Event Type	Count	Severity	First Occurrence	Last Update	Handler	Tags
> MS.IIS.bdir.HTR.Information.Disclosure (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> PHPURL.Code.Injection (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> 91.189.92.18 (1)	Mitigated	SSL	5	Low	2 hours ago	2 hours ago	Default-Risky-Destination-Detection-By-Threat	Risky SSL
> HTTP.RequestURL.Directory.Traversal (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> Apache.Expect.Header.XSS (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
✓ 10.0.1.10 (7)							Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion MS.IIS.bdir.HTR.Informati...	Mitigated	IPS	2	Medium	2021-12-01 21:32:33	2021-12-01 21:32:41	Default-Risky-Destination-Detection-By-Endpoint	Risky SSL
Internal intrusion PHPURL.Code.Injection bl...	Mitigated	IPS	2	Medium	2021-12-01 21:32:11	2021-12-01 21:32:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Insecure SSL connection blocked	Mitigated	SSL	5	Low	2021-12-01 21:32:01	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.RequestURL.Direct...	Mitigated	IPS	2	Medium	2021-12-01 21:31:51	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Apache.Expect.Header.XS...	Mitigated	IPS	2	Medium	2021-12-01 21:31:31	2021-12-01 21:31:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
✓ 10.200.1.254 (6)								
Internal intrusion MS.IIS.bdir.HTR.Informati...	Mitigated	IPS	2	Medium	2021-12-01 21:32:33	2021-12-01 21:32:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion PHPURL.Code.Injection bl...	Mitigated	IPS	2	Medium	2021-12-01 21:32:11	2021-12-01 21:32:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.RequestURL.Direct...	Mitigated	IPS	2	Medium	2021-12-01 21:31:51	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Apache.Expect.Header.XS...	Mitigated	IPS	2	Medium	2021-12-01 21:31:31	2021-12-01 21:31:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.Password.Access blocke...	Mitigated	IPS	2	Medium	2021-12-01 21:31:11	2021-12-01 21:31:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Nikto.Web-Scanner detect...	Unmitigated	IPS	21	High	2021-12-01 21:31:11	2021-12-01 21:32:36	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature

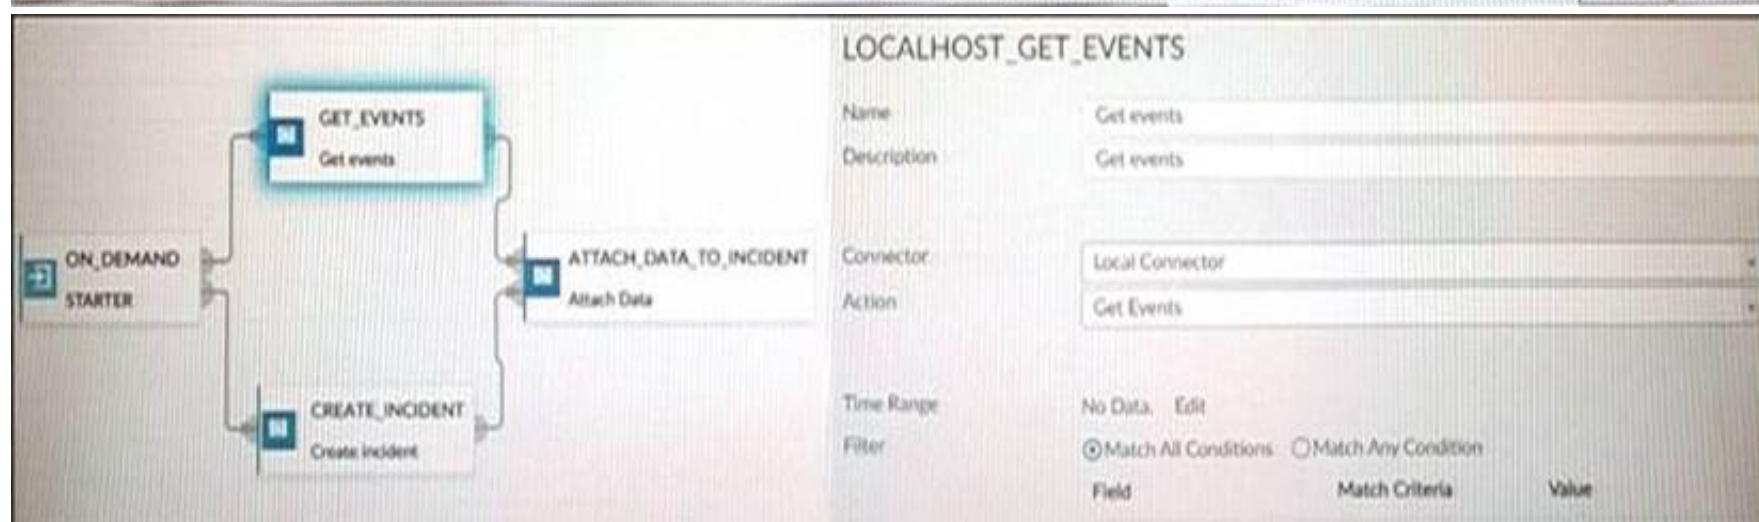

How many events will be added to the incident created after running this playbook?

- A. Ten events will be added.
- B. No events will be added.
- C. Five events will be added.
- D. Thirteen events will be added.

**Answer: A**

#### NEW QUESTION 132

Which log will generate an event with the status Contained?

- A. An IPS log with action=pass.
- B. A WebFilter log with action=dropped.
- C. An AV log with action=quarantine.
- D. An AppControl log with action=blocked.

**Answer: C**

#### NEW QUESTION 135

What is the purpose of output variables?

- A. To store playbook execution statistics
- B. To use the output of the previous task as the input of the current task
- C. To display details of the connectors used by a playbook
- D. To save all the task settings when a playbook is exported

**Answer: B**

#### Explanation:

FortiAnalyzer\_7.0\_Study\_Guide-Online.pdf page 242: Output variables allow you to use the output from a preceding task as an input to the current task.  
"Output variables allow you to use the output from a preceding task as an input to the current task." FortiAnalyzer\_7.0\_Study\_Guide-Online page 242

#### NEW QUESTION 140

Why must you wait for several minutes before you run a playbook that you just created?

- A. FortiAnalyzer needs that time to parse the new playbook.
- B. FortiAnalyzer needs that time to back up the current playbooks.
- C. FortiAnalyzer needs that time to ensure there are no other playbooks running.
- D. FortiAnalyzer needs that time to debug the new playbook.

**Answer: A**

**NEW QUESTION 142**

.....

## Thank You for Trying Our Product

\* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

\* One year free update

You can enjoy free update one year. 24x7 online support.

\* Trusted by Millions

We currently serve more than 30,000,000 customers.

\* Shop Securely

All transactions are protected by VeriSign!

**100% Pass Your NSE5\_FAZ-7.2 Exam with Our Prep Materials Via below:**

[https://www.certleader.com/NSE5\\_FAZ-7.2-dumps.html](https://www.certleader.com/NSE5_FAZ-7.2-dumps.html)