

# Salesforce

## Exam Questions Platform-Developer-I

Platform Developer I



#### NEW QUESTION 1

A custom Visualforce controller calls the `ApexPages.addMessage()` method, but no messages are rendering on the page. Which component should be added to the Visualforce page to display the message?

- A. `<apex: pageMessages />`
- B. `<apex: pageMessage severity="info"/>`
- C. `<Apex: facet name=" message"/>`
- D. `<Apex: message for=" info"/>`

**Answer:** B

#### NEW QUESTION 2

For which three items can 2 trace flag be configured? Choose 3 answers

- A. Flow
- B. Apex Class
- C. User
- D. Apex Trager
- E. Visualforce

**Answer:** BCD

#### NEW QUESTION 3


Which three steps allow a custom SVG to be included in a Lightning web component? Choose 3 answers

- A. Upload the SVG as a static resource.
- B. Import the static resource and provide a getter for it in JavaScript.
- C. Reference the getter in the HTML template.
- D. Reference the import in the HTML template.
- E. Import the SVG as a content asset file.

**Answer:** ABC

#### NEW QUESTION 4

A developer created these three Rollup Summary fields in the custom object, Project\_ct,

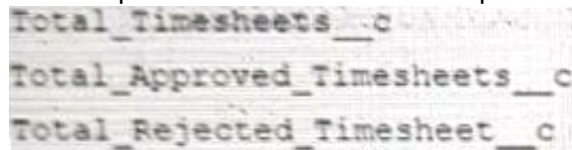

The developer is asked to create a new field that shows the ratio between rejected and approved timesheets for a given project. Which should the developer use to Implement the business requirement in order to minimize maintenance overhead?

- A. Record-triggered Flow
- B. Formula field
- C. Apex Trigger
- D. Process Builder

**Answer:** B

#### NEW QUESTION 5

What are three capabilities of the `<ltng : require>` tag when loading JavaScript resources in Aura components? Choose 3 answers

- A. Loading files from Documents
- B. One-time loading for duplicate scripts
- C. Specifying loading order
- D. Loading scripts In parallel
- E. Loading externally hosted scripts

**Answer:** BCD

#### NEW QUESTION 6

Where are two locations a developer can look to find information about the status of asynchronous or future methods? Choose 2 answers

- A. Apex Flex Queue
- B. Apex Jobs
- C. Paused Flow Interviews component
- D. Time-Based Workflow Monitor

**Answer:** AB

#### NEW QUESTION 7

Which aspect of Apex programming is limited due to multitenancy?

- A. The number of active Apex classes

- B. The number of methods in an Apex Class
- C. The number of records processed in a loop
- D. The number of records returned from database queries

**Answer:** D

#### NEW QUESTION 8

Universal Containers has large number of custom applications that were built using a third-party JavaScript framework and exposed using Visualforce pages. The Company wants to update these applications to apply styling that resembles the look and feel of Lightning Experience. What should the developer do to fulfill the business request in the quickest and most effective manner?

- A. Incorporate the Salesforce Lightning Design System CSS stylesheet into the JavaScript applications.
- B. Rewrite all Visualforce pages as Lightning components.
- C. Set the attribute enableLightning to true in the definition.
- D. Enable Available for Lightning Experience, Lightning Communities, and the mobile app on Visualforce pages used by the custom application.

**Answer:** A

#### NEW QUESTION 9

Since Aura application events follow the traditional publish-subscribe model, which method is used to fire an event?

- A. emit()
- B. fireEvent()
- C. fire()
- D. registerEvent()

**Answer:** C

#### NEW QUESTION 10

A developer has an integer variable called maxAttempts. The developer needs to ensure that once maxAttempts is initialized, it preserves its value for the length of the Apex transaction; while being able to share the variable's state between trigger executions. How should the developer declare maxAttempts to meet these requirements?

- A. Declare maxAttempts as a member variable on the trigger definition.
- B. Declare maxAttempts as a private static variable on a helper class
- C. Declare maxAttempts as a constant using the static and final keywords
- D. Declare maxAttempts as a variable on a helper class

**Answer:** C

#### NEW QUESTION 10

Which Lightning code segment should be written to declare dependencies on a Lightning component, c:accountList, that is used in a Visualforce page?

A)

```
<aura:application access="GLOBAL" extends="ltng:outApp">
    <aura:dependency resource="c:accountList"/>
</aura:application>
```

B)

```
<aura:component access="GLOBAL" extends="ltng:outApp">
    <aura:dependency resource="c:accountList"/>
</aura:component>
```

C)

```
<aura:component access="GLOBAL">
    <aura:dependency resource="c:accountList"/>
</aura:component>
```

D)

```
<aura:application access="GLOBAL">
    <aura:dependency resource="c:accountList"/>
</aura:application>
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

**Answer:** A

#### NEW QUESTION 11

A developer is migrating a Visualforce page into a Lightning web component.

The Visualforce page shows information about a single record. The developer decides to use Lightning Data Service to access record data.

Which security consideration should the developer be aware of?

- A. Lightning Data Service handles sharing rules and field-level security.
- B. Lightning Data Service ignores field-level security.
- C. The with sharing keyword must be used to enforce sharing rules.
- D. The isAccessible ( ) method must be used for field-level access checks

**Answer:** A

#### NEW QUESTION 15

What are two use cases for executing Anonymous Apex code? Choose 2 answers

- A. To delete 15,000 inactive Accounts In a single transaction after a deployment
- B. To schedule an Apex class to run periodically
- C. To run a batch Apex class to update all Contacts
- D. To add unit test code coverage to an org

**Answer:** BC

#### NEW QUESTION 18

Assuming that naze is 8 String obtained by an <apex:inpotText> tag on 8 Visualforce page, which two SOQL queries performed are safe from SOQL injection? Choose 2 answers

- A)
- ```
String query = 'SELECT Id FROM Account WHERE Name LIKE \'' + name + '\''';  
List<Account> results = Database.query(query);
```
- B)
- ```
String query = 'SELECT Id FROM Account WHERE Name LIKE \'' + name.noQuotes() + '\''';  
List<Account> results = Database.query(query);
```
- C)
- ```
String query = 'SELECT Id FROM Account WHERE Name LIKE \'' + String.escapeSingleQuotes(name) + '\''';  
List<Account> results = Database.query(query);
```
- D)
- ```
String query = '\'' + name + '\'';  
List<Account> results = [SELECT Id FROM Account WHERE Name LIKE :query];
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

**Answer:** CD

#### NEW QUESTION 22

What should be used to create scratch orgs?

- A. Developer Console
- B. Salesforce CLI
- C. Workbench
- D. Sandbox refresh

**Answer:** B

#### NEW QUESTION 24

A team of developers is working on a source-driven project that allows them to work independently, with many different org configurations. Which type of Salesforce orgs should they use for their development?

- A. Developer sandboxes
- B. Scratch orgs
- C. Full Copy sandboxes
- D. Developer orgs

**Answer:** B

#### NEW QUESTION 29

What should a developer use to script the deployment and unit test execution as part of continuous integration?

- A. Developer Console
- B. Execute Anonymous
- C. Salesforce CLI
- D. VS Code

**Answer:** C

#### NEW QUESTION 32

A developer observes that an Apex test method fails in the Sandbox. To identify the issue, the developer copies the code inside the test method and executes it via the Execute Anonymous tool in the Developer Console. The code then executes with no exceptions or errors. Why did the test method fail in the sandbox and pass in the Developer Console?

- A. The test method has a syntax error in the code.
- B. The test method relies on existing data in the sandbox.

- C. The test method is calling an @future method.
- D. The test method does not use System.runAs to execute as a specific user.

**Answer:** B

#### NEW QUESTION 36

How does the Lightning Component framework help developers implement solutions faster?

- A. By providing an Agile process with default steps
- B. By providing code review standards and processes
- C. By providing device-awareness for mobile and desktops
- D. By providing change history and version control

**Answer:** C

#### NEW QUESTION 40

A custom picklist field, Food\_Preference\_\_c, exist on a custom object. The picklist contains the following options: 'Vegan','Kosher','No Preference'. The developer must ensure a value is populated every time a record is created or updated. What is the most efficient way to ensure a value is selected every time a record is saved?

- A. Set "Use the first value in the list as the default value" as True.
- B. Set a validation rule to enforce a value is selected.
- C. Mark the field as Required on the field definition.
- D. Mark the field as Required on the object's page layout.

**Answer:** C

#### NEW QUESTION 44

A developer must create a lightning component that allows users to input contact record information to create a contact record, including a salary\_\_c custom field. what should the developer use, along with a lightning-record-edit form, so that salary\_\_c field functions as a currency input and is only viewable and editable by users that have the correct field levelpermissions on salary\_\_C?

- A. <lightning-input-field field-name="Salary\_\_c"></lightning-input-field>
- B. <lightning-formatted-number value="Salary\_\_c" format-style="currency"></lightning-formatted-number>
- C. <lightning-input type="number" value="Salary\_\_c" formatter="currency"></lightning-input>
- D. <lightning-input-currency value="Salary\_\_c"></lightning-input-currency>

**Answer:** A

#### NEW QUESTION 48

A custom object Trainer\_c has a lookup field to another custom object Gym c. Which SOQL query will get the record for the Viridian City gym and it's trainers?

- A. SELECT Id, (SELECT Id FROM Trainers) FROM Gym\_C WHERE Name = 'Viridian City Gym'
- B. SELECT Id, (SELECT Id FROM Trainer\_c) FROM Gym\_c WHERE Name = 'Viridian City Gym'
- C. SELECT ID FROM Trainer\_c WHERE Gym\_r.Name = 'Viridian City Gym'
- D. SELECT Id, (SELECT Id FROM Trainers) FROM Gym\_C WHERE Name = 'Viridian City Gym'

**Answer:** A

#### NEW QUESTION 50

What are three considerations when using the @InvocableMethod annotation in Apex? Choose 3 answers

- A. A method using the @InvocableMethod annotation must define a return value.
- B. A method using the @InvocableMethod annotation can have multiple input parameters.
- C. A method using the @InvocableMethod annotation must be declared as static
- D. A method using the @InvocableMethod annotation can be declared as Public or Global.
- E. Only one method using the @InvocableMethod annotation can be defined per Apex class.

**Answer:** CDE

#### NEW QUESTION 53

Einstein Next Best Action Is configured at Universal Containers to display recommendations to internal users on the Account detail page.

If the recommendation is approved, a new opportunity record and task should be generated. If the recommendation is rejected, an Apex method must be executed to perform a callout to an external system.

Which three factors should a developer keep Hi mind when implementing the Apex method? Choose 3 answers

- A. The method must use the @AuraEnabled annotation.
- B. The method must use the @Future annotation.
- C. The method must use the @invocableMethod annotation.
- D. The method must be defined as static.
- E. The method must be defined as public.

**Answer:** BDE

#### NEW QUESTION 56

Given the following code snippet, that is part of a custom controller for a Visualforce page:

```
public void updateContact(Contact thisContact){  
    thisContact.Is_Active__c = false;  
    try(  
        update thisContact;  
    )catch(Exception e){  
        String errorMessage = 'An error occurred while updating the Contact. ' + e.getMessage();  
        ApexPages.addMessage(new ApexPages.message(ApexPages.severity.FATAL,errorMessage));  
    }  
}
```

In which two ways can the try/catch be enclosed to enforce object and field-level permissions and prevent the DML statement from being executed if the current logged-in user does not have the appropriate level of access? Choose 2 answers

- A. Use if (Schema, objectType, Contact, isUpdatable ( ) )
- B. Use if (Schema , objectType
- C. Contac
- D. Field, Is\_Active\_\_
- E. is Updateable ( ) )
- F. Use if (Schema.sObjectType.Contact.isAccessible ( ) )
- G. Use if (thisContact.Owner == UserInfo.getUserId ( ) )

**Answer:** AB

#### NEW QUESTION 58

A Lightning component has a wired property, searchResults, that stores a list of Opportunities. Which definition of the Apex method, to which the searchResults property is wired, should be used?

- A. @AuraEnabled(cacheable=true)public static List<Opportunity> search(String term) { /\* implementation\*/ }
- B. @AuraEnabled(cacheable=true) public List<Opportunity> search(String term) { /\*implementation\*/ }
- C. @AuraEnabled(cacheable=false) public static List<Opportunity> search(String term) { /\*implementation\*/ }
- D. @AuraEnabled(cacheable=false) public List<Opportunity> search(String term) { /\*implementation\*/ }

**Answer:** A

#### NEW QUESTION 61

An Apex method, getAccounts, that returns a list of Accounts given a searchTerm, is available for Lightning Web Components to use.

What is the correct definition of a Lightning Web Component property that uses the getAccounts method? A)

```
@AuraEnabled(getAccounts, '$searchTerm')  
accountList;
```

B)

```
@wire(getAccounts, { searchTerm: '$searchTerm' })  
accountList;
```

C)

```
@AuraEnabled(getAccounts, { searchTerm: '$searchTerm' })  
accountList;
```

D)

```
@wire(getAccounts, '$searchTerm')  
accountList;
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

**Answer:** C

#### NEW QUESTION 63

A developer is asked to prevent anyone other than a user with Sales Manager profile from changing the Opportunity Status to Closed Lost if the lost reason is blank.

Which automation allows the developer to satisfy this requirement in the most efficient manner?

- A. A record trigger flow on the Opportunity object
- B. An Apex trigger on the Opportunity object
- C. approval process on the Opportunity object
- D. An error condition formula on a validation rule on Opportunity

**Answer:** D



**NEW QUESTION 64**

A developer considers the following snippet of code:

```
Boolean isOK;  
Integer x;  
String theString = 'Hello';  
  
if (isOK == false && theString == 'Hello'){  
    x = 1;  
} else if (isOK == true && theString == 'Hello') {  
    x = 2;  
} else if (isOK != null && theString == 'Hello'){  
    x = 3;  
} else {  
    x = 4;  
}
```

Based on this code, what is the value of x?

- A. 3
- B. 1
- C. 4
- D. 2

**Answer: C**

**NEW QUESTION 65**

In the Lightning UI, where should a developer look to find information about a Paused Flow Interview?

- A. On the Paused Row Interviews related List for a given record
- B. In the Paused Interviews section of the Apex Flex Queue
- C. In the system debug log by Altering on Paused Row Interview
- D. On the Paused Row Interviews component on the Home page

**Answer: B**

**NEW QUESTION 68**

A developer is asked to create a Visualforce page that lists the contacts owned by the current user. This component will be embedded in a Lightning page. Without writing unnecessary code, which controller should be used for this purpose?

- A. Standard list controller
- B. Standard controller
- C. Lightning controller
- D. Custom controller

**Answer: B**

**NEW QUESTION 69**

A developer is creating a test coverage for a class and needs to insert records to validate functionality. Which method annotation should be used to create records for every method in the test class?

- A. @BeforeTest
- B. @isTest(SeeAllData=True)
- C. @TestSetup
- D. @PreTest

**Answer: C**

**NEW QUESTION 73**

A developer needs to implement a custom SOAP Web Service that is used by an external Web Application. The developer chooses to include helper methods that are not used by the Web Application in the implementation of the Web Service Class.

Which code segment shows the correct declaration of the class and methods?

A)

```
global class WebServiceClass {  
    private Boolean helperMethod() { /* implementation ... */ }  
    global String updateRecords() { /* implementation ... */ }  
}
```

B)

```
webservice class WebServiceClass {  
    private Boolean helperMethod() { /* implementation ... */ }  
    global static String updateRecords() { /* implementation ... */ }  
}
```

C)

```
global class WebServiceClass {  
    private Boolean helperMethod() { /* implementation ... */ }  
    webservice static String updateRecords() { /* implementation ... */ }  
}
```

D)

```
webservice class WebServiceClass {  
    private Boolean helperMethod() { /* implementation ... */ }  
    webservice static String updateRecords() { /* implementation ... */ }  
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

**Answer:** C

#### NEW QUESTION 74

Which Apex class contains methods to return the amount of resources that have been used for a particular governor, such as the number of DML statements?

- A. Exception
- B. Messaging
- C. OrgLimits
- D. Limits

**Answer:** D

#### NEW QUESTION 75

Universal Containers hires a developer to build a custom search page to help user- find the Accounts they want. Users will be able to search on Name, Description, and a custom comments field.

Which consideration should the developer be aware of when deciding between SOQL and SOSL? Choose 2 answers

- A. SOSL is able to return more records.
- B. SOQL is faster for text searches.
- C. SOSL is faster for text searches.
- D. SOQL is able to return more records.

**Answer:** CD

#### NEW QUESTION 79

If apex code executes inside the execute() method of an Apex class when implementing the Batchable interface, which statement are true regarding governor limits? Choose 2 answers

- A. The Apex governor limits might be higher due to the asynchronous nature of the transaction.
- B. The apex governor limits are reset for each iteration of the execute() method.
- C. The Apex governor limits are relaxed while calling the constructor of the Apex class.
- D. The Apex governor limits cannot be exceeded due to the asynchronous nature of the transaction,

**Answer:** AB

#### NEW QUESTION 81

A developer wrote Apex code that calls out to an external system. How should a developer write the test to provide test coverage?

- A. Write a class that extends HTTPCalloutMock.
- B. Write a class that implements the HTTPCalloutMock interface.
- C. Write a class that implements the WebserviceMock interface.



D. Write a class that extends WebserviceMock

**Answer:** B

#### NEW QUESTION 86

Refer to the following code snippet for an environment has more than 200 Accounts belonging to the Technology' industry:

```
for(Account thisAccount : [Select Id, Industry FROM Account LIMIT 150]){  
    if(thisAccount.Industry == 'Technology'){  
        thisAccount.Is_Tech__c = true;  
    }  
    update thisAccount;  
}
```

When the code execution, which two events occur as a result of the Apex transaction? When the code executes, which two events occur as a result of the Apex transaction? Choose 2 answers

- A. If executed in an asynchronous context, the apex transaction is likely to fall by exceeding the DMLgovernor limit
- B. The Apex transaction succeeds regardless of any uncaught exception and all processed accounts are updated.
- C. The Apex transaction fails with the following messag
- D. "SObject row was retrieved via SOQL without querying the requested field Account.Is.Tech\_\_c".
- E. If executed In a synchronous context, the apex transaction is likely to fall by exceeding the DHL governor limit.

**Answer:** A

#### NEW QUESTION 91

Universal Containers has a Visualforce page that displays a table of every Container\_c. being ..... Is falling with a view state limit because some of the customers rent over 10,000 containers.

What should a developer change about the Visualforce page to help with the page load errors?

- A. Use Lazy loading and a transient List variable.
- B. Use JavaScript remoting with SOQL Offset.
- C. Implement pagination with an OffsetController.
- D. Implement pagination with a StandardSetController,

**Answer:** D

#### NEW QUESTION 94

The Job\_Application\_\_c custom object has a field that is a Master-Detail relationship to the Contact object, where the Contact object is the Master. As part of a feature implementation, a developer needs to retrieve a list containing all Contact records where the related Account Industry is 'Technology' while also retrieving the contact's Job\_Application\_\_c records.

Based on the object's relationships, what is the most efficient statement to retrieve the list of contacts?

- A. [SELECT Id, (SELECT Id FROM Job\_Applications\_r) FROM Contact WHERE Account.Industry = 'Technology'];
- B. [SELECT Id, (SELECT Id FROM Job\_Applications\_r) FROM Contact WHERE Accounts.Industry = 'Technology'];
- C. [SELECT Id, (SELECT Id FROM Job\_Applications\_c) FROM Contact WHERE Accounts.Industry = 'Technology'];
- D. [SELECT Id, (SELECT Id FROM Job\_Application\_c) FROM Contact WHERE Account.Industry = 'Technology'];

**Answer:** B

#### NEW QUESTION 98

.....

## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### Platform-Developer-I Practice Exam Features:

- \* Platform-Developer-I Questions and Answers Updated Frequently
- \* Platform-Developer-I Practice Questions Verified by Expert Senior Certified Staff
- \* Platform-Developer-I Most Realistic Questions that Guarantee you a Pass on Your First Try
- \* Platform-Developer-I Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The Platform-Developer-I Practice Test Here](#)**