

Exam Questions OmniStudio-Developer

Salesforce Certified OmniStudio Developer (SU21)

<https://www.2passeasy.com/dumps/OmniStudio-Developer/>



NEW QUESTION 1

A developer need to use the CONTIF function to process data entered by the user in an OmniScript. The output of the function needs to be displayed to the user immediately in the current step.

Based on best practice, what element should the developer use this function in?

- A. A Calculation Action element
- B. A Set Values element
- C. A formula element
- D. A Range element

Answer: C

NEW QUESTION 2

A developer builds a new OmniScript. It contains a Set Values element with a ContextId key/value pair that was used during testing.

What should the developer do before moving the OmniScript to a production org?

- A. Update the ContextId value to specify an id from the Production org.
- B. Add a Show/Hide condition on the Set Values element.
- C. Delete or Deactivate the Set Values element.
- D. Deactivate the contextId key/value pair

Answer: B

NEW QUESTION 3

A developer creates a FlexCard with five state elements. For of the states have a condition. To test the FlexCard, the developer previews it using sample data that causes two of the states to have true conditions.

In this scenario, how will the developer know which state will display?

- A. The first state with true conditions sequence closest to the top of the FlexCard canvas will display.
- B. The first state with true nested condition, regardless of sequence in the FlexCard canvas, will display
- C. The state sequenced first in the FlexCard canvas will display.
- D. The first state with a true AND condition, regardless of sequence in the FlexCard canvas, will display.

Answer: C

NEW QUESTION 4


A developer needs to limit the of a DataRaptor Extract to a maximum of one result. How should the developer configure this?

- A. Define a formula with the Filter function
- B. Use a Custom Output Type when creating the DataRaptor
- C. Use the LIMIT filter on the Extract definition
- D. Set the Limit Property on the Action that calls the DataRaptor Extract.

Answer: C

NEW QUESTION 5

A developer is creating an OmniScript that provisions trail orgs to their customers. The following text block in the Omniscript uses a merge code to display the ID for the new trail org:

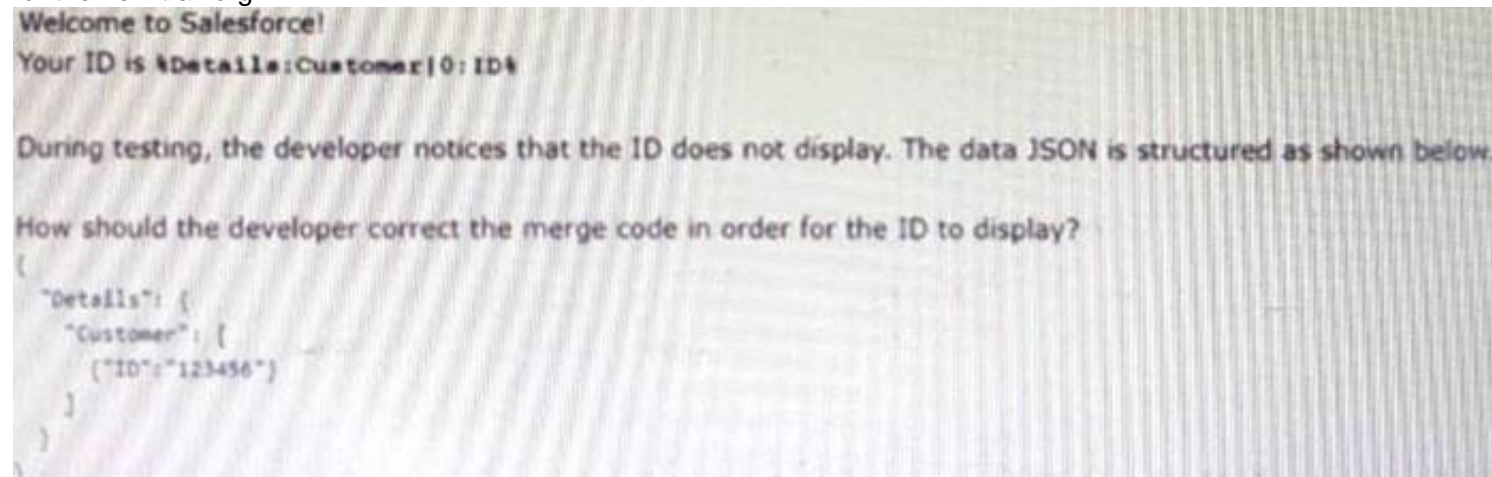

- A. To %sDetails: Customer|0: ID\$
- B. To %Details: Customer|1: ID%
- C. To %sDetails: Customer|0: ID%%
- D. To %Details: Customer|n: ID%

Answer: B

NEW QUESTION 6

Which two of these options can a developer use to retrieve data from a Salesforce object? Choose 2 answers

- A. A DataRaptor Load Action
- B. A DataRaptor Extract Action

- C. A Lookup Input Element
- D. A DataRapt or Post Action

Answer: BD

NEW QUESTION 7


A developer need to configure a calculation procedure to calculation a subtotal using twodifferent depending on whether the input Boolean variable is Customer is set to true or false.
 How should a developer configure the calculation procedure to conditionally execute the correct formula?

- A. Use two separate Calculation Steps with the Conditional Step property selected: use the ISTRUE(isCustomer) and NOT (ISTRUE) (isCustomer) functions in the Condition syntax.
- B. Use two separate Calculation Steps with the Conditional Step property selected: reference just theisCustomer variable in the Conditional syntax (no comparison necessary)
- C. Use two separate Calculation Steps with the Conditional Step property selected: compare the isCustomer variable directly to the literal true and false values in the Condition syntax.
- D. Use a single Calculation Stepswith IF statement directly in the formula definition to reference the isCustome variable and conditionally perform the appropriate calculation.

Answer: B

NEW QUESTION 8

A developer has an existing DataRaptor Load that insert Contact records with inputs as LastName and firstName. The DataRaptor works as expected when previewed.
 The developercreates an integration Procedure to test the DataRaptor and is using a SetValues element in the Integration Procedure to set the first name and last name for the contact record. The DataRaptor and Integration Procedure are set up as shown in the exhibit below.

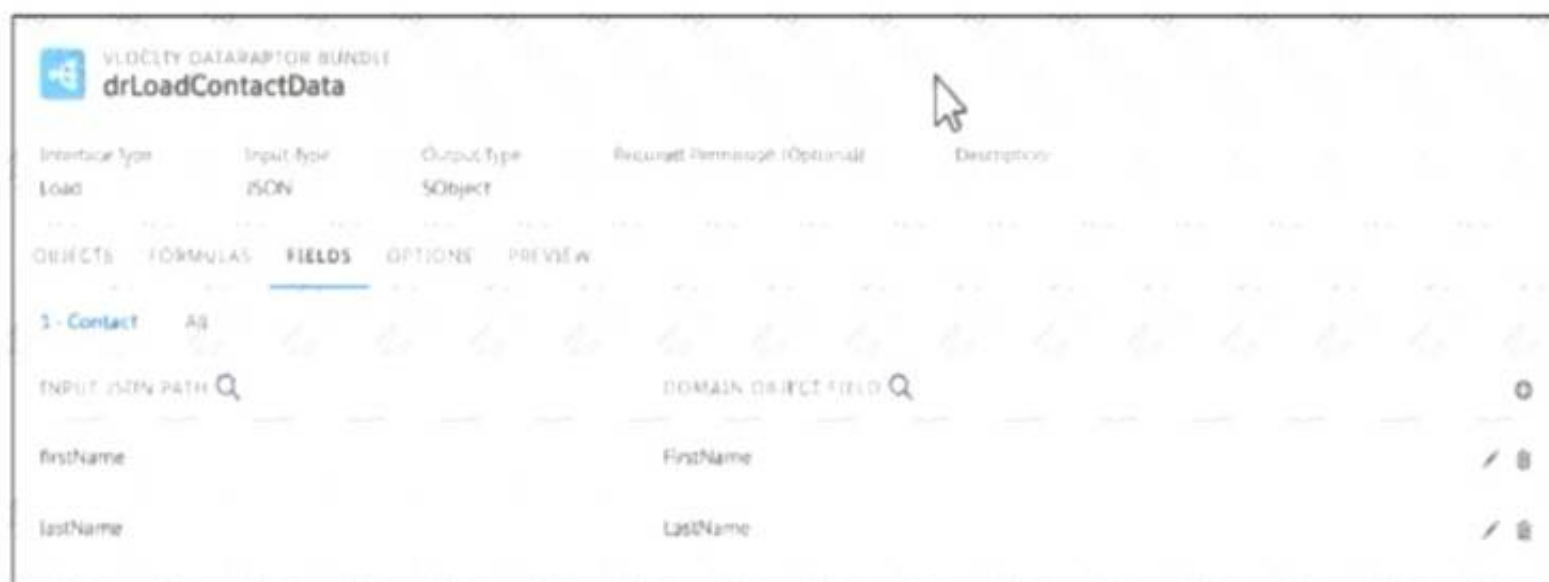


When the developer executes the Integration procedure in preview, the following error message displays: Required fields are missing: [last Name]”,
 How should the developer address this issue?

- A. SetValuesContactDetails should have been added to Additional input of DataRaptor Post Action in Integration Procedure
- B. The Set values Action Keys should include the DataRaptor Post Action element name path, e,g LoadContactDetails, lastname
- C. The DataRaptor Post Action in the integration procedure should have been executed before the Set Values Action
- D. The valid field names should be added in the Domain object field in the DataRaptor

Answer: A

NEW QUESTION 9

Refer to the exhibit.

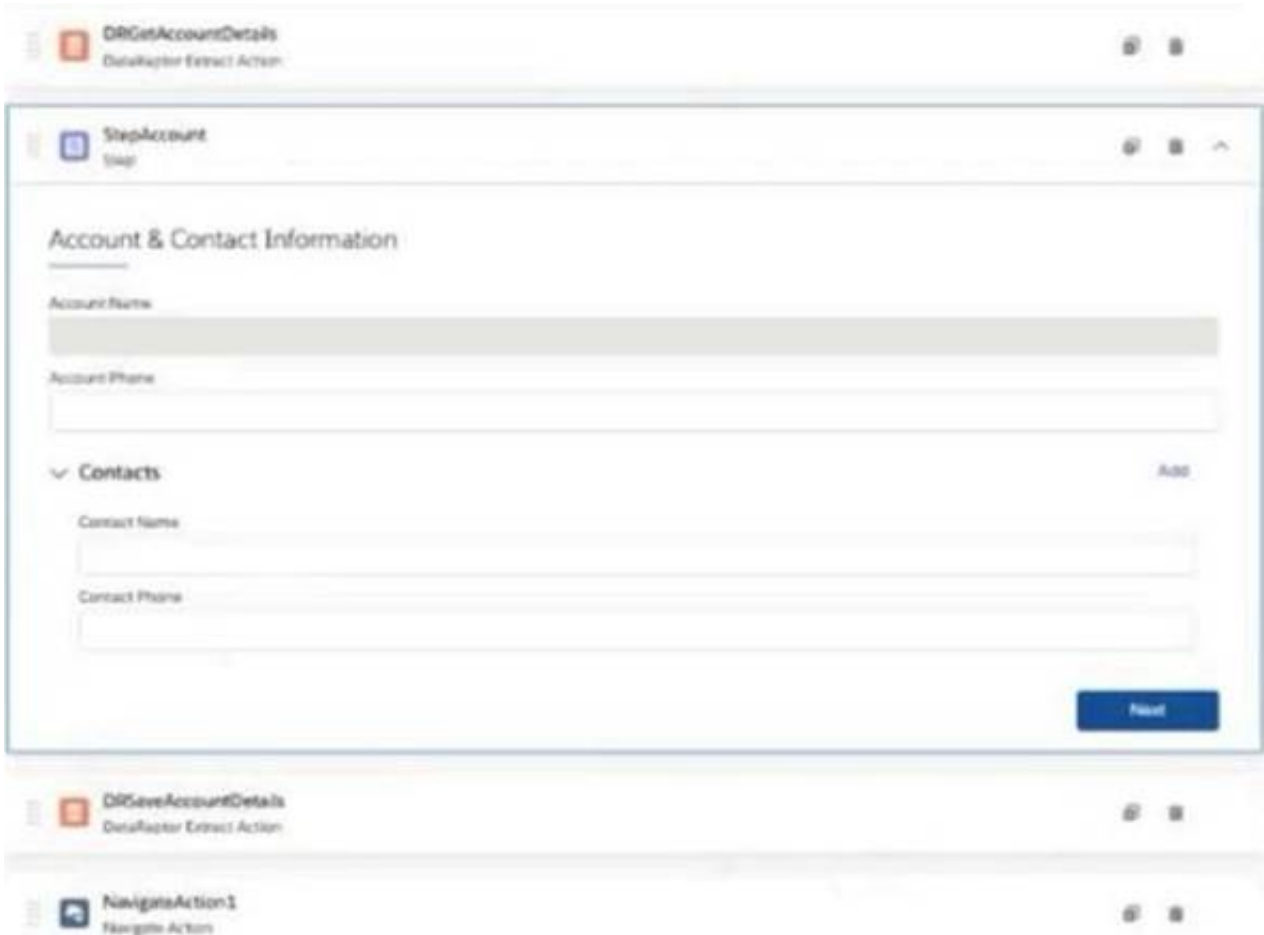

What JSON from the DRGetAccountDetails action would display all six values correctly in the OmniScript structure shown? BlkContacts is a Repeat Block.

A)

```
{
  "Contacts": [{
    "ContactPhone": "(212) 169-1475",
    "ContactName": "Edward Stamos"
  }, {
    "ContactPhone": "(212) 189-8979",
    "ContactName": "Leanne Tomlin"
  }]
}
```

B)

```
{
  "ContactPhone": "(212) 169-1475",
  "ContactName": "Edward Stamos",
  "ContactPhone": "(212) 189-8979",
  "ContactName": "Leanne Tomlin",
  "AccountPhone": "2221546450",
  "AccountName": "Acme"
}
```

C)

```
{
  "BlkContacts": [{
    "ContactPhone": "(212) 169-1475",
    "ContactName": "Edward Stamos"
  }, {
    "ContactPhone": "(212) 189-8979",
    "ContactName": "Leanne Tomlin"
  }],
  "AccountPhone": "2221546450",
  "AccountName": "Acme"
}
```

D)

```
{
  "BlkContacts": [{
    "Phone": "(212) 169-1475",
    "Name": "Edward Stamos"
  }, {
    "Phone": "(212) 189-8979",
    "Name": "Leanne Tomlin"
  }]
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

NEW QUESTION 10

A developer has a requirement to create a child FlexCard that contain all of its parent FlexCard's records in a Datatable.

- A. {Records[0]}
- B. {Records}
- C. {Params records}

D. {recordId}

Answer: B

NEW QUESTION 10

A developer creates a DataRaptor Extract to retrieve data to pass to an external service. The external service expects the field value to be integer. However, the DataRaptor is sending it as a string.

Which action can the developer take to fix this?

- A. In the DataRaptor Output tab, select the Output Data Type of that field to Integer.
- B. In the DataRaptor Output tab, enter the default value as 0 on the field.
- C. In the DataRaptor Extract tab, set the Input Data Type field to Integer.
- D. In the DataRaptor Formula tab, define a formula using the function TOINTEGER and use the formula as output.

Answer: A

NEW QUESTION 14

Which two in an integration Procedure or DataRaptor can execute a function like CONCAT or DATEDIFF? Choose 2 answers

- A. In a Set Values Action in a Value field.
- B. In a DataRaptor in an Output Tab Output JSON Path.
- C. In a DataRaptor Action in an Input Parameters value field.
- D. In a Remote Action in an Additional Output value field.

Answer: AD

NEW QUESTION 16

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual OmniStudio-Developer Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the OmniStudio-Developer Product From:

<https://www.2passeasy.com/dumps/OmniStudio-Developer/>

Money Back Guarantee

OmniStudio-Developer Practice Exam Features:

- * OmniStudio-Developer Questions and Answers Updated Frequently
- * OmniStudio-Developer Practice Questions Verified by Expert Senior Certified Staff
- * OmniStudio-Developer Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * OmniStudio-Developer Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year