

EC-Council

Exam Questions 312-50v11

Certified Ethical Hacker Exam (CEH v11)



NEW QUESTION 1

Which of the following scanning method splits the TCP header into several packets and makes it difficult for packet filters to detect the purpose of the packet?

- A. ACK flag probe scanning
- B. ICMP Echo scanning
- C. SYN/FIN scanning using IP fragments
- D. IPID scanning

Answer: C

NEW QUESTION 2

You are logged in as a local admin on a Windows 7 system and you need to launch the Computer Management Console from command line. Which command would you use?

- A. c:\compmgmt.msc
- B. c:\services.msc
- C. c:\ncpa.cp
- D. c:\gpedit

Answer: A

Explanation:

To start the Computer Management Console from command line just type compmgmt.msc

/computer:computername in your run box or at the command line and it should automatically open the Computer Management console.

References:

<http://www.waynezim.com/tag/compmgmtmsc/>

NEW QUESTION 3

What is the proper response for a NULL scan if the port is open?

- A. SYN
- B. ACK
- C. FIN
- D. PSH
- E. RST
- F. No response

Answer: F

NEW QUESTION 4

An attacker is trying to redirect the traffic of a small office. That office is using their own mail server, DNS server and NTP server because of the importance of their job. The attacker gain access to the DNS server and redirect the direction www.google.com to his own IP address. Now when the employees of the office want to go to Google they are being redirected to the attacker machine. What is the name of this kind of attack?

- A. MAC Flooding
- B. Smurf Attack
- C. DNS spoofing
- D. ARP Poisoning

Answer: C

NEW QUESTION 5

Which of the following incident handling process phases is responsible for defining rules, collaborating human workforce, creating a back-up plan, and testing the plans for an organization?

- A. Preparation phase
- B. Containment phase
- C. Identification phase
- D. Recovery phase

Answer: A

NEW QUESTION 6

A security analyst uses Zenmap to perform an ICMP timestamp ping scan to acquire information related to the current time from the target host machine. Which of the following Zenmap options must the analyst use to perform the ICMP timestamp ping scan?

- A. -PY
- B. -PU
- C. -PP
- D. -Pn

Answer: C

NEW QUESTION 7

John is investigating web-application firewall logs and observers that someone is attempting to inject the following:

```
char buff[10]; buff[>o] = 'a';
```


What type of attack is this?

- A. CSRF
- B. XSS
- C. Buffer overflow
- D. SQL injection

Answer: C

Explanation:

Buffer overflow this attack is an anomaly that happens when software writing data to a buffer overflows the buffer's capacity, leading to adjacent memory locations being overwritten. In other words, an excessive amount of information is being passed into a container that doesn't have enough space, which information finishes up replacing data in adjacent containers. Buffer overflows are often exploited by attackers with a goal of modifying a computer's memory so as to undermine or take hold of program execution.

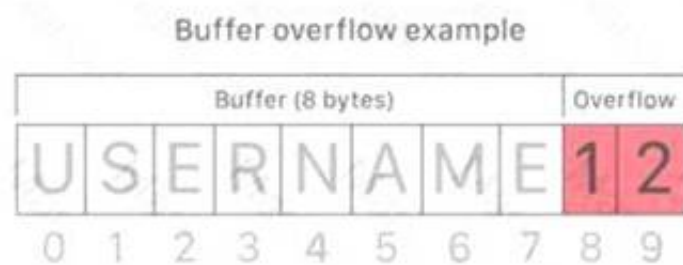

What's a buffer? A buffer, or data buffer, is a neighborhood of physical memory storage used to temporarily store data while it's being moved from one place to a different . These buffers typically sleep in RAM memory. Computers frequently use buffers to assist improve performance; latest hard drives cash in of buffering to efficiently access data, and lots of online services also use buffers. for instance , buffers are frequently utilized in online video streaming to stop interruption. When a video is streamed, the video player downloads and stores perhaps 20% of the video at a time during a buffer then streams from that buffer. This way, minor drops in connection speed or quick service disruptions won't affect the video stream performance. Buffers are designed to contain specific amounts of knowledge . Unless the program utilizing the buffer has built-in instructions to discard data when an excessive amount of is shipped to the buffer, the program will overwrite data in memory adjacent to the buffer. Buffer overflows are often exploited by attackers to corrupt software. Despite being well-understood, buffer overflow attacks are still a serious security problem that torment cyber-security teams. In 2014 a threat referred to as 'heartbleed' exposed many many users to attack due to a buffer overflow vulnerability in SSL software.

How do attackers exploit buffer overflows? An attacker can deliberately feed a carefully crafted input into a program which will cause the program to undertake and store that input during a buffer that isn't large enough, overwriting portions of memory connected to the buffer space. If the memory layout of the program is well-defined, the attacker can deliberately overwrite areas known to contain executable code. The attacker can then replace this code together with his own executable code, which may drastically change how the program is meant to figure . For example if the overwritten part in memory contains a pointer (an object that points to a different place in memory) the attacker's code could replace that code with another pointer that points to an exploit payload. this will transfer control of the entire program over to the attacker's code.

NEW QUESTION 8

Which of the following antennas is commonly used in communications for a frequency band of 10 MHz to VHF and UHF?

- A. Yagi antenna
- B. Dipole antenna
- C. Parabolic grid antenna
- D. Omnidirectional antenna

Answer: A

NEW QUESTION 9

You are a penetration tester tasked with testing the wireless network of your client Brakeme SA. You are attempting to break into the wireless network with the SSID "Brakeme-Internal." You realize that this network uses WPA3 encryption, which of the following vulnerabilities is the promising to exploit?

- A. Dragonblood
- B. Cross-site request forgery
- C. Key reinstallation attack
- D. AP Misconfiguration

Answer: A

Explanation:

Dragonblood allows an attacker in range of a password-protected Wi-Fi network to get the password and gain access to sensitive information like user credentials, emails and mastercard numbers. consistent with the published report: "The WPA3 certification aims to secure Wi-Fi networks, and provides several advantages over its predecessor WPA2, like protection against offline dictionary attacks and forward secrecy. Unfortunately, we show that WPA3 is suffering from several design flaws, and analyze these flaws both theoretically and practically. Most prominently, we show that WPA3's Simultaneous Authentication of Equals (SAE) handshake, commonly referred to as Dragonfly, is suffering from password partitioning attacks." Our Wi-Fi researchers at WatchGuard are educating businesses globally that WPA3 alone won't stop the Wi-Fi hacks that allow attackers to steal information over the air (learn more in our recent blog post on the topic). These Dragonblood vulnerabilities impact a little amount of devices that were released with WPA3 support, and makers are currently making patches available. one among the most important takeaways for businesses of all sizes is to know that a long-term fix might not be technically feasible for devices with lightweight processing capabilities like IoT and embedded systems. Businesses got to consider adding products that enable a Trusted Wireless Environment for all kinds of devices and users alike. Recognizing that vulnerabilities like KRACK and Dragonblood require attackers to initiate these attacks by bringing an "Evil Twin" Access Point or a Rogue Access Point into a Wi-Fi environment, we've been that specialize in developing Wi-Fi security solutions that neutralize these threats in order that these attacks can never occur. The Trusted Wireless Environment framework protects against the "Evil Twin" Access Point and Rogue Access Point. one among these hacks is required to initiate the 2 downgrade or side-channel attacks referenced in Dragonblood. What's next? WPA3 is an improvement over WPA2 Wi-Fi encryption protocol, however, as we predicted, it still doesn't provide protection from the six known Wi-Fi threat categories. It's highly likely that we'll see more WPA3 vulnerabilities announced within the near future. To help reduce Wi-Fi vulnerabilities, we're asking all of you to hitch the Trusted Wireless Environment movement and advocate for a worldwide security standard for Wi-Fi.

NEW QUESTION 10

Which results will be returned with the following Google search query?
site:target.com – site:Marketing.target.com accounting

- A. Results from matches on the site marketing.target.com that are in the domain target.com but do not include the word accounting.
- B. Results matching all words in the query.
- C. Results for matches on target.com and Marketing.target.com that include the word “accounting”
- D. Results matching “accounting” in domain target.com but not on the site Marketing.target.com

Answer: D

NEW QUESTION 10

Daniel is a professional hacker who is attempting to perform an SQL injection attack on a target website. www.movlescope.com. During this process, he encountered an IDS that detects SQL Injection attempts based on predefined signatures. To evade any comparison statement, he attempted placing characters such as "or '1'='1" in any basic injection statement such as "or 1=1." Identify the evasion technique used by Daniel in the above scenario.

- A. Null byte
- B. IP fragmentation
- C. Char encoding
- D. Variation

Answer: D

Explanation:

One may append the comment “—” operator along with the String for the username and whole avoid executing the password segment of the SQL query.

Everything when the — operator would be considered as comment and not dead.

To launch such an attack, the value passed for name could be 'OR '1'='1' ; —Statement = “SELECT * FROM 'CustomerDB' WHERE 'name' = ' ”+ userName + “ ‘ AND 'password' = ' ”+ passwd + “ ‘ ; ”

Statement = “SELECT * FROM 'CustomerDB' WHERE 'name' = ' ' OR '1'='1';— + “ ‘ AND 'password' = ' ”+ passwd + “ ‘ ; ”

All the records from the customer database would be listed.

Yet, another variation of the SQL Injection Attack can be conducted in dbms systems that allow multiple SQL injection statements. Here, we will also create use of the vulnerability in some dbms whereby a user provided field isn't strongly used in or isn't checked for sort constraints.

This could take place once a numeric field is to be employed in a SQL statement; but, the programmer makes no checks to validate that the user supplied input is numeric.

Variation is an evasion technique whereby the attacker can easily evade any comparison statement. The attacker does this by placing characters such as "" or '1'='1' in any basic injection statement such as “or 1=1” or with other accepted SQL comments.

Evasion Technique: Variation Variation is an evasion technique whereby the attacker can easily evade any comparison statement. The attacker does this by placing characters such as "" or '1'='1' in any basic injection statement such as “or 1=1” or with other accepted SQL comments. The SQL interprets this as a comparison between two strings or characters instead of two numeric values. As the evaluation of two strings yields a true statement, similarly, the evaluation of two numeric values yields a true statement, thus rendering the evaluation of the complete query unaffected. It is also possible to write many other signatures; thus, there are infinite possibilities of variation as well. The main aim of the attacker is to have a WHERE statement that is always evaluated as “true” so that any mathematical or string comparison can be used, where the SQL can perform the same.

NEW QUESTION 15

The security team of Debry Inc. decided to upgrade Wi-Fi security to thwart attacks such as dictionary attacks and key recovery attacks. For this purpose, the security team started implementing cutting-edge technology that uses a modern key establishment protocol called the simultaneous authentication of equals (SAE), also known as dragonfly key exchange, which replaces the PSK concept. What is the Wi-Fi encryption technology implemented by Debry Inc.?

- A. WEP
- B. WPA
- C. WPA2
- D. WPA3

Answer: C

NEW QUESTION 20

Susan has attached to her company's network. She has managed to synchronize her boss's sessions with that of the file server. She then intercepted his traffic destined for the server, changed it the way she wanted to and then placed it on the server in his home directory. What kind of attack is Susan carrying on?

- A. A sniffing attack
- B. A spoofing attack
- C. A man in the middle attack
- D. A denial of service attack

Answer: C

NEW QUESTION 25

Email is transmitted across the Internet using the Simple Mail Transport Protocol. SMTP does not encrypt email, leaving the information in the message vulnerable to being read by an unauthorized person. SMTP can upgrade a connection between two mail servers to use TLS. Email transmitted by SMTP over TLS is encrypted. What is the name of the command used by SMTP to transmit email over TLS?

- A. OPPORTUNISTICTLS
- B. UPGRADE TLS
- C. FORCE TLS
- D. START TLS

Answer: D

NEW QUESTION 30

Bob is doing a password assessment for one of his clients. Bob suspects that security policies are not in place. He also suspects that weak passwords are probably the norm throughout the company he is evaluating. Bob is familiar with password weaknesses and key loggers. Which of the following options best represents the means that Bob can adopt to retrieve passwords from his clients hosts and servers?

- A. Hardware, Software, and Sniffing.
- B. Hardware and Software Keyloggers.
- C. Passwords are always best obtained using Hardware key loggers.
- D. Software only, they are the most effective.

Answer: A

NEW QUESTION 33

Internet Protocol Security IPsec is actually a suite pf protocols. Each protocol within the suite provides different functionality. Collective IPsec does everything except.

- A. Protect the payload and the headers
- B. Encrypt
- C. Work at the Data Link Layer
- D. Authenticate

Answer: C

Explanation:

<https://en.wikipedia.org/wiki/IPsec> Usage of IPsec Authentication Header format in Tunnel and Transpor modes

NEW QUESTION 36

Bill has been hired as a penetration tester and cyber security auditor for a major credit card company. Which information security standard is most applicable to his role?

- A. FISMA
- B. HITECH
- C. PCI-DSS
- D. Sarbanes-OxleyAct

Answer: C

NEW QUESTION 39

While performing an Nmap scan against a host, Paola determines the existence of a firewall. In an attempt to determine whether the firewall is stateful or stateless, which of the following options would be best to use?

- A. -sA
- B. -sX
- C. -sT
- D. -sF

Answer: A

NEW QUESTION 43

Which among the following is the best example of the hacking concept called "clearing tracks"?

- A. After a system is breached, a hacker creates a backdoor to allow re-entry into a system.
- B. During a cyberattack, a hacker injects a rootkit into a server.
- C. An attacker gains access to a server through an exploitable vulnerability.
- D. During a cyberattack, a hacker corrupts the event logs on all machines.

Answer: D

NEW QUESTION 44

You are attempting to run an Nmap port scan on a web server. Which of the following commands would result in a scan of common ports with the least amount of noise in order to evade IDS?

- A. nmap -A - Pn
- B. nmap -sP -p-65535 -T5
- C. nmap -sT -O -T0
- D. nmap -A --host-timeout 99 -T1

Answer: C

NEW QUESTION 48

You have been authorized to perform a penetration test against a website. You want to use Google dorks to footprint the site but only want results that show file extensions. What Google dork operator would you use?

- A. filetype
- B. ext
- C. inurl

D. site

Answer: A

Explanation:

Restrict results to those of a certain filetype. E.g., PDF, DOCX, TXT, PPT, etc. Note: The “ext:” operator can also be used—the results are identical.

Example: apple filetype:pdf / apple ext:pdf

NEW QUESTION 52

Which of the following is a command line packet analyzer similar to GUI-based Wireshark?

- A. nessus
- B. tcpdump
- C. ethereal
- D. jack the ripper

Answer: B

NEW QUESTION 57

Attacker Simon targeted the communication network of an organization and disabled the security controls of NetNTLMv1 by modifying the values of LMCompatibilityLevel, NTLMMinClientSec, and RestrictSendingNTLMTraffic. He then extracted all the non-network logon tokens from all the active processes to masquerade as a legitimate user to launch further attacks. What is the type of attack performed by Simon?

- A. Internal monologue attack
- B. Combinator attack
- C. Rainbow table attack
- D. Dictionary attack

Answer: A

NEW QUESTION 62

Bill is a network administrator. He wants to eliminate unencrypted traffic inside his company's network. He decides to setup a SPAN port and capture all traffic to the datacenter. He immediately discovers unencrypted traffic in port UDP 161. what protocol is this port using and how can he secure that traffic?

- A. it is not necessary to perform any actions, as SNMP is not carrying important information.
- B. SNMP and he should change it to SNMP V3
- C. RPC and the best practice is to disable RPC completely
- D. SNMP and he should change it to SNMP v2, which is encrypted

Answer: B

Explanation:

We have various articles already in our documentation for setting up SNMPv2 trap handling in Opsview, but SNMPv3 traps are a whole new ballgame. They can be quite confusing and complicated to set up the first time you go through the process, but when you understand what is going on, everything should make more sense.

SNMP has gone through several revisions to improve performance and security (version 1, 2c and 3). By default, it is a UDP port based protocol where communication is based on a ‘fire and forget’ methodology in which network packets are sent to another device, but there is no check for receipt of that packet (versus TCP port when a network packet must be acknowledged by the other end of the communication link).

There are two modes of operation with SNMP – get requests (or polling) where one device requests information from an SNMP enabled device on a regular basis (normally using UDP port 161), and traps where the SNMP enabled device sends a message to another device when an event occurs (normally using UDP port 162). The latter includes instances such as someone logging on, the device powering up or down, or a wide variety of other problems that would need this type of investigation.

This blog covers SNMPv3 traps, as polling and version 2c traps are covered elsewhere in our documentation. SNMP trapsSince SNMP is primarily a UDP port based system, traps may be ‘lost’ when sending between devices; the sending device does not wait to see if the receiver got the trap. This means if the configuration on the sending device is wrong (using the wrong receiver IP address or port) or the receiver isn’t listening for traps or rejecting them out of hand due to misconfiguration, the sender will never know.

The SNMP v2c specification introduced the idea of splitting traps into two types; the original ‘hope it gets there’ trap and the newer ‘INFORM’ traps. Upon receipt of an INFORM, the receiver must send an acknowledgement back. If the sender doesn’t get the acknowledgement back, then it knows there is an existing problem and can log it for sysadmins to find when they interrogate the device.

NEW QUESTION 64

Every company needs a formal written document which spells out to employees precisely what they are allowed to use the company's systems for, what is prohibited, and what will happen to them if they break the rules. Two printed copies of the policy should be given to every employee as soon as possible after they join the organization. The employee should be asked to sign one copy, which should be safely filed by the company. No one should be allowed to use the company's computer systems until they have signed the policy in acceptance of its terms.

What is this document called?

- A. Information Audit Policy (IAP)
- B. Information Security Policy (ISP)
- C. Penetration Testing Policy (PTP)
- D. Company Compliance Policy (CCP)

Answer: B

NEW QUESTION 69

Jack, a disgruntled ex-employee of Incalsol Ltd., decided to inject fileless malware into Incalsol's systems. To deliver the malware, he used the current employees' email IDs to send fraudulent emails embedded with malicious links that seem to be legitimate. When a victim employee clicks on the link, they are directed to a fraudulent website that automatically loads Flash and triggers the exploit. What is the technique used by Jack to launch the fileless malware on the target systems?

- A. In-memory exploits
- B. Phishing
- C. Legitimate applications
- D. Script-based injection

Answer: B

NEW QUESTION 70

Study the snort rule given below:

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 135
(msg: "NETBIOS DCERPC ISystemActivator bind attempt";
flow:to_server, established; content: "|05|"; distance: 0; within: 1;
content: "|0b|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2192; rev: 1;)
```

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 445 (msg: "NETBIOS SMB
DCERPC ISystemActivator bind attempt"; flow: to_server, established;
content: "|FF|SMB|25|"; nocase; offset:4; depth:5; content: "|26 00|";
nocase; distance:5; within: 12; content: "|05|"; distance:0; within:1;
content: "|0b|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2193; rev: 1;)
```

From the options below, choose the exploit against which this rule applies.

- A. WebDav
- B. SQL Slammer
- C. MS Blaster
- D. MyDoom

Answer: C

NEW QUESTION 71

While examining audit logs, you discover that people are able to telnet into the SMTP server on port 25. You would like to block this, though you do not see any evidence of an attack or other wrong doing. However, you are concerned about affecting the normal functionality of the email server. From the following options choose how best you can achieve this objective?

- A. Block port 25 at the firewall.
- B. Shut off the SMTP service on the server.
- C. Force all connections to use a username and password.
- D. Switch from Windows Exchange to UNIX Sendmail.
- E. None of the above.

Answer: E

NEW QUESTION 76

Steve, a scientist who works in a governmental security agency, developed a technological solution to identify people based on walking patterns and implemented this approach to a physical control access.

A camera captures people walking and identifies the individuals using Steve's approach.

After that, people must approximate their RFID badges. Both the identifications are required to open the door. In this case, we can say:

- A. Although the approach has two phases, it actually implements just one authentication factor
- B. The solution implements the two authentication factors: physical object and physical characteristic
- C. The solution will have a high level of false positives
- D. Biological motion cannot be used to identify people

Answer: B

NEW QUESTION 77

Lewis, a professional hacker, targeted the IoT cameras and devices used by a target venture-capital firm. He used an information-gathering tool to collect information about the IoT devices connected to a network, open ports and services, and the attack surface area. Using this tool, he also generated statistical reports on broad usage patterns and trends. This tool helped Lewis continually monitor every reachable server and device on the Internet, further allowing him to exploit these devices in the network. Which of the following tools was employed by Lewis in the above scenario?

- A. Censys
- B. Wapiti
- C. NeuVector
- D. Lacework

Answer: A

Explanation:

Censys scans help the scientific community accurately study the Internet. The data is sometimes used to detect security problems and to inform operators of vulnerable systems so that they can fixed

NEW QUESTION 80

Which of the following is the primary objective of a rootkit?

- A. It opens a port to provide an unauthorized service
- B. It creates a buffer overflow
- C. It replaces legitimate programs
- D. It provides an undocumented opening in a program

Answer: C

NEW QUESTION 81

Bob, a system administrator at TPNQM SA, concluded one day that a DMZ is not needed if he properly configures the firewall to allow access just to servers/ports, which can have direct internet access, and block the access to workstations.

Bob also concluded that DMZ makes sense just when a stateful firewall is available, which is not the case of TPNQM SA.

In this context, what can you say?

- A. Bob can be right since DMZ does not make sense when combined with stateless firewalls
- B. Bob is partially right
- C. He does not need to separate networks if he can create rules by destination IPs, one by one
- D. Bob is totally wrong
- E. DMZ is always relevant when the company has internet servers and workstations
- F. Bob is partially right
- G. DMZ does not make sense when a stateless firewall is available

Answer: C

NEW QUESTION 82

Which command can be used to show the current TCP/IP connections?

- A. Netsh
- B. Netstat
- C. Net use connection
- D. Net use

Answer: A

NEW QUESTION 83

Which of the following tactics uses malicious code to redirect users' web traffic?

- A. Spimming
- B. Pharming
- C. Phishing
- D. Spear-phishing

Answer: B

NEW QUESTION 88

which of the following protocols can be used to secure an LDAP service against anonymous queries?

- A. SSO
- B. RADIUS
- C. WPA
- D. NTLM

Answer: D

Explanation:

In a Windows network, nongovernmental organization (New Technology) local area network Manager (NTLM) could be a suite of Microsoft security protocols supposed to produce authentication, integrity, and confidentiality to users. NTLM is that the successor to the authentication protocol in Microsoft local area network Manager (LANMAN), Associate in Nursing older Microsoft product. The NTLM protocol suite is enforced in an exceedingly Security Support supplier, which mixes the local area network Manager authentication protocol, NTLMv1, NTLMv2 and NTLM2 Session protocols in an exceedingly single package. whether or not these protocols area unit used or will be used on a system is ruled by cluster Policy settings, that totally different{completely different} versions of Windows have different default settings. NTLM passwords area unit thought-about weak as a result of they will be brute-forced very simply with fashionable hardware.

NTLM could be a challenge-response authentication protocol that uses 3 messages to authenticate a consumer in an exceedingly affiliation orientating setting (connectionless is similar), and a fourth extra message if integrity is desired.

- First, the consumer establishes a network path to the server and sends a NEGOTIATE_MESSAGE advertising its capabilities.
- Next, the server responds with CHALLENGE_MESSAGE that is employed to determine the identity of the consumer.
- Finally, the consumer responds to the challenge with Associate in Nursing AUTHENTICATE_MESSAGE.

The NTLM protocol uses one or each of 2 hashed word values, each of that are keep on the server (or domain controller), and that through a scarcity of seasoning area unit word equivalent, that means that if you grab the hash price from the server, you'll evidence while not knowing the particular word. the 2 area unit the lm Hash (a DES-based operate applied to the primary fourteen chars of the word born-again to the standard eight bit laptop charset for the language), and also the nt Hash (MD4 of the insufficient endian UTF-16 Unicode password). each hash values area unit sixteen bytes (128 bits) every.

The NTLM protocol additionally uses one among 2 a method functions, looking on the NTLM version. National Trust LanMan and NTLM version one use the DES primarily based LanMan a method operate (LMOWF), whereas National TrustLMv2 uses the NT MD4 primarily based a method operate (NTOWF).

NEW QUESTION 92

Which DNS resource record can indicate how long any "DNS poisoning" could last?

- A. MX
- B. SOA
- C. NS
- D. TIMEOUT

Answer: B

NEW QUESTION 96

What would be the fastest way to perform content enumeration on a given web server by using the Gobuster tool?

- A. Performing content enumeration using the bruteforce mode and 10 threads
- B. Shipping SSL certificate verification
- C. Performing content enumeration using a wordlist
- D. Performing content enumeration using the bruteforce mode and random file extensions

Answer: A

NEW QUESTION 101

Under what conditions does a secondary name server request a zone transfer from a primary name server?

- A. When a primary SOA is higher than a secondary SOA
- B. When a secondary SOA is higher than a primary SOA
- C. When a primary name server has had its service restarted
- D. When a secondary name server has had its service restarted
- E. When the TTL falls to zero

Answer: A

NEW QUESTION 104

A security analyst is performing an audit on the network to determine if there are any deviations from the security policies in place. The analyst discovers that a user from the IT department had a dial-out modem installed.

Which security policy must the security analyst check to see if dial-out modems are allowed?

- A. Firewall-management policy
- B. Acceptable-use policy
- C. Permissive policy
- D. Remote-access policy

Answer: D

NEW QUESTION 105

Which of the following tools is used to detect wireless LANs using the 802.11a/b/g/n WLAN standards on a linux platform?

- A. Kismet
- B. Abel
- C. Netstumbler
- D. Nessus

Answer: A

NEW QUESTION 108

Which protocol is used for setting up secure channels between two devices, typically in VPNs?

- A. PEM
- B. ppp
- C. IPSEC
- D. SET

Answer: C

NEW QUESTION 112

Websites and web portals that provide web services commonly use the Simple Object Access Protocol (SOAP).

Which of the following is an incorrect definition or characteristics of the protocol?

- A. Exchanges data between web services
- B. Only compatible with the application protocol HTTP
- C. Provides a structured model for messaging
- D. Based on XML

Answer: B

NEW QUESTION 114

You went to great lengths to install all the necessary technologies to prevent hacking attacks, such as expensive firewalls, antivirus software, anti-spam systems and intrusion detection/prevention tools in your company's network. You have configured the most secure policies and tightened every device on your network. You are confident that hackers will never be able to gain access to your network with complex security system in place.

Your peer, Peter Smith who works at the same department disagrees with you.

He says even the best network security technologies cannot prevent hackers gaining access to the network because of presence of "weakest link" in the security chain.

What is Peter Smith talking about?

- A. Untrained staff or ignorant computer users who inadvertently become the weakest link in your security chain
- B. "zero-day" exploits are the weakest link in the security chain since the IDS will not be able to detect these attacks
- C. "Polymorphic viruses" are the weakest link in the security chain since the Anti-Virus scanners will not be able to detect these attacks
- D. Continuous Spam e-mails cannot be blocked by your security system since spammers use different techniques to bypass the filters in your gateway

Answer: A

NEW QUESTION 118

What hacking attack is challenge/response authentication used to prevent?

- A. Replay attacks
- B. Scanning attacks
- C. Session hijacking attacks
- D. Password cracking attacks

Answer: A

NEW QUESTION 122

What would be the purpose of running "wget 192.168.0.15 -q -S" against a web server?

- A. Performing content enumeration on the web server to discover hidden folders
- B. Using wget to perform banner grabbing on the webserver
- C. Flooding the web server with requests to perform a DoS attack
- D. Downloading all the contents of the web page locally for further examination

Answer: B

Explanation:

-q, --quiet quiet (no output)
-S, --server-response print server response

NEW QUESTION 126

What is the way to decide how a packet will move from an untrusted outside host to a protected inside that is behind a firewall, which permits the hacker to determine which ports are open and if the packets can pass through the packet-filtering of the firewall?

- A. Session hijacking
- B. Firewalking
- C. Man-in-the middle attack
- D. Network sniffing

Answer: B

NEW QUESTION 129

Jason, an attacker, targeted an organization to perform an attack on its Internet-facing web server with the intention of gaining access to backend servers, which are protected by a firewall. In this process, he used a URL <https://xyz.com/feed.php?url:externalsile.com/feed/to> to obtain a remote feed and altered the URL input to the local host to view all the local resources on the target server. What is the type of attack Jason performed In the above scenario?

- A. website defacement
- B. Server-side request forgery (SSRF) attack
- C. Web server misconfiguration
- D. web cache poisoning attack

Answer: B

Explanation:

Server-side request forgery (also called SSRF) is a net security vulnerability that allows an assaulter to induce the server-side application to make http requests to associate arbitrary domain of the attacker's choosing.

In typical SSRF examples, the attacker might cause the server to make a connection back to itself, or to other web-based services among the organization's infrastructure, or to external third-party systems.

Another type of trust relationship that often arises with server-side request forgery is where the application server is able to interact with different back-end systems that aren't directly reachable by users. These systems typically have non-routable private informatics addresses. Since the back-end systems normally ordinarily protected by the topology, they typically have a weaker security posture. In several cases, internal back-end systems contain sensitive functionality that may be accessed while not authentication by anyone who is able to act with the systems.

In the preceding example, suppose there's an body interface at the back-end url <https://192.168.0.68/admin>. Here, an attacker will exploit the SSRF vulnerability to access the executive interface by submitting the following request:

POST /product/stock HTTP/1.0

Content-Type: application/x-www-form-urlencoded Content-Length: 118 stockApi=http://192.168.0.68/admin

NEW QUESTION 130

Session splicing is an IDS evasion technique in which an attacker delivers data in multiple, small sized packets to the target computer, making it very difficult for an IDS to detect the attack signatures. Which tool can be used to perform session splicing attacks?

- A. tcpsplice

- B. Burp
- C. Hydra
- D. Whisker

Answer: D

NEW QUESTION 135

Calvin, a grey-hat hacker, targets a web application that has design flaws in its authentication mechanism. He enumerates usernames from the login form of the web application, which requests users to feed data and specifies the incorrect field in case of invalid credentials. Later, Calvin uses this information to perform social engineering.

Which of the following design flaws in the authentication mechanism is exploited by Calvin?

- A. Insecure transmission of credentials
- B. Verbose failure messages
- C. User impersonation
- D. Password reset mechanism

Answer: D

NEW QUESTION 136

John is an incident handler at a financial institution. His steps in a recent incident are not up to the standards of the company. John frequently forgets some steps and procedures while handling responses as they are very stressful to perform. Which of the following actions should John take to overcome this problem with the least administrative effort?

- A. Create an incident checklist.
- B. Select someone else to check the procedures.
- C. Increase his technical skills.
- D. Read the incident manual every time it occurs.

Answer: C

NEW QUESTION 140

Sam is working as a system administrator in an organization. He captured the principal characteristics of a vulnerability and produced a numerical score to reflect its severity using CVSS v3.0 to properly assess and prioritize the organization's vulnerability management processes. The base score that Sam obtained after performing cvss rating was 4.0. What is the CVSS severity level of the vulnerability discovered by Sam in the above scenario?

- A. Medium
- B. Low
- C. Critical
- D. High

Answer: A

Explanation:

Rating CVSS Score None 0.0
Low 0.1 - 3.9
Medium 4.0 - 6.9
High 7.0 - 8.9
Critical 9.0 - 10.0

NEW QUESTION 141

The company ABC recently contracts a new accountant. The accountant will be working with the financial statements. Those financial statements need to be approved by the CFO and then they will be sent to the accountant but the CFO is worried because he wants to be sure that the information sent to the accountant was not modified once he approved it. Which of the following options can be useful to ensure the integrity of the data?

- A. The CFO can use a hash algorithm in the document once he approved the financial statements
- B. The CFO can use an excel file with a password
- C. The financial statements can be sent twice, one by email and the other delivered in USB and the accountant can compare both to be sure is the same document
- D. The document can be sent to the accountant using an exclusive USB for that document

Answer: A

NEW QUESTION 146

Which of the following statements is TRUE?

- A. Packet Sniffers operate on the Layer 1 of the OSI model.
- B. Packet Sniffers operate on Layer 2 of the OSI model.
- C. Packet Sniffers operate on both Layer 2 & Layer 3 of the OSI model.
- D. Packet Sniffers operate on Layer 3 of the OSI model.

Answer: B

NEW QUESTION 151

During a recent security assessment, you discover the organization has one Domain Name Server (DNS) in a Demilitarized Zone (DMZ) and a second DNS server on the internal network.

What is this type of DNS configuration commonly called?

- A. DynDNS
- B. DNS Scheme
- C. DNSSEC
- D. Split DNS

Answer: D

NEW QUESTION 155

Taylor, a security professional, uses a tool to monitor her company's website, analyze the website's traffic, and track the geographical location of the users visiting the company's website. Which of the following tools did Taylor employ in the above scenario?

- A. WebSite Watcher
- B. web-Stat
- C. Webroot
- D. WAFW00F

Answer: B

Explanation:

Increase your web site's performance and grow! Add Web-Stat to your site (it's free!) and watch individuals act together with your pages in real time. Learn how individuals realize your web site. Get details concerning every visitor's path through your web site and track pages that flip browsers into consumers. One-click install. observe locations, in operation systems, browsers and screen sizes and obtain alerts for new guests and conversions

NEW QUESTION 157

A newly joined employee. Janet, has been allocated an existing system used by a previous employee. Before issuing the system to Janet, it was assessed by Martin, the administrator. Martin found that there were possibilities of compromise through user directories, registries, and other system parameters. He also Identified vulnerabilities such as native configuration tables, incorrect registry or file permissions, and software configuration errors. What is the type of vulnerability assessment performed by Martin?

- A. Credentialed assessment
- B. Database assessment
- C. Host-based assessment
- D. Distributed assessment

Answer: C

Explanation:

The host-based vulnerability assessment (VA) resolution arose from the auditors' got to periodically review systems. Arising before the net becoming common, these tools typically take an "administrator's eye" read of the setting by evaluating all of the knowledge that an administrator has at his or her disposal. UsesHost VA tools verify system configuration, user directories, file systems, registry settings, and all forms of other info on a number to gain information about it. Then, it evaluates the chance of compromise. it should also live compliance to a predefined company policy so as to satisfy an annual audit. With administrator access, the scans area unit less possible to disrupt traditional operations since the computer code has the access it has to see into the complete configuration of the system.

What it Measures Host

VA tools will examine the native configuration tables and registries to spot not solely apparent vulnerabilities, however additionally "dormant" vulnerabilities – those weak or misconfigured systems and settings which will be exploited when an initial entry into the setting. Host VA solutions will assess the safety settings of a user account table; the access management lists related to sensitive files or data; and specific levels of trust applied to other systems. The host VA resolution will a lot of accurately verify the extent of the danger by determinant however way any specific exploit could also be ready to get.

NEW QUESTION 159

Alex, a cloud security engineer working in Eyecloud Inc. is tasked with isolating applications from the underlying infrastructure and stimulating communication via well-defined channels. For this purpose, he used an open-source technology that helped him in developing, packaging, and running applications; further, the technology provides PaaS through OS-level visualization, delivers containerized software packages, and promotes fast software delivery. What is the cloud technology employed by Alex in the above scenario?

- A. Virtual machine
- B. Serverless computing
- C. Docker
- D. Zero trust network

Answer: C

NEW QUESTION 164

An attacker attaches a rogue router in a network. He wants to redirect traffic to a LAN attached to his router as part of a man-in-the-middle attack. What measure on behalf of the legitimate admin can mitigate this attack?

- A. Make sure that legitimate network routers are configured to run routing protocols with authentication.
- B. Disable all routing protocols and only use static routes
- C. Only using OSPFv3 will mitigate this risk.
- D. Redirection of the traffic cannot happen unless the admin allows it explicitly.

Answer: A

NEW QUESTION 168

A company's Web development team has become aware of a certain type of security vulnerability in their Web software. To mitigate the possibility of this vulnerability being exploited, the team wants to modify the software requirements to disallow users from entering HTML as input into their Web application. What kind of Web application vulnerability likely exists in their software?

- A. Cross-site scripting vulnerability
- B. SQL injection vulnerability
- C. Web site defacement vulnerability
- D. Gross-site Request Forgery vulnerability

Answer: A

NEW QUESTION 172

Which of the following algorithms can be used to guarantee the integrity of messages being sent, in transit, or stored?

- A. symmetric algorithms
- B. asymmetric algorithms
- C. hashing algorithms
- D. integrity algorithms

Answer: C

NEW QUESTION 176

Gilbert, a web developer, uses a centralized web API to reduce complexity and increase the Integrity of updating and changing data. For this purpose, he uses a web service that uses HTTP methods such as PUT. POST. GET. and DELETE and can improve the overall performance, visibility, scalability, reliability, and portability of an application. What is the type of web-service API mentioned in the above scenario?

- A. JSON-RPC
- B. SOAP API
- C. RESTful API
- D. REST API

Answer: C

Explanation:

*REST is not a specification, tool, or framework, but instead is an architectural style for web services that serves as a communication medium between various systems on the web. *RESTful APIs, which are also known as RESTful services, are designed using REST principles and HTTP communication protocols RESTful is a collection of resources that use HTTP methods such as PUT, POST, GET, and DELETE

RESTful API: RESTful API is a RESTful service that is designed using REST principles and HTTP communication protocols. RESTful is a collection of resources that use HTTP methods such as PUT, POST, GET, and DELETE. RESTful API is also designed to make applications independent to improve the overall performance, visibility, scalability, reliability, and portability of an application. APIs with the following features can be referred to as to RESTful APIs: o Stateless: The client end stores the state of the session; the server is restricted to save data during the request processing o Cacheable: The client should save responses (representations) in the cache. This feature can enhance API performance pg. 1920 CEHv11 manual.

<https://cloud.google.com/files/apigee/apigee-web-api-design-the-missing-link-ebook.pdf>

The HTTP methods GET, POST, PUT or PATCH, and DELETE can be used with these templates to read, create, update, and delete description resources for dogs and their owners. This API style has become popular for many reasons. It is straightforward and intuitive, and learning this pattern is similar to learning a programming language API. APIs like this one are commonly called RESTful APIs, although they do not display all of the characteristics that define REST (more on REST later).

NEW QUESTION 181

Which Nmap option would you use if you were not concerned about being detected and wanted to perform a very fast scan?

- A. -T5
- B. -O
- C. -T0
- D. -A

Answer: A

NEW QUESTION 184

in this form of encryption algorithm, every Individual block contains 64-bit data, and three keys are used, where each key consists of 56 bits. Which is this encryption algorithm?

- A. IDEA
- B. Triple Data Encryption standard
- C. MDS encryption algorithm
- D. AES

Answer: B

Explanation:

Triple DES is another mode of DES operation. It takes three 64-bit keys, for an overall key length of 192 bits. In Stealth, you merely type within the entire 192-bit (24 character) key instead of entering each of the three keys individually. The Triple DES DLL then breaks the user-provided key into three subkeys, padding the keys if necessary in order that they are each 64 bits long. The procedure for encryption is strictly an equivalent as regular DES, but it's repeated 3 times , hence the name Triple DES. the info is encrypted with the primary key, decrypted with the second key, and eventually encrypted again with the third key. Triple DES runs 3 times slower than DES, but is far safer if used properly. The procedure for decrypting something is that the same because the procedure for encryption, except it's executed in reverse. Like DES, data is encrypted and decrypted in 64-bit chunks. Although the input key for DES is 64 bits long, the particular key employed by DES is merely 56 bits long . the smallest amount significant (right-most) bit in each byte may be a parity , and will be set in order that there are always an odd number of 1s in every byte. These parity bits are ignored, so only the seven most vital bits of every byte are used, leading to a key length of 56 bits. this suggests that the effective key strength for Triple DES is really 168 bits because each of the three keys contains 8 parity bits that aren't used during the encryption process. Triple DES Modes Triple ECB (Electronic Code Book)• This variant of Triple DES works precisely the same way because the ECB mode of DES. • this is often the foremost commonly used mode of operation. Triple CBC (Cipher Block Chaining)• This method is extremely almost like the quality DES CBC mode. • like Triple ECB, the effective key length is 168 bits and keys are utilized in an equivalent manner, as described above, but the chaining features of CBC mode also are employed. • the primary 64-bit key acts because the Initialization Vector to DES. • Triple ECB is then executed for one 64-bit block of plaintext. • The resulting

ciphertext is then XORed with subsequent plaintext block to be encrypted, and therefore the procedure is repeated. • This method adds an additional layer of security to Triple DES and is therefore safer than Triple ECB, although it's not used as widely as Triple ECB.

NEW QUESTION 189

Which method of password cracking takes the most time and effort?

- A. Dictionary attack
- B. Shoulder surfing
- C. Rainbow tables
- D. Brute force

Answer: D

NEW QUESTION 192

What useful information is gathered during a successful Simple Mail Transfer Protocol (SMTP) enumeration?

- A. The two internal commands VRFY and EXPN provide a confirmation of valid users, email addresses, aliases, and mailing lists.
- B. Reveals the daily outgoing message limits before mailboxes are locked
- C. The internal command RCPT provides a list of ports open to message traffic.
- D. A list of all mail proxy server addresses used by the targeted host

Answer: A

NEW QUESTION 195

Which of the following is not a Bluetooth attack?

- A. Bluedriving
- B. Bluesmacking
- C. Bluejacking
- D. Bluesnarfing

Answer: A

NEW QUESTION 197

Which of the following steps for risk assessment methodology refers to vulnerability identification?

- A. Determines if any flaws exist in systems, policies, or procedures
- B. Assigns values to risk probabilities; Impact values.
- C. Determines risk probability that vulnerability will be exploited (High, Medium, Low)
- D. Medium, Low
- E. Identifies sources of harm to an IT system
- F. (Natural, Human, Environmental)
- G. Environmental

Answer: C

NEW QUESTION 200

Security administrator John Smith has noticed abnormal amounts of traffic coming from local computers at night. Upon reviewing, he finds that user data have been exfiltrated by an attacker. AV tools are unable to find any malicious software, and the IDS/IPS has not reported on any non-whitelisted programs, what type of malware did the attacker use to bypass the company's application whitelisting?

- A. Phishing malware
- B. Zero-day malware
- C. File-less malware
- D. Logic bomb malware

Answer: C

Explanation:

<https://www.mcafee.com/enterprise/en-us/security-awareness/ransomware/what-is-fileless-malware.html>

NEW QUESTION 204

CyberTech Inc. recently experienced SQL injection attacks on its official website. The company appointed Bob, a security professional, to build and incorporate defensive strategies against such attacks. Bob adopted a practice whereby only a list of entities such as the data type, range, size, and value, which have been approved for secured access, is accepted. What is the defensive technique employed by Bob in the above scenario?

- A. Output encoding
- B. Enforce least privileges
- C. Whitelist validation
- D. Blacklist validation

Answer: C

NEW QUESTION 207

You need to deploy a new web-based software package for your organization. The package requires three separate servers and needs to be available on the

Internet. What is the recommended architecture in terms of server placement?

- A. All three servers need to be placed internally
- B. A web server facing the Internet, an application server on the internal network, a database server on the internal network
- C. A web server and the database server facing the Internet, an application server on the internal network
- D. All three servers need to face the Internet so that they can communicate between themselves

Answer: B

NEW QUESTION 208

Jim, a professional hacker, targeted an organization that is operating critical Industrial Infrastructure. Jim used Nmap to scan open ports and running services on systems connected to the organization's OT network. He used an Nmap command to identify Ethernet/IP devices connected to the Internet and further gathered information such as the vendor name, product code and name, device name, and IP address. Which of the following Nmap commands helped Jim retrieve the required information?

- A. `nmap -Pn -sT --scan-delay 1s --max-parallelism 1 -p < Port List > < Target IP >`
- B. `nmap -Pn -sU -p 44818 --script enip-info < Target IP >`
- C. `nmap -Pn -sT -p 46824 < Target IP >`
- D. `nmap -Pn -sT -p 102 --script s7-info < Target IP >`

Answer: B

NEW QUESTION 213

Mr. Omkar performed tool-based vulnerability assessment and found two vulnerabilities. During analysis, he found that these issues are not true vulnerabilities. What will you call these issues?

- A. False positives
- B. True negatives
- C. True positives
- D. False negatives

Answer: A

NEW QUESTION 218

Miley, a professional hacker, decided to attack a target organization's network. To perform the attack, she used a tool to send fake ARP messages over the target network to link her MAC address with the target system's IP address. By performing this, Miley received messages directed to the victim's MAC address and further used the tool to intercept, steal, modify, and block sensitive communication to the target system. What is the tool employed by Miley to perform the above attack?

- A. Gobbler
- B. KDerpNSpoof
- C. BetterCAP
- D. Wireshark

Answer: C

NEW QUESTION 223

Within the context of Computer Security, which of the following statements describes Social Engineering best?

- A. Social Engineering is the act of publicly disclosing information
- B. Social Engineering is the means put in place by human resource to perform time accounting
- C. Social Engineering is the act of getting needed information from a person rather than breaking into a system
- D. Social Engineering is a training program within sociology studies

Answer: C

NEW QUESTION 228

What is the main security service a cryptographic hash provides?

- A. Integrity and ease of computation
- B. Message authentication and collision resistance
- C. Integrity and collision resistance
- D. Integrity and computational in-feasibility

Answer: D

NEW QUESTION 232

Roma is a member of a security team. She was tasked with protecting the internal network of an organization from imminent threats. To accomplish this task, Roma fed threat intelligence into the security devices in a digital format to block and identify inbound and outbound malicious traffic entering the organization's network.

Which type of threat intelligence is used by Roma to secure the internal network?

- A. Technical threat intelligence
- B. Operational threat intelligence
- C. Tactical threat intelligence
- D. Strategic threat intelligence

Answer: A

NEW QUESTION 233

Which tool can be used to silently copy files from USB devices?

- A. USB Grabber
- B. USB Snoopy
- C. USB Sniffer
- D. Use Dumper

Answer: D

NEW QUESTION 235

Which mode of IPSec should you use to assure security and confidentiality of data within the same LAN?

- A. ESP transport mode
- B. ESP confidential
- C. AH permiscuous
- D. AH Tunnel mode

Answer: A

NEW QUESTION 240

What ports should be blocked on the firewall to prevent NetBIOS traffic from not coming through the firewall if your network is comprised of Windows NT, 2000, and XP?

- A. 110
- B. 135
- C. 139
- D. 161
- E. 445
- F. 1024

Answer: BCE

NEW QUESTION 242

A zone file consists of which of the following Resource Records (RRs)?

- A. DNS, NS, AXFR, and MX records
- B. DNS, NS, PTR, and MX records
- C. SOA, NS, AXFR, and MX records
- D. SOA, NS, A, and MX records

Answer: D

NEW QUESTION 243

SQL injection (SQLi) attacks attempt to inject SQL syntax into web requests, which may Bypass authentication and allow attackers to access and/or modify data attached to a web application.

Which of the following SQLi types leverages a database server's ability to make DNS requests to pass data to an attacker?

- A. Union-based SQLi
- B. Out-of-band SQLi
- C. In-band SQLi
- D. Time-based blind SQLi

Answer: B

Explanation:

Out-of-band SQL injection occurs when an attacker is unable to use an equivalent channel to launch the attack and gather results. ... Out-of-band SQLi techniques would believe the database server's ability to form DNS or HTTP requests to deliver data to an attacker. Out-of-band SQL injection is not very common, mostly because it depends on features being enabled on the database server being used by the web application.

Out-of-band SQL injection occurs when an attacker is unable to use the same channel to launch the attack and gather results.

Out-of-band techniques, offer an attacker an alternative to inferential time-based techniques, especially if the server responses are not very stable (making an inferential time-based attack unreliable).

Out-of-band SQLi techniques would rely on the database server's ability to make DNS or HTTP requests to deliver data to an attacker. Such is the case with Microsoft SQL Server's xp_dirtree command, which can be used to make DNS requests to a server an attacker controls; as well as Oracle Database's UTL_HTTP

package, which can be used to send HTTP requests from SQL and PL/SQL to a server an attacker controls.

NEW QUESTION 244

```
#!/usr/bin/python import socket buffer=["A"] counter=50 while len(buffer)<=100: buffer.append ("A"*counter)
counter=counter+50 commands= ["HELP","STATS .","RTIME .","LTIME .","SRUN .","TRUN
","GMON
","GDOG .","KSTET .","GTER .","HTER .","LTER .","KSTAN ."] for command in
commands: for
buffstring in buffer: print "Exploiting" +command +":"+str(len(buffstring))
s=socket.socket(socket.AF_INET,
```

socket.SOCK_STREAM) s.connect(('127.0.0.1', 9999)) s.recv(50) s.send(command+buffstring) s.close() What is the code written for?

- A. Denial-of-service (DOS)
- B. Buffer Overflow
- C. Bruteforce
- D. Encryption

Answer: B

NEW QUESTION 246

Which of the following is an extremely common IDS evasion technique in the web world?

- A. Spyware
- B. Subnetting
- C. Unicode Characters
- D. Port Knocking

Answer: C

NEW QUESTION 248

Which wireless security protocol replaces the personal pre-shared key (PSK) authentication with Simultaneous Authentication of Equals (SAE) and is therefore resistant to offline dictionary attacks?

- A. WPA3-Personal
- B. WPA2-Enterprise
- C. Bluetooth
- D. ZigBee

Answer: A

NEW QUESTION 251

BitLocker encryption has been implemented for all the Windows-based computers in an organization. You are concerned that someone might lose their cryptographic key. Therefore, a mechanism was implemented to recover the keys from Active Directory. What is this mechanism called in cryptography?

- A. Key archival
- B. Key escrow.
- C. Certificate rollover
- D. Key renewal

Answer: B

NEW QUESTION 254

At what stage of the cyber kill chain theory model does data exfiltration occur?

- A. Actions on objectives
- B. Weaponization
- C. installation
- D. Command and control

Answer: A

Explanation:

The longer an adversary has this level of access, the greater the impact. Defenders must detect this stage as quickly as possible and deploy tools which can enable them to gather forensic evidence. One example would come with network packet captures, for damage assessment. Only now, after progressing through the primary six phases, can intruders take actions to realize their original objectives. Typically, the target of knowledge exfiltration involves collecting, encrypting and extracting information from the victim(s) environment; violations of knowledge integrity or availability are potential objectives also . Alternatively, and most ordinarily , the intruder may only desire access to the initial victim box to be used as a hop point to compromise additional systems and move laterally inside the network. Once this stage is identified within an environment, the implementation of prepared reaction plans must be initiated. At a minimum, the plan should include a comprehensive communication plan, detailed evidence must be elevated to the very best ranking official or board , the deployment of end-point security tools to dam data loss and preparation for briefing a CIRT Team. Having these resources well established beforehand may be a “MUST” in today’s quickly evolving landscape of cybersecurity threats

NEW QUESTION 258

Jim’s company regularly performs backups of their critical servers. But the company cannot afford to send backup tapes to an off-site vendor for long-term storage and archiving. Instead, Jim’s company keeps the backup tapes in a safe in the office. Jim’s company is audited each year, and the results from this year’s audit show a risk because backup tapes are not stored off-site. The Manager of Information Technology has a plan to take the backup tapes home with him and wants to know what two things he can do to secure the backup tapes while in transit?

- A. Encrypt the backup tapes and transport them in a lock box.
- B. Degauss the backup tapes and transport them in a lock box.
- C. Hash the backup tapes and transport them in a lock box.
- D. Encrypt the backup tapes and use a courier to transport them.

Answer: A

NEW QUESTION 261

What did the following commands determine?

```
C: user2sid \earth guest
s-1-5-21-343818398-789336058-1343024091-501
C:sid2user 5 21 343818398 789336058 1343024091 500
Name is Joe
Domain is EARTH
```

- A. That the Joe account has a SID of 500
- B. These commands demonstrate that the guest account has NOT been disabled
- C. These commands demonstrate that the guest account has been disabled
- D. That the true administrator is Joe
- E. Issued alone, these commands prove nothing

Answer: D

NEW QUESTION 263

When a security analyst prepares for the formal security assessment - what of the following should be done in order to determine inconsistencies in the secure assets database and verify that system is compliant to the minimum security baseline?

- A. Data items and vulnerability scanning
- B. Interviewing employees and network engineers
- C. Reviewing the firewalls configuration
- D. Source code review

Answer: A

NEW QUESTION 266

You have successfully comprised a server having an IP address of 10.10.0.5. You would like to enumerate all machines in the same network quickly. What is the best Nmap command you will use?

- A. nmap -T4 -q 10.10.0.0/24
- B. nmap -T4 -F 10.10.0.0/24
- C. nmap -T4 -r 10.10.1.0/24
- D. nmap -T4 -O 10.10.0.0/24

Answer: B

NEW QUESTION 270

Morris, an attacker, wanted to check whether the target AP is in a locked state. He attempted using different utilities to identify WPS-enabled APs in the target wireless network. Ultimately, he succeeded with one special command-line utility. Which of the following command-line utilities allowed Morris to discover the WPS-enabled APs?

- A. wash
- B. ntptrace
- C. macof
- D. net View

Answer: A

NEW QUESTION 275

in an attempt to increase the security of your network, you Implement a solution that will help keep your wireless network undiscoverable and accessible only to those that know it. How do you accomplish this?

- A. Delete the wireless network
- B. Remove all passwords
- C. Lock all users
- D. Disable SSID broadcasting

Answer: D

NEW QUESTION 277

You are a security officer of a company. You had an alert from IDS that indicates that one PC on your Intranet is connected to a blacklisted IP address (C2 Server) on the Internet. The IP address was blacklisted just before the alert. You are starting an investigation to roughly analyze the severity of the situation. Which of the following is appropriate to analyze?

- A. IDS log
- B. Event logs on domain controller
- C. Internet Firewall/Proxy log.
- D. Event logs on the PC

Answer: C

NEW QUESTION 280

These hackers have limited or no training and know how to use only basic techniques or tools. What kind of hackers are we talking about?

- A. Black-Hat Hackers A

- B. Script Kiddies
- C. White-Hat Hackers
- D. Gray-Hat Hacker

Answer: B

Explanation:

Script Kiddies: These hackers have limited or no training and know how to use only basic techniques or tools. Even then they may not understand any or all of what they are doing.

NEW QUESTION 283

Suppose that you test an application for the SQL injection vulnerability. You know that the backend database is based on Microsoft SQL Server. In the login/password form, you enter the following credentials: Username: attack' or 1=1 Password: 123456

Based on the above credentials, which of the following SQL commands are you expecting to be executed by the server, if there is indeed an SQL injection vulnerability?

- A. select * from Users where UserName = 'attack' ' or 1=1 -- and UserPassword = '123456'
- B. select * from Users where UserName = 'attack' or 1=1 -- and UserPassword = '123456'
- C. select * from Users where UserName = 'attack or 1=1 -- and UserPassword = '123456'
- D. select * from Users where UserName = 'attack' or 1=1 --' and UserPassword = '123456'

Answer: A

NEW QUESTION 288

Which of the following tools can be used to perform a zone transfer?

- A. NSLookup
- B. Finger
- C. Dig
- D. Sam Spade
- E. Host
- F. Netcat
- G. Neotrace

Answer: ACDE

NEW QUESTION 290

Given below are different steps involved in the vulnerability-management life cycle.

- 1) Remediation
- 2) Identify assets and create a baseline
- 3) Verification
- 4) Monitor
- 5) Vulnerability scan
- 6) Risk assessment

Identify the correct sequence of steps involved in vulnerability management.

- A. 2-->5-->6-->1-->3-->4
- B. 2-->1-->5-->6-->4-->3
- C. 2-->4-->5-->3-->6--> 1
- D. 1-->2-->3-->4-->5-->6

Answer: A

NEW QUESTION 295

You have compromised a server on a network and successfully opened a shell. You aimed to identify all operating systems running on the network. However, as you attempt to fingerprint all machines in the network using the nmap syntax below, it is not going through.

```
invictus@victim_server.~$ nmap -T4 -O 10.10.0.0/24 TCP/IP fingerprinting (for OS scan) xxxxxxxx xxxxxx
```

xc. QUITTING!

What seems to be wrong?

- A. The nmap syntax is wrong.
- B. This is a common behavior for a corrupted nmap application.
- C. The outgoing TCP/IP fingerprinting is blocked by the host firewall.
- D. OS Scan requires root privileges.

Answer: D

NEW QUESTION 296

Joel, a professional hacker, targeted a company and identified the types of websites frequently visited by its employees. Using this information, he searched for possible loopholes in these websites and injected a malicious script that can redirect users from the web page and download malware onto a victim's machine. Joel waits for the victim to access the infected web application so as to compromise the victim's machine. Which of the following techniques is used by Joel in the above scenario?

- A. DNS rebinding attack
- B. Clickjacking attack
- C. MarioNet attack
- D. Watering hole attack

Answer: B

NEW QUESTION 298

A regional bank hires your company to perform a security assessment on their network after a recent data breach. The attacker was able to steal financial data from the bank by compromising only a single server. Based on this information, what should be one of your key recommendations to the bank?

- A. Place a front-end web server in a demilitarized zone that only handles external web traffic
- B. Require all employees to change their anti-virus program with a new one
- C. Move the financial data to another server on the same IP subnet
- D. Issue new certificates to the web servers from the root certificate authority

Answer: A

NEW QUESTION 299

What is the purpose of DNS AAAA record?

- A. Authorization, Authentication and Auditing record
- B. Address prefix record
- C. Address database record
- D. IPv6 address resolution record

Answer: D

NEW QUESTION 303

Tony is a penetration tester tasked with performing a penetration test. After gaining initial access to a target system, he finds a list of hashed passwords. Which of the following tools would not be useful for cracking the hashed passwords?

- A. John the Ripper
- B. Hashcat
- C. netcat
- D. THC-Hydra

Answer: A

NEW QUESTION 308

In the field of cryptanalysis, what is meant by a “rubber-hose” attack?

- A. Forcing the targeted keystream through a hardware-accelerated device such as an ASIC.
- B. A backdoor placed into a cryptographic algorithm by its creator.
- C. Extraction of cryptographic secrets through coercion or torture.
- D. Attempting to decrypt ciphertext by making logical assumptions about the contents of the original plaintext.

Answer: C

NEW QUESTION 310

Juliet, a security researcher in an organization, was tasked with checking for the authenticity of images to be used in the organization's magazines. She used these images as a search query and tracked the original source and details of the images, which included photographs, profile pictures, and memes. Which of the following footprinting techniques did Rachel use to finish her task?

- A. Reverse image search
- B. Meta search engines
- C. Advanced image search
- D. Google advanced search

Answer: C

NEW QUESTION 312

Which utility will tell you in real time which ports are listening or in another state?

- A. Netstat
- B. TCPView
- C. Nmap
- D. Loki

Answer: B

NEW QUESTION 317

Shellshock allowed an unauthorized user to gain access to a server. It affected many Internet-facing services, which OS did it not directly affect?

- A. Linux
- B. Unix
- C. OS X
- D. Windows

Answer: D

NEW QUESTION 320

You are working as a Security Analyst in a company XYZ that owns the whole subnet range of 23.0.0.0/8 and 192.168.0.0/8.

While monitoring the data, you find a high number of outbound connections. You see that IP's owned by XYZ (Internal) and private IP's are communicating to a Single Public IP. Therefore, the Internal IP's are sending data to the Public IP.

After further analysis, you find out that this Public IP is a blacklisted IP, and the internal communicating devices are compromised.

What kind of attack does the above scenario depict?

- A. Botnet Attack
- B. Spear Phishing Attack
- C. Advanced Persistent Threats
- D. Rootkit Attack

Answer: A

NEW QUESTION 323

what are common files on a web server that can be misconfigured and provide useful Information for a hacker such as verbose error messages?

- A. httpd.conf
- B. administration.config
- C. idq.dll
- D. php.ini

Answer: D

Explanation:

The php.ini file may be a special file for PHP. it's where you declare changes to your PHP settings. The server is already configured with standard settings for PHP, which your site will use by default. Unless you would like to vary one or more settings, there's no got to create or modify a php.ini file. If you'd wish to make any changes to settings, please do so through the MultiPHP INI Editor.

NEW QUESTION 326

In this attack, a victim receives an e-mail claiming from PayPal stating that their account has been disabled and confirmation is required before activation. The attackers then scam to collect not one but two credit card numbers, ATM PIN number and other personal details. Ignorant users usually fall prey to this scam.

Which of the following statement is incorrect related to this attack?

- A. Do not reply to email messages or popup ads asking for personal or financial information
- B. Do not trust telephone numbers in e-mails or popup ads
- C. Review credit card and bank account statements regularly
- D. Antivirus, anti-spyware, and firewall software can very easily detect these type of attacks
- E. Do not send credit card numbers, and personal or financial information via e-mail

Answer: D

NEW QUESTION 329

Sam, a web developer, was instructed to incorporate a hybrid encryption software program into a web application to secure email messages. Sam used an encryption software, which is a free implementation of the OpenPGP standard that uses both symmetric-key cryptography and asymmetric-key cryptography for improved speed and secure key exchange. What is the encryption software employed by Sam for securing the email messages?

- A. PGP
- B. S/MIME
- C. SMTP
- D. GPG

Answer: A

NEW QUESTION 333

Based on the following extract from the log of a compromised machine, what is the hacker really trying to steal?

- A. har.txt
- B. SAM file
- C. wwwroot
- D. Repair file

Answer: B

NEW QUESTION 338

Let's imagine three companies (A, B and C), all competing in a challenging global environment. Company A and B are working together in developing a product that will generate a major competitive advantage for them. Company A has a secure DNS server while company B has a DNS server vulnerable to spoofing. With a spoofing attack on the DNS server of company B, company C gains access to outgoing e-mails from company

- A. How do you prevent DNS spoofing?
- B. Install DNS logger and track vulnerable packets
- C. Disable DNS timeouts
- D. Install DNS Anti-spoofing
- E. Disable DNS Zone Transfer

Answer: C

NEW QUESTION 341

What information security law or standard aims at protecting stakeholders and the general public from accounting errors and fraudulent activities within organizations?

- A. PCI-DSS
- B. FISMA
- C. SOX
- D. ISO/IEC 27001:2013

Answer: C

NEW QUESTION 344

What type of a vulnerability/attack is it when the malicious person forces the user's browser to send an authenticated request to a server?

- A. Session hijacking
- B. Server side request forgery
- C. Cross-site request forgery
- D. Cross-site scripting

Answer: C

NEW QUESTION 349

John, a disgruntled ex-employee of an organization, contacted a professional hacker to exploit the organization. In the attack process, the professional hacker installed a scanner on a machine belonging to one of the victims and scanned several machines on the same network to identify vulnerabilities to perform further exploitation. What is the type of vulnerability assessment tool employed by John in the above scenario?

- A. Proxy scanner
- B. Agent-based scanner
- C. Network-based scanner
- D. Cluster scanner

Answer: B

Explanation:

Knowing when to include agents into your vulnerability management processes isn't an easy decision. Below are common use cases for agent-based vulnerability scanning to assist you build out your combined scanning strategy.

➤ Intermittent or Irregular Connectivity: Vulnerability management teams are now tasked with scanning devices that access the company network remotely using public or home-based Wi-Fi connections. These connections are often unreliable and intermittent leading to missed network-based scans. Fortunately, the scanning frequency of agents doesn't require a network connection. The agent detects when the device is back online, sending scan data when it's ready to communicate with the VM platform.

➤ Connecting Non-Corporate Devices to Corporate Networks: With the increased use of private devices, company networks are more exposed to malware and infections thanks to limited IT and security teams' control and visibility. Agent-based scanning gives security teams insight into weaknesses on non-corporate endpoints, keeping them informed about professional hacker is potential attack vectors in order that they can take appropriate action.

➤ Endpoints Residing Outside of Company Networks: Whether company-issued or BYOD, remote assets frequently hook up with the web outside of traditional network bounds. An agent that resides on remote endpoints conducts regular, authenticated scans checking out system changes and unpatched software. The results are then sent back to the VM platform and combined with other scan results for review, prioritization, and mitigation planning.

Agent-Based Scanner: Agent-based scanners reside on a single machine but can scan several machines on the same network.

NEW QUESTION 351

Tess King is using the nslookup command to craft queries to list all DNS information (such as Name Servers, host names, MX records, CNAME records, glue records (delegation for child Domains), zone serial number, TimeToLive (TTL) records, etc) for a Domain.

What do you think Tess King is trying to accomplish? Select the best answer.

- A. A zone harvesting
- B. A zone transfer
- C. A zone update
- D. A zone estimate

Answer: B

NEW QUESTION 356

Which Metasploit Framework tool can help penetration tester for evading Anti-virus Systems?

- A. msfpayload
- B. msfcli
- C. msfd
- D. msfencode

Answer: D

NEW QUESTION 357

Fingerprinting an Operating System helps a cracker because:

- A. It defines exactly what software you have installed
- B. It opens a security-delayed window based on the port being scanned
- C. It doesn't depend on the patches that have been applied to fix existing security holes

D. It informs the cracker of which vulnerabilities he may be able to exploit on your system

Answer: D

NEW QUESTION 360

By using a smart card and pin, you are using a two-factor authentication that satisfies

- A. Something you are and something you remember
- B. Something you have and something you know
- C. Something you know and something you are
- D. Something you have and something you are

Answer: B

NEW QUESTION 364

joe works as an it administrator in an organization and has recently set up a cloud computing service for the organization. To implement this service, he reached out to a telecom company for providing Internet connectivity and transport services between the organization and the cloud service provider, in the NIST cloud deployment reference architecture, under which category does the telecom company fall in the above scenario?

- A. Cloud booker
- B. Cloud consumer
- C. Cloud carrier
- D. Cloud auditor

Answer: C

Explanation:

A cloud carrier acts as an intermediary that provides connectivity and transport of cloud services between cloud consumers and cloud providers.

Cloud carriers provide access to consumers through network, telecommunication and other access devices. for instance, cloud consumers will obtain cloud services through network access devices, like computers, laptops, mobile phones, mobile web devices (MIDs), etc.

The distribution of cloud services is often provided by network and telecommunication carriers or a transport agent, wherever a transport agent refers to a business organization that provides physical transport of storage media like high-capacity hard drives.

Note that a cloud provider can started SLAs with a cloud carrier to provide services consistent with the level of SLAs offered to cloud consumers, and will require the cloud carrier to provide dedicated and secure connections between cloud consumers and cloud providers.

NEW QUESTION 368

Robert, a professional hacker, is attempting to execute a fault injection attack on a target IoT device. In this process, he injects faults into the power supply that can be used for remote execution, also causing the skipping of key instructions. He also injects faults into the clock network used for delivering a synchronized signal across the chip.

Which of the following types of fault injection attack is performed by Robert in the above scenario?

- A. Frequency/voltage tampering
- B. Optical, electromagnetic fault injection (EMFI)
- C. Temperature attack
- D. Power/clock/reset glitching

Answer: D

Explanation:

These types of attacks occur when faults or glitches are INJECTED into the Power supply that can be used for remote execution.

NEW QUESTION 370

Abel, a security professional, conducts penetration testing in his client organization to check for any security loopholes. He launched an attack on the DHCP servers by broadcasting forged DHCP requests and leased all the DHCP addresses available in the DHCP scope until the server could not issue any more IP addresses. This led to a Dos attack, and as a result, legitimate employees were unable to access the clients network. Which of the following attacks did Abel perform in the above scenario?

- A. VLAN hopping
- B. DHCP starvation
- C. Rogue DHCP server attack
- D. STP attack

Answer: B

Explanation:

A DHCP starvation assault is a pernicious computerized assault that objectifies DHCP workers. During a DHCP assault, an unfriendly entertainer floods a DHCP worker with false DISCOVER bundles until the DHCP worker debilitates its stock of IP addresses. When that occurs, the aggressor can deny genuine organization clients administration, or even stock an other DHCP association that prompts a Man-in-the-Middle (MITM) assault.

In a DHCP Starvation assault, a threatening entertainer sends a huge load of false DISCOVER parcels until the DHCP worker thinks they've used their accessible pool. Customers searching for IP tends to find that there are no IP addresses for them, and they're refused assistance. Furthermore, they may search for an alternate DHCP worker, one which the unfriendly entertainer may give. What's more, utilizing a threatening or sham IP address, that unfriendly entertainer would now be able to peruse all the traffic that customer sends and gets.

In an unfriendly climate, where we have a malevolent machine running some sort of an instrument like Yersinia, there could be a machine that sends DHCP DISCOVER bundles. This malevolent customer doesn' send a modest bunch – it sends a great many vindictive DISCOVER bundles utilizing sham, made-up MAC addresses as the source MAC address for each solicitation.

In the event that the DHCP worker reacts to every one of these false DHCP DISCOVER parcels, the whole IP address pool could be exhausted, and that DHCP worker could trust it has no more IP delivers to bring to the table to legitimate DHCP demands.

When a DHCP worker has no more IP delivers to bring to the table, ordinarily the following thing to happen would be for the aggressor to get their own DHCP

worker. This maverick DHCP worker at that point starts giving out IP addresses.

The advantage of that to the assailant is that if a false DHCP worker is distributing IP addresses, including default DNS and door data, customers who utilize those IP delivers and begin to utilize that default passage would now be able to be directed through the aggressor's machine. That is all that an unfriendly entertainer requires to play out a man-in-the-center (MITM) assault.

NEW QUESTION 371

Nedved is an IT Security Manager of a bank in his country. One day, he found out that there is a security breach to his company's email server based on analysis of a suspicious connection from the email server to an unknown IP Address.

What is the first thing that Nedved needs to do before contacting the incident response team?

- A. Leave it as it is and contact the incident response team right away
- B. Block the connection to the suspicious IP Address from the firewall
- C. Disconnect the email server from the network
- D. Migrate the connection to the backup email server

Answer: C

NEW QUESTION 374

A "Server-Side Includes" attack refers to the exploitation of a web application by injecting scripts in HTML pages or executing arbitrary code remotely.

Which web-page file type, if it exists on the web server, is a strong indication that the server is vulnerable to this kind of attack?

- A. .stm
- B. .html
- C. .rss
- D. .cms

Answer: A

NEW QUESTION 377

James is working as an ethical hacker at Technix Solutions. The management ordered James to discover how vulnerable its network is towards footprinting attacks. James took the help of an open-source framework for performing automated reconnaissance activities. This framework helped James in gathering information using free tools and resources. What is the framework used by James to conduct footprinting and reconnaissance activities?

- A. WebSploit Framework
- B. Browser Exploitation Framework
- C. OSINT framework
- D. SpeedPhish Framework

Answer: C

NEW QUESTION 380

Eric, a cloud security engineer, implements a technique for securing the cloud resources used by his organization. This technique assumes by default that a user attempting to access the network is not an authentic entity and verifies every incoming connection before allowing access to the network. Using this technique, he also imposed conditions such that employees can access only the resources required for their role.

What is the technique employed by Eric to secure cloud resources?

- A. Serverless computing
- B. Demilitarized zone
- C. Container technology
- D. Zero trust network

Answer: D

NEW QUESTION 384

To create a botnet, the attacker can use several techniques to scan vulnerable machines. The attacker first collects information about a large number of vulnerable machines to create a list. Subsequently, they infect the machines. The list is divided by assigning half of the list to the newly compromised machines. The scanning process runs simultaneously. This technique ensures the spreading and installation of malicious code in little time.

Which technique is discussed here?

- A. Hit-list-scanning technique
- B. Topological scanning technique
- C. Subnet scanning technique
- D. Permutation scanning technique

Answer: A

Explanation:

One of the biggest problems a worm faces in achieving a very fast rate of infection is "getting off the ground." although a worm spreads exponentially throughout the early stages of infection, the time needed to infect say the first 10,000 hosts dominates the infection time.

There is a straightforward way for an active worm to surmount this obstacle, that we term hit-list scanning. Before the worm is free, the worm author collects a listing of say ten,000 to 50,000 potentially vulnerable machines, ideally ones with sensible network connections. The worm, when released onto an initial machine on this hit-list, begins scanning down the list. once it infects a machine, it divides the hit-list in half, communicating half to the recipient worm, keeping the other half.

This fast division ensures that even if only 10-20% of the machines on the hit-list are actually vulnerable, an active worm can quickly bear the hit-list and establish itself on all vulnerable machines in only some seconds. though the hit-list could begin at 200 kilobytes, it quickly shrinks to nothing during the partitioning. This provides a great benefit in constructing a quick worm by speeding the initial infection.

The hit-list needn't be perfect: a simple list of machines running a selected server sort could serve, though larger accuracy can improve the unfold. The hit-list itself is generated victimization one or many of the following techniques, ready well before, typically with very little concern of detection.

- Stealthy scans. Portscans are so common and then wide ignored that even a quick scan of the whole net would be unlikely to attract law enforcement attention or over gentle comment within the incident response community. However, for attackers wish to be particularly careful, a randomised sneaky scan taking many months would be not possible to attract much attention, as most intrusion detection systems are not currently capable of detecting such low-profile scans. Some portion of the scan would be out of date by the time it had been used, however abundant of it'd not.
 - Distributed scanning. an assailant might scan the web using a few dozen to some thousand already-compromised "zombies," the same as what DDOS attackers assemble in a very fairly routine fashion. Such distributed scanning has already been seen within the wild—Lawrence Berkeley National Laboratory received ten throughout the past year.
 - DNS searches. Assemble a list of domains (for example, by using wide offered spam mail lists, or trolling the address registries). The DNS will then be searched for the science addresses of mail-servers (via mx records) or net servers (by looking for www.domain.com).
 - Spiders. For net server worms (like Code Red), use Web-crawling techniques the same as search engines so as to produce a list of most Internet-connected web sites. this would be unlikely to draw in serious attention.
 - Public surveys. for many potential targets there may be surveys available listing them, like the Netcraft survey.
 - Just listen. Some applications, like peer-to-peer networks, wind up advertising many of their servers.
- Similarly, many previous worms effectively broadcast that the infected machine is vulnerable to further attack. easy, because of its widespread scanning, during the Code Red I infection it was easy to select up the addresses of upwards of 300,000 vulnerable IIS servers—because each came knock on everyone's door!

NEW QUESTION 389

An Internet Service Provider (ISP) has a need to authenticate users connecting via analog modems, Digital Subscriber Lines (DSL), wireless data services, and Virtual Private Networks (VPN) over a Frame Relay network.

Which AAA protocol is the most likely able to handle this requirement?

- A. TACACS+
- B. DIAMETER
- C. Kerberos
- D. RADIUS

Answer: D

NEW QUESTION 391

Why should the security analyst disable/remove unnecessary ISAPI filters?

- A. To defend against social engineering attacks
- B. To defend against webserver attacks
- C. To defend against jailbreaking
- D. To defend against wireless attacks

Answer: B

NEW QUESTION 392

An organization has automated the operation of critical infrastructure from a remote location. For this purpose, all the industrial control systems are connected to the Internet. To empower the manufacturing process, ensure the reliability of industrial networks, and reduce downtime and service disruption, the organization deckled to install an OT security tool that further protects against security incidents such as cyber espionage, zero-day attacks, and malware. Which of the following tools must the organization employ to protect its critical infrastructure?

- A. Robotium
- B. BalenaCloud
- C. Flowmon
- D. IntentFuzzer

Answer: C

Explanation:

Source: <https://www.flowmon.com>

Flowmon empowers manufacturers and utility companies to ensure the reliability of their industrial networks confidently to avoid downtime and disruption of service continuity. This can be achieved by continuous monitoring and anomaly detection so that malfunctioning devices or security incidents, such as cyber espionage, zero-days, or malware, can be reported and remedied as quickly as possible.

NEW QUESTION 394

A computer science student needs to fill some information into a secured Adobe PDF job application that was received from a prospective employer. Instead of requesting a new document that allowed the forms to be completed, the student decides to write a script that pulls passwords from a list of commonly used passwords to try against the secured PDF until the correct password is found or the list is exhausted.

Which cryptography attack is the student attempting?

- A. Man-in-the-middle attack
- B. Brute-force attack
- C. Dictionary attack
- D. Session hijacking

Answer: C

NEW QUESTION 396

To hide the file on a Linux system, you have to start the filename with a specific character. What is the character?

- A. Exclamation mark (!)
- B. Underscore (_)
- C. Tilde H

D. Period (.)

Answer: D

NEW QUESTION 399

Identify the UDP port that Network Time Protocol (NTP) uses as its primary means of communication?

- A. 113
- B. 69
- C. 123
- D. 161

Answer: C

NEW QUESTION 400

Which Nmap switch helps evade IDS or firewalls?

- A. -n/-R
- B. -0N/-0X/-0G
- C. -T
- D. -D

Answer: C

NEW QUESTION 401

_____ is a type of phishing that targets high-profile executives such as CEOs, CFOs, politicians, and celebrities who have access to confidential and highly valuable information.

- A. Spear phishing
- B. Whaling
- C. Vishing
- D. Phishing

Answer: B

NEW QUESTION 402

You have the SOA presented below in your Zone.

Your secondary servers have not been able to contact your primary server to synchronize information. How long will the secondary servers attempt to contact the primary server before it considers that zone is dead and stops responding to queries?

collegae.edu.SOA, cikkye.edu ipad.college.edu. (200302028 3600 3600 604800 3600)

- A. One day
- B. One hour
- C. One week
- D. One month

Answer: C

NEW QUESTION 407

An attacker with access to the inside network of a small company launches a successful STP manipulation attack. What will he do next?

- A. He will create a SPAN entry on the spoofed root bridge and redirect traffic to his computer.
- B. He will activate OSPF on the spoofed root bridge.
- C. He will repeat this action so that it escalates to a DoS attack.
- D. He will repeat the same attack against all L2 switches of the network.

Answer: A

NEW QUESTION 410

You are a Network Security Officer. You have two machines. The first machine (192.168.0.99) has snort installed, and the second machine (192.168.0.150) has kiwi syslog installed. You perform a syn scan in your network, and you notice that kiwi syslog is not receiving the alert message from snort. You decide to run Wireshark in the snort machine to check if the messages are going to the kiwi syslog machine. What Wireshark filter will show the connections from the snort machine to kiwi syslog machine?

- A. tcp.srcport= 514 && ip.src= 192.168.0.99
- B. tcp.srcport= 514 && ip.src= 192.168.150
- C. tcp.dstport= 514 && ip.dst= 192.168.0.99
- D. tcp.dstport= 514 && ip.dst= 192.168.0.150

Answer: D

NEW QUESTION 415

What is GINA?

- A. Gateway Interface Network Application

- B. GUI Installed Network Application CLASS
- C. Global Internet National Authority (G-USA)
- D. Graphical Identification and Authentication DLL

Answer: D

NEW QUESTION 417

What is the following command used for?
net use \targetipc\$ "" /u:""

- A. Grabbing the etc/passwd file
- B. Grabbing the SAM
- C. Connecting to a Linux computer through Samba.
- D. This command is used to connect as a null session
- E. Enumeration of Cisco routers

Answer: D

NEW QUESTION 418

What does the following command in netcat do? nc -l -u -p55555 < /etc/passwd

- A. logs the incoming connections to /etc/passwd file
- B. loads the /etc/passwd file to the UDP port 55555
- C. grabs the /etc/passwd file when connected to UDP port 55555
- D. deletes the /etc/passwd file when connected to the UDP port 55555

Answer: C

NEW QUESTION 422

A company's policy requires employees to perform file transfers using protocols which encrypt traffic. You suspect some employees are still performing file transfers using unencrypted protocols because the employees do not like changes. You have positioned a network sniffer to capture traffic from the laptops used by employees in the data ingest department. Using Wireshark to examine the captured traffic, which command can be used as display filter to find unencrypted file transfers?

- A. tcp.port == 21
- B. tcp.port == 23
- C. tcp.port == 21 || tcp.port == 22
- D. tcp.port != 21

Answer: A

NEW QUESTION 426

Jake, a professional hacker, installed spyware on a target iPhone to spy on the target user's activities. He can take complete control of the target mobile device by jailbreaking the device remotely and record audio, capture screenshots, and monitor all phone calls and SMS messages. What is the type of spyware that Jake used to infect the target device?

- A. DroidSheep
- B. Andorot
- C. Zscaler
- D. Trident

Answer: B

NEW QUESTION 431

A company's security policy states that all Web browsers must automatically delete their HTTP browser cookies upon terminating. What sort of security breach is this policy attempting to mitigate?

- A. Attempts by attackers to access the user and password information stored in the company's SQL database.
- B. Attempts by attackers to access Web sites that trust the Web browser user by stealing the user's authentication credentials.
- C. Attempts by attackers to access password stored on the user's computer without the user's knowledge.
- D. Attempts by attackers to determine the user's Web browser usage patterns, including when sites were visited and for how long.

Answer: B

NEW QUESTION 435

jane invites her friends Alice and John over for a LAN party. Alice and John access Jane's wireless network without a password. However. Jane has a long, complex password on her router. What attack has likely occurred?

- A. Wireless sniffing
- B. Piggybacking
- C. Evil twin
- D. Wardriving

Answer: C

Explanation:

An evil twin may be a fraudulent Wi-Fi access point that appears to be legitimate but is about up to pay attention to wireless communications.[1] The evil twin is that the wireless LAN equivalent of the phishing scam. This type of attack could also be wont to steal the passwords of unsuspecting users, either by monitoring their connections or by phishing, which involves fixing a fraudulent internet site and luring people there. The attacker snoops on Internet traffic employing a bogus wireless access point. Unwitting web users could also be invited to log into the attacker's server, prompting them to enter sensitive information like usernames and passwords. Often, users are unaware they need been duped until well after the incident has occurred. When users log into unsecured (non-HTTPS) bank or e-mail accounts, the attacker intercepts the transaction, since it's sent through their equipment. The attacker is additionally ready to hook up with other networks related to the users' credentials. Fake access points are found out by configuring a wireless card to act as an access point (known as HostAP). they're hard to trace since they will be shut off instantly. The counterfeit access point could also be given an equivalent SSID and BSSID as a close-by Wi-Fi network. The evil twin are often configured to pass Internet traffic through to the legitimate access point while monitoring the victim's connection, or it can simply say the system is temporarily unavailable after obtaining a username and password.

NEW QUESTION 436

Dayn, an attacker, wanted to detect if any honeypots are installed in a target network. For this purpose, he used a time-based TCP fingerprinting method to validate the response to a normal computer and the response of a honeypot to a manual SYN request. Which of the following techniques is employed by Dayn to detect honeypots?

- A. Detecting honeypots running on VMware
- B. Detecting the presence of Honeyd honeypots
- C. Detecting the presence of Snort_inline honeypots
- D. Detecting the presence of Sebek-based honeypots

Answer: C

NEW QUESTION 441

E- mail scams and mail fraud are regulated by which of the following?

- A. 18 U.S.
- B. pa
- C. 1030 Fraud and Related activity in connection with Computers
- D. 18 U.S.
- E. pa
- F. 1029 Fraud and Related activity in connection with Access Devices
- G. 18 U.S.
- H. pa
- I. 1362 Communication Lines, Stations, or Systems
- J. 18 U.S.
- K. pa
- L. 2510 Wire and Electronic Communications Interception and Interception of Oral Communication

Answer: A

NEW QUESTION 445

Firewalls are the software or hardware systems that are able to control and monitor the traffic coming in and out the target network based on pre-defined set of rules. Which of the following types of firewalls can protect against SQL injection attacks?

- A. Data-driven firewall
- B. Packet firewall
- C. Web application firewall
- D. Stateful firewall

Answer: C

NEW QUESTION 446

What would you enter if you wanted to perform a stealth scan using Nmap?

- A. nmap -sM
- B. nmap -sU
- C. nmap -sS
- D. nmap -sT

Answer: C

NEW QUESTION 450

Which type of security feature stops vehicles from crashing through the doors of a building?

- A. Bollards
- B. Receptionist
- C. Mantrap
- D. Turnstile

Answer: A

NEW QUESTION 452

Which regulation defines security and privacy controls for Federal information systems and organizations?

- A. HIPAA
- B. EU Safe Harbor

- C. PCI-DSS
- D. NIST-800-53

Answer: D

NEW QUESTION 455

What is the minimum number of network connections in a multi homed firewall?

- A. 3
- B. 5
- C. 4
- D. 2

Answer: A

NEW QUESTION 457

During a black-box pen test you attempt to pass IRC traffic over port 80/TCP from a compromised web enabled host. The traffic gets blocked; however, outbound HTTP traffic is unimpeded. What type of firewall is inspecting outbound traffic?

- A. Circuit
- B. Stateful
- C. Application
- D. Packet Filtering

Answer: B

NEW QUESTION 460

John, a professional hacker, targeted an organization that uses LDAP for accessing distributed directory services. He used an automated tool to anonymously query the IDAP service for sensitive information such as usernames. addresses, departmental details, and server names to launch further attacks on the target organization.

What is the tool employed by John to gather information from the IDAP service?

- A. jxplorer
- B. Zabasearch
- C. EarthExplorer
- D. Ike-scan

Answer: A

Explanation:

JXplorer could be a cross platform LDAP browser and editor. it's a standards compliant general purpose LDAP client which will be used to search, scan and edit any commonplace LDAP directory, or any directory service with an LDAP or DSML interface.

It is extremely flexible and can be extended and custom in a very number of the way. JXplorer is written in java, and also the source code and source code build system ar obtainable via svn or as a packaged build for users who wish to experiment or any develop the program.

JX is is available in 2 versions; the free open source version under an OSI Apache two style licence, or within the JXWorkBench Enterprise bundle with inbuilt reporting, administrative and security tools.

JX has been through a number of different versions since its creation in 1999; the foremost recent stable release is version 3.3.1, the August 2013 release.

JXplorer could be a absolutely useful LDAP consumer with advanced security integration and support for the harder and obscure elements of the LDAP protocol. it's been tested on Windows, Solaris, linux and OSX, packages are obtainable for HPUX, AIX, BSD and it should run on any java supporting OS.

NEW QUESTION 464

Which service in a PKI will vouch for the identity of an individual or company?

- A. KDC
- B. CR
- C. CBC
- D. CA

Answer: D

NEW QUESTION 467

What is correct about digital signatures?

- A. A digital signature cannot be moved from one signed document to another because it is the hash of the original document encrypted with the private key of the signing party.
- B. Digital signatures may be used in different documents of the same type.
- C. A digital signature cannot be moved from one signed document to another because it is a plain hash of the document content.
- D. Digital signatures are issued once for each user and can be used everywhere until they expire.

Answer: A

NEW QUESTION 470

An attacker identified that a user and an access point are both compatible with WPA2 and WPA3 encryption. The attacker installed a rogue access point with only WPA2 compatibility in the vicinity and forced the victim to go through the WPA2 four-way handshake to get connected. After the connection was established, the attacker used automated tools to crack WPA2-encrypted messages. What is the attack performed in the above scenario?

- A. Timing-based attack
- B. Side-channel attack
- C. Downgrade security attack
- D. Cache-based attack

Answer: B

NEW QUESTION 475

The establishment of a TCP connection involves a negotiation called three-way handshake. What type of message does the client send to the server in order to begin this negotiation?

- A. ACK
- B. SYN
- C. RST
- D. SYN-ACK

Answer: B

NEW QUESTION 480

what firewall evasion scanning technique make use of a zombie system that has low network activity as well as its fragment identification numbers?

- A. Decoy scanning
- B. Packet fragmentation scanning
- C. Spoof source address scanning
- D. Idle scanning

Answer: D

Explanation:

The idle scan could be a communications protocol port scan technique that consists of causing spoofed packets to a pc to seek out out what services square measure obtainable. this can be accomplished by impersonating another pc whose network traffic is extremely slow or nonexistent (that is, not transmission or receiving information). this might be associate idle pc, known as a “zombie”.

This action are often done through common code network utilities like nmap and hping. The attack involves causing solid packets to a particular machine target in an attempt to seek out distinct characteristics of another zombie machine. The attack is refined as a result of there’s no interaction between the offender pc and also the target: the offender interacts solely with the “zombie” pc.

This exploit functions with 2 functions, as a port scanner and a clerk of sure informatics relationships between machines. The target system interacts with the “zombie” pc and distinction in behavior are often discovered mistreatment totally different|completely different “zombies” with proof of various privileges granted by the target to different computers.

The overall intention behind the idle scan is to “check the port standing whereas remaining utterly invisible to the targeted host.”

The first step in execution associate idle scan is to seek out associate applicable zombie. It must assign informatics ID packets incrementally on a worldwide (rather than per-host it communicates with) basis. It ought to be idle (hence the scan name), as extraneous traffic can raise its informatics ID sequence, confusing the scan logic. The lower the latency between the offender and also the zombie, and between the zombie and also the target, the quicker the scan can proceed.

Note that once a port is open, IPIDs increment by a pair of. Following is that the sequence:

- offender to focus on -> SYN, target to zombie ->SYN/ACK, Zombie to focus on -> RST (IPID increment by 1)
- currently offender tries to probe zombie for result. offender to Zombie ->SYN/ACK, Zombie to offender -> RST (IPID increment by 1)

So, during this method IPID increments by a pair of finally.

When associate idle scan is tried, tools (for example nmap) tests the projected zombie and reports any issues with it. If one does not work, attempt another.

Enough net hosts square measure vulnerable that zombie candidates are not exhausting to seek out. a standard approach is to easily execute a ping sweep of some network. selecting a network close to your supply address, or close to the target, produces higher results. you’ll be able to attempt associate idle scan mistreatment every obtainable host from the ping sweep results till you discover one that works. As usual, it’s best to raise permission before mistreatment someone’s machines for surprising functions like idle scanning.

Simple network devices typically create nice zombies as a result of {they square measure|they’re} normally each underused (idle) and designed with straightforward network stacks that are susceptible to informatics ID traffic detection.

While distinguishing an acceptable zombie takes some initial work, you’ll be able to keep re-using the nice ones. as an alternative, there are some analysis on utilizing unplanned public internet services as zombie hosts to perform similar idle scans. leverage the approach a number of these services perform departing connections upon user submissions will function some quite poor’s man idle scanning.

NEW QUESTION 485

You are programming a buffer overflow exploit and you want to create a NOP sled of 200 bytes in the program exploit.c

```
char shellcode[] =  
"\x31\xc0\xb0\x46\x31\xdb\x31\xc9\xcd\x80\xeb\x16\x5b\x31\xc0"  
"\x88\x43\x07\x89\x5b\x08\x89\x43\x0c\xb0\x0b\x8d\x4b\x08\x8d"  
"\x53\x0c\xcd\x80\xe8\xe5\xff\xff\xff\x2f\x62\x69\x6e\x2f\x73"  
"\x68";
```

What is the hexadecimal value of NOP instruction?

- A. 0x60
- B. 0x80
- C. 0x70
- D. 0x90

Answer: D

NEW QUESTION 486

Stella, a professional hacker, performs an attack on web services by exploiting a vulnerability that provides additional routing information in the SOAP header to

support asynchronous communication. This further allows the transmission of web-service requests and response messages using different TCP connections. Which of the following attack techniques is used by Stella to compromise the web services?

- A. XML injection
- B. WS-Address spoofing
- C. SOAPAction spoofing
- D. Web services parsing attacks

Answer: B

Explanation:

WS-Address provides additional routing information in the SOAP header to support asynchronous communication. This technique allows the transmission of web service requests and response messages using different TCP connections

<https://www.google.com/search?client=firefox-b-d&q=WS-Address+spoofing> CEH V11 Module 14 Page 1896

NEW QUESTION 488

A friend of yours tells you that he downloaded and executed a file that was sent to him by a coworker. Since the file did nothing when executed, he asks you for help because he suspects that he may have installed a trojan on his computer. what tests would you perform to determine whether his computer Is Infected?

- A. Use ExifTool and check for malicious content.
- B. You do not check; rather, you immediately restore a previous snapshot of the operating system.
- C. Upload the file to VirusTotal.
- D. Use netstat and check for outgoing connections to strange IP addresses or domains.

Answer: D

NEW QUESTION 489

You want to do an ICMP scan on a remote computer using hping2. What is the proper syntax?

- A. hping2 host.domain.com
- B. hping2 --set-ICMP host.domain.com
- C. hping2 -i host.domain.com
- D. hping2 -1 host.domain.com

Answer: D

NEW QUESTION 494

A large mobile telephony and data network operator has a data center that houses network elements. These are essentially large computers running on Linux. The perimeter of the data center is secured with firewalls and IPS systems.

What is the best security policy concerning this setup?

- A. Network elements must be hardened with user ids and strong password
- B. Regular security tests and audits should be performed.
- C. As long as the physical access to the network elements is restricted, there is no need for additional measures.
- D. There is no need for specific security measures on the network elements as long as firewalls and IPS systems exist.
- E. The operator knows that attacks and down time are inevitable and should have a backup site.

Answer: A

NEW QUESTION 497

An organization is performing a vulnerability assessment for mitigating threats. James, a pen tester, scanned the organization by building an inventory of the protocols found on the organization's machines to detect which ports are attached to services such as an email server, a web server or a database server. After identifying the services, he selected the vulnerabilities on each machine and started executing only the relevant tests. What is the type of vulnerability assessment solution that James employed in the above scenario?

- A. Product-based solutions
- B. Tree-based assessment
- C. Service-based solutions
- D. inference-based assessment

Answer: D

Explanation:

In an inference-based assessment, scanning starts by building an inventory of the protocols found on the machine. After finding a protocol, the scanning process starts to detect which ports are attached to services, such as an email server, web server, or database server. After finding services, it selects vulnerabilities on each machine and starts to execute only those relevant tests.

NEW QUESTION 500

When analyzing the IDS logs, the system administrator noticed an alert was logged when the external router was accessed from the administrator's Computer to update the router configuration. What type of an alert is this?

- A. False negative
- B. True negative
- C. True positive
- D. False positive

Answer: D

Explanation:

True Positive - IDS referring a behavior as an attack, in real life it is


True Negative - IDS referring a behavior not an attack and in real life it is not False Positive - IDS referring a behavior as an attack, in real life it is not

False Negative - IDS referring a behavior not an attack, but in real life is an attack.

False Negative - is the most serious and dangerous state of all !!!!

NEW QUESTION 503

Switches maintain a CAM Table that maps individual MAC addresses on the network to physical ports on the switch.

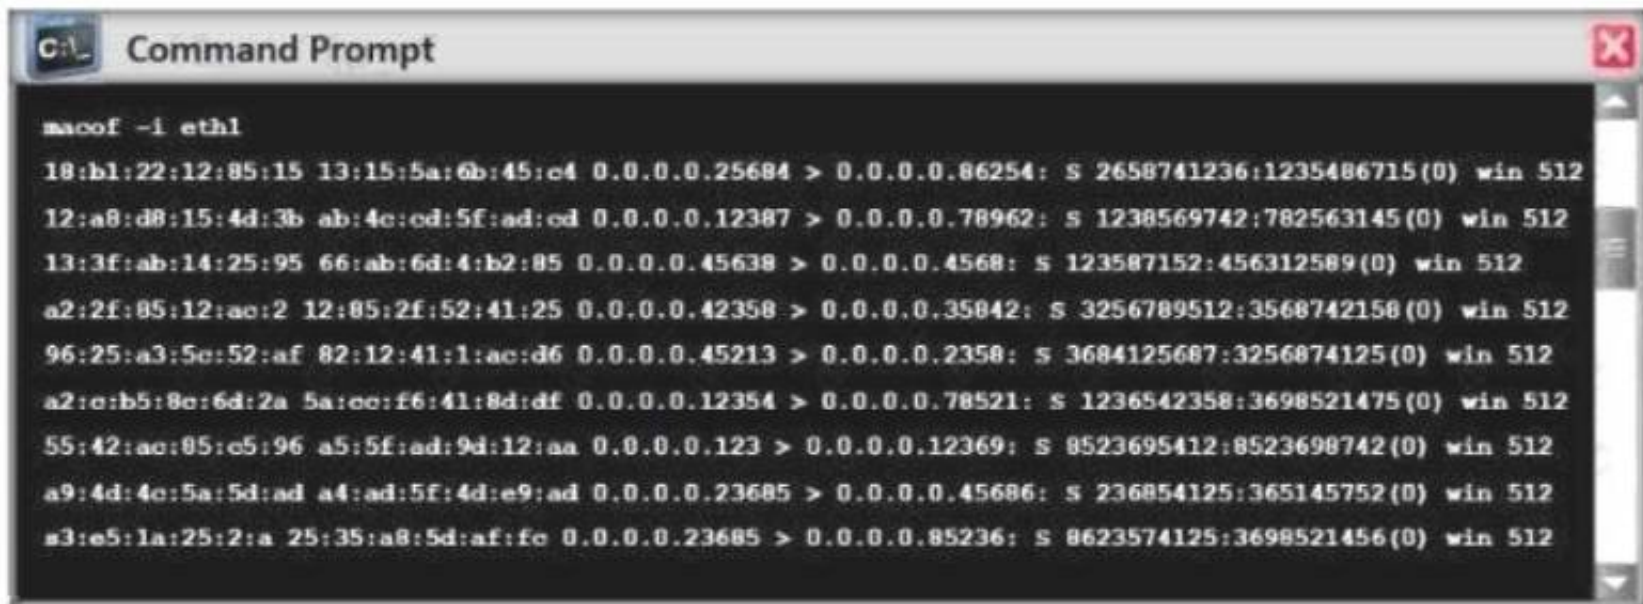

In MAC flooding attack, a switch is fed with many Ethernet frames, each containing different source MAC addresses, by the attacker. Switches have a limited memory for mapping various MAC addresses to physical ports. What happens when the CAM table becomes full?

- A. Switch then acts as hub by broadcasting packets to all machines on the network
- B. The CAM overflow table will cause the switch to crash causing Denial of Service
- C. The switch replaces outgoing frame switch factory default MAC address of FF:FF:FF:FF:FF:FF
- D. Every packet is dropped and the switch sends out SNMP alerts to the IDS port

Answer: A

NEW QUESTION 506

Which of the following options represents a conceptual characteristic of an anomaly-based IDS over a signature-based IDS?

- A. Produces less false positives
- B. Can identify unknown attacks
- C. Requires vendor updates for a new threat
- D. Cannot deal with encrypted network traffic

Answer: B

NEW QUESTION 507

You just set up a security system in your network. In what kind of system would you find the following string of characters used as a rule within its configuration? alert tcp any any -> 192.168.100.0/24 21 (msg: ""FTP on the network!"";)

- A. A firewall IPTable
- B. FTP Server rule
- C. A Router IPTable
- D. An Intrusion Detection System

Answer: D

NEW QUESTION 510

What do Trinoo, TFN2k, WinTrinoo, T-Sight, and Stracheldraht have in common?

- A. All are hacking tools developed by the legion of doom
- B. All are tools that can be used not only by hackers, but also security personnel
- C. All are DDOS tools
- D. All are tools that are only effective against Windows
- E. All are tools that are only effective against Linux

Answer: C

NEW QUESTION 511

After an audit, the auditors Inform you that there is a critical finding that you must tackle Immediately. You read the audit report, and the problem is the service running on port 389. Which service Is this and how can you tackle the problem?

- A. The service is LDA
- B. and you must change it to 636. which is LDAPPS.
- C. The service is NT
- D. and you have to change It from UDP to TCP in order to encrypt it
- E. The findings do not require immediate actions and are only suggestions.
- F. The service is SMTP, and you must change it to SMIM

G. which is an encrypted way to send emails.

Answer: A

Explanation:

AD is port 389 and then LDAPS is secure port

NEW QUESTION 513

A large company intends to use Blackberry for corporate mobile phones and a security analyst is assigned to evaluate the possible threats. The analyst will use the Blackjacking attack method to demonstrate how an attacker could circumvent perimeter defenses and gain access to the Prometric Online Testing – Reports https://ibt1.prometric.com/users/custom/report_queue/rq_str... corporate network. What tool should the analyst use to perform a Blackjacking attack?

- A. Paros Proxy
- B. BBProxy
- C. Blooover
- D. BBCrack

Answer: B

NEW QUESTION 514

An Intrusion Detection System (IDS) has alerted the network administrator to a possibly malicious sequence of packets sent to a Web server in the network's external DMZ. The packet traffic was captured by the IDS and saved to a PCAP file. What type of network tool can be used to determine if these packets are genuinely malicious or simply a false positive?

- A. Protocol analyzer
- B. Network sniffer
- C. Intrusion Prevention System (IPS)
- D. Vulnerability scanner

Answer: A

NEW QUESTION 516

Which of the following provides a security professional with most information about the system's security posture?

- A. Phishing, spamming, sending trojans
- B. Social engineering, company site browsing tailgating
- C. Wardriving, warchalking, social engineering
- D. Port scanning, banner grabbing service identification

Answer: D

NEW QUESTION 518

What is the purpose of a demilitarized zone on a network?

- A. To scan all traffic coming through the DMZ to the internal network
- B. To only provide direct access to the nodes within the DMZ and protect the network behind it
- C. To provide a place to put the honeypot
- D. To contain the network devices you wish to protect

Answer: B

NEW QUESTION 522

What piece of hardware on a computer's motherboard generates encryption keys and only releases a part of the key so that decrypting a disk on a new piece of hardware is not possible?

- A. CPU
- B. GPU
- C. UEFI
- D. TPM

Answer: D

Explanation:

The TPM is a chip that's part of your computer's motherboard

— if you bought an off-the-shelf PC, it's soldered onto the motherboard. If you built your own computer, you can buy one as an add-on module if your motherboard supports it. The TPM generates encryption keys, keeping part of the key to itself

NEW QUESTION 526

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

312-50v11 Practice Exam Features:

- * 312-50v11 Questions and Answers Updated Frequently
- * 312-50v11 Practice Questions Verified by Expert Senior Certified Staff
- * 312-50v11 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 312-50v11 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 312-50v11 Practice Test Here](#)