

Exam Questions 312-50v11

Certified Ethical Hacker Exam (CEH v11)

<https://www.2passeasy.com/dumps/312-50v11/>



NEW QUESTION 1

Which of the following allows attackers to draw a map or outline the target organization's network infrastructure to know about the actual environment that they are going to hack.

- A. Enumeration
- B. Vulnerability analysis
- C. Malware analysis
- D. Scanning networks

Answer: D

NEW QUESTION 2

Null sessions are un-authenticated connections (not using a username or password.) to an NT or 2000 system. Which TCP and UDP ports must you filter to check null sessions on your network?

- A. 137 and 139
- B. 137 and 443
- C. 139 and 443
- D. 139 and 445

Answer: D

NEW QUESTION 3

An attacker is trying to redirect the traffic of a small office. That office is using their own mail server, DNS server and NTP server because of the importance of their job. The attacker gain access to the DNS server and redirect the direction www.google.com to his own IP address. Now when the employees of the office want to go to Google they are being redirected to the attacker machine. What is the name of this kind of attack?

- A. MAC Flooding
- B. Smurf Attack
- C. DNS spoofing
- D. ARP Poisoning

Answer: C

NEW QUESTION 4

John is investigating web-application firewall logs and observers that someone is attempting to inject the following:

`char buff[10]; buff[>o] - 'a';`


What type of attack is this?

- A. CSRF
- B. XSS
- C. Buffer overflow
- D. SQL injection

Answer: C

Explanation:

Buffer overflow this attack is an anomaly that happens when software writing data to a buffer overflows the buffer's capacity, leading to adjacent memory locations being overwritten. In other words, an excessive amount of information is being passed into a container that doesn't have enough space, which information finishes up replacing data in adjacent containers. Buffer overflows are often exploited by attackers with a goal of modifying a computer's memory so as to undermine or take hold of program execution.

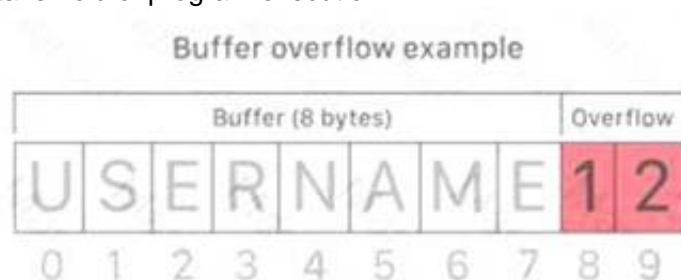

What's a buffer? A buffer, or data buffer, is a neighborhood of physical memory storage wont to temporarily store data while it's being moved from one place to a different . These buffers typically sleep in RAM memory. Computers frequently use buffers to assist improve performance; latest hard drives cash in of buffering to efficiently access data, and lots of online services also use buffers. for instance , buffers are frequently utilized in online video streaming to stop interruption. When a video is streamed, the video player downloads and stores perhaps 20% of the video at a time during a buffer then streams from that buffer. This way, minor drops in connection speed or quick service disruptions won't affect the video stream performance. Buffers are designed to contain specific amounts of knowledge . Unless the program utilizing the buffer has built-in instructions to discard data when an excessive amount of is shipped to the buffer, the program will overwrite data in memory adjacent to the buffer. Buffer overflows are often exploited by attackers to corrupt software. Despite being well-understood, buffer overflow attacks are still a serious security problem that torment cyber-security teams. In 2014 a threat referred to as 'heartbleed' exposed many many users to attack due to a buffer overflow vulnerability in SSL software.

How do attackers exploit buffer overflows? An attacker can deliberately feed a carefully crafted input into a program which will cause the program to undertake and store that input during a buffer that isn't large enough, overwriting portions of memory connected to the buffer space. If the memory layout of the program is well-defined, the attacker can deliberately overwrite areas known to contain executable code. The attacker can then replace this code together with his own executable code, which may drastically change how the program is meant to figure .For example if the overwritten part in memory contains a pointer (an object that points to a different place in memory) the attacker's code could replace that code with another pointer that points to an exploit payload. this will transfer control of the entire program over to the attacker's code.

NEW QUESTION 5

Suppose your company has just passed a security risk assessment exercise. The results display that the risk of the breach in the main company application is 50%. Security staff has taken some measures and implemented the necessary controls. After that, another security risk assessment was performed showing that risk has decreased to 10%. The risk threshold for the application is 20%. Which of the following risk decisions will be the best for the project in terms of its successful continuation with the most business profit?

- A. Accept the risk
- B. Introduce more controls to bring risk to 0%
- C. Mitigate the risk
- D. Avoid the risk

Answer: A

NEW QUESTION 6

To invisibly maintain access to a machine, an attacker utilizes a toolkit that sits undetected in the core components of the operating system. What is this type of rootkit an example of?

- A. Hypervisor rootkit
- B. Kernel toolkit
- C. Hardware rootkit
- D. Firmware rootkit

Answer: B

Explanation:

Kernel-mode rootkits run with the best operating system privileges (Ring 0) by adding code or replacement parts of the core operating system, as well as each the kernel and associated device drivers. Most operative systems support kernel-mode device drivers, that execute with a similar privileges because the software itself. As such, several kernel-mode rootkits square measure developed as device drivers or loadable modules, like loadable kernel modules in Linux or device drivers in Microsoft Windows. This category of rootkit has unrestricted security access, however is tougher to jot down. The quality makes bugs common, and any bugs in code operative at the kernel level could seriously impact system stability, resulting in discovery of the rootkit. one amongst the primary wide familiar kernel rootkits was developed for Windows NT four.0 and discharged in Phrack magazine in 1999 by Greg Hoglund. Kernel rootkits is particularly tough to observe and take away as a result of they operate at a similar security level because the software itself, and square measure therefore able to intercept or subvert the foremost sure software operations. Any package, like antivirus package, running on the compromised system is equally vulnerable. during this scenario, no a part of the system is sure.

NEW QUESTION 7

Which results will be returned with the following Google search query?
site:target.com – site:Marketing.target.com accounting

- A. Results from matches on the site marketing.target.com that are in the domain target.com but do not include the word accounting.
- B. Results matching all words in the query.
- C. Results for matches on target.com and Marketing.target.com that include the word “accounting”
- D. Results matching “accounting” in domain target.com but not on the site Marketing.target.com

Answer: D

NEW QUESTION 8

The security team of Debry Inc. decided to upgrade Wi-Fi security to thwart attacks such as dictionary attacks and key recovery attacks. For this purpose, the security team started implementing cutting-edge technology that uses a modern key establishment protocol called the simultaneous authentication of equals (SAE), also known as dragonfly key exchange, which replaces the PSK concept. What is the Wi-Fi encryption technology implemented by Debry Inc.?

- A. WEP
- B. WPA
- C. WPA2
- D. WPA3

Answer: C

NEW QUESTION 9

Internet Protocol Security IPsec is actually a suite pf protocols. Each protocol within the suite provides different functionality. Collective IPsec does everything except.

- A. Protect the payload and the headers
- B. Encrypt
- C. Work at the Data Link Layer
- D. Authenticate

Answer: C

Explanation:

<https://en.wikipedia.org/wiki/IPsec> Usage of IPsec Authentication Header format in Tunnel and Transpor modes

NEW QUESTION 10

John the Ripper is a technical assessment tool used to test the weakness of which of the following?

- A. Passwords
- B. File permissions
- C. Firewall rulesets
- D. Usernames

Answer: A

NEW QUESTION 10

Which of the following DoS tools is used to attack target web applications by starvation of available sessions on the web server?
 The tool keeps sessions at halt using never-ending POST transmissions and sending an arbitrarily large content-length header value.

- A. My Doom
- B. Astacheldraht
- C. R-U-Dead-Yet?(RUDY)
- D. LOIC

Answer: C

NEW QUESTION 12

When discussing passwords, what is considered a brute force attack?

- A. You attempt every single possibility until you exhaust all possible combinations or discover the password
- B. You threaten to use the rubber hose on someone unless they reveal their password
- C. You load a dictionary of words into your cracking program
- D. You create hashes of a large number of words and compare it with the encrypted passwords
- E. You wait until the password expires

Answer: A

NEW QUESTION 15

Which among the following is the best example of the hacking concept called "clearing tracks"?

- A. After a system is breached, a hacker creates a backdoor to allow re-entry into a system.
- B. During a cyberattack, a hacker injects a rootkit into a server.
- C. An attacker gains access to a server through an exploitable vulnerability.
- D. During a cyberattack, a hacker corrupts the event logs on all machines.

Answer: D

NEW QUESTION 17

The following is an entry captured by a network IDS. You are assigned the task of analyzing this entry. You notice the value 0x90, which is the most common NOOP instruction for the Intel processor. You figure that the attacker is attempting a buffer overflow attack. You also notice "/bin/sh" in the ASCII part of the output. As an analyst what would you conclude about the attack?

```
45 00 01 ce 28 1e 40 00 32 06 96 92 d1 3a 18 09 86 9f 18 97 E..î(.0.2...Ñ:.....
06 38 02 03 6f 54 4f a9 01 af fe 78 50 18 7d 78 76 dd 00 00 .8...oTO@.p xP.\)
Application "Calculator" "%path:..\dtsapps\calc\dcalc.exe" " " size 0.75in 0.25in 0.50in
0.05inxvY..
42 42 20 f7 ff bf 21 f7 ff bf 22 f7 ff bf 23 f7 ff bf 58 58 BB +yç!÷yç"-yç#÷yçXX
58 58 58 58 58 58 58 58 58 58 58 58 58 58 58 58 25 2e 32 32 XXXXXXXXXXXXXXXXXXXX%.22
34 75 25 33 30 30 24 6e 25 2e 32 31 33 75 25 33 30 31 24 6e 4u*300$n*.213u*301$n
73 65 63 75 25 33 30 32 24 6e 25 2e 31 39 32 75 25 33 30 33 secu*302$n*.192u*303
24 6e 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 $n.....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 31 db 31 c9 31 c0 b0 46 cd 80 89 e5 31 d2 b2 66 89 d0 ..1Û1É1À°FÍ..Å1Ô*f.Đ
31 c9 89 cb 43 89 5d f8 43 89 5d f4 4b 89 4d fc 8d 4d f4 cd 1Ě.ĚC.]øC.]ôK.Mü.Móİ
80 31 c9 89 45 f4 43 66 89 5d ec 66 c7 45 ee 0f 27 89 4d f0 .1Ě.EóCf.]ifÇEi.'.Mô
8d 45 ec 89 45 f8 c6 45 fc 10 89 d0 8d 4d f4 cd 80 89 d0 43 .Ei.EøÆEu..Đ.Móİ..ĐC
43 cd 80 89 d0 43 cd 80 89 c3 31 c9 b2 3f 89 d0 cd 80 89 d0 CÍ..ĐCÍ..Ā1Ě*?.ĐÍ..Đ
41 cd 80 eb 18 5e 89 75 08 31 c0 88 46 07 89 45 0c b0 0b 89 AÍ.Ě.^.u.1À.F..E.°..
f3 8d 4d 08 8d 55 0c cd 80 e8 e3 ff ff ff 2f 62 69 6e 2f 73 ó.M..U.Ī.ěäyyy/bin/s
68 0a h.
EVENT4: [NOOP:X86] (tcp,dp=515,sp=1592)
```

- A. The buffer overflow attack has been neutralized by the IDS
- B. The attacker is creating a directory on the compromised machine
- C. The attacker is attempting a buffer overflow attack and has succeeded
- D. The attacker is attempting an exploit that launches a command-line shell

Answer: D

NEW QUESTION 18

To reach a bank web site, the traffic from workstations must pass through a firewall. You have been asked to review the firewall configuration to ensure that workstations in network 10.10.10.0/24 can only reach the bank web site 10.20.20.1 using https. Which of the following firewall rules meets this requirement?

- A. If (source matches 10.10.10.0/24 and destination matches 10.20.20.1 and port matches 443) then permit
- B. If (source matches 10.10.10.0/24 and destination matches 10.20.20.1 and port matches 80 or 443) then permit
- C. If (source matches 10.20.20.1 and destination matches 10.10.10.0/24 and port matches 443) then permit

D. If (source matches 10.10.10.0 and destination matches 10.20.20.1 and port matches 443) then permit

Answer: A

NEW QUESTION 20

Which of the following Bluetooth hacking techniques does an attacker use to send messages to users without the recipient's consent, similar to email spamming?

- A. Bluesmacking
- B. BlueSniffing
- C. Bluejacking
- D. Bluesnarfing

Answer: C

NEW QUESTION 21

Jack, a disgruntled ex-employee of Incalsol Ltd., decided to inject fileless malware into Incalsol's systems. To deliver the malware, he used the current employees' email IDs to send fraudulent emails embedded with malicious links that seem to be legitimate. When a victim employee clicks on the link, they are directed to a fraudulent website that automatically loads Flash and triggers the exploit. What is the technique used by Jack to launch the fileless malware on the target systems?

- A. In-memory exploits
- B. Phishing
- C. Legitimate applications
- D. Script-based injection

Answer: B

NEW QUESTION 22

Study the snort rule given below:

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 135
(msg: "NETBIOS DCERPC ISystemActivator bind attempt";
flow:to_server, established; content: "|05|"; distance: 0; within: 1;
content: "|0b|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2192; rev: 1;)
```

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 445 (msg: "NETBIOS SMB
DCERPC ISystemActivator bind attempt"; flow: to_server, established;
content: "|FF|SMB|25|"; nocase; offset:4; depth:5; content: "|26 00|";
nocase; distance:5; within: 12; content: "|05|"; distance:0; within:1;
content: "|0b|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2193; rev: 1;)
```

From the options below, choose the exploit against which this rule applies.

- A. WebDav
- B. SQL Slammer
- C. MS Blaster
- D. MyDoom

Answer: C

NEW QUESTION 24

Ricardo has discovered the username for an application in his targets environment. As he has a limited amount of time, he decides to attempt to use a list of common passwords he found on the Internet. He compiles them into a list and then feeds that list as an argument into his password-cracking application, what type of attack is Ricardo performing?

- A. Known plaintext
- B. Password spraying
- C. Brute force
- D. Dictionary

Answer: D

Explanation:

A dictionary Attack as an attack vector utilized by the attacker to break in a very system, that is password protected, by golf shot technically each word in a very dictionary as a variety of password for that system. This attack vector could be a variety of Brute Force Attack.

The lexicon will contain words from an English dictionary and conjointly some leaked list of commonly used passwords and once combined with common character substitution with numbers, will generally be terribly effective and quick.

How is it done?

Basically, it's attempting each single word that's already ready. it's done victimization machine-controlled tools that strive all the possible words within the dictionary.

Some password Cracking Software:

- John the ripper
- L0phtCrack
- Aircrack-ng

NEW QUESTION 27

Which of the following is the primary objective of a rootkit?

- A. It opens a port to provide an unauthorized service
- B. It creates a buffer overflow
- C. It replaces legitimate programs
- D. It provides an undocumented opening in a program

Answer: C

NEW QUESTION 29

Wilson, a professional hacker, targets an organization for financial benefit and plans to compromise its systems by sending malicious emails. For this purpose, he uses a tool to track the emails of the target and extracts information such as sender identities, mail servers, sender IP addresses, and sender locations from different public sources. He also checks if an email address was leaked using the haveibeenpwned.com API. Which of the following tools is used by Wilson in the above scenario?

- A. Factiva
- B. Netcraft
- C. infoga
- D. Zoominfo

Answer: C

Explanation:

Infoga may be a tool gathering email accounts informations (ip,hostname,country,...) from completely different public supply (search engines, pgp key servers and shodan) and check if email was leaked using haveibeenpwned.com API. is a really simple tool, however very effective for the first stages of a penetration test or just to know the visibility of your company within the net.

NEW QUESTION 32

Mirai malware targets IoT devices. After infiltration, it uses them to propagate and create botnets that then used to launch which types of attack?

- A. MITM attack
- B. Birthday attack
- C. DDoS attack
- D. Password attack

Answer: C

NEW QUESTION 35

Study the following log extract and identify the attack.

```
12/26-07:06:22:31.167035 207.219.207.240:1882 -> 172.16.1.106:80
TCP TTL:13 TTL:50 TOS:0x0 IP:53476 DFF
***AP*** Seq: 0x2BDC107 Ack: 0x1CB9F186 Win: 0x2238 TcpLen: 20
47 45 54 20 2F 6D 73 61 64 63 2F 2E 2E C0 AF 2E GET /msadc/.....
2E 2F 2E 2E C0 AF 2E 2E 2F 2E 2E C0 AF 2E 2E 2F ./...../...../
77 69 6E 6E 74 2F 73 79 73 74 65 6D 33 32 2F 63 winnt/system32/c
6D 64 2E 65 78 65 3F 2F 63 2B 64 69 72 2B 63 3A md.exe?/c+dir+c:
5C 20 48 54 54 50 2F 31 2E 31 0D 0A 41 63 63 65 \ HTTP/1.1..Acce
70 74 3A 20 69 6D 61 67 65 2F 67 69 66 2C 20 69 pt: image/gif, i
6D 61 67 65 2F 78 2D 78 62 69 74 6D 61 70 2C 20 mage/x-xbitmap
69 6D 61 67 65 2F 6A 70 65 67 2C 20 69 6D 61 67 image/jpeg, imag
65 2F 70 6A 70 65 67 2C 20 61 70 70 6C 69 63 61 e/jpeg, applica
74 69 6F 6E 2F 76 6E 64 2E 6D 73 2D 65 78 63 65 tion/vnd.ms-exce
6C 2C 20 61 70 70 6C 69 63 61 74 69 6F 6E 2F 6D l, application/m
73 77 6F 72 64 2C 20 61 70 70 6C 69 63 61 74 69 sword, applicati
6F 6E 2F 76 6E 64 2E 6D 73 2D 70 6F 77 65 72 70 on/vnd.ms-powerp
6F 69 6E 74 2C 20 2A 2F 2A 0D 0A 41 63 63 65 70 oint, =/..Accep
74 2D 4C 6C 6C 61 2F 34 2E 30 20 28 63 6F 6D 70ozilla/age: en-v
73 0D 0A 62 6C 65 3B 20 4D 53 49 45 20 35 2E 30 atible;pt-EncodD
6E 67 3A 57 69 6E 64 6F 77 73 20 39 35 29 0D 0A l; Windo, deflat
65 0D 0A 55 73 65 72 2D 41 67 65 6A 74 3A 20 4D e..User-Agent: M
6F 7A 69 6C 6C 61 2F 34 2E 30 20 28 63 6F 6D 70ozilla/4.0 (comp
61 74 69 62 6C 65 3B 20 4D 53 49 45 20 35 2E 30 atible; MSIE 5.0
31 3B 20 57 69 6E 64 6F 77 73 20 39 35 29 0D 0A l; Windows 95)..
48 6F 73 74 3A 20 6C 61 62 2E 77 69 72 65 74 72 Host: lib.bvxttr
69 70 2E 6E 65 74 0D 0A 43 6F 6E 6E 65 63 74 69 ip.org..Connecti
6F 6E 3A 20 4B 65 65 70 2D 41 6C 69 76 65 0D 0A on: Keep-Alive..
43 6F 6F 6B 69 65 3A 20 41 53 50 53 45 53 53 49 Cookie: ASPSESSI
4F 4E 49 44 47 51 51 51 51 51 5A 55 3D 4B 4E 4F ONIDGQQQQQU=KNO
48 4D 4F 4A 41 4B 50 46 4F 50 48 4D 4C 41 50 4E HMOJAKPFOPHMLAPN
49 46 49 46 42 0D 0A 0D 0A 41 50 4E 49 46 49 46 IFIFB....APNIFIF
42 0D 0A 0D 0A B....
```

- Answer: D**

Which of the following tactics uses malicious code to redirect users' web traffic?

- Answer: B**

What should you do?

- Answer: D**

Answer: C

Answer: C

<https://hub.packtpub.com/discovering-network-hosts-with-tcp-syn-and-tcp-ack-ping-scans-in-nmaptutorial/>

Answer: D

A. LNMIB2.MIB
B. WINS.MIB
C. DHCP.MIS

D. MIB_II.MIB

Answer: A

Explanation:

DHCP.MIB: Monitors network traffic between DHCP servers and remote hosts HOSTMIB.MIB: Monitors and manages host resources

LNMB2.MIB: Contains object types for workstation and server services MIBJI.MIB: Manages TCP/IP-based Internet using a simple architecture and system

WINS.MIB: For the Windows Internet Name Service (WINS)

NEW QUESTION 50

Which of the following program infects the system boot sector and the executable files at the same time?

- A. Polymorphic virus
- B. Stealth virus
- C. Multipartite Virus
- D. Macro virus

Answer: C

NEW QUESTION 54

What would be the fastest way to perform content enumeration on a given web server by using the Gobuster tool?

- A. Performing content enumeration using the bruteforce mode and 10 threads
- B. Shipping SSL certificate verification
- C. Performing content enumeration using a wordlist
- D. Performing content enumeration using the bruteforce mode and random file extensions

Answer: A

NEW QUESTION 56

You are using a public Wi-Fi network inside a coffee shop. Before surfing the web, you use your VPN to prevent intruders from sniffing your traffic. If you did not have a VPN, how would you identify whether someone is performing an ARP spoofing attack on your laptop?

- A. You should check your ARP table and see if there is one IP address with two different MAC addresses.
- B. You should scan the network using Nmap to check the MAC addresses of all the hosts and look for duplicates.
- C. You should use netstat to check for any suspicious connections with another IP address within the LAN.
- D. You cannot identify such an attack and must use a VPN to protect your traffic, r

Answer: A

NEW QUESTION 57

Rebecca, a security professional, wants to authenticate employees who use web services for safe and secure communication. In this process, she employs a component of the Web Service Architecture, which is an extension of SOAP, and it can maintain the integrity and confidentiality of SOAP messages.

Which of the following components of the Web Service Architecture is used by Rebecca for securing the communication?

- A. WSDL
- B. WS Work Processes
- C. WS-Policy
- D. WS-Security

Answer: D

NEW QUESTION 61

A security analyst is performing an audit on the network to determine if there are any deviations from the security policies in place. The analyst discovers that a user from the IT department had a dial-out modem installed.

Which security policy must the security analyst check to see if dial-out modems are allowed?

- A. Firewall-management policy
- B. Acceptable-use policy
- C. Permissive policy
- D. Remote-access policy

Answer: D

NEW QUESTION 62

An attacker scans a host with the below command. Which three flags are set?

nmap -sX host.domain.com

- A. This is SYN sca
- B. SYN flag is set.
- C. This is Xmas sca
- D. URG, PUSH and FIN are set.
- E. This is ACK sca
- F. ACK flag is set.
- G. This is Xmas sca
- H. SYN and ACK flags are set.

Answer: B

NEW QUESTION 66

A group of hackers were roaming around a bank office building in a city, driving a luxury car. They were using hacking tools on their laptop with the intention to find a free-access wireless network. What is this hacking process known as?

- A. GPS mapping
- B. Spectrum analysis
- C. Wardriving
- D. Wireless sniffing

Answer: C

NEW QUESTION 68

Which of the following tools is used to detect wireless LANs using the 802.11a/b/g/n WLAN standards on a linux platform?

- A. Kismet
- B. Abel
- C. Netstumbler
- D. Nessus

Answer: A

NEW QUESTION 72

The security administrator of ABC needs to permit Internet traffic in the host 10.0.0.2 and UDP traffic in the host 10.1.1.3. He also needs to permit all FTP traffic to the rest of the network and deny all other traffic. After he applied his ACL configuration in the router, nobody can access the ftp, and the permitted hosts cannot access the Internet. According to the next configuration, what is happening in the network?

```
access-list 102 deny tcp any any
```

```
access-list 104 permit udp host 10.0.0.3 any
```

```
access-list 110 permit tcp host 10.0.0.2 eq www any access-list 108 permit tcp any eq ftp any
```

- A. The ACL 104 needs to be first because is UDP
- B. The first ACL is denying all TCP traffic and the other ACLs are being ignored by the router
- C. The ACL for FTP must be before the ACL 110
- D. The ACL 110 needs to be changed to port 80

Answer: B

NEW QUESTION 75

A hacker is an intelligent individual with excellent computer skills and the ability to explore a computer's software and hardware without the owner's permission. Their intention can either be to simply gain knowledge or to illegally make changes.

Which of the following class of hacker refers to an individual who works both offensively and defensively at various times?

- A. White Hat
- B. Suicide Hacker
- C. Gray Hat
- D. Black Hat

Answer: C

NEW QUESTION 76

Bob is acknowledged as a hacker of repute and is popular among visitors of "underground" sites.

Bob is willing to share his knowledge with those who are willing to learn, and many have expressed their interest in learning from him. However, this knowledge has a risk associated with it, as it can be used for malevolent attacks as well.

In this context, what would be the most effective method to bridge the knowledge gap between the "black" hats or crackers and the "white" hats or computer security professionals? (Choose the test answer.)

- A. Educate everyone with books, articles and training on risk analysis, vulnerabilities and safeguards.
- B. Hire more computer security monitoring personnel to monitor computer systems and networks.
- C. Make obtaining either a computer security certification or accreditation easier to achieve so more individuals feel that they are a part of something larger than life.
- D. Train more National Guard and reservist in the art of computer security to help out in times of emergency or crises.

Answer: A

NEW QUESTION 81

By performing a penetration test, you gained access under a user account. During the test, you established a connection with your own machine via the SMB service and occasionally entered your login and password in plaintext.

Which file do you have to clean to clear the password?

- A. .X session-log
- B. .bashrc
- C. .profile
- D. .bash_history

Answer: D

Explanation:

File created by Bash, a Unix-based shell program commonly used on Mac OS X and Linux operating systems; stores a history of user commands entered at the command prompt; used for viewing old commands that are executed. BASH_HISTORY files are hidden files with no filename prefix. They always use the filename .bash_history. NOTE: Bash is that the shell program employed by Apple Terminal. Our goal is to assist you understand what a file with a *.bash_history suffix is and the way to open it. The Bash History file type, file format description, and Mac and Linux programs listed on this page are individually researched and verified by the FileInfo team. We attempt for 100% accuracy and only publish information about file formats that we've tested and validated.

NEW QUESTION 86

What does the -oX flag do in an Nmap scan?

- A. Perform an eXpress scan
- B. Output the results in truncated format to the screen
- C. Output the results in XML format to a file
- D. Perform an Xmas scan

Answer: C

NEW QUESTION 89

Alice, a professional hacker, targeted an organization's cloud services. She infiltrated the target's MSP provider by sending spear-phishing emails and distributed custom-made malware to compromise user accounts and gain remote access to the cloud service. Further, she accessed the target customer profiles with her MSP account, compressed the customer data, and stored them in the MSP. Then, she used this information to launch further attacks on the target organization. Which of the following cloud attacks did Alice perform in the above scenario?

- A. Cloud hopper attack
- B. Cloud cryptojacking
- C. Cloudborne attack
- D. Man-in-the-cloud (MITC) attack

Answer: A

Explanation:

Operation Cloud Hopper was an in-depth attack and theft of data in 2017 directed at MSP within the UK (U.K.), US (U.S.), Japan, Canada, Brazil, France, Switzerland, Norway, Finland, Sweden, South Africa, India, Thailand, South Korea, and Australia. The group used MSP as intermediaries to accumulate assets and trade secrets from MSP client engineering, MSP industrial manufacturing, retail, energy, pharmaceuticals, telecommunications, and government agencies. Operation Cloud Hopper used over 70 variants of backdoors, malware, and trojans. These were delivered through spear-phishing emails. The attacks scheduled tasks or leveraged services/utilities to continue Microsoft Windows systems albeit the PC system was rebooted. It installed malware and hacking tools to access systems and steal data.

NEW QUESTION 90

Sam, a professional hacker, targeted an organization with intention of compromising AWS IAM credentials. He attempted to lure one of the employees of the organization by initiating fake calls while posing as a legitimate employee. Moreover, he sent phishing emails to steal the AWS IAM credentials and further compromise the employee's account. What is the technique used by Sam to compromise the AWS IAM credentials?

- A. Social engineering
- B. Insider threat
- C. Password reuse
- D. Reverse engineering

Answer: A

Explanation:

Just like any other service that accepts usernames and passwords for logging in, AWS users are vulnerable to social engineering attacks from attackers. Fake emails, calls, or any other method of social engineering, may find yourself with an AWS user's credentials within the hands of an attacker.

If a user only uses API keys for accessing AWS, general phishing techniques could still be used to gain access to other accounts or their PC itself, where the attacker may then pull the API keys for the aforementioned AWS user.

With basic open-source intelligence (OSINT), it's usually simple to collect a list of workers of an organization that use AWS on a regular basis. This list will then be targeted with spear phishing to do and gather credentials. An easy technique may include an email that says your bill has spiked 500% within the past 24 hours, "click here for additional information", and when they click the link, they're forwarded to a malicious copy of the AWS login page designed to steal their credentials.

An example of such an email will be seen within the screenshot below. It's exactly like an email that AWS would send to you if you were to exceed the free tier limits, except for a few little changes. If you clicked on any of the highlighted regions within the screenshot, you'd not be taken to the official AWS website and you'd instead be forwarded to a pretend login page setup to steal your credentials.

These emails will get even more specific by playing a touch bit additional OSINT before causing them out. If an attacker was ready to discover your AWS account ID on-line somewhere, they could use methods we at Rhino have free previously to enumerate what users and roles exist in your account with no logs contact on your side. They could use this list to more refine their target list, further as their emails to reference services they will know that you often use.

For reference, the journal post for using AWS account IDs for role enumeration will be found [here](#) and the journal post for using AWS account IDs for user enumeration will be found [here](#).

During engagements at Rhino, we find that phishing is one in all the fastest ways for us to achieve access to an AWS environment.

NEW QUESTION 94

An attacker utilizes a Wi-Fi Pineapple to run an access point with a legitimate-looking SSID for a nearby business in order to capture the wireless password. What kind of attack is this?

- A. MAC spoofing attack
- B. Evil-twin attack
- C. War driving attack
- D. Phishing attack

Answer: B

NEW QUESTION 96

Which tier in the N-tier application architecture is responsible for moving and processing data between the tiers?

- A. Presentation tier
- B. Application Layer
- C. Logic tier
- D. Data tier

Answer: C

NEW QUESTION 98

Bob, an attacker, has managed to access a target IoT device. He employed an online tool to gather information related to the model of the IoT device and the certifications granted to it. Which of the following tools did Bob employ to gather the above Information?

- A. search.com
- B. EarthExplorer
- C. Google image search
- D. FCC ID search

Answer: D

Explanation:

Footprinting techniques are used to collect basic information about the target IoT and OT platforms to exploit them. Information collected through footprinting techniques includes IP address, hostname, ISP, device location, banner of the target IoT device, FCC ID information, certification granted to the device, etc. pg. 5052
ECHv11 manual

NEW QUESTION 99

Session splicing is an IDS evasion technique in which an attacker delivers data in multiple, small sized packets to the target computer, making it very difficult for an IDS to detect the attack signatures. Which tool can be used to perform session splicing attacks?

- A. tcpsplice
- B. Burp
- C. Hydra
- D. Whisker

Answer: D

NEW QUESTION 100

Calvin, a grey-hat hacker, targets a web application that has design flaws in its authentication mechanism. He enumerates usernames from the login form of the web application, which requests users to feed data and specifies the incorrect field in case of invalid credentials. Later, Calvin uses this information to perform social engineering.

Which of the following design flaws in the authentication mechanism is exploited by Calvin?

- A. Insecure transmission of credentials
- B. Verbose failure messages
- C. User impersonation
- D. Password reset mechanism

Answer: D

NEW QUESTION 102

_____ is a tool that can hide processes from the process list, can hide files, registry entries, and intercept keystrokes.

- A. Trojan
- B. RootKit
- C. DoS tool
- D. Scanner
- E. Backdoor

Answer: B

NEW QUESTION 107

Andrew is an Ethical Hacker who was assigned the task of discovering all the active devices hidden by a restrictive firewall in the IPv4 range in a given target network.

Which of the following host discovery techniques must he use to perform the given task?

- A. UDP scan
- B. TCP Maimon scan
- C. arp ping scan
- D. ACK flag probe scan

Answer: C

Explanation:

One of the most common Nmap usage scenarios is scanning an Ethernet LAN. Most LANs, especially those that use the private address range granted by RFC

1918, do not always use the overwhelming majority of IP addresses. When Nmap attempts to send a raw IP packet, such as an ICMP echo request, the OS must determine a destination hardware (ARP) address, such as the target IP, so that the Ethernet frame can be properly addressed. .. This is required to issue a series of ARP requests. This is best illustrated by an example where a ping scan is attempted against an Area Ethernet host. The `--send-ip` option tells Nmap to send IP-level packets (rather than raw Ethernet), even on area networks. The Wireshark output of the three ARP requests and their timing have been pasted into the session.

Raw IP ping scan example for offline targets This example took quite a couple of seconds to finish because the (Linux) OS sent three ARP requests at 1 second intervals before abandoning the host. Waiting for a few seconds is excessive, as long as the ARP response usually arrives within a few milliseconds. Reducing this timeout period is not a priority for OS vendors, as the overwhelming majority of packets are sent to the host that actually exists. Nmap, on the other hand, needs to send packets to 16 million IP s given a target like 10.0.0.0/8. Many targets are pinged in parallel, but waiting 2 seconds each is very delayed.

There is another problem with raw IP ping scans on the LAN. If the destination host turns out to be unresponsive, as in the previous example, the source host usually adds an incomplete entry for that destination IP to the kernel ARP table. ARP tablespaces are finite and some operating systems become unresponsive when full. If Nmap is used in rawIP mode (`--send-ip`), Nmap may have to wait a few minutes for the ARP cache entry to expire before continuing host discovery. ARP scans solve both problems by giving Nmap the highest priority. Nmap issues raw ARP requests and handles retransmissions and timeout periods in its sole discretion. The system ARP cache is bypassed. The example shows the difference. This ARP scan takes just over a tenth of the time it takes for an equivalent IP. Example b ARP ping scan of offline target



In example b, neither the `-PR` option nor the `--send-eth` option has any effect. This is often because ARP has a default scan type on the Area Ethernet network when scanning Ethernet hosts that Nmap discovers. This includes traditional wired Ethernet as 802.11 wireless networks. As mentioned above, ARP scanning is not only more efficient, but also more accurate. Hosts frequently block IP-based ping packets, but usually cannot block ARP requests or responses and communicate over the network. Nmap uses ARP instead of all targets on equivalent targets, even if different ping types (such as `-PE` and `-PS`) are specified. LAN.. If you do not need to attempt an ARP scan at all, specify `--send-ip` as shown in Example a "Raw IP Ping Scan for Offline Targets".

If you give Nmap control to send raw Ethernet frames, Nmap can also adjust the source MAC address. If you have the only PowerBook in your security conference room and a large ARP scan is initiated from an

Apple-registered MAC address, your head may turn to you. Use the `--spoof-mac` option to spoof the MAC address as described in the MAC Address Spoofing section.

NEW QUESTION 112

Eve is spending her day scanning the library computers. She notices that Alice is using a computer whose port 445 is active and listening. Eve uses the ENUM tool to enumerate Alice machine. From the command prompt, she types the following command.

```
For /f "tokens=1 %%a in (hackfile.txt) do net use *
\\10.1.2.3\c$ /user:"Administrator" %%a
```

What is Eve trying to do?

- A. Eve is trying to connect as a user with Administrator privileges
- B. Eve is trying to enumerate all users with Administrative privileges
- C. Eve is trying to carry out a password crack for user Administrator
- D. Eve is trying to escalate privilege of the null user to that of Administrator

Answer: C

NEW QUESTION 116

Which of the following statements is TRUE?

- A. Packet Sniffers operate on the Layer 1 of the OSI model.
- B. Packet Sniffers operate on Layer 2 of the OSI model.
- C. Packet Sniffers operate on both Layer 2 & Layer 3 of the OSI model.
- D. Packet Sniffers operate on Layer 3 of the OSI model.

Answer: B

NEW QUESTION 120

There are multiple cloud deployment options depending on how isolated a customer's resources are from those of other customers. Shared environments share the costs and allow each customer to enjoy lower operations expenses. One solution is for a customer to Join with a group of users or organizations to share a cloud environment. What is this cloud deployment option called?

- A. Hybrid
- B. Community
- C. Public
- D. Private

Answer: B

Explanation:

The purpose of this idea is to permit multiple customers to figure on joint projects and applications that belong to the community, where it's necessary to possess a centralized clouds infrastructure. In other words, Community Cloud may be a distributed infrastructure that solves the precise problems with business sectors by integrating the services provided by differing types of clouds solutions.

The communities involved in these projects, like tenders, business organizations, and research companies, specialise in similar issues in their cloud interactions. Their shared interests may include concepts and policies associated with security and compliance considerations, and therefore the goals of the project also .

Community Cloud computing facilitates its users to spot and analyze their business demands better. Community Clouds could also be hosted during a data center, owned by one among the tenants, or by a third-party cloud services provider and may be either on-site or off-site.

Community Cloud Examples and Use Cases Cloud providers have developed Community Cloud offerings, and a few organizations are already seeing the advantages . the subsequent list shows a number of the most scenarios of the Community Cloud model that's beneficial to the participating organizations.

➤ Multiple governmental departments that perform transactions with each other can have their processing systems on shared infrastructure. This setup makes it cost-effective to the tenants, and may also reduce their data traffic.

Benefits of Community Clouds Community Cloud provides benefits to organizations within the community, individually also as collectively. Organizations don't

need to worry about the safety concerns linked with Public Cloud due to the closed user group.

This recent cloud computing model has great potential for businesses seeking cost-effective cloud services to collaborate on joint projects, because it comes with multiple advantages.

Openness and ImpartialityCommunity Clouds are open systems, and that they remove the dependency organizations wear cloud service providers. Organizations are able to do many benefits while avoiding the disadvantages of both public and personal clouds.

➤ Ensures compatibility among each of its users, allowing them to switch properties consistent with their individual use cases. They also enable companies to interact with their remote employees and support the utilization of various devices, be it a smartphone or a tablet. This makes this sort of cloud solution more flexible to users' demands.

➤ Consists of a community of users and, as such, is scalable in several aspects like hardware resources, services, and manpower. It takes under consideration demand growth, and you simply need to increase the user-base.

Flexibility and ScalabilityHigh Availability and ReliabilityYour cloud service must be ready to make sure the availability of knowledge and applications in the least times. Community Clouds secure your data within the same way as the other cloud service, by replicating data and applications in multiple secure locations to guard them from unforeseen circumstances.

Cloud possesses redundant infrastructure to form sure data is out there whenever and wherever you would like it. High availability and reliability are critical concerns for any sort of cloud solution.

Security and ComplianceTwo significant concerns discussed when organizations believe cloud computing are data security and compliance with relevant regulatory authorities. Compromising each other's data security isn't profitable to anyone during a Community Cloud.

➤ the power to dam users from editing and downloading specific datasets.

➤ Making sensitive data subject to strict regulations on who has access to Sharing sensitive data unique to a specific organization would bring harm to all or any the members involved.

➤ What devices can store sensitive data.

Users can configure various levels of security for his or her data. Common use cases:Convenience and ControlConflicts associated with convenience and control don't arise during a Community Cloud. Democracy may be a crucial factor the Community Cloud offers as all tenants share and own the infrastructure and make decisions collaboratively. This setup allows organizations to possess their data closer to them while avoiding the complexities of a personal Cloud.

Less Work for the IT DepartmentHaving data, applications, and systems within the cloud means you are doing not need to manage them entirely. This convenience eliminates the necessity for tenants to use extra human resources to manage the system. Even during a self-managed solution, the work is split among the participating organizations.

Environment SustainabilityIn the Community Cloud, organizations use one platform for all their needs, which dissuades them from investing in separate cloud facilities. This shift introduces a symbiotic relationship between broadening and shrinking the utilization of cloud among clients. With the reduction of organizations using different clouds, resources are used more efficiently, thus resulting in a smaller carbon footprint.

NEW QUESTION 122

How is the public key distributed in an orderly, controlled fashion so that the users can be sure of the sender's identity?

- A. Hash value
- B. Private key
- C. Digital signature
- D. Digital certificate

Answer: D

NEW QUESTION 124

On performing a risk assessment, you need to determine the potential impacts when some of the critical business processes of the company interrupt its service. What is the name of the process by which you can determine those critical businesses?

- A. Emergency Plan Response (EPR)
- B. Business Impact Analysis (BIA)
- C. Risk Mitigation
- D. Disaster Recovery Planning (DRP)

Answer: B

NEW QUESTION 129

The network in ABC company is using the network address 192.168.1.64 with mask 255.255.255.192. In the network the servers are in the addresses 192.168.1.122, 192.168.1.123 and 192.168.1.124. An attacker is trying to find those servers but he cannot see them in his scanning. The command he is using is: nmap 192.168.1.64/28.

Why he cannot see the servers?

- A. He needs to add the command ""ip address"" just before the IP address
- B. He needs to change the address to 192.168.1.0 with the same mask
- C. He is scanning from 192.168.1.64 to 192.168.1.78 because of the mask /28 and the servers are not in that range
- D. The network must be dawn and the nmap command and IP address are ok

Answer: C

NEW QUESTION 133

Alex, a cloud security engineer working in Eyecloud Inc. is tasked with isolating applications from the underlying infrastructure and stimulating communication via well-defined channels. For this purpose, he used an open-source technology that helped him in developing, packaging, and running applications; further, the technology provides PaaS through OS-level visualization, delivers containerized software packages, and promotes fast software delivery. What is the cloud technology employed by Alex in the above scenario?

- A. Virtual machine
- B. Serverless computing
- C. Docker
- D. Zero trust network

Answer: C

NEW QUESTION 137

Which of the following algorithms can be used to guarantee the integrity of messages being sent, in transit, or stored?

- A. symmetric algorithms
- B. asymmetric algorithms
- C. hashing algorithms
- D. integrity algorithms

Answer: C

NEW QUESTION 139

What is a NULL scan?

- A. A scan in which all flags are turned off
- B. A scan in which certain flags are off
- C. A scan in which all flags are on
- D. A scan in which the packet size is set to zero
- E. A scan with an illegal packet size

Answer: A

NEW QUESTION 143

Which Nmap option would you use if you were not concerned about being detected and wanted to perform a very fast scan?

- A. -T5
- B. -O
- C. -T0
- D. -A

Answer: A

NEW QUESTION 148

A network admin contacts you. He is concerned that ARP spoofing or poisoning might occur on his network. What are some things he can do to prevent it? Select the best answers.

- A. Use port security on his switches.
- B. Use a tool like ARPwatch to monitor for strange ARP activity.
- C. Use a firewall between all LAN segments.
- D. If you have a small network, use static ARP entries.
- E. Use only static IP addresses on all PC's.

Answer: ABD

NEW QUESTION 150

What useful information is gathered during a successful Simple Mail Transfer Protocol (SMTP) enumeration?

- A. The two internal commands VRFY and EXPN provide a confirmation of valid users, email addresses, aliases, and mailing lists.
- B. Reveals the daily outgoing message limits before mailboxes are locked
- C. The internal command RCPT provides a list of ports open to message traffic.
- D. A list of all mail proxy server addresses used by the targeted host

Answer: A

NEW QUESTION 155

This kind of password cracking method uses word lists in combination with numbers and special characters:

- A. Hybrid
- B. Linear
- C. Symmetric
- D. Brute Force

Answer: A

NEW QUESTION 159

An attacker can employ many methods to perform social engineering against unsuspecting employees, including scareware. What is the best example of a scareware attack?

- A. A pop-up appears to a user stating, "You have won a free cruise! Click here to claim your prize!"
- B. A banner appears to a user stating, "Your account has been locke
- C. Click here to reset your password and unlock your account."
- D. A banner appears to a user stating, "Your Amazon order has been delaye
- E. Click here to find out your new delivery date."
- F. A pop-up appears to a user stating, "Your computer may have been infected with spywar
- G. Click here to install an anti-spyware tool to resolve this issue."

Answer:

D

NEW QUESTION 161

You are performing a penetration test for a client and have gained shell access to a Windows machine on the internal network. You intend to retrieve all DNS records for the internal domain, if the DNS server is at 192.168.10.2 and the domain name is abccorp.local, what command would you type at the nslookup prompt to attempt a zone transfer?

- A. list server=192.168.10.2 type=all
- B. is-d abccorp.local
- C. lserver 192.168.10.2-t all
- D. List domain=Abccorp.local type=zone

Answer: B

NEW QUESTION 162

Why is a penetration test considered to be more thorough than vulnerability scan?

- A. Vulnerability scans only do host discovery and port scanning by default.
- B. A penetration test actively exploits vulnerabilities in the targeted infrastructure, while a vulnerability scan does not typically involve active exploitation.
- C. It is not – a penetration test is often performed by an automated tool, while a vulnerability scan requires active engagement.
- D. The tools used by penetration testers tend to have much more comprehensive vulnerability databases.

Answer: B

NEW QUESTION 163

The Heartbleed bug was discovered in 2014 and is widely referred to under MITRE's Common Vulnerabilities and Exposures (CVE) as CVE-2014-0160. This bug affects the OpenSSL implementation of the Transport Layer Security (TLS) protocols defined in RFC6520.

What type of key does this bug leave exposed to the Internet making exploitation of any compromised system very easy?

- A. Public
- B. Private
- C. Shared
- D. Root

Answer: B

NEW QUESTION 168

You need to deploy a new web-based software package for your organization. The package requires three separate servers and needs to be available on the Internet. What is the recommended architecture in terms of server placement?

- A. All three servers need to be placed internally
- B. A web server facing the Internet, an application server on the internal network, a database server on the internal network
- C. A web server and the database server facing the Internet, an application server on the internal network
- D. All three servers need to face the Internet so that they can communicate between themselves

Answer: B

NEW QUESTION 171

Jim, a professional hacker, targeted an organization that is operating critical Industrial Infrastructure. Jim used Nmap to scan open ports and running services on systems connected to the organization's OT network. He used an Nmap command to identify Ethernet/IP devices connected to the Internet and further gathered Information such as the vendor name, product code and name, device name, and IP address. Which of the following Nmap commands helped Jim retrieve the required information?

- A. nmap -Pn -sT --scan-delay 1s --max-parallelism 1 -p < Port List > < Target IP >
- B. nmap -Pn -sU -p 44818 --script enip-info < Target IP >
- C. nmap -Pn -sT -p 46824 < Target IP >
- D. nmap -Pn -sT -p 102 --script s7-info < Target IP >

Answer: B

NEW QUESTION 174

Which address translation scheme would allow a single public IP address to always correspond to a single machine on an internal network, allowing "server publishing"?

- A. Overloading Port Address Translation
- B. Dynamic Port Address Translation
- C. Dynamic Network Address Translation
- D. Static Network Address Translation

Answer: D

NEW QUESTION 177

During the enumeration phase, Lawrence performs banner grabbing to obtain information such as OS details and versions of services running. The service that he enumerated runs directly on TCP port 445.

Which of the following services is enumerated by Lawrence in this scenario?

- A. Server Message Block (SMB)
- B. Network File System (NFS)
- C. Remote procedure call (RPC)
- D. Telnet

Answer: A

Explanation:

Worker Message Block (SMB) is an organization document sharing and information texture convention. SMB is utilized by billions of gadgets in a different arrangement of working frameworks, including Windows, MacOS, iOS , Linux, and Android. Customers use SMB to get to information on workers. This permits sharing of records, unified information the board, and brought down capacity limit needs for cell phones. Workers additionally use SMB as a feature of the Software-characterized Data Center for outstanding burdens like grouping and replication.

Since SMB is a far off record framework, it requires security from assaults where a Windows PC may be fooled into reaching a pernicious worker running inside a confided in organization or to a far off worker outside the organization edge. Firewall best practices and arrangements can upgrade security keeping malevolent traffic from leaving the PC or its organization.

For Windows customers and workers that don't have SMB shares, you can obstruct all inbound SMB traffic utilizing the Windows Defender Firewall to keep far off associations from malignant or bargained gadgets. In the Windows Defender Firewall, this incorporates the accompanying inbound principles.

Name	Profile	Enabled
File and Printer Sharing (SMB-In)	All	No
Netlogon Service (NP-In)	All	No
Remote Event Log Management (NP-In)	All	No
Remote Service Management (NP-In)	All	No

You should also create a new blocking rule to override any other inbound firewall rules. Use the following suggested settings for any Windows clients or servers that do not host SMB Shares:

- > Name: Block all inbound SMB 445
- > Description: Blocks all inbound SMB TCP 445 traffic. Not to be applied to domain controllers or computers that host SMB shares.
- > Action: Block the connection
- > Programs: All
- > Remote Computers: Any
- > Protocol Type: TCP
- > Local Port: 445
- > Remote Port: Any
- > Profiles: All
- > Scope (Local IP Address): Any
- > Scope (Remote IP Address): Any
- > Edge Traversal: Block edge traversal

You must not globally block inbound SMB traffic to domain controllers or file servers. However, you can restrict access to them from trusted IP ranges and devices to lower their attack surface. They should also be restricted to Domain or Private firewall profiles and not allow Guest/Public traffic.

NEW QUESTION 179

Which of the following tools performs comprehensive tests against web servers, including dangerous files and CGIs?

- A. Nikto
- B. John the Ripper
- C. Dsniff
- D. Snort

Answer: A

NEW QUESTION 182

What is the main security service a cryptographic hash provides?

- A. Integrity and ease of computation
- B. Message authentication and collision resistance
- C. Integrity and collision resistance
- D. Integrity and computational in-feasibility

Answer: D

NEW QUESTION 183

What port number is used by LDAP protocol?

- A. 110
- B. 389
- C. 464
- D. 445

Answer: B

NEW QUESTION 187

A zone file consists of which of the following Resource Records (RRs)?

- A. DNS, NS, AXFR, and MX records

- B. DNS, NS, PTR, and MX records
- C. SOA, NS, AXFR, and MX records
- D. SOA, NS, A, and MX records

Answer: D

NEW QUESTION 191

Which of the following is an extremely common IDS evasion technique in the web world?

- A. Spyware
- B. Subnetting
- C. Unicode Characters
- D. Port Knocking

Answer: C

NEW QUESTION 192

You have gained physical access to a Windows 2008 R2 server which has an accessible disc drive. When you attempt to boot the server and log in, you are unable to guess the password. In your toolkit, you have an Ubuntu 9.10 Linux LiveCD. Which Linux-based tool can change any user's password or activate disabled Windows accounts?

- A. John the Ripper
- B. SET
- C. CHNTPW
- D. Cain & Abel

Answer: C

NEW QUESTION 196

A penetration tester is conducting a port scan on a specific host. The tester found several ports opened that were confusing in concluding the Operating System (OS) version installed. Considering that NMAP result below, which of the following is likely to be installed on the target machine by the OS? Starting NMAP 5.21 at 2011-03-15 11:06 NMAP scan report for 172.16.40.65 Host is up (1.00s latency). Not shown: 993 closed ports PORT STATE SERVICE 21/tcp open ftp 23/tcp open telnet 80/tcp open http 139/tcp open netbios-ssn 515/tcp open 631/tcp open ipp 9100/tcp open MAC Address: 00:00:48:0D:EE:8

- A. The host is likely a Linux machine.
- B. The host is likely a printer.
- C. The host is likely a router.
- D. The host is likely a Windows machine.

Answer: B

NEW QUESTION 198

Your company was hired by a small healthcare provider to perform a technical assessment on the network. What is the best approach for discovering vulnerabilities on a Windows-based computer?

- A. Use the built-in Windows Update tool
- B. Use a scan tool like Nessus
- C. Check MITRE.org for the latest list of CVE findings
- D. Create a disk image of a clean Windows installation

Answer: B

NEW QUESTION 201

What is the BEST alternative if you discover that a rootkit has been installed on one of your computers?

- A. Copy the system files from a known good system
- B. Perform a trap and trace
- C. Delete the files and try to determine the source
- D. Reload from a previous backup
- E. Reload from known good media

Answer: E

NEW QUESTION 206

Bob was recently hired by a medical company after it experienced a major cyber security breach. Many patients are complaining that their personal medical records are fully exposed on the Internet and someone can find them with a simple Google search. Bob's boss is very worried because of regulations that protect those data. Which of the following regulations is mostly violated?

- A. HIPPA/PHI
- B. PII
- C. PCIDSS
- D. ISO 2002

Answer: A

Explanation:

PHI stands for Protected Health info. The HIPAA Privacy Rule provides federal protections for private health info held by lined entities and provides patients an array of rights with regard to that info. under HIPAA phi is considered to be any identifiable health info that's used, maintained, stored, or transmitted by a HIPAA-covered entity – a healthcare provider, health plan or health insurer, or a aid clearinghouse – or a business associate of a HIPAA-covered entity, in relation to the availability of aid or payment for aid services.

It is not only past and current medical info that's considered letter under HIPAA Rules, however also future info concerning medical conditions or physical and mental health related to the provision of care or payment for care. phi is health info in any kind, together with physical records, electronic records, or spoken info. Therefore, letter includes health records, medical histories, lab check results, and medical bills. basically, all health info is considered letter once it includes individual identifiers. Demographic info is additionally thought of phi underneath HIPAA Rules, as square measure several common identifiers like patient names, Social Security numbers, Driver's license numbers, insurance details, and birth dates, once they square measure connected with health info.

The eighteen identifiers that create health info letter are:

- Names
- Dates, except year
- phonephone numbers
- Geographic information
- FAX numbers
- Social Security numbers
- Email addresses
- case history numbers
- Account numbers
- Health arrange beneficiary numbers
- Certificate/license numbers
- Vehicle identifiers and serial numbers together with license plates
- Web URLs
- Device identifiers and serial numbers
- net protocol addresses
- Full face photos and comparable pictures
- Biometric identifiers (i.e. retinal scan, fingerprints)
- Any distinctive identifying variety or code

One or a lot of of those identifiers turns health info into letter, and phi HIPAA Privacy Rule restrictions can then apply that limit uses and disclosures of the data. HIPAA lined entities and their business associates will ought to guarantee applicable technical, physical, and body safeguards are enforced to make sure the confidentiality, integrity, and availability of phi as stipulated within the HIPAA Security Rule.

NEW QUESTION 208

Louis, a professional hacker, had used specialized tools or search engines to encrypt all his browsing activity and navigate anonymously to obtain sensitive/hidden information about official government or federal databases. After gathering the Information, he successfully performed an attack on the target government organization without being traced. Which of the following techniques is described in the above scenario?

- A. Dark web footprinting
- B. VoIP footpnnting
- C. VPN footprinting
- D. website footprinting

Answer: A

Explanation:

The deep web is the layer of the online cyberspace that consists of web pages and content that are hidden and unindexed.

NEW QUESTION 209

What did the following commands determine?

```
C: user2sid \earth guest
s-1-5-21-343818398-789336058-1343024091-501
C:sid2user 5 21 343818398 789336058 1343024091 500
Name is Joe
Domain is EARTH
```

- A. That the Joe account has a SID of 500
- B. These commands demonstrate that the guest account has NOT been disabled
- C. These commands demonstrate that the guest account has been disabled
- D. That the true administrator is Joe
- E. Issued alone, these commands prove nothing

Answer: D

NEW QUESTION 210

When a security analyst prepares for the formal security assessment - what of the following should be done in order to determine inconsistencies in the secure assets database and verify that system is compliant to the minimum security baseline?

- A. Data items and vulnerability scanning
- B. Interviewing employees and network engineers
- C. Reviewing the firewalls configuration
- D. Source code review

Answer: A

NEW QUESTION 214

Ben purchased a new smartphone and received some updates on it through the OTA method. He received two messages: one with a PIN from the network operator and another asking him to enter the PIN received from the operator. As soon as he entered the PIN, the smartphone started functioning in an abnormal manner. What is the type of attack performed on Ben in the above scenario?

- A. Advanced SMS phishing
- B. Bypass SSL pinning
- C. Phishing
- D. Tap 'n ghost attack

Answer: A

NEW QUESTION 217

George is a security professional working for iTech Solutions. He was tasked with securely transferring sensitive data of the organization between industrial systems. In this process, he used a short-range communication protocol based on the IEEE 203.15.4 standard. This protocol is used in devices that transfer data infrequently at a low rate in a restricted area, within a range of 10-100 m. What is the short-range wireless communication technology George employed in the above scenario?

- A. MQTT
- B. LPWAN
- C. Zigbee
- D. NB-IoT

Answer: C

Explanation:

Zigbee could be a wireless technology developed as associate open international normal to deal with the unique desires of affordable, low-power wireless IoT networks. The Zigbee normal operates on the IEEE 802.15.4 physical radio specification and operates in unauthorised bands as well as a pair of 4 GHz, 900 MHz and 868 MHz.

The 802.15.4 specification upon that the Zigbee stack operates gained confirmation by the Institute of Electrical and physical science Engineers (IEEE) in 2003.

The specification could be a packet-based radio protocol supposed for affordable, battery-operated devices. The protocol permits devices to speak in an exceedingly kind of network topologies and may have battery life lasting many years.

The Zigbee three.0 Protocol

The Zigbee protocol has been created and ratified by member corporations of the Zigbee Alliance. Over three hundred leading semiconductor makers, technology corporations, OEMs and repair corporations comprise the Zigbee Alliance membership. The Zigbee protocol was designed to supply associate easy-to-use wireless information answer characterised by secure, reliable wireless network architectures.

THE ZIGBEE ADVANTAGE

The Zigbee 3.0 protocol is intended to speak information through rip-roaring RF environments that area unit common in business and industrial applications. Version 3.0 builds on the prevailing Zigbee normal however unifies the market-specific application profiles to permit all devices to be wirelessly connected within the same network, no matter their market designation and performance. what is more, a Zigbee 3.0 certification theme ensures the ability of product from completely different makers. Connecting Zigbee three.0 networks to the information science domain unveil observance and management from devices like smartphones and tablets on a local area network or WAN, as well as the web, and brings verity net of Things to fruition.

Zigbee protocol options include:

- Support for multiple network topologies like point-to-point, point-to-multipoint and mesh networks
- Low duty cycle – provides long battery life
- Low latency
- Direct Sequence unfold Spectrum (DSSS)
- Up to 65,000 nodes per network
- 128-bit AES encryption for secure information connections
- Collision avoidance, retries and acknowledgements

This is another short-range communication protocol based on the IEEE 203.15.4 standard. Zig-Bee is used in devices that transfer data infrequently at a low rate in a restricted area and within a range of 10–100 m.

NEW QUESTION 222

You have successfully comprised a server having an IP address of 10.10.0.5. You would like to enumerate all machines in the same network quickly. What is the best Nmap command you will use?

- A. nmap -T4 -q 10.10.0.0/24
- B. nmap -T4 -F 10.10.0.0/24
- C. nmap -T4 -r 10.10.1.0/24
- D. nmap -T4 -O 10.10.0.0/24

Answer: B

NEW QUESTION 225

You are a security officer of a company. You had an alert from IDS that indicates that one PC on your Intranet is connected to a blacklisted IP address (C2 Server) on the Internet. The IP address was blacklisted just before the alert. You are starting an investigation to roughly analyze the severity of the situation. Which of the following is appropriate to analyze?

- A. IDS log
- B. Event logs on domain controller
- C. Internet Firewall/Proxy log.
- D. Event logs on the PC

Answer: C

NEW QUESTION 226

Todd has been asked by the security officer to purchase a counter-based authentication system. Which of the following best describes this type of system?

- A. A biometric system that bases authentication decisions on behavioral attributes.
- B. A biometric system that bases authentication decisions on physical attributes.
- C. An authentication system that creates one-time passwords that are encrypted with secret keys.
- D. An authentication system that uses passphrases that are converted into virtual passwords.

Answer: C

NEW QUESTION 231

These hackers have limited or no training and know how to use only basic techniques or tools. What kind of hackers are we talking about?

- A. Black-Hat Hackers A
- B. Script Kiddies
- C. White-Hat Hackers
- D. Gray-Hat Hacker

Answer: B

Explanation:

Script Kiddies: These hackers have limited or no training and know how to use only basic techniques or tools. Even then they may not understand any or all of what they are doing.

NEW QUESTION 236

Richard, an attacker, aimed to hack IoT devices connected to a target network. In this process, Richard recorded the frequency required to share information between connected devices. After obtaining the frequency, he captured the original data when commands were initiated by the connected devices. Once the original data were collected, he used free tools such as URH to segregate the command sequence. Subsequently, he started injecting the segregated command sequence on the same frequency into the IoT network, which repeats the captured signals of the devices. What is the type of attack performed by Richard in the above scenario?

- A. Side-channel attack
- B. Replay attack
- C. Cryptanalysis attack
- D. Reconnaissance attack

Answer: B

Explanation:

Replay Attack could be a variety of security attack to the info sent over a network. In this attack, the hacker or a person with unauthorized access, captures the traffic and sends communication to its original destination, acting because the original sender. The receiver feels that it's a genuine message, however it's really the message sent by the aggressor. The most feature of the Replay Attack is that the consumer would receive the message double, hence the name, Replay Attack.

Prevention from Replay Attack : 1. Timestamp technique –Prevention from such attackers is feasible, if timestamp is employed at the side of the info. Supposedly, the timestamp on an information is over a precise limit, it may be discarded, and sender may be asked to send the info once more. 2. Session key technique –Another way of hindrance, is by victimisation session key. This key may be used one time (by sender and receiver) per dealing, and can't be reused.

NEW QUESTION 239

Which of the following statements about a zone transfer is correct? (Choose three.)

- A. A zone transfer is accomplished with the DNS
- B. A zone transfer is accomplished with the nslookup service
- C. A zone transfer passes all zone information that a DNS server maintains
- D. A zone transfer passes all zone information that a nslookup server maintains
- E. A zone transfer can be prevented by blocking all inbound TCP port 53 connections
- F. Zone transfers cannot occur on the Internet

Answer: ACE

NEW QUESTION 242

What is the role of test automation in security testing?

- A. It is an option but it tends to be very expensive.
- B. It should be used exclusively.
- C. Manual testing is outdated because of low speed and possible test setup inconsistencies.
- D. Test automation is not usable in security due to the complexity of the tests.
- E. It can accelerate benchmark tests and repeat them with a consistent test setup.
- F. But it cannot replace manual testing completely.

Answer: D

NEW QUESTION 244

If a token and 4-digit personal identification number (PIN) are used to access a computer system and the token performs off-line checking for the correct PIN, what

type of attack is possible?

- A. Birthday
- B. Brute force
- C. Man-in-the-middle
- D. Smurf

Answer: B

NEW QUESTION 247

Joel, a professional hacker, targeted a company and identified the types of websites frequently visited by its employees. Using this information, he searched for possible loopholes in these websites and injected a malicious script that can redirect users from the web page and download malware onto a victim's machine. Joel waits for the victim to access the infected web application so as to compromise the victim's machine. Which of the following techniques is used by Joel in the above scenario?

- A. DNS rebinding attack
- B. Clickjacking attack
- C. MarioNet attack
- D. Watering hole attack

Answer: B

NEW QUESTION 249

In the field of cryptanalysis, what is meant by a “rubber-hose” attack?

- A. Attempting to decrypt cipher text by making logical assumptions about the contents of the original plain text.
- B. Extraction of cryptographic secrets through coercion or torture.
- C. Forcing the targeted key stream through a hardware-accelerated device such as an ASIC.
- D. A backdoor placed into a cryptographic algorithm by its creator.

Answer: B

NEW QUESTION 251

which type of virus can change its own code and then cipher itself multiple times as it replicates?

- A. Stealth virus
- B. Tunneling virus
- C. Cavity virus
- D. Encryption virus

Answer: A

Explanation:

A stealth virus may be a sort of virus malware that contains sophisticated means of avoiding detection by antivirus software. After it manages to urge into the now-infected machine a stealth viruses hides itself by continually renaming and moving itself round the disc. Like other viruses, a stealth virus can take hold of the many parts of one's PC. When taking control of the PC and performing tasks, antivirus programs can detect it, but a stealth virus sees that coming and can rename then copy itself to a special drive or area on the disc, before the antivirus software. Once moved and renamed a stealth virus will usually replace the detected 'infected' file with a clean file that doesn't trigger anti-virus detection. It's a never-ending game of cat and mouse. The intelligent architecture of this sort of virus about guarantees it's impossible to completely rid oneself of it once infected. One would need to completely wipe the pc and rebuild it from scratch to completely eradicate the presence of a stealth virus. Using regularly-updated antivirus software can reduce risk, but, as we all know, antivirus software is additionally caught in an endless cycle of finding new threats and protecting against them.
<https://www.techslang.com/definition/what-is-a-stealth-virus/>

NEW QUESTION 254

John, a professional hacker, targeted CyberSol Inc., an MNC. He decided to discover the IoT devices connected in the target network that are using default credentials and are vulnerable to various hijacking attacks. For this purpose, he used an automated tool to scan the target network for specific types of IoT devices and detect whether they are using the default, factory-set credentials. What is the tool employed by John in the above scenario?

- A. IoTSeeker
- B. IoT Inspector
- C. AT&T IoT Platform
- D. Azure IoT Central

Answer: A

NEW QUESTION 258

You are a penetration tester working to test the user awareness of the employees of the client xyz. You harvested two employees' emails from some public sources and are creating a client-side backdoor to send it to the employees via email. Which stage of the cyber kill chain are you at?

- A. Reconnaissance
- B. Command and control
- C. Weaponization
- D. Exploitation

Answer: C

Explanation:

Weaponization

The adversary analyzes the data collected in the previous stage to identify the vulnerabilities and techniques that can exploit and gain unauthorized access to the target organization. Based on the vulnerabilities identified during analysis, the adversary selects or creates a tailored deliverable malicious payload (remote-access malware weapon) using an exploit and a backdoor to send it to the victim. An adversary may target specific network devices, operating systems, endpoint devices, or even individuals within the organization to carry out their attack. For example, the adversary may send a phishing email to an employee of the target organization, which may include a malicious attachment such as a virus or worm that, when downloaded, installs a backdoor on the system that allows remote access to the adversary. The following are the activities of the adversary:

- o Identifying appropriate malware payload based on the analysis
- o Creating a new malware payload or selecting, reusing, modifying the available malware payloads based on the identified vulnerability
- o Creating a phishing email campaign
- o Leveraging exploit kits and botnets

NEW QUESTION 259

An organization decided to harden its security against web-application and web-server attacks. John, a security personnel in the organization, employed a security scanner to automate web-application security testing and to guard the organization's web infrastructure against web-application threats. Using that tool, he also wants to detect XSS, directory transversal problems, fault injection, SQL injection, attempts to execute commands, and several other attacks. Which of the following security scanners will help John perform the above task?

- A. AlienVault®OSSIM™
- B. Syhunt Hybrid
- C. Saleae Logic Analyzer
- D. Cisco ASA

Answer: B

NEW QUESTION 262

Juliet, a security researcher in an organization, was tasked with checking for the authenticity of images to be used in the organization's magazines. She used these images as a search query and tracked the original source and details of the images, which included photographs, profile pictures, and memes. Which of the following footprinting techniques did Rachel use to finish her task?

- A. Reverse image search
- B. Meta search engines
- C. Advanced image search
- D. Google advanced search

Answer: C

NEW QUESTION 264

Which utility will tell you in real time which ports are listening or in another state?

- A. Netstat
- B. TCPView
- C. Nmap
- D. Loki

Answer: B

NEW QUESTION 265

You are working as a Security Analyst in a company XYZ that owns the whole subnet range of 23.0.0.0/8 and 192.168.0.0/8.

While monitoring the data, you find a high number of outbound connections. You see that IP's owned by XYZ (Internal) and private IP's are communicating to a Single Public IP. Therefore, the Internal IP's are sending data to the Public IP.

After further analysis, you find out that this Public IP is a blacklisted IP, and the internal communicating devices are compromised.

What kind of attack does the above scenario depict?

- A. Botnet Attack
- B. Spear Phishing Attack
- C. Advanced Persistent Threats
- D. Rootkit Attack

Answer: A

NEW QUESTION 268

An attacker redirects the victim to malicious websites by sending them a malicious link by email. The link appears authentic but redirects the victim to a malicious web page, which allows the attacker to steal the victim's data. What type of attack is this?

- A. Phishing
- B. Vishing
- C. Spoofing
- D. DDoS

Answer: A

NEW QUESTION 269

While testing a web application in development, you notice that the web server does not properly ignore the "dot dot slash" (../) character string and instead returns the file listing of a folder structure of the server.

What kind of attack is possible in this scenario?

- A. Cross-site scripting
- B. Denial of service
- C. SQL injection

D. Directory traversal

Answer: D

Explanation:

Appropriately controlling admittance to web content is significant for running a safe web worker. Index crossing or Path Traversal is a HTTP assault which permits aggressors to get to limited catalogs and execute orders outside of the web worker's root registry.

Web workers give two primary degrees of security instruments

- Access Control Lists (ACLs)
- Root index

An Access Control List is utilized in the approval cycle. It is a rundown which the web worker's manager uses to show which clients or gatherings can get to, change or execute specific records on the worker, just as other access rights.

The root registry is a particular index on the worker record framework in which the clients are kept. Clients can't get to anything over this root.

For instance: the default root registry of IIS on Windows is C:\inetpub\wwwroot and with this arrangement, a client doesn't approach C:\Windows yet approaches C:\inetpub\wwwroot\news and some other indexes and documents under the root catalog (given that the client is confirmed by means of the ACLs).

The root index keeps clients from getting to any documents on the worker, for example, C:\WINDOWS\system32\win.ini on Windows stages and the/and so on/passwd record on Linux/UNIX stages.

This weakness can exist either in the web worker programming itself or in the web application code.

To play out a registry crossing assault, all an assailant requires is an internet browser and some information on where to aimlessly discover any default documents and registries on the framework.

What an assailant can do if your site is defenseless With a framework defenseless against index crossing, an aggressor can utilize this weakness to venture out of the root catalog and access different pieces of the record framework. This may enable the assailant to see confined documents, which could give the aggressor more data needed to additional trade off the framework.

Contingent upon how the site access is set up, the aggressor will execute orders by mimicking himself as the client which is related with "the site". Along these lines everything relies upon what the site client has been offered admittance to in the framework.

Illustration of a Directory Traversal assault by means of web application code In web applications with dynamic pages, input is generally gotten from programs through GET or POST solicitation techniques. Here is an illustration of a HTTP GET demand URL

GET

`http://test.webarticles.com/show.asp?view=oldarchive.html HTTP/1.1 Host: test.webarticles.com`

With this URL, the browser requests the dynamic page show.asp from the server and with it also sends the parameter view with the value of oldarchive.html. When this request is executed on the web

server, show.asp retrieves the file oldarchive.html from the server's file system, renders it and then sends

back to the browser which displays it to the user. The attacker would assume that show.asp can retrieve files from the file system and sends the following custom URL.

GET

`http://test.webarticles.com/show.asp?view=../../../../Windows/system.ini HTTP/1.1 Host: test.webarticles.com`

This will cause the dynamic page to retrieve the file system.ini from the file system and display it to the user The expression ../ instructs the system to go one directory up which is commonly used as an operating system directive. The attacker has to guess how many directories he has to go up to find the Windows folder on the system, but this is easily done by trial and error.

Example of a Directory Traversal attack via web server Apart from vulnerabilities in the code, even the web server itself can be open to directory traversal attacks.

The problem can either be incorporated into the web server software or inside some sample script files left available on the server.

The vulnerability has been fixed in the latest versions of web server software, but there are web servers online which are still using older versions of IIS and Apache which might be open to directory traversal attacks. Even though you might be using a web server software version that has fixed this vulnerability, you might still have some sensitive default script directories exposed which are well known to hackers.

For example, a URL request which makes use of the scripts directory of IIS to traverse directories and execute a command can be

GET

`http://server.com/scripts/..%5c../Windows/System32/cmd.exe?/c+dir+c:\ HTTP/1.1 Host: server.com`

The request would return to the user a list of all files in the C:\ directory by executing the cmd.exe comm shell file and run the command dir c:\ in the shell. The %5c expression that is in the URL request is a we server escape code which is used to represent normal characters. In this case %5c represents the character \ Newer versions of modern web server software check for these escape codes and do not let them through. Some older versions however, do not filter out these codes in the root directory enforcer and will let the attackers execute such commands.

NEW QUESTION 271

In this attack, a victim receives an e-mail claiming from PayPal stating that their account has been disabled and confirmation is required before activation. The attackers then scam to collect not one but two credit card numbers, ATM PIN number and other personal details. Ignorant users usually fall prey to this scam. Which of the following statement is incorrect related to this attack?

- A. Do not reply to email messages or popup ads asking for personal or financial information
- B. Do not trust telephone numbers in e-mails or popup ads
- C. Review credit card and bank account statements regularly
- D. Antivirus, anti-spyware, and firewall software can very easily detect these type of attacks
- E. Do not send credit card numbers, and personal or financial information via e-mail

Answer: D

NEW QUESTION 274

There have been concerns in your network that the wireless network component is not sufficiently secure. You perform a vulnerability scan of the wireless network and find that it is using an old encryption protocol that was designed to mimic wired encryption, what encryption protocol is being used?

- A. WEP
- B. RADIUS
- C. WPA
- D. WPA3

Answer: A

Explanation:

Wired Equivalent Privacy (WEP) may be a security protocol, laid out in the IEEE wireless local area network (Wi-Fi) standard, 802.11b, that's designed to supply a wireless local area network (WLAN) with A level of security and privacy like what's usually expected of a wired LAN. A wired local area network (LAN) is usually protected by physical security mechanisms (controlled access to a building, for example) that are effective for a controlled physical environment, but could also be

ineffective for WLANs because radio waves aren't necessarily bound by the walls containing the network. WEP seeks to determine similar protection thereto offered by the wired network's physical security measures by encrypting data transmitted over the WLAN. encoding protects the vulnerable wireless link between clients and access points; once this measure has been taken, other typical LAN security mechanisms like password protection, end-to-end encryption, virtual private networks (VPNs), and authentication are often put in situ to make sure privacy. A research group from the University of California at Berkeley recently published a report citing "major security flaws" in WEP that left WLANs using the protocol susceptible to attacks (called wireless equivalent privacy attacks). within the course of the group's examination of the technology, they were ready to intercept and modify transmissions and gain access to restricted networks. The Wireless Ethernet Compatibility Alliance (WECA) claims that WEP – which is included in many networking products – was never intended to be the only security mechanism for a WLAN, and that, in conjunction with traditional security practices, it's very effective.

NEW QUESTION 277

Firewalk has just completed the second phase (the scanning phase) and a technician receives the output shown below. What conclusions can be drawn based on these scan results?

TCP port 21 no response
TCP port 22 no response
TCP port 23 Time-to-live exceeded

- A. The lack of response from ports 21 and 22 indicate that those services are not running on the destination server
- B. The scan on port 23 was able to make a connection to the destination host prompting the firewall to respond with a TTL error
- C. The scan on port 23 passed through the filtering device
- D. This indicates that port 23 was not blocked at the firewall
- E. The firewall itself is blocking ports 21 through 23 and a service is listening on port 23 of the target host

Answer: C

NEW QUESTION 278

DNS cache snooping is a process of determining if the specified resource address is present in the DNS cache records. It may be useful during the examination of the network to determine what software update resources are used, thus discovering what software is installed.

What command is used to determine if the entry is present in DNS cache?

- A. nslookup -fullrecursive update.antivirus.com
- B. dnsnoping -rt update.antivirus.com
- C. nslookup -norecursive update.antivirus.com
- D. dns --snoop update.antivirus.com

Answer: C

NEW QUESTION 279

Due to a slowdown of normal network operations, the IT department decided to monitor internet traffic for all of the employees. From a legal standpoint, what would be troublesome to take this kind of measure?

- A. All of the employees would stop normal work activities
- B. IT department would be telling employees who the boss is
- C. Not informing the employees that they are going to be monitored could be an invasion of privacy.
- D. The network could still experience traffic slow down.

Answer: C

NEW QUESTION 284

Tess King is using the nslookup command to craft queries to list all DNS information (such as Name Servers, host names, MX records, CNAME records, glue records (delegation for child Domains), zone serial number, TimeToLive (TTL) records, etc) for a Domain.

What do you think Tess King is trying to accomplish? Select the best answer.

- A. A zone harvesting
- B. A zone transfer
- C. A zone update
- D. A zone estimate

Answer: B

NEW QUESTION 286

Which of the following types of SQL injection attacks extends the results returned by the original query, enabling attackers to run two or more statements if they have the same structure as the original one?

- A. Error-based injection
- B. Boolean-based blind SQL injection
- C. Blind SQL injection
- D. Union SQL injection

Answer: D

NEW QUESTION 290

Windows LAN Manager (LM) hashes are known to be weak.

Which of the following are known weaknesses of LM? (Choose three.)

- A. Converts passwords to uppercase.
- B. Hashes are sent in clear text over the network.
- C. Makes use of only 32-bit encryption.

D. Effective length is 7 characters.

Answer: ABD

NEW QUESTION 292

Nedved is an IT Security Manager of a bank in his country. One day, he found out that there is a security breach to his company's email server based on analysis of a suspicious connection from the email server to an unknown IP Address.

What is the first thing that Nedved needs to do before contacting the incident response team?

- A. Leave it as it is and contact the incident response team right away
- B. Block the connection to the suspicious IP Address from the firewall
- C. Disconnect the email server from the network
- D. Migrate the connection to the backup email server

Answer: C

NEW QUESTION 297

You receive an e-mail like the one shown below. When you click on the link contained in the mail, you are redirected to a website seeking you to download free Anti-Virus software.

Dear valued customers,

We are pleased to announce the newest version of Antivirus 2010 for Windows which will probe you with total security against the latest spyware, malware, viruses, Trojans and other online threats. Simply visit the link below and enter your antivirus code:

```
Antivirus code: 5014
http://www.juggyboy/virus/virus.html
Thank you for choosing us, the worldwide leader Antivirus solutions.
Mike Robertson
PDF Reader Support
Copyright Antivirus 2010 ?All rights reserved
If you want to stop receiving mail, please go to:
http://www.juggyboy.com
```

or you may contact us at the following address: Media Internet Consultants, Edif. Neptuno, Planta

Baja, Ave. Ricardo J. Alfaro, Tumba Muerto, n/a Panama

How will you determine if this is Real Anti-Virus or Fake Anti-Virus website?

- A. Look at the website design, if it looks professional then it is a Real Anti-Virus website
- B. Connect to the site using SSL, if you are successful then the website is genuine
- C. Search using the URL and Anti-Virus product name into Google and lookout for suspicious warnings against this site
- D. Download and install Anti-Virus software from this suspicious looking site, your Windows 7 will prompt you and stop the installation if the downloaded file is a malware
- E. Download and install Anti-Virus software from this suspicious looking site, your Windows 7 will prompt you and stop the installation if the downloaded file is a malware

Answer: C

NEW QUESTION 299

David is a security professional working in an organization, and he is implementing a vulnerability management program in the organization to evaluate and control the risks and vulnerabilities in its IT

infrastructure. He is currently executing the process of applying fixes on vulnerable systems to reduce the impact and severity of vulnerabilities. Which phase of the vulnerability-management life cycle is David currently in?

- A. verification
- B. Risk assessment
- C. Vulnerability scan
- D. Remediation

Answer: D

NEW QUESTION 302

Sophia is a shopping enthusiast who spends significant time searching for trendy outfits online. Clark, an attacker, noticed her activities several times and sent a fake email containing a deceptive page link to her social media page displaying all-new and trendy outfits. In excitement, Sophia clicked on the malicious link and logged in to that page using her valid credentials. Which of the following tools is employed by Clark to create the spoofed email?

- A. PyLoris
- B. Slowloris
- C. Evilginx
- D. PLCinject

Answer: C

NEW QUESTION 305

An Internet Service Provider (ISP) has a need to authenticate users connecting via analog modems, Digital Subscriber Lines (DSL), wireless data services, and Virtual Private Networks (VPN) over a Frame Relay network.

Which AAA protocol is the most likely able to handle this requirement?

- A. TACACS+
- B. DIAMETER
- C. Kerberos

D. RADIUS

Answer: D

NEW QUESTION 310

An organization has automated the operation of critical infrastructure from a remote location. For this purpose, all the industrial control systems are connected to the Internet. To empower the manufacturing process, ensure the reliability of industrial networks, and reduce downtime and service disruption, the organization decided to install an OT security tool that further protects against security incidents such as cyber espionage, zero-day attacks, and malware. Which of the following tools must the organization employ to protect its critical infrastructure?

- A. Robotium
- B. BalenaCloud
- C. Flowmon
- D. IntentFuzzer

Answer: C

Explanation:

Source: <https://www.flowmon.com>

Flowmon empowers manufacturers and utility companies to ensure the reliability of their industrial networks confidently to avoid downtime and disruption of service continuity. This can be achieved by continuous monitoring and anomaly detection so that malfunctioning devices or security incidents, such as cyber espionage, zero-days, or malware, can be reported and remedied as quickly as possible.

NEW QUESTION 313

In order to tailor your tests during a web-application scan, you decide to determine which web-server version is hosting the application. On using the sV flag with Nmap, you obtain the following response:

80/tcp open http-proxy Apache Server 7.1.6

what Information-gathering technique does this best describe?

- A. WhoIS lookup
- B. Banner grabbing
- C. Dictionary attack
- D. Brute forcing

Answer: B

Explanation:

Banner grabbing is a technique used to gain info about a computer system on a network and the services running on its open ports. administrators will use this to take inventory of the systems and services on their network. However, an intruder will use banner grabbing so as to search out network hosts that are running versions of applications and operating systems with known exploits.

Some samples of service ports used for banner grabbing are those used by Hyper Text Transfer Protocol (HTTP), File Transfer Protocol (FTP), and Simple Mail Transfer Protocol (SMTP); ports 80, 21, and 25 severally. Tools normally used to perform banner grabbing are Telnet, nmap and Netcat.

For example, one may establish a connection to a target internet server using Netcat, then send an HTTP request. The response can usually contain info about the service running on the host:

Graphical user interface, text, application Description automatically generated

```
[root@prober]# nc www.targethost.com 80
HEAD / HTTP/1.1
HTTP/1.1 200 OK
Date: Mon, 12 Feb 2000 22:38:46 EDT
Server: Apache/2.0.46 (Ubuntu) (Red Hat/Linux)
Last-Modified: Thu, 10 Apr 2009 11:28:28 PST
Etag: "5000-001-173a0d0c"
Accept-Ranges: bytes
Content-Length: 1128
Connection: close
Content-Type: text/html
```

This information may be used by an administrator to catalog this system, or by an intruder to narrow down a list of applicable exploits. To prevent this, network administrators should restrict access to services on their networks and shut down unused or unnecessary services running on network hosts. Shodan is a search engine for banners grabbed from portscanning the Internet.

NEW QUESTION 317

Ethical hacker Jane Doe is attempting to crack the password of the head of the IT department of ABC company. She is utilizing a rainbow table and notices upon entering a password that extra characters are added to the password after submitting. What countermeasure is the company using to protect against rainbow tables?

- A. Password key hashing
- B. Password salting
- C. Password hashing
- D. Account lockout

Answer: B

Explanation:

Passwords are usually delineated as “hashed and salted”. salting is simply the addition of a unique, random string of characters renowned solely to the site to every parole before it’s hashed, typically this “salt” is placed in front of each password.

The salt value needs to be held on by the site, which means typically sites use the same salt for each parole. This makes it less effective than if individual salts are used.

The use of unique salts means that common passwords shared by multiple users – like “123456” or “password” – aren’t revealed when one such hashed password is known – because despite the passwords being the same the immediately and hashed values are not.

Large salts also protect against certain methods of attack on hashes, including rainbow tables or logs of hashed passwords previously broken.

Both hashing and salting may be repeated more than once to increase the issue in breaking the security.

NEW QUESTION 318

You need a tool that can do network intrusion prevention and intrusion detection, function as a network sniffer, and record network activity, what tool would you most likely select?

- A. Nmap
- B. Cain & Abel
- C. Nessus
- D. Snort

Answer: D

NEW QUESTION 323

Which Nmap switch helps evade IDS or firewalls?

- A. -n/-R
- B. -ON/-OX/-OG
- C. -T
- D. -D

Answer: C

NEW QUESTION 324

What type of virus is most likely to remain undetected by antivirus software?

- A. Cavity virus
- B. Stealth virus
- C. File-extension virus
- D. Macro virus

Answer: B

NEW QUESTION 329

Bob is going to perform an active session hijack against Brownies Inc. He has found a target that allows session oriented connections (Telnet) and performs the sequence prediction on the target operating system. He manages to find an active session due to the high level of traffic on the network. What is Bob supposed to do next?

- A. Take over the session
- B. Reverse sequence prediction
- C. Guess the sequence numbers
- D. Take one of the parties offline

Answer: C

NEW QUESTION 334

Which iOS jailbreaking technique patches the kernel during the device boot so that it becomes jailbroken after each successive reboot?

- A. Tethered jailbreaking
- B. Semi-tethered jailbreaking
- C. Untethered jailbreaking
- D. Semi-Untethered jailbreaking

Answer: C

Explanation:

An untethered jailbreak is one that allows a telephone to finish a boot cycle when being pwned with none interruption to jailbreak-oriented practicality.

Untethered jailbreaks are the foremost sought-after of all, however they're additionally the foremost difficult to attain due to the powerful exploits and organic process talent they need. Associate unbound jailbreak is sent over a physical USB cable association to a laptop or directly on the device itself by approach of associate application-based exploit, like a web site in campaign.

Upon running associate unbound jailbreak, you'll be able to flip your pwned telephone off and on once more while not running the jailbreak tool once more. All of your jailbreak tweaks and apps would then continue in operation with none user intervention necessary.

It's been an extended time since iOS has gotten the unbound jailbreak treatment. The foremost recent example was the computer-based Pangu break, that supported most handsets that ran iOS nine.1. We've additionally witnessed associate unbound jailbreak within the kind of JailbreakMe, that allowed users to pwn their handsets directly from the mobile campaign applications programme while not a laptop.

NEW QUESTION 338

_____ is a type of phishing that targets high-profile executives such as CEOs, CFOs, politicians, and celebrities who have access to confidential and highly valuable information.

- A. Spear phishing
- B. Whaling
- C. Vishing
- D. Phishing

Answer: B

NEW QUESTION 340

You are tasked to configure the DHCP server to lease the last 100 usable IP addresses in subnet to. 1.4.0/23. Which of the following IP addresses could be teased as a result of the new configuration?

- A. 210.1.55.200
- B. 10.1.4.254
- C. 10.1.5.200
- D. 10.1.4.156

Answer: C

NEW QUESTION 341

What is the following command used for?

```
net use \targetipc$ "" /u:""
```

- A. Grabbing the etc/passwd file
- B. Grabbing the SAM
- C. Connecting to a Linux computer through Samba.
- D. This command is used to connect as a null session
- E. Enumeration of Cisco routers

Answer: D

NEW QUESTION 345

How can rainbow tables be defeated?

- A. Use of non-dictionary words
- B. All uppercase character passwords
- C. Password salting
- D. Lockout accounts under brute force password cracking attempts

Answer: C

NEW QUESTION 349

Which of the following programs is usually targeted at Microsoft Office products?

- A. Polymorphic virus
- B. Multipart virus
- C. Macro virus
- D. Stealth virus

Answer: C

NEW QUESTION 352

A bank stores and processes sensitive privacy information related to home loans. However, auditing has never been enabled on the system. What is the first step that the bank should take before enabling the audit feature?

- A. Perform a vulnerability scan of the system.
- B. Determine the impact of enabling the audit feature.
- C. Perform a cost/benefit analysis of the audit feature.
- D. Allocate funds for staffing of audit log review.

Answer: B

NEW QUESTION 353

This form of encryption algorithm is asymmetric key block cipher that is characterized by a 128-bit block size, and its key size can be up to 256 bits. Which among the following is this encryption algorithm?

- A. Twofish encryption algorithm
- B. HMAC encryption algorithm
- C. IDEA
- D. Blowfish encryption algorithm

Answer: A

Explanation:

Twofish is an encryption algorithm designed by Bruce Schneier. It's a symmetric key block cipher with a block size of 128 bits, with keys up to 256 bits. it's associated with AES (Advanced Encryption Standard) and an earlier block cipher called Blowfish. Twofish was actually a finalist to become the industry standard for encryption, but was ultimately beaten out by the present AES. Twofish has some distinctive features that set it aside from most other cryptographic protocols. For one, it uses pre-computed, key-dependent S-boxes. An S-box (substitution-box) may be a basic component of any symmetric key algorithm which performs substitution. within the context of Twofish's block cipher, the S-box works to obscure the connection of the key to the ciphertext. Twofish uses a pre-computed, key-dependent S-box which suggests that the S-box is already provided, but depends on the cipher key to decrypt the knowledge .

How Secure is Twofish? Twofish is seen as a really secure option as far as encryption protocols go. one among the explanation that it wasn't selected because the advanced encryption standard is thanks to its slower speed. Any encryption standard that uses a 128-bit or higher key, is theoretically safe from brute force attacks. Twofish is during this category. Because Twofish uses "pre-computed key-dependent S-boxes", it are often susceptible to side channel attacks. this is often thanks to the tables being pre-computed. However, making these tables key-dependent helps mitigate that risk. There are a couple of attacks on Twofish, but consistent with its creator, Bruce Schneier, it didn't constitute a real cryptanalysis. These attacks didn't constitute a practical break within the cipher.

Products That Use Twofish

GnuPG: GnuPG may be a complete and free implementation of the OpenPGP standard as defined by RFC4880 (also referred to as PGP). GnuPG allows you to encrypt and sign your data and communications; it features a flexible key management system, along side access modules for all types of public key directories.

KeePass: KeePass may be a password management tool that generates passwords with top-notch security. It's a free, open source, lightweight and easy-to-use password manager with many extensions and plugins.

Password Safe: Password Safe uses one master password to stay all of your passwords protected, almost like the functionality of most of the password managers on this list. It allows you to store all of your passwords during a single

password database, or multiple databases for various purposes. Creating a database is straightforward, just create the database, set your master password. PGP (Pretty Good Privacy): PGP is employed mostly for email encryption, it encrypts the content of the e-mail. However, Pretty Good Privacy doesn't encrypt the topic and sender of the e-mail, so make certain to never put sensitive information in these fields when using PGP. TrueCrypt: TrueCrypt may be a software program that encrypts and protects files on your devices. With TrueCrypt the encryption is transparent to the user and is completed locally at the user's computer. This suggests you'll store a TrueCrypt file on a server and TrueCrypt will encrypt that file before it's sent over the network.

NEW QUESTION 357

A company's policy requires employees to perform file transfers using protocols which encrypt traffic. You suspect some employees are still performing file transfers using unencrypted protocols because the employees do not like changes. You have positioned a network sniffer to capture traffic from the laptops used by employees in the data ingest department. Using Wireshark to examine the captured traffic, which command can be used as display filter to find unencrypted file transfers?

- A. tcp.port == 21
- B. tcp.port == 23
- C. tcp.port == 21 || tcp.port == 22
- D. tcp.port != 21

Answer: A

NEW QUESTION 362

Jake, a professional hacker, installed spyware on a target iPhone to spy on the target user's activities. He can take complete control of the target mobile device by jailbreaking the device remotely and record audio, capture screenshots, and monitor all phone calls and SMS messages. What is the type of spyware that Jake used to infect the target device?

- A. DroidSheep
- B. Andorot
- C. Zscaler
- D. Trident

Answer: B

NEW QUESTION 364

Attacker Rony installed a rogue access point within an organization's perimeter and attempted to intrude into its internal network. Johnson, a security auditor, identified some unusual traffic in the internal network that is aimed at cracking the authentication mechanism. He immediately turned off the targeted network and tested for any weak and outdated security mechanisms that are open to attack. What is the type of vulnerability assessment performed by Johnson in the above scenario?

- A. Host-based assessment
- B. Wireless network assessment
- C. Application assessment
- D. Distributed assessment

Answer: B

Explanation:

Wireless network assessment determines the vulnerabilities in an organization's wireless networks. In the past, wireless networks used weak and defective data encryption mechanisms. Now, wireless network standards have evolved, but many networks still use weak and outdated security mechanisms and are open to attack. Wireless network assessments try to attack wireless authentication mechanisms and gain unauthorized access. This type of assessment tests wireless networks and identifies rogue networks that may exist within an organization's perimeter. These assessments audit client-specified sites with a wireless network. They sniff wireless network traffic and try to crack encryption keys. Auditors test other network access if they gain access to the wireless network.

NEW QUESTION 369

If you send a TCP ACK segment to a known closed port on a firewall but it does not respond with an RST. What do you know about the firewall you are scanning?

- A. There is no firewall in place.
- B. This event does not tell you anything about the firewall.
- C. It is a stateful firewall.
- D. It is a non-stateful firewall.

Answer: B

NEW QUESTION 371

Richard, an attacker, targets an MNC. In this process, he uses a footprinting technique to gather as much information as possible. Using this technique, he gathers domain information such as the target domain name, contact details of its owner, expiry date, and creation date. With this information, he creates a map of the organization's network and misleads domain owners with social engineering to obtain internal details of its network. What type of footprinting technique is employed by Richard?

- A. VPN footprinting
- B. Email footprinting
- C. VoIP footprinting
- D. Whois footprinting

Answer: B

NEW QUESTION 375

Jane invites her friends Alice and John over for a LAN party. Alice and John access Jane's wireless network without a password. However, Jane has a long, complex password on her router. What attack has likely occurred?

- A. Wireless sniffing
- B. Piggybacking
- C. Evil twin
- D. Wardriving

Answer: C

Explanation:

An evil twin may be a fraudulent Wi-Fi access point that appears to be legitimate but is about up to pay attention to wireless communications.[1] The evil twin is that the wireless LAN equivalent of the phishing scam. This type of attack could also be used to steal the passwords of unsuspecting users, either by monitoring their connections or by phishing, which involves fixing a fraudulent internet site and luring people there. The attacker snoops on Internet traffic employing a bogus wireless access point. Unwitting web users could also be invited to log into the attacker's server, prompting them to enter sensitive information like usernames and passwords. Often, users are unaware they need been duped until well after the incident has occurred. When users log into unsecured (non-HTTPS) bank or e-mail accounts, the attacker intercepts the transaction, since it's sent through their equipment. The attacker is additionally ready to hook up with other networks related to the users' credentials. Fake access points are found out by configuring a wireless card to act as an access point (known as HostAP). They're hard to trace since they will be shut off instantly. The counterfeit access point could also be given an equivalent SSID and BSSID as a close-by Wi-Fi network. The evil twin are often configured to pass Internet traffic through to the legitimate access point while monitoring the victim's connection, or it can simply say the system is temporarily unavailable after obtaining a username and password.

NEW QUESTION 377

What is the minimum number of network connections in a multi homed firewall?

- A. 3
- B. 5
- C. 4
- D. 2

Answer: A

NEW QUESTION 382

What is the following command used for?

```
sqlmap.py-u  
„http://10.10.1.20/?p=1  
&forumaction=search" -dbs
```

- A. Creating backdoors using SQL injection
- B. Enumerating the databases in the DBMS for the URL
- C. Retrieving SQL statements being executed on the database
- D. Searching database statements at the IP address given

Answer: A

NEW QUESTION 384

Don, a student, came across a gaming app in a third-party app store and installed it. Subsequently, all the legitimate apps in his smartphone were replaced by deceptive applications that appeared legitimate. He also received many advertisements on his smartphone after installing the app. What is the attack performed on Don in the above scenario?

- A. SMS phishing attack
- B. SIM card attack
- C. Agent Smith attack
- D. Clickjacking

Answer: C

Explanation:

Agent Smith Attack

Agent Smith attacks are carried out by luring victims into downloading and installing malicious apps designed and published by attackers in the form of games, photo editors, or other attractive tools from third-party app stores such as 9Apps. Once the user has installed the app, the core malicious code inside the application infects or replaces the legitimate apps in the victim's mobile device C&C commands. The deceptive application replaces legitimate apps such as WhatsApp, SHAREit, and MX Player with similar infected versions. The application sometimes also appears to be an authentic Google product such as Google Updater or Themes. The attacker then produces a massive volume of irrelevant and fraudulent advertisements on the victim's device through the infected app for financial gain. Attackers exploit these apps to steal critical information such as personal information, credentials, and bank details, from the victim's mobile device through C&C commands.

NEW QUESTION 387

During a black-box pen test you attempt to pass IRC traffic over port 80/TCP from a compromised web enabled host. The traffic gets blocked; however, outbound HTTP traffic is unimpeded. What type of firewall is inspecting outbound traffic?

- A. Circuit
- B. Stateful
- C. Application
- D. Packet Filtering

Answer: B

NEW QUESTION 390

What does a firewall check to prevent particular ports and applications from getting packets into an organization?

- A. Transport layer port numbers and application layer headers
- B. Presentation layer headers and the session layer port numbers
- C. Network layer headers and the session layer port numbers
- D. Application layer port numbers and the transport layer headers

Answer: A

NEW QUESTION 394

is a set of extensions to DNS that provide the origin authentication of DNS data to DNS clients (resolvers) so as to reduce the threat of DNS poisoning, spoofing, and similar types of attacks.

- A. DNSSEC
- B. Resource records
- C. Resource transfer
- D. Zone transfer

Answer: A

NEW QUESTION 395

Jude, a pen tester, examined a network from a hacker's perspective to identify exploits and vulnerabilities accessible to the outside world by using devices such as firewalls, routers, and servers. In this process, he also estimated the threat of network security attacks and determined the level of security of the corporate network.

What is the type of vulnerability assessment that Jude performed on the organization?

- A. External assessment
- B. Passive assessment
- C. Host-based assessment
- D. Application assessment

Answer: A

NEW QUESTION 400

what firewall evasion scanning technique make use of a zombie system that has low network activity as well as its fragment identification numbers?

- A. Decoy scanning
- B. Packet fragmentation scanning
- C. Spoof source address scanning
- D. Idle scanning

Answer: D

Explanation:

The idle scan could be a communications protocol port scan technique that consists of causing spoofed packets to a pc to seek out out what services square measure obtainable. this can be accomplished by impersonating another pc whose network traffic is extremely slow or nonexistent (that is, not transmission or receiving information). this might be associate idle pc, known as a “zombie”.

This action are often done through common code network utilities like nmap and hping. The attack involves causing solid packets to a particular machine target in an attempt to seek out distinct characteristics of another zombie machine. The attack is refined as a result of there's no interaction between the offender pc and also the target: the offender interacts solely with the “zombie” pc.

This exploit functions with 2 functions, as a port scanner and a clerk of sure informatics relationships between machines. The target system interacts with the “zombie” pc and distinction in behavior are often discovered mistreatment totally different|completely different “zombies” with proof of various privileges granted by the target to different computers.

The overall intention behind the idle scan is to “check the port standing whereas remaining utterly invisible to the targeted host.”

The first step in execution associate idle scan is to seek out associate applicable zombie. It must assign informatics ID packets incrementally on a worldwide (rather than per-host it communicates with) basis. It ought to be idle (hence the scan name), as extraneous traffic can raise its informatics ID sequence, confusing the scan logic. The lower the latency between the offender and also the zombie, and between the zombie and also the target, the quicker the scan can proceed.

Note that once a port is open, IPIDs increment by a pair of. Following is that the sequence:

➤ offender to focus on -> SYN, target to zombie ->SYN/ACK, Zombie to focus on -> RST (IPID increment by 1)

➤ currently offender tries to probe zombie for result. offender to Zombie ->SYN/ACK, Zombie to offender

-> RST (IPID increment by 1)

So, during this method IPID increments by a pair of finally.

When associate idle scan is tried, tools (for example nmap) tests the projected zombie and reports any issues with it. If one does not work, attempt another.

Enough net hosts square measure vulnerable that zombie candidates are not exhausting to seek out. a standard approach is to easily execute a ping sweep of some network. selecting a network close to your supply address, or close to the target, produces higher results. you'll be able to attempt associate idle scan mistreatment every obtainable host from the ping sweep results till you discover one that works. As usual, it's best to raise permission before mistreatment someone's machines for surprising functions like idle scanning.

Simple network devices typically create nice zombies as a result of {they square measure|they're} normally each underused (idle) and designed with straightforward network stacks that are susceptible to informatics ID traffic detection.

While distinguishing an acceptable zombie takes some initial work, you'll be able to keep re-using the nice ones. as an alternative, there are some analysis on utilizing unplanned public internet services as zombie hosts to perform similar idle scans. leverage the approach a number of these services perform departing connections upon user submissions will function some quite poor's man idle scanning.

NEW QUESTION 404

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 312-50v11 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 312-50v11 Product From:

<https://www.2passeasy.com/dumps/312-50v11/>

Money Back Guarantee

312-50v11 Practice Exam Features:

- * 312-50v11 Questions and Answers Updated Frequently
- * 312-50v11 Practice Questions Verified by Expert Senior Certified Staff
- * 312-50v11 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 312-50v11 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year