

EC-Council

Exam Questions 312-50v11

Certified Ethical Hacker Exam (CEH v11)



NEW QUESTION 1

Gregory, a professional penetration tester working at Sys Security Ltd., is tasked with performing a security test of web applications used in the company. For this purpose, Gregory uses a tool to test for any security loopholes by hijacking a session between a client and server. This tool has a feature of intercepting proxy that can be used to inspect and modify the traffic between the browser and target application. This tool can also perform customized attacks and can be used to test the randomness of session tokens. Which of the following tools is used by Gregory in the above scenario?

- A. Nmap
- B. Burp Suite
- C. CxSAST
- D. Wireshark

Answer: B

NEW QUESTION 2

Which of the following allows attackers to draw a map or outline the target organization's network infrastructure to know about the actual environment that they are going to hack.

- A. Enumeration
- B. Vulnerability analysis
- C. Malware analysis
- D. Scanning networks

Answer: D

NEW QUESTION 3

jane, an ethical hacker. Is testing a target organization's web server and website to identify security loopholes. In this process, she copied the entire website and its content on a local drive to view the complete profile of the site's directory structure, file structure, external links, images, web pages, and so on. This information helps jane map the website's directories and gain valuable information. What is the attack technique employed by Jane in the above scenario?

- A. website mirroring
- B. Session hijacking
- C. Web cache poisoning
- D. Website defacement

Answer: A

Explanation:

A mirror site may be a website or set of files on a computer server that has been copied to a different computer server in order that the location or files are available from quite one place. A mirror site has its own URL, but is otherwise just like the principal site. Load-balancing devices allow high-volume sites to scale easily, dividing the work between multiple mirror sites. A mirror site is typically updated frequently to make sure it reflects the contents of the first site. In some cases, the first site may arrange for a mirror site at a bigger location with a better speed connection and, perhaps, a better proximity to an outsized audience. If the first site generates an excessive amount of traffic, a mirror site can ensure better availability of the web site or files. For websites that provide copies or updates of widely used software, a mirror site allows the location to handle larger demands and enables the downloaded files to arrive more quickly. Microsoft, Sun Microsystems and other companies have mirror sites from which their browser software are often downloaded. Mirror sites are wont to make site access faster when the first site could also be geographically distant from those accessing it. A mirrored web server is usually located on a special continent from the principal site, allowing users on the brink of the mirror site to urge faster and more reliable access. Mirroring an internet site also can be done to make sure that information are often made available to places where access could also be unreliable or censored. In 2013, when Chinese authorities blocked access to foreign media outlets just like the Wall Street Journal and Reuters, site mirroring was wont to restore access and circumvent government censorship.

NEW QUESTION 4

A network administrator discovers several unknown files in the root directory of his Linux FTP server. One of the files is a tarball, two are shell script files, and the third is a binary file is named "nc." The FTP server's access logs show that the anonymous user account logged in to the server, uploaded the files, and extracted the contents of the tarball and ran the script using a function provided by the FTP server's software. The "ps" command shows that the "nc" file is running as process, and the netstat command shows the "nc" process is listening on a network port.

What kind of vulnerability must be present to make this remote attack possible?

- A. File system permissions
- B. Privilege escalation
- C. Directory traversal
- D. Brute force login

Answer: A

NEW QUESTION 5

When a normal TCP connection starts, a destination host receives a SYN (synchronize/start) packet from a source host and sends back a SYN/ACK (synchronize acknowledge). The destination host must then hear an ACK (acknowledge) of the SYN/ACK before the connection is established. This is referred to as the "TCP three-way handshake." While waiting for the ACK to the SYN ACK, a connection queue of finite size on the destination host keeps track of connections waiting to be completed. This queue typically empties quickly since the ACK is expected to arrive a few milliseconds after the SYN ACK.

How would an attacker exploit this design by launching TCP SYN attack?

- A. Attacker generates TCP SYN packets with random destination addresses towards a victim host
- B. Attacker floods TCP SYN packets with random source addresses towards a victim host
- C. Attacker generates TCP ACK packets with random source addresses towards a victim host
- D. Attacker generates TCP RST packets with random source addresses towards a victim host

Answer: B

NEW QUESTION 6

You start performing a penetration test against a specific website and have decided to start from grabbing all the links from the main page. What is the best Linux pipe to achieve your milestone?

- A. `dirb https://site.com | grep "site"`
- B. `curl -s https://sile.com | grep "< a href='\http" | grep "Site-com- | cut -d "V" -f 2`
- C. `wget https://stte.com | grep "< a href=*http" | grep "site.com"`
- D. `wgethttps://site.com | cut -d"http`

Answer: C

NEW QUESTION 7

What is the proper response for a NULL scan if the port is open?

- A. SYN
- B. ACK
- C. FIN
- D. PSH
- E. RST
- F. No response

Answer: F

NEW QUESTION 8

An attacker is trying to redirect the traffic of a small office. That office is using their own mail server, DNS server and NTP server because of the importance of their job. The attacker gain access to the DNS server and redirect the direction `www.google.com` to his own IP address. Now when the employees of the office want to go to Google they are being redirected to the attacker machine. What is the name of this kind of attack?

- A. MAC Flooding
- B. Smurf Attack
- C. DNS spoofing
- D. ARP Poisoning

Answer: C

NEW QUESTION 9

In Trojan terminology, what is a covert channel?



- A. A channel that transfers information within a computer system or network in a way that violates the security policy
- B. A legitimate communication path within a computer system or network for transfer of data
- C. It is a kernel operation that hides boot processes and services to mask detection
- D. It is Reverse tunneling technique that uses HTTPS protocol instead of HTTP protocol to establish connections

Answer: A

NEW QUESTION 10

Jacob works as a system administrator in an organization. He wants to extract the source code of a mobile application and disassemble the application to analyze its design flaws. Using this technique, he wants to fix any bugs in the application, discover underlying vulnerabilities, and improve defense strategies against attacks.

What is the technique used by Jacob in the above scenario to improve the security of the mobile application?

- A. Reverse engineering
- B. App sandboxing
- C. Jailbreaking
- D. Social engineering

Answer: A

NEW QUESTION 10

A security analyst uses Zenmap to perform an ICMP timestamp ping scan to acquire information related to the current time from the target host machine. Which of the following Zenmap options must the analyst use to perform the ICMP timestamp ping scan?

- A. `-PY`
- B. `-PU`
- C. `-PP`
- D. `-Pn`

Answer: C

NEW QUESTION 11

The change of a hard drive failure is once every three years. The cost to buy a new hard drive is \$300. It will require 10 hours to restore the OS and software to the new hard disk. It will require a further 4 hours to restore the database from the last backup to the new hard disk. The recovery person earns \$10/hour. Calculate the SLE, ARO, and ALE. Assume the EF = 1(100%). What is the closest approximate cost of this replacement and recovery operation per year?

- A. \$1320
- B. \$440
- C. \$100
- D. \$146

Answer: D

NEW QUESTION 13

You are a penetration tester tasked with testing the wireless network of your client Brakeme SA. You are attempting to break into the wireless network with the SSID "Brakeme-Internal." You realize that this network uses WPA3 encryption, which of the following vulnerabilities is the promising to exploit?

- A. Dragonblood
- B. Cross-site request forgery
- C. Key reinstallation attack
- D. AP Myconfiguration

Answer: A

Explanation:

Dragonblood allows an attacker in range of a password-protected Wi-Fi network to get the password and gain access to sensitive information like user credentials, emails and mastercard numbers. consistent with the published report: "The WPA3 certification aims to secure Wi-Fi networks, and provides several advantages over its predecessor WPA2, like protection against offline dictionary attacks and forward secrecy. Unfortunately, we show that WPA3 is suffering from several design flaws, and analyze these flaws both theoretically and practically. Most prominently, we show that WPA3's Simultaneous Authentication of Equals (SAE) handshake, commonly referred to as Dragonfly, is suffering from password partitioning attacks." Our Wi-Fi researchers at WatchGuard are educating businesses globally that WPA3 alone won't stop the Wi-Fi hacks that allow attackers to steal information over the air (learn more in our recent blog post on the topic). These Dragonblood vulnerabilities impact a little amount of devices that were released with WPA3 support, and makers are currently making patches available. one among the most important takeaways for businesses of all sizes is to know that a long-term fix might not be technically feasible for devices with lightweight processing capabilities like IoT and embedded systems. Businesses got to consider adding products that enable a Trusted Wireless Environment for all kinds of devices and users alike. Recognizing that vulnerabilities like KRACK and Dragonblood require attackers to initiate these attacks by bringing an "Evil Twin" Access Point or a Rogue Access Point into a Wi-Fi environment, we've been that specialize in developing Wi-Fi security solutions that neutralize these threats in order that these attacks can never occur. The Trusted Wireless Environment framework protects against the "Evil Twin" Access Point and Rogue Access Point. one among these hacks is required to initiate the 2 downgrade or side-channel attacks referenced in Dragonblood. What's next? WPA3 is an improvement over WPA2 Wi-Fi encryption protocol, however, as we predicted, it still doesn't provide protection from the six known Wi-Fi threat categories. It's highly likely that we'll see more WPA3 vulnerabilities announced within the near future. To help reduce Wi-Fi vulnerabilities, we're asking all of you to hitch the Trusted Wireless Environment movement and advocate for a worldwide security standard for Wi-Fi.

NEW QUESTION 18

Suppose your company has just passed a security risk assessment exercise. The results display that the risk of the breach in the main company application is 50%. Security staff has taken some measures and implemented the necessary controls. After that, another security risk assessment was performed showing that risk has decreased to 10%. The risk threshold for the application is 20%. Which of the following risk decisions will be the best for the project in terms of its successful continuation with the most business profit?

- A. Accept the risk
- B. Introduce more controls to bring risk to 0%
- C. Mitigate the risk
- D. Avoid the risk

Answer: A

NEW QUESTION 21

To invisibly maintain access to a machine, an attacker utilizes a toolkit that sits undetected in the core components of the operating system. What is this type of rootkit an example of?

- A. Hypervisor rootkit
- B. Kernel toolkit
- C. Hardware rootkit
- D. Firmware rootkit

Answer: B

Explanation:

Kernel-mode rootkits run with the best operating system privileges (Ring 0) by adding code or replacement parts of the core operating system, as well as each the kernel and associated device drivers. Most operative systems support kernel-mode device drivers, that execute with a similar privileges because the software itself. As such, several kernel-mode rootkits square measure developed as device drivers or loadable modules, like loadable kernel modules in Linux or device drivers in Microsoft Windows. This category of rootkit has unrestricted security access, however is tougher to jot down. The quality makes bugs common, and any bugs in code operative at the kernel level could seriously impact system stability, resulting in discovery of the rootkit. one amongst the primary wide familiar kernel rootkits was developed for Windows NT four.0 and discharged in Phrack magazine in 1999 by Greg Hoglund. Kernel rootkits is particularly tough to observe and take away as a result of they operate at a similar security level because the software itself, and square measure therefore able to intercept or subvert the foremost sure software operations. Any package, like antivirus package, running on the compromised system is equally vulnerable. during this scenario, no a part of the system is sure.

NEW QUESTION 25

Which results will be returned with the following Google search query?

site:target.com – site:Marketing.target.com accounting

- A. Results from matches on the site marketing.target.com that are in the domain target.com but do not include the word accounting.
- B. Results matching all words in the query.
- C. Results for matches on target.com and Marketing.target.com that include the word “accounting”
- D. Results matching “accounting” in domain target.com but not on the site Marketing.target.com

Answer: D

NEW QUESTION 29

This is an attack that takes advantage of a web site vulnerability in which the site displays content that includes un-sanitized user-provided data.

```
<ahref="http://foobar.com/index.html?id=%3Cscript%20src=%22  
http://baddomain.com/badscript.js %22%3E%3C/script%3E">See foobar</a>
```

What is this attack?

- A. Cross-site-scripting attack
- B. SQL Injection
- C. URL Traversal attack
- D. Buffer Overflow attack

Answer: A

NEW QUESTION 30

Daniel is a professional hacker who is attempting to perform an SQL injection attack on a target website. www.movlescope.com. During this process, he encountered an IDS that detects SQL Injection attempts based on predefined signatures. To evade any comparison statement, he attempted placing characters such as “or '1'='1” in any basic injection statement such as “or 1=1.” Identify the evasion technique used by Daniel in the above scenario.

- A. Null byte
- B. IP fragmentation
- C. Char encoding
- D. Variation

Answer: D

Explanation:

One may append the comment “—” operator along with the String for the username and whole avoid executing the password segment of the SQL query.

Everything when the — operator would be considered as comment and not dead.

To launch such an attack, the value passed for name could be 'OR '1'='1' ; —Statement = “SELECT * FROM 'CustomerDB' WHERE 'name' = ' ”+ userName + “ ' AND 'password' = ' ”+ passwd + “ ' ; ”

Statement = “SELECT * FROM 'CustomerDB' WHERE 'name' = ' ' OR '1'='1';— + “ ' AND 'password' = ' ”+ passwd + “ ' ; ”

All the records from the customer database would be listed.

Yet, another variation of the SQL Injection Attack can be conducted in dbms systems that allow multiple SQL injection statements. Here, we will also create use of the vulnerability in some dbms whereby a user provided field isn't strongly used in or isn't checked for sort constraints.

This could take place once a numeric field is to be employed in a SQL statement; but, the programmer makes no checks to validate that the user supplied input is numeric.

Variation is an evasion technique whereby the attacker can easily evade any comparison statement. The attacker does this by placing characters such as “” or '1'='1” in any basic injection statement such as “or 1=1” or with other accepted SQL comments.

Evasion Technique: Variation Variation is an evasion technique whereby the attacker can easily evade any comparison statement. The attacker does this by placing characters such as “” or '1'='1” in any basic injection statement such as “or 1=1” or with other accepted SQL comments. The SQL interprets this as a comparison between two strings or characters instead of two numeric values. As the evaluation of two strings yields a true statement, similarly, the evaluation of two numeric values yields a true statement, thus rendering the evaluation of the complete query unaffected. It is also possible to write many other signatures; thus, there are infinite possibilities of variation as well. The main aim of the attacker is to have a WHERE statement that is always evaluated as “true” so that any mathematical or string comparison can be used, where the SQL can perform the same.

NEW QUESTION 33

Gerard, a disgruntled ex-employee of Sunglass IT Solutions, targets this organization to perform sophisticated attacks and bring down its reputation in the market. To launch the attacks process, he performed DNS footprinting to gather information about DNS servers and to identify the hosts connected in the target network. He used an automated tool that can retrieve information about DNS zone data including DNS domain names, computer names. IP addresses. DNS records, and network Who is records. He further exploited this information to launch other sophisticated attacks. What is the tool employed by Gerard in the above scenario?

- A. Knative
- B. zANTI
- C. Towelroot
- D. Bluto

Answer: D

Explanation:

<https://www.darknet.org.uk/2017/07/bluto-dns-recon-zone-transfer-brute-forcer/>

"Attackers also use DNS lookup tools such as DNSdumpster.com, Bluto, and Domain Dossier to retrieve DNS records for a specified domain or hostname. These tools retrieve information such as domains and IP addresses, domain Whois records, DNS records, and network Whois records." CEH Module 02 Page 138

NEW QUESTION 34

Email is transmitted across the Internet using the Simple Mail Transport Protocol. SMTP does not encrypt email, leaving the information in the message vulnerable to being read by an unauthorized person. SMTP can upgrade a connection between two mail servers to use TLS. Email transmitted by SMTP over TLS is encrypted. What is the name of the command used by SMTP to transmit email over TLS?

- A. OPPORTUNISTICTLS

- B. UPGRADE TLS
- C. FORCE TLS
- D. START TLS

Answer: D

NEW QUESTION 38

Morris, a professional hacker, performed a vulnerability scan on a target organization by sniffing the traffic on the network to identify the active systems, network services, applications, and vulnerabilities. He also obtained the list of the users who are currently accessing the network. What is the type of vulnerability assessment that Morris performed on the target organization?

- A. internal assessment
- B. Passive assessment
- C. External assessment
- D. Credentialed assessment

Answer: B

Explanation:

Passive Assessment Passive assessments sniff the traffic present on the network to identify the active systems, network services, applications, and vulnerabilities. Passive assessments also provide a list of the users who are currently accessing the network.

NEW QUESTION 43

A technician is resolving an issue where a computer is unable to connect to the Internet using a wireless access point. The computer is able to transfer files locally to other machines, but cannot successfully reach the Internet. When the technician examines the IP address and default gateway they are both on the 192.168.1.0/24. Which of the following has occurred?

- A. The computer is not using a private IP address.
- B. The gateway is not routing to a public IP address.
- C. The gateway and the computer are not on the same network.
- D. The computer is using an invalid IP address.

Answer: B

NEW QUESTION 47

Internet Protocol Security IPsec is actually a suite of protocols. Each protocol within the suite provides different functionality. Collective IPsec does everything except.

- A. Protect the payload and the headers
- B. Encrypt
- C. Work at the Data Link Layer
- D. Authenticate

Answer: C

Explanation:

<https://en.wikipedia.org/wiki/IPsec> Usage of IPsec Authentication Header format in Tunnel and Transport modes

NEW QUESTION 51

John the Ripper is a technical assessment tool used to test the weakness of which of the following?

- A. Passwords
- B. File permissions
- C. Firewall rulesets
- D. Usernames

Answer: A

NEW QUESTION 55

How does a denial-of-service attack work?

- A. A hacker prevents a legitimate user (or group of users) from accessing a service
- B. A hacker uses every character, word, or letter he or she can think of to defeat authentication
- C. A hacker tries to decipher a password by using a system, which subsequently crashes the network
- D. A hacker attempts to imitate a legitimate user by confusing a computer or even another person

Answer: A

NEW QUESTION 59

This type of injection attack does not show any error message. It is difficult to exploit as it returns information when the application is given SQL payloads that elicit a true or false response from the server. By observing the response, an attacker can extract sensitive information. What type of attack is this?

- A. Time-based SQL injection
- B. Union SQL injection
- C. Error-based SQL injection
- D. Blind SQL injection

Answer: D

NEW QUESTION 64

Which of the following DoS tools is used to attack target web applications by starvation of available sessions on the web server?
The tool keeps sessions at halt using never-ending POST transmissions and sending an arbitrarily large content-length header value.

- A. My Doom
- B. Astacheldraht
- C. R-U-Dead-Yet?(RUDY)
- D. LOIC

Answer: C

NEW QUESTION 69

Which rootkit is characterized by its function of adding code and/or replacing some of the operating-system kernel code to obscure a backdoor on a system?

- A. User-mode rootkit
- B. Library-level rootkit
- C. Kernel-level rootkit
- D. Hypervisor-level rootkit

Answer: C

NEW QUESTION 72

When discussing passwords, what is considered a brute force attack?

- A. You attempt every single possibility until you exhaust all possible combinations or discover the password
- B. You threaten to use the rubber hose on someone unless they reveal their password
- C. You load a dictionary of words into your cracking program
- D. You create hashes of a large number of words and compare it with the encrypted passwords
- E. You wait until the password expires

Answer: A

NEW QUESTION 77

If a tester is attempting to ping a target that exists but receives no response or a response that states the destination is unreachable, ICMP may be disabled and the network may be using TCP. Which other option could the tester use to get a response from a host using TCP?

- A. Traceroute
- B. Hping
- C. TCP ping
- D. Broadcast ping

Answer: B

Explanation:

<https://tools.kali.org/information-gathering/hping3>

NEW QUESTION 82

Bobby, an attacker, targeted a user and decided to hijack and intercept all their wireless communications. He installed a fake communication tower between two authentic endpoints to mislead the victim. Bobby used this virtual tower to interrupt the data transmission between the user and real tower, attempting to hijack an active session, upon receiving the users request. Bobby manipulated the traffic with the virtual tower and redirected the victim to a malicious website. What is the attack performed by Bobby in the above scenario?

- A. Wardriving
- B. KRACK attack
- C. jamming signal attack
- D. aLTEr attack

Answer: D

Explanation:

aLTEr attacks are usually performed on LTE devices Attacker installs a virtual (fake) communication tower between two authentic endpoints intending to mislead the victim This virtual tower is used to interrupt the data transmission between the user and real tower attempting to hijack the active session.

NEW QUESTION 85

As a Certified Ethical Hacker, you were contracted by a private firm to conduct an external security assessment through penetration testing.
What document describes the specifics of the testing, the associated violations, and essentially protects both the organization's interest and your liabilities as a tester?

- A. Service Level Agreement
- B. Project Scope
- C. Rules of Engagement
- D. Non-Disclosure Agreement

Answer: C

NEW QUESTION 90

Which among the following is the best example of the hacking concept called "clearing tracks"?

- A. After a system is breached, a hacker creates a backdoor to allow re-entry into a system.
- B. During a cyberattack, a hacker injects a rootkit into a server.
- C. An attacker gains access to a server through an exploitable vulnerability.
- D. During a cyberattack, a hacker corrupts the event logs on all machines.

Answer: D

NEW QUESTION 92

Log monitoring tools performing behavioral analysis have alerted several suspicious logins on a Linux server occurring during non-business hours. After further examination of all login activities, it is noticed that none of the logins have occurred during typical work hours. A Linux administrator who is investigating this problem realizes the system time on the Linux server is wrong by more than twelve hours. What protocol used on Linux servers to synchronize the time has stopped working?

- A. Time Keeper
- B. NTP
- C. PPP
- D. OSPP

Answer: B

NEW QUESTION 97

The following is an entry captured by a network IDS. You are assigned the task of analyzing this entry. You notice the value 0x90, which is the most common NOOP instruction for the Intel processor. You figure that the attacker is attempting a buffer overflow attack.

You also notice "/bin/sh" in the ASCII part of the output. As an analyst what would you conclude about the attack?

```
45 00 01 ce 28 1e 40 00 32 06 96 92 d1 3a 18 09 86 9f 18 97 E..î(.@.2...Ñ:.....
06 38 02 03 6f 54 4f a9 01 af fe 78 50 18 7d 78 76 dd 00 00 .8...oTO@.pxP.\)
Application "Calculator" "%path:..\dtsapps\calc\dcalc.exe%" " " size 0.75in 0.25in 0.50in
0.05in xvÝ..
42 42 20 f7 ff bf 21 f7 ff bf 22 f7 ff bf 23 f7 ff bf 58 58 BB ÷ÿ!÷ÿ"÷ÿ#÷ÿXX
58 58 58 58 58 58 58 58 58 58 58 58 58 58 58 58 25 2e 32 32 XXXXXXXXXXXXXXXXXXXX%.22
34 75 25 33 30 30 24 6e 25 2e 32 31 33 75 25 33 30 31 24 6e 4u%300$n%.213u%301$n
73 65 63 75 25 33 30 32 24 6e 25 2e 31 39 32 75 25 33 30 33 secu%302$n%.192u%303
24 6e 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 $n.....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 90 .....
90 90 31 db 31 c9 31 c0 b0 46 cd 80 89 e5 31 d2 b2 66 89 d0 ..iÛ1É1À°FÍ..&1Ô*f.Ð
31 c9 89 cb 43 89 5d f8 43 89 5d f4 4b 89 4d fc 8d 4d f4 cd 1É.ËC.]øC.]óK.Mü.MóÍ
80 31 c9 89 45 f4 43 66 89 5d ec 66 c7 45 ee 0f 27 89 4d f0 .1É.EóCf.]ifÇEi.'.Mô
8d 45 ec 89 45 f8 c6 45 fc 10 89 d0 8d 4d f4 cd 80 89 d0 43 .Eì.EøÆEu..Ð.MóÍ..ÐC
43 cd 80 89 d0 43 cd 80 89 c3 31 c9 b2 3f 89 d0 cd 80 89 d0 CÍ..ÐCÍ..&1É*?.ÐÍ..Ð
41 cd 80 eb 18 5e 89 75 08 31 c0 88 46 07 89 45 0c b0 0b 89 Áí.è.^..u.1À.F..E.°..
f3 8d 4d 08 8d 55 0c cd 80 e8 e3 ff ff ff 2f 62 69 6e 2f 73 ó.M..U.Í.è&ÿÿÿ/bin/s
68 0a h.
EVENT4: [NOOP:X86] (tcp,dp=515,sp=1592)
```

- A. The buffer overflow attack has been neutralized by the IDS
- B. The attacker is creating a directory on the compromised machine
- C. The attacker is attempting a buffer overflow attack and has succeeded
- D. The attacker is attempting an exploit that launches a command-line shell

Answer: D

NEW QUESTION 98

Robin, a professional hacker, targeted an organization's network to sniff all the traffic. During this process. Robin plugged in a rogue switch to an unused port in the LAN with a priority lower than any other switch in the network so that he could make it a root bridge that will later allow him to sniff all the traffic in the network. What is the attack performed by Robin in the above scenario?

- A. ARP spoofing attack
- B. VLAN hopping attack
- C. DNS poisoning attack
- D. STP attack


Answer: D

Explanation:

STP prevents bridging loops in a redundant switched network environment. By avoiding loops, you can ensure that broadcast traffic does not become a traffic storm.

STP is a hierarchical tree-like topology with a "root" switch at the top. A switch is elected as root based on the lowest configured priority of any switch (0 through 65,535). When a switch boots up, it begins a process of identifying other switches and determining the root bridge. After a root bridge is elected, the topology is established from its perspective of the connectivity. The switches determine the path to the root bridge, and all redundant paths are blocked. STP sends configuration and topology change notifications and acknowledgments (TCN/TCA) using bridge protocol data units (BPDU).

An STP attack involves an attacker spoofing the root bridge in the topology. The attacker broadcasts out an STP configuration/topology change BPDU in an attempt to force an STP recalculation. The BPDU sent out announces that the attacker's system has a lower bridge priority. The attacker can then see a variety of frames forwarded from other switches to it. STP recalculation may also cause a denial-of-service (DoS) condition on the network by causing an interruption of 30 to 45 seconds each time the root bridge changes. An attacker using STP network topology changes to force its host to be elected as the root bridge.

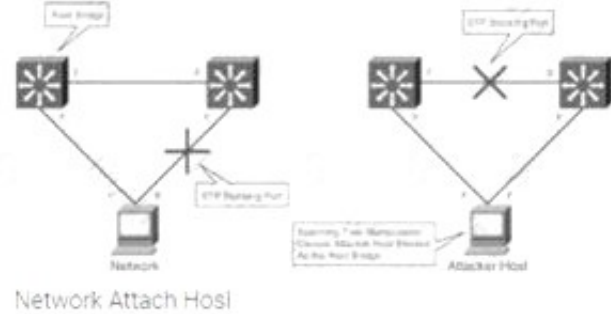

switch

NEW QUESTION 102

To reach a bank web site, the traffic from workstations must pass through a firewall. You have been asked to review the firewall configuration to ensure that workstations in network 10.10.10.0/24 can only reach the bank web site 10.20.20.1 using https. Which of the following firewall rules meets this requirement?

- A. If (source matches 10.10.10.0/24 and destination matches 10.20.20.1 and port matches 443) then permit
- B. If (source matches 10.10.10.0/24 and destination matches 10.20.20.1 and port matches 80 or 443) then permit
- C. If (source matches 10.20.20.1 and destination matches 10.10.10.0/24 and port matches 443) then permit
- D. If (source matches 10.10.10.0 and destination matches 10.20.20.1 and port matches 443) then permit

Answer: A

NEW QUESTION 107

Upon establishing his new startup, Tom hired a cloud service provider (CSP) but was dissatisfied with their service and wanted to move to another CSP. What part of the contract might prevent him from doing so?

- A. Virtualization
- B. Lock-in
- C. Lock-down
- D. Lock-up

Answer: B

NEW QUESTION 109

Ethical hacker Jane Smith is attempting to perform an SQL injection attack. She wants to test the response time of a true or false response and wants to use a second command to determine whether the database will return true or false results for user IDs. Which two SQL Injection types would give her the results she is looking for?

- A. Out of band and boolean-based
- B. Time-based and union-based
- C. Union-based and error-based
- D. Time-based and boolean-based

Answer: D

Explanation:

"Boolean based" we mean that it is based on Boolean values, that is, true or false / true and false. AND

Time-based SQL Injection is an inferential SQL Injection technique that relies on sending an SQL query to the database which forces the database to wait for a specified amount of time (in seconds) before responding. The response time will indicate to the attacker whether the result of the query is TRUE or FALSE.

Boolean-based (content-based) Blind SQLi

Boolean-based SQL Injection is an inferential SQL Injection technique that relies on sending an SQL query to the database which forces the application to return a different result depending on whether the query returns a TRUE or FALSE result.

Depending on the result, the content within the HTTP response will change, or remain the same. This allows an attacker to infer if the payload used returned true or false, even though no data from the database is returned. This attack is typically slow (especially on large databases) since an attacker would need to enumerate a database, character by character.

Time-based Blind SQLi

Time-based SQL Injection is an inferential SQL Injection technique that relies on sending an SQL query to the database which forces the database to wait for a specified amount of time (in seconds) before responding. The response time will indicate to the attacker whether the result of the query is TRUE or FALSE.

Depending on the result, an HTTP response will be returned with a delay, or returned immediately. This allows an attacker to infer if the payload used returned true or false, even though no data from the database is returned. This attack is typically slow (especially on large databases) since an attacker would need to enumerate a database character by character.

<https://www.acunetix.com/websitesecurity/sql-injection2/>

NEW QUESTION 112

Which is the first step followed by Vulnerability Scanners for scanning a network?

- A. OS Detection
- B. Firewall detection
- C. TCP/UDP Port scanning
- D. Checking if the remote host is alive

Answer: D

NEW QUESTION 113

DHCP snooping is a great solution to prevent rogue DHCP servers on your network. Which security feature on switchers leverages the DHCP snooping database to help prevent man-in-the-middle attacks?

- A. Spanning tree
- B. Dynamic ARP Inspection (DAI)
- C. Port security
- D. Layer 2 Attack Prevention Protocol (LAPP)

Answer: B

NEW QUESTION 116

As a securing consultant, what are some of the things you would recommend to a company to ensure DNS security?

- A. Use the same machines for DNS and other applications
- B. Harden DNS servers
- C. Use split-horizon operation for DNS servers
- D. Restrict Zone transfers
- E. Have subnet diversity between DNS servers

Answer: BCDE

NEW QUESTION 117

Study the snort rule given below:

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 135
(msg: "NETBIOS DCERPC ISystemActivator bind attempt";
flow:to_server, established; content: "|05|"; distance: 0; within: 1;
content: "|0b|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2192; rev: 1;)
```

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 445 (msg: "NETBIOS SMB
DCERPC ISystemActivator bind attempt"; flow: to_server, established;
content: "|FF|SMB|25|"; nocase; offset:4, depth:5; content: "|26 00|";
nocase; distance:5; within: 12; content: "|05|"; distance:0; within:1;
content: "|0b|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2193; rev: 1;)
```

From the options below, choose the exploit against which this rule applies.

- A. WebDav
- B. SQL Slammer
- C. MS Blaster
- D. MyDoom

Answer: C

NEW QUESTION 118

What is the minimum number of network connections in a multihomed firewall?

- A. 3
- B. 5
- C. 4
- D. 2

Answer: A

NEW QUESTION 121


Annie, a cloud security engineer, uses the Docker architecture to employ a client/server model in the application she is working on. She utilizes a component that can process API requests and handle various Docker objects, such as containers, volumes. Images, and networks. What is the component of the Docker architecture used by Annie in the above scenario?

- A. Docker client
- B. Docker objects
- C. Docker daemon
- D. Docker registries

Answer: C

Explanation:

Docker uses a client-server design. The docker client talks to the docker daemon, that will the work of building, running, and distributing your docker containers. The docker client and daemon will run on the same system, otherwise you will connect a docker consumer to a remote docker daemon. The docker consumer and daemon communicate using a REST API, over OS sockets or a network interface.

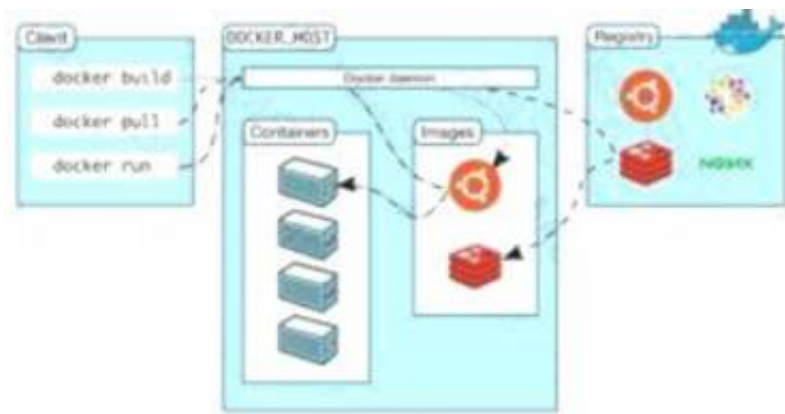

The docker daemon (dockerd) listens for docker API requests and manages docker objects like pictures, containers, networks, and volumes. A daemon may communicate with other daemons to manage docker services.

NEW QUESTION 125

Mary found a high vulnerability during a vulnerability scan and notified her server team. After analysis, they sent her proof that a fix to that issue had already been applied. The vulnerability that Marry found is called what?

- A. False-negative
- B. False-positive
- C. Brute force attack
- D. Backdoor

Answer: B

NEW QUESTION 130

While examining audit logs, you discover that people are able to telnet into the SMTP server on port 25. You would like to block this, though you do not see any evidence of an attack or other wrong doing. However, you are concerned about affecting the normal functionality of the email server. From the following options choose how best you can achieve this objective?

- A. Block port 25 at the firewall.
- B. Shut off the SMTP service on the server.
- C. Force all connections to use a username and password.
- D. Switch from Windows Exchange to UNIX Sendmail.
- E. None of the above.

Answer: E

NEW QUESTION 132

Shiela is an information security analyst working at HiTech Security Solutions. She is performing service version discovery using Nmap to obtain information about the running services and their versions on a target system.

Which of the following Nmap options must she use to perform service version discovery on the target host?

- A. -SN
- B. -SX
- C. -sV
- D. -SF

Answer: C

NEW QUESTION 133

Which of the following is the primary objective of a rootkit?

- A. It opens a port to provide an unauthorized service
- B. It creates a buffer overflow
- C. It replaces legitimate programs
- D. It provides an undocumented opening in a program

Answer: C

NEW QUESTION 137

Which of the following statements is FALSE with respect to Intrusion Detection Systems?

- A. Intrusion Detection Systems can be configured to distinguish specific content in network packets
- B. Intrusion Detection Systems can easily distinguish a malicious payload in an encrypted traffic
- C. Intrusion Detection Systems require constant update of the signature library
- D. Intrusion Detection Systems can examine the contents of the data n context of the network protocol

Answer: B

NEW QUESTION 139

During the process of encryption and decryption, what keys are shared?

- A. Private keys
- B. User passwords
- C. Public keys

D. Public and private keys

Answer: C

NEW QUESTION 144

Ron, a security professional, was pen testing web applications and SaaS platforms used by his company. While testing, he found a vulnerability that allows hackers to gain unauthorized access to API objects and perform actions such as view, update, and delete sensitive data of the company. What is the API vulnerability revealed in the above scenario?

- A. Code injections
- B. Improper use of CORS
- C. No ABAC validation
- D. Business logic flaws

Answer: B

NEW QUESTION 145

Sam is a penetration tester hired by Inception Tech, a security organization. He was asked to perform port scanning on a target host in the network. While performing the given task, Sam sends FIN/ACK probes and determines that an RST packet is sent in response by the target host, indicating that the port is closed. What is the port scanning technique used by Sam to discover open ports?

- A. Xmas scan
- B. IDLE/IPID header scan
- C. TCP Maimon scan
- D. ACK flag probe scan

Answer: C

Explanation:

TCP Maimon scan

This scan technique is very similar to NULL, FIN, and Xmas scan, but the probe used here is

FIN/ACK. In most cases, to determine if the port is open or closed, the RST packet should be generated as a response to a probe request. However, in many BSD systems, the port is open if the packet gets dropped in response to a probe.

<https://nmap.org/book/scan-methods-maimon-scan.html> How Nmap interprets responses to a Maimon scan probe

Probe Response Assigned State
No response received (even after retransmissions) open|filtered TCP RST packet closed

ICMP unreachable error (type 3, code 1, 2, 3, 9, 10, or 13) filtered

NEW QUESTION 149

Bob received this text message on his mobile phone: "Hello, this is Scott Smelby from the Yahoo Bank. Kindly contact me for a vital transaction on: scottsmelby@yahoo.com". Which statement below is true?

- A. This is a scam as everybody can get a @yahoo address, not the Yahoo customer service employees.
- B. This is a scam because Bob does not know Scott.
- C. Bob should write to scottmelby@yahoo.com to verify the identity of Scott.
- D. This is probably a legitimate message as it comes from a respectable organization.

Answer: A

NEW QUESTION 151

Study the following log extract and identify the attack.


```
12/26-07:06:22:31.167035 207.219.207.240:1882 -> 172.16.1.106:80
TCP TTL:13 TTL:50 TOS:0x0 IP:53476 DFF
***AP*** Seq: 0x2BDC107 Ack: 0x1CB9F186 Win: 0x2238 TcpLen: 20
47 45 54 2D 2F 6D 73 61 64 63 2F 2E 2E C0 AF 2E GET /msadc/.....
2E 2F 2E 2E C0 AF 2E 2E 2F 2E 2E C0 AF 2E 2E 2F ./...../...../
77 69 6E 6E 74 2F 73 79 73 74 65 6D 33 32 2F 63 winnt/system32/c
6D 64 2E 65 78 65 3F 2F 63 2B 64 69 72 2B 63 3A md.exe?/c+dir+c:
5C 20 48 54 54 50 2F 31 2E 31 0D 0A 41 63 63 65 \ HTTP/1.1..Acce
70 74 3A 2D 69 6D 61 67 65 2F 67 69 66 2C 20 69 pt: image/gif, i
6D 61 67 65 2F 78 2D 78 62 69 74 6D 61 70 2C 20 mage/x-xbitmap
69 6D 61 67 65 2F 6A 70 65 67 2C 20 69 6D 61 67 image/jpeg, imag
65 2F 70 6A 70 65 67 2C 20 61 70 70 6C 69 63 61 e/jpeg, applica
74 69 6F 6E 2F 76 6E 64 2E 6D 73 2D 65 78 63 65 tion/vnd.ms-exce
6C 2C 20 61 70 70 6C 69 63 61 74 69 6F 6E 2F 6D l, application/m
73 77 6F 72 64 2C 20 61 70 70 6C 69 63 61 74 69 sword, applicati
6F 6E 2F 76 6E 64 2E 6D 73 2D 70 6F 77 65 72 70 on/vnd.ms-powerp
6F 69 6E 74 2C 20 2A 2F 2A 0D 0A 41 63 63 65 70 oint, */*..Accep
74 2D 4C 6C 6C 61 2F 34 2E 30 20 28 63 6F 6D 70 ozilla/age: en-u
73 0D 0A 62 6C 65 3B 20 4D 53 49 45 20 35 2E 30 atible;pt-EncodD
6E 67 3A 57 69 6E 64 6F 77 73 20 39 35 29 0D 0A l; Windo, deflat
65 0D 0A 55 73 65 72 2D 41 67 65 6A 74 3A 20 4D e..User-Agent: M
6F 7A 69 6C 6C 61 2F 34 2E 30 20 28 63 6F 6D 70 ozilla/4.0 (comp
61 74 69 62 6C 65 3B 20 4D 53 49 45 20 35 2E 30 atible; MSIE 5.0
31 3B 20 57 69 6E 64 6F 77 73 20 39 35 29 0D 0A l; Windows 95)..
48 6F 73 74 3A 20 6C 61 62 2E 77 69 72 65 74 72 Host: lib.bvxttr
69 70 2E 6E 65 74 0D 0A 43 6F 6E 6E 65 63 74 69 ip.org..Connecti
6F 6E 3A 2D 4B 65 65 70 2D 41 6C 69 76 65 0D 0A on: Keep-Alive..
43 6F 6F 6B 69 65 3A 20 41 53 50 53 45 53 53 49 Cookie: ASPSESSI
4F 4E 49 44 47 51 51 51 51 51 5A 55 3D 4B 4E 4F ONIDGQQQQZU=KNO
48 4D 4F 4A 41 4B 50 46 4F 50 48 4D 4C 41 50 4E HMOJAKPFOPHMLAPN
49 46 49 46 42 0D 0A 0D 0A 41 50 4E 49 46 49 46 IFIFB....APNIFIF
42 0D 0A 0D 0A B....
```

- A. Hexcode Attack
- B. Cross Site Scripting
- C. Multiple Domain Traversal Attack
- D. Unicode Directory Traversal Attack

Answer: D

NEW QUESTION 155

Which of the following tactics uses malicious code to redirect users' web traffic?

- A. Spimming
- B. Pharming
- C. Phishing
- D. Spear-phishing

Answer: B

NEW QUESTION 156

Your company performs penetration tests and security assessments for small and medium-sized business in the local area. During a routine security assessment, you discover information that suggests your client is involved with human trafficking.

What should you do?

- A. Confront the client in a respectful manner and ask her about the data.
- B. Copy the data to removable media and keep it in case you need it.
- C. Ignore the data and continue the assessment until completed as agreed.
- D. Immediately stop work and contact the proper legal authorities.

Answer: D

NEW QUESTION 160

which of the following protocols can be used to secure an LDAP service against anonymous queries?

- A. SSO
- B. RADIUS
- C. WPA
- D. NTLM

Answer: D

Explanation:

In a Windows network, nongovernmental organization (New Technology) local area network Manager (NTLM) could be a suite of Microsoft security protocols supposed to produce authentication, integrity, and confidentiality to users. NTLM is that the successor to the authentication protocol in Microsoft local area network Manager (LANMAN), Associate in Nursing older Microsoft product. The NTLM protocol suite is enforced in an exceedingly Security Support supplier, which mixes the local area network Manager authentication protocol, NTLMv1, NTLMv2 and NTLM2 Session protocols in an exceedingly single package. whether or not these protocols area unit used or will be used on a system is ruled by cluster Policy settings, that totally different|completely different} versions of Windows have different default settings. NTLM passwords area unit thought-about weak as a result of they will be brute-forced very simply with fashionable hardware. NTLM could be a challenge-response authentication protocol that uses 3 messages to authenticate a consumer in an exceedingly affiliation orientating setting (connectionless is similar), and a fourth extra message if integrity is desired.

- First, the consumer establishes a network path to the server and sends a NEGOTIATE_MESSAGE advertising its capabilities.
- Next, the server responds with CHALLENGE_MESSAGE that is employed to determine the identity of the consumer.
- Finally, the consumer responds to the challenge with Associate in Nursing AUTHENTICATE_MESSAGE.

The NTLM protocol uses one or each of 2 hashed word values, each of that are keep on the server (or domain controller), and that through a scarcity of seasoning area unit word equivalent, that means that if you grab the hash price from the server, you'll evidence while not knowing the particular word. the 2 area unit the lm Hash (a DES-based operate applied to the primary fourteen chars of the word born-again to the standard eight bit laptop charset for the language), and also the nt Hash (MD4 of the insufficient endian UTF-16 Unicode password). each hash values area unit sixteen bytes (128 bits) every.

The NTLM protocol additionally uses one among 2 a method functions, looking on the NTLM version. National Trust LanMan and NTLM version one use the DES primarily based LanMan a method operate (LMOWF), whereas National TrustLMv2 uses the NT MD4 primarily based a method operate (NTOWF).

NEW QUESTION 161

Techno Security Inc. recently hired John as a penetration tester. He was tasked with identifying open ports in the target network and determining whether the ports are online and any firewall rule sets are encountered. John decided to perform a TCP SYN ping scan on the target network. Which of the following Nmap commands must John use to perform the TCP SYN ping scan?

- A. `nmap -sn -pp < target ip address >`
- B. `nmap -sn -PO < target IP address >`
- C. `nmap -sn -PS < target IP address >`
- D. `nmap -sn -PA < target IP address >`

Answer: C

Explanation:

<https://hub.packtpub.com/discovering-network-hosts-with-tcp-syn-and-tcp-ack-ping-scans-in-nmaptutorial/>

NEW QUESTION 166

Which of the following programming languages is most susceptible to buffer overflow attacks, due to its lack of a built-in bounds checking mechanism?

Code:

```
#include <string.h> int main(){char buffer[8];
strcpy(buffer, "11111111111111111111111111111111");} Output: Segmentation fault
```

- A. C#
- B. Python
- C. Java
- D. C++

Answer: D

NEW QUESTION 168

What would be the fastest way to perform content enumeration on a given web server by using the Gobuster tool?

- A. Performing content enumeration using the bruteforce mode and 10 threads
- B. Shipping SSL certificate verification
- C. Performing content enumeration using a wordlist
- D. Performing content enumeration using the bruteforce mode and random file extensions

Answer: A

NEW QUESTION 172

You are using a public Wi-Fi network inside a coffee shop. Before surfing the web, you use your VPN to prevent intruders from sniffing your traffic. If you did not have a VPN, how would you identify whether someone is performing an ARP spoofing attack on your laptop?

- A. You should check your ARP table and see if there is one IP address with two different MAC addresses.
- B. You should scan the network using Nmap to check the MAC addresses of all the hosts and look for duplicates.
- C. You should use netstat to check for any suspicious connections with another IP address within the LAN.
- D. You cannot identify such an attack and must use a VPN to protect your traffic, r

Answer: A

NEW QUESTION 175

Some clients of TPNQM SA were redirected to a malicious site when they tried to access the TPNQM main site. Bob, a system administrator at TPNQM SA, found that they were victims of DNS Cache Poisoning. What should Bob recommend to deal with such a threat?

- A. The use of security agents in clients' computers
- B. The use of DNSSEC
- C. The use of double-factor authentication
- D. Client awareness

Answer: B

NEW QUESTION 177

A group of hackers were roaming around a bank office building in a city, driving a luxury car. They were using hacking tools on their laptop with the intention to find a free-access wireless network. What is this hacking process known as?

- A. GPS mapping
- B. Spectrum analysis
- C. Wardriving
- D. Wireless sniffing

Answer: C

NEW QUESTION 181

User A is writing a sensitive email message to user B outside the local network. User A has chosen to use PKI to secure his message and ensure only user B can read the sensitive email. At what layer of the OSI layer does the encryption and decryption of the message take place?

- A. Application
- B. Transport
- C. Session
- D. Presentation

Answer: D

NEW QUESTION 183

The tools which receive event logs from servers, network equipment, and applications, and perform analysis and correlation on those logs, and can generate alarms for security relevant issues, are known as what?

- A. network Sniffer
- B. Vulnerability Scanner
- C. Intrusion prevention Server
- D. Security incident and event Monitoring

Answer: D

NEW QUESTION 184

You went to great lengths to install all the necessary technologies to prevent hacking attacks, such as expensive firewalls, antivirus software, anti-spam systems and intrusion detection/prevention tools in your company's network. You have configured the most secure policies and tightened every device on your network.

You are confident that hackers will never be able to gain access to your network with complex security system in place.

Your peer, Peter Smith who works at the same department disagrees with you.

He says even the best network security technologies cannot prevent hackers gaining access to the network because of presence of "weakest link" in the security chain.

What is Peter Smith talking about?

- A. Untrained staff or ignorant computer users who inadvertently become the weakest link in your security chain
- B. "zero-day" exploits are the weakest link in the security chain since the IDS will not be able to detect these attacks
- C. "Polymorphic viruses" are the weakest link in the security chain since the Anti-Virus scanners will not be able to detect these attacks
- D. Continuous Spam e-mails cannot be blocked by your security system since spammers use different techniques to bypass the filters in your gateway

Answer: A

NEW QUESTION 187

Bob is acknowledged as a hacker of repute and is popular among visitors of "underground" sites.

Bob is willing to share his knowledge with those who are willing to learn, and many have expressed their interest in learning from him. However, this knowledge has a risk associated with it, as it can be used for malevolent attacks as well.

In this context, what would be the most effective method to bridge the knowledge gap between the "black" hats or crackers and the "white" hats or computer security professionals? (Choose the test answer.)

- A. Educate everyone with books, articles and training on risk analysis, vulnerabilities and safeguards.
- B. Hire more computer security monitoring personnel to monitor computer systems and networks.
- C. Make obtaining either a computer security certification or accreditation easier to achieve so more individuals feel that they are a part of something larger than life.
- D. Train more National Guard and reservist in the art of computer security to help out in times of emergency or crises.

Answer: A

NEW QUESTION 188

By performing a penetration test, you gained access under a user account. During the test, you established a connection with your own machine via the SMB service and occasionally entered your login and password in plaintext.

Which file do you have to clean to clear the password?

- A. .X session-log
- B. .bashrc
- C. .profile
- D. .bash_history

Answer: D

Explanation:

File created by Bash, a Unix-based shell program commonly used on Mac OS X and Linux operating systems; stores a history of user commands entered at the command prompt; used for viewing old commands that are executed. BASH_HISTORY files are hidden files with no filename prefix. They always use the filename .bash_history. NOTE: Bash is that the shell program employed by Apple Terminal. Our goal is to assist you understand what a file with a *.bash_history suffix is and the way to open it. The Bash History file type, file format description, and Mac and Linux programs listed on this page are individually researched and verified by the FileInfo team. we attempt for 100% accuracy and only publish information about file formats that we've tested and validated.

NEW QUESTION 192

Identify the correct terminology that defines the above statement.

"Testing the network using the same methodologies and tools employed by attackers"

- A. Vulnerability Scanning
- B. Penetration Testing
- C. Security Policy Implementation
- D. Designing Network Security

Answer: B

NEW QUESTION 195

You are a penetration tester and are about to perform a scan on a specific server. The agreement that you signed with the client contains the following specific condition for the scan: "The attacker must scan every port on the server several times using a set of spoofed sources IP addresses. " Suppose that you are using Nmap to perform this scan. What flag will you use to satisfy this requirement?

- A. The -A flag
- B. The -g flag
- C. The -f flag
- D. The -D flag

Answer: D

Explanation:

flags --source-port and -g are equivalent and instruct nmap to send packets through a selected port. this option is used to try to cheat firewalls whitelisting traffic from specific ports. the following example can scan the target from the port twenty to ports eighty, 22, 21,23 and 25 sending fragmented packets to LinuxHint.

NEW QUESTION 200

Which of the following viruses tries to hide from anti-virus programs by actively altering and corrupting the chosen service call interruptions when they are being run?

- A. Macro virus
- B. Stealth/Tunneling virus
- C. Cavity virus
- D. Polymorphic virus

Answer: B

NEW QUESTION 201

Alice, a professional hacker, targeted an organization's cloud services. She infiltrated the targets MSP provider by sending spear-phishing emails and distributed custom-made malware to compromise user accounts and gain remote access to the cloud service. Further, she accessed the target customer profiles with her MSP account, compressed the customer data, and stored them in the MSP. Then, she used this information to launch further attacks on the target organization. Which of the following cloud attacks did Alice perform in the above scenario?

- A. Cloud hopper attack
- B. Cloud cryptojacking
- C. Cloudborne attack
- D. Man-in-the-cloud (MITC) attack

Answer: A

Explanation:

Operation Cloud Hopper was an in depth attack and theft of data in 2017 directed at MSP within the uk (U.K.), us (U.S.), Japan, Canada, Brazil, France, Switzerland, Norway, Finland, Sweden, South Africa , India, Thailand, South Korea and Australia. The group used MSP as intermediaries to accumulate assets and trade secrets from MSP client engineering, MSP industrial manufacturing, retail, energy, pharmaceuticals, telecommunications, and government agencies. Operation Cloud Hopper used over 70 variants of backdoors, malware and trojans. These were delivered through spear-phishing emails. The attacks scheduled tasks or leveraged services/utilities to continue Microsoft Windows systems albeit the pc system was rebooted. It installed malware and hacking tools to access systems and steal data.

NEW QUESTION 204

What would be the purpose of running "wget 192.168.0.15 -q -S" against a web server?

- A. Performing content enumeration on the web server to discover hidden folders
- B. Using wget to perform banner grabbing on the webserver
- C. Flooding the web server with requests to perform a DoS attack
- D. Downloading all the contents of the web page locally for further examination

Answer: B

Explanation:

-q, --quiet quiet (no output)
-S, --server-response print server response

NEW QUESTION 206

Which tier in the N-tier application architecture is responsible for moving and processing data between the tiers?

- A. Presentation tier
- B. Application Layer
- C. Logic tier
- D. Data tier

Answer: C

NEW QUESTION 208

When purchasing a biometric system, one of the considerations that should be reviewed is the processing speed. Which of the following best describes what it is meant by processing?

- A. The amount of time and resources that are necessary to maintain a biometric system
- B. How long it takes to setup individual user accounts
- C. The amount of time it takes to be either accepted or rejected from when an individual provides identification and authentication information
- D. The amount of time it takes to convert biometric data into a template on a smart card

Answer: C

NEW QUESTION 209

Session splicing is an IDS evasion technique in which an attacker delivers data in multiple, small sized packets to the target computer, making it very difficult for an IDS to detect the attack signatures. Which tool can be used to perform session splicing attacks?

- A. tcpsplice
- B. Burp
- C. Hydra
- D. Whisker

Answer: D

NEW QUESTION 214

Sam is working as a system administrator In an organization. He captured the principal characteristics of a vulnerability and produced a numerical score to reflect Its severity using CVSS v3.0 to property assess and prioritize the organization's vulnerability management processes. The base score that Sam obtained after performing cvss rating was 4.0. What is the CVSS severity level of the vulnerability discovered by Sam in the above scenario?

- A. Medium
- B. Low
- C. Critical
- D. High

Answer: A

Explanation:

Rating CVSS Score None 0.0
Low 0.1 - 3.9
Medium 4.0 - 6.9
High 7.0 - 8.9
Critical 9.0 - 10.0

NEW QUESTION 216

_____ is a tool that can hide processes from the process list, can hide files, registry entries, and intercept keystrokes.

- A. Trojan
- B. RootKit
- C. DoS tool
- D. Scanner
- E. Backdoor

Answer: B

NEW QUESTION 217

The company ABC recently contracts a new accountant. The accountant will be working with the financial statements. Those financial statements need to be approved by the CFO and then they will be sent to the accountant but the CFO is worried because he wants to be sure that the information sent to the accountant was not modified once he approved it. Which of the following options can be useful to ensure the integrity of the data?

- A. The CFO can use a hash algorithm in the document once he approved the financial statements
- B. The CFO can use an excel file with a password
- C. The financial statements can be sent twice, one by email and the other delivered in USB and the accountant can compare both to be sure is the same document
- D. The document can be sent to the accountant using an exclusive USB for that document

Answer: A

NEW QUESTION 222

Andrew is an Ethical Hacker who was assigned the task of discovering all the active devices hidden by a restrictive firewall in the IPv4 range in a given target network.

Which of the following host discovery techniques must he use to perform the given task?

- A. UDP scan
- B. TCP Maimon scan
- C. arp ping scan
- D. ACK flag probe scan

Answer: C

Explanation:

One of the most common Nmap usage scenarios is scanning an Ethernet LAN. Most LANs, especially those that use the private address range granted by RFC 1918, do not always use the overwhelming majority of IP addresses. When Nmap attempts to send a raw IP packet, such as an ICMP echo request, the OS must determine a destination hardware (ARP) address, such as the target IP, so that the Ethernet frame can be properly addressed. .. This is required to issue a series of ARP requests. This is best illustrated by an example where a ping scan is attempted against an Area Ethernet host. The `--send-ip` option tells Nmap to send IP-level packets (rather than raw Ethernet), even on area networks. The Wireshark output of the three ARP requests and their timing have been pasted into the session.

Raw IP ping scan example for offline targets This example took quite a couple of seconds to finish because the (Linux) OS sent three ARP requests at 1 second intervals before abandoning the host. Waiting for a few seconds is excessive, as long as the ARP response usually arrives within a few milliseconds. Reducing this timeout period is not a priority for OS vendors, as the overwhelming majority of packets are sent to the host that actually exists. Nmap, on the other hand, needs to send packets to 16 million IP s given a target like 10.0.0.0/8. Many targets are pinged in parallel, but waiting 2 seconds each is very delayed.

There is another problem with raw IP ping scans on the LAN. If the destination host turns out to be unresponsive, as in the previous example, the source host usually adds an incomplete entry for that destination IP to the kernel ARP table. ARP tablespaces are finite and some operating systems become unresponsive when full. If Nmap is used in rawIP mode (`--send-ip`), Nmap may have to wait a few minutes for the ARP cache entry to expire before continuing host discovery.

ARP scans solve both problems by giving Nmap the highest priority. Nmap issues raw ARP requests and handles retransmissions and timeout periods in its sole discretion. The system ARP cache is bypassed. The example shows the difference. This ARP scan takes just over a tenth of the time it takes for an equivalent IP.

Example b ARP ping scan of offline target



In example b, neither the `-PR` option nor the `--send-eth` option has any effect. This is often because ARP has a default scan type on the Area Ethernet network when scanning Ethernet hosts that Nmap discovers. This includes traditional wired Ethernet as 802.11 wireless networks. As mentioned above, ARP scanning is not only more efficient, but also more accurate. Hosts frequently block IP-based ping packets, but usually cannot block ARP requests or responses and communicate over the network. Nmap uses ARP instead of all targets on equivalent targets, even if different ping types (such as `-PE` and `-PS`) are specified. LAN.. If you do not need to attempt an ARP scan at all, specify `--send-ip` as shown in Example a "Raw IP Ping Scan for Offline Targets".

If you give Nmap control to send raw Ethernet frames, Nmap can also adjust the source MAC address. If you have the only PowerBook in your security conference room and a large ARP scan is initiated from an

Apple-registered MAC address, your head may turn to you. Use the `--spoof-mac` option to spoof the MAC address as described in the MAC Address Spoofing section.

NEW QUESTION 226

Which of the following statements is TRUE?

- A. Packet Sniffers operate on the Layer 1 of the OSI model.
- B. Packet Sniffers operate on Layer 2 of the OSI model.
- C. Packet Sniffers operate on both Layer 2 & Layer 3 of the OSI model.
- D. Packet Sniffers operate on Layer 3 of the OSI model.

Answer: B

NEW QUESTION 229

There are multiple cloud deployment options depending on how isolated a customer's resources are from those of other customers. Shared environments share the costs and allow each customer to enjoy lower operations expenses. One solution is for a customer to Join with a group of users or organizations to share a cloud environment. What is this cloud deployment option called?

- A. Hybrid
- B. Community
- C. Public
- D. Private

Answer: B

Explanation:

The purpose of this idea is to permit multiple customers to figure on joint projects and applications that belong to the community, where it's necessary to possess a centralized clouds infrastructure. In other words, Community Cloud may be a distributed infrastructure that solves the precise problems with business sectors by integrating the services provided by differing types of clouds solutions.

The communities involved in these projects, like tenders, business organizations, and research companies, specialise in similar issues in their cloud interactions. Their shared interests may include concepts and policies associated with security and compliance considerations, and therefore the goals of the project also .

Community Cloud computing facilitates its users to spot and analyze their business demands better. Community Clouds could also be hosted during a data center, owned by one among the tenants, or by a third-party cloud services provider and may be either on-site or off-site.

Community Cloud Examples and Use Cases Cloud providers have developed Community Cloud offerings, and a few organizations are already seeing the advantages . the subsequent list shows a number of the most scenarios of the Community Cloud model that's beneficial to the participating organizations.

➤ Multiple governmental departments that perform transactions with each other can have their processing systems on shared infrastructure. This setup makes it cost-effective to the tenants, and may also reduce their data traffic.

Benefits of Community CloudsCommunity Cloud provides benefits to organizations within the community, individually also as collectively. Organizations don't need to worry about the safety concerns linked with Public Cloud due to the closed user group.

This recent cloud computing model has great potential for businesses seeking cost-effective cloud services to collaborate on joint projects, because it comes with multiple advantages.

Openness and ImpartialityCommunity Clouds are open systems, and that they remove the dependency organizations wear cloud service providers. Organizations are able to do many benefits while avoiding the disadvantages of both public and personal clouds.

➤ Ensures compatibility among each of its users, allowing them to switch properties consistent with their individual use cases. They also enable companies to interact with their remote employees and support the utilization of various devices, be it a smartphone or a tablet. This makes this sort of cloud solution more flexible to users' demands.

➤ Consists of a community of users and, as such, is scalable in several aspects like hardware resources, services, and manpower. It takes under consideration demand growth, and you simply need to increase the user-base.

Flexibility and ScalabilityHigh Availability and ReliabilityYour cloud service must be ready to make sure the availability of knowledge and applications in the least times. Community Clouds secure your data within the same way as the other cloud service, by replicating data and applications in multiple secure locations to guard them from unforeseen circumstances.

Cloud possesses redundant infrastructure to form sure data is out there whenever and wherever you would like it. High availability and reliability are critical concerns for any sort of cloud solution.

Security and ComplianceTwo significant concerns discussed when organizations believe cloud computing are data security and compliance with relevant regulatory authorities. Compromising each other's data security isn't profitable to anyone during a Community Cloud.

➤ the power to dam users from editing and downloading specific datasets.

➤ Making sensitive data subject to strict regulations on who has access to Sharing sensitive data unique to a specific organization would bring harm to all or any the members involved.

➤ What devices can store sensitive data.

Users can configure various levels of security for his or her data. Common use cases:**Convenience and Control**Conflicts associated with convenience and control don't arise during a Community Cloud. Democracy may be a crucial factor the Community Cloud offers as all tenants share and own the infrastructure and make decisions collaboratively. This setup allows organizations to possess their data closer to them while avoiding the complexities of a personal Cloud.

Less Work for the IT DepartmentHaving data, applications, and systems within the cloud means you are doing not need to manage them entirely. This convenience eliminates the necessity for tenants to use extra human resources to manage the system. Even during a self-managed solution, the work is split among the participating organizations.

Environment SustainabilityIn the Community Cloud, organizations use one platform for all their needs, which dissuades them from investing in separate cloud facilities. This shift introduces a symbiotic relationship between broadening and shrinking the utilization of cloud among clients. With the reduction of organizations using different clouds, resources are used more efficiently, thus resulting in a smaller carbon footprint.

NEW QUESTION 230

Taylor, a security professional, uses a tool to monitor her company's website, analyze the website's traffic, and track the geographical location of the users visiting the company's website. Which of the following tools did Taylor employ in the above scenario?

- A. WebSite Watcher
- B. web-Stat
- C. Webroot
- D. WAFW00F

Answer: B

Explanation:

Increase your web site's performance and grow! Add Web-Stat to your site (it's free!) and watch individuals act together with your pages in real time.

Learn how individuals realize your web site. Get details concerning every visitor's path through your web site and track pages that flip browsers into consumers.

One-click install. observe locations, in operation systems, browsers and screen sizes and obtain alerts for new guests and conversions

NEW QUESTION 232

This TCP flag instructs the sending system to transmit all buffered data immediately.

- A. SYN
- B. RST
- C. PSH
- D. URG
- E. FIN

Answer: C

NEW QUESTION 236

Mike, a security engineer, was recently hired by BigFox Ltd. The company recently experienced disastrous DoS attacks. The management had instructed Mike to build defensive strategies for the company's IT infrastructure to thwart DoS/DDoS attacks. Mike deployed some countermeasures to handle jamming and scrambling attacks. What is the countermeasure Mike applied to defend against jamming and scrambling attacks?

- A. Allow the usage of functions such as gets and strcpy
- B. Allow the transmission of all types of addressed packets at the ISP level
- C. Implement cognitive radios in the physical layer
- D. A Disable TCP SYN cookie protection

Answer: D

NEW QUESTION 240

In an internal security audit, the white hat hacker gains control over a user account and attempts to acquire access to another account's confidential files and information. How can he achieve this?

- A. Privilege Escalation
- B. Shoulder-Surfing

- C. Hacking Active Directory
- D. Port Scanning

Answer: A

NEW QUESTION 241

OpenSSL on Linux servers includes a command line tool for testing TLS. What is the name of the tool and the correct syntax to connect to a web server?

- A. openssl s_client -site www.website.com:443
- B. openssl_client -site www.website.com:443
- C. openssl s_client -connect www.website.com:443
- D. openssl_client -connect www.website.com:443

Answer: C

NEW QUESTION 245

Which of the following is considered an exploit framework and has the ability to perform automated attacks on services, ports, applications and unpatched security flaws in a computer system?

- A. Wireshark
- B. Maltego
- C. Metasploit
- D. Nessus

Answer: C

NEW QUESTION 247

Which of the following Linux commands will resolve a domain name into IP address?

- A. >host-t a hackeddomain.com
- B. >host-t ns hackeddomain.com
- C. >host -t soa hackeddomain.com
- D. >host -t AXFR hackeddomain.com

Answer: A

NEW QUESTION 249

A newly joined employee, Janet, has been allocated an existing system used by a previous employee. Before issuing the system to Janet, it was assessed by Martin, the administrator. Martin found that there were possibilities of compromise through user directories, registries, and other system parameters. He also identified vulnerabilities such as native configuration tables, incorrect registry or file permissions, and software configuration errors. What is the type of vulnerability assessment performed by Martin?

- A. Credentialed assessment
- B. Database assessment
- C. Host-based assessment
- D. Distributed assessment

Answer: C

Explanation:

The host-based vulnerability assessment (VA) resolution arose from the auditors' got to periodically review systems. Arising before the net becoming common, these tools typically take an "administrator's eye" read of the setting by evaluating all of the knowledge that an administrator has at his or her disposal. UsesHost VA tools verify system configuration, user directories, file systems, registry settings, and all forms of other info on a number to gain information about it. Then, it evaluates the chance of compromise. it should also live compliance to a predefined company policy so as to satisfy an annual audit. With administrator access, the scans area unit less possible to disrupt traditional operations since the computer code has the access it has to see into the complete configuration of the system.

What it Measures Host

VA tools will examine the native configuration tables and registries to spot not solely apparent vulnerabilities, however additionally "dormant" vulnerabilities – those weak or misconfigured systems and settings which will be exploited when an initial entry into the setting. Host VA solutions will assess the safety settings of a user account table; the access management lists related to sensitive files or data; and specific levels of trust applied to other systems. The host VA resolution will a lot of accurately verify the extent of the danger by determinant however way any specific exploit could also be ready to get.

NEW QUESTION 253

which of the following Bluetooth hacking techniques refers to the theft of information from a wireless device through Bluetooth?

- A. Bluesmacking
- B. Bluebugging
- C. Bluejacking
- D. Bluesnarfing

Answer: D

Explanation:

Bluesnarfing is the unauthorized access of information from a wireless device through Bluetooth connection, often between phones, desktops, laptops, and PDAs (personal digital assistant).

NEW QUESTION 258

An attacker attaches a rogue router in a network. He wants to redirect traffic to a LAN attached to his router as part of a man-in-the-middle attack. What measure on behalf of the legitimate admin can mitigate this attack?

- A. Make sure that legitimate network routers are configured to run routing protocols with authentication.
- B. Disable all routing protocols and only use static routes
- C. Only using OSPFv3 will mitigate this risk.
- D. Redirection of the traffic cannot happen unless the admin allows it explicitly.

Answer: A

NEW QUESTION 259

A company's Web development team has become aware of a certain type of security vulnerability in their Web software. To mitigate the possibility of this vulnerability being exploited, the team wants to modify the software requirements to disallow users from entering HTML as input into their Web application. What kind of Web application vulnerability likely exists in their software?

- A. Cross-site scripting vulnerability
- B. SQL injection vulnerability
- C. Web site defacement vulnerability
- D. Cross-site Request Forgery vulnerability

Answer: A

NEW QUESTION 262

Which of the following algorithms can be used to guarantee the integrity of messages being sent, in transit, or stored?

- A. symmetric algorithms
- B. asymmetric algorithms
- C. hashing algorithms
- D. integrity algorithms

Answer: C

NEW QUESTION 265

An attacker changes the profile information of a particular user (victim) on the target website. The attacker uses this string to update the victim's profile to a text file and then submit the data to the attacker's database.

```
<
iframe src=""http://www.vulnweb.com/updateif.php"" style=""display:none""
> < /iframe >
```

What is this type of attack (that can use either HTTP GET or HTTP POST) called?

- A. Browser Hacking
- B. Cross-Site Scripting
- C. SQL Injection
- D. Cross-Site Request Forgery

Answer: D

NEW QUESTION 268

Clark, a professional hacker, was hired by an organization to gather sensitive information about its competitors surreptitiously. Clark gathers the server IP address of the target organization using Whois footprinting. Further, he entered the server IP address as an input to an online tool to retrieve information such as the network range of the target organization and to identify the network topology and operating system used in the network. What is the online tool employed by Clark in the above scenario?

- A. AOL
- B. ARIN
- C. DuckDuckGo
- D. Baidu

Answer: B

Explanation:

<https://search.arin.net/rdap/?query=199.43.0.43>

NEW QUESTION 273

Joseph was the Web site administrator for the Mason Insurance in New York, whose main Web site was located at www.masonins.com. Joseph uses his laptop computer regularly to administer the Web site. One night, Joseph received an urgent phone call from his friend, Smith. According to Smith, the main Mason Insurance web site had been vandalized! All of its normal content was removed and replaced with an attacker's message "Hacker Message: You are dead! Freaks!" From his office, which was directly connected to Mason Insurance's internal network, Joseph surfed to the Web site using his laptop. In his browser, the Web site looked completely intact.

No changes were apparent. Joseph called a friend of his at his home to help troubleshoot the problem. The Web site appeared defaced when his friend visited using his DSL connection. So, while Smith and his friend could see the defaced page, Joseph saw the intact Mason Insurance web site. To help make sense of this problem, Joseph decided to access the Web site using his dial-up ISP. He disconnected his laptop from the corporate internal network and used his modem to dial up the same ISP used by Smith. After his modem connected, he quickly typed www.masonins.com in his browser to reveal the following web page:

```
H@cker Mess@g@:
Y0u @re De@d! Fre@ks!
```

After seeing the defaced Web site, he disconnected his dial-up line, reconnected to the internal network, and used Secure Shell (SSH) to log in directly to the Web

server. He ran Tripwire against the entire Web site, and determined that every system file and all the Web content on the server were intact. How did the attacker accomplish this hack?

- A. ARP spoofing
- B. SQL injection
- C. DNS poisoning
- D. Routing table injection

Answer: C

NEW QUESTION 276

Gilbert, a web developer, uses a centralized web API to reduce complexity and increase the Integrity of updating and changing data. For this purpose, he uses a web service that uses HTTP methods such as PUT. POST. GET. and DELETE and can improve the overall performance, visibility, scalability, reliability, and portability of an application. What is the type of web-service API mentioned in the above scenario?

- A. JSON-RPC
- B. SOAP API
- C. RESTful API
- D. REST API

Answer: C

Explanation:

*REST is not a specification, tool, or framework, but instead is an architectural style for web services that serves as a communication medium between various systems on the web. *RESTful APIs, which are also known as RESTful services, are designed using REST principles and HTTP communication protocols RESTful is a collection of resources that use HTTP methods such as PUT, POST, GET, and DELETE

RESTful API: RESTful API is a RESTful service that is designed using REST principles and HTTP communication protocols. RESTful is a collection of resources that use HTTP methods such as PUT, POST, GET, and DELETE. RESTful API is also designed to make applications independent to improve the overall performance, visibility, scalability, reliability, and portability of an application. APIs with the following features can be referred to as RESTful APIs: o Stateless: The client end stores the state of the session; the server is restricted to save data during the request processing o Cacheable: The client should save responses (representations) in the cache. This feature can enhance API performance pg. 1920 CEHv11 manual.

<https://cloud.google.com/files/apigee/apigee-web-api-design-the-missing-link-ebook.pdf>

The HTTP methods GET, POST, PUT or PATCH, and DELETE can be used with these templates to read, create, update, and delete description resources for dogs and their owners. This API style has become popular for many reasons. It is straightforward and intuitive, and learning this pattern is similar to learning a programming language API. APIs like this one are commonly called RESTful APIs, although they do not display all of the characteristics that define REST (more on REST later).

NEW QUESTION 280

Which Nmap option would you use if you were not concerned about being detected and wanted to perform a very fast scan?

- A. -T5
- B. -O
- C. -T0
- D. -A

Answer: A

NEW QUESTION 283

in this form of encryption algorithm, every Individual block contains 64-bit data, and three keys are used, where each key consists of 56 bits. Which is this encryption algorithm?

- A. IDEA
- B. Triple Data Encryption standard
- C. MDS encryption algorithm
- D. AES

Answer: B

Explanation:

Triple DES is another mode of DES operation. It takes three 64-bit keys, for an overall key length of 192 bits. In Stealth, you merely type within the entire 192-bit (24 character) key instead of entering each of the three keys individually. The Triple DES DLL then breaks the user-provided key into three subkeys, padding the keys if necessary in order that they are each 64 bits long. The procedure for encryption is strictly an equivalent as regular DES, but it's repeated 3 times, hence the name Triple DES. the info is encrypted with the primary key, decrypted with the second key, and eventually encrypted again with the third key. Triple DES runs 3 times slower than DES, but is far safer if used properly. The procedure for decrypting something is that the same because the procedure for encryption, except it's executed in reverse. Like DES, data is encrypted and decrypted in 64-bit chunks. Although the input key for DES is 64 bits long, the particular key employed by DES is merely 56 bits long. the smallest amount significant (right-most) bit in each byte may be a parity, and will be set in order that there are always an odd number of 1s in every byte. These parity bits are ignored, so only the seven most vital bits of every byte are used, leading to a key length of 56 bits. this suggests that the effective key strength for Triple DES is really 168 bits because each of the three keys contains 8 parity bits that aren't used during the encryption process. Triple DES Modes Triple ECB (Electronic Code Book) • This variant of Triple DES works precisely the same way because the ECB mode of DES. • this is often the foremost commonly used mode of operation. Triple CBC (Cipher Block Chaining) • This method is extremely almost like the quality DES CBC mode. • like Triple ECB, the effective key length is 168 bits and keys are utilized in an equivalent manner, as described above, but the chaining features of CBC mode also are employed. • the primary 64-bit key acts because the Initialization Vector to DES. • Triple ECB is then executed for one 64-bit block of plaintext. • The resulting ciphertext is then XORed with subsequent plaintext block to be encrypted, and therefore the procedure is repeated. • This method adds an additional layer of security to Triple DES and is therefore safer than Triple ECB, although it's not used as widely as Triple ECB.

NEW QUESTION 287

What useful information is gathered during a successful Simple Mail Transfer Protocol (SMTP) enumeration?

- A. The two internal commands VRFY and EXPN provide a confirmation of valid users, email addresses, aliases, and mailing lists.

- B. Reveals the daily outgoing message limits before mailboxes are locked
- C. The internal command RCPT provides a list of ports open to message traffic.
- D. A list of all mail proxy server addresses used by the targeted host

Answer: A

NEW QUESTION 292

Which of the following is not a Bluetooth attack?

- A. Bluedriving
- B. Bluesmacking
- C. Bluejacking
- D. Bluesnarfing

Answer: A

NEW QUESTION 296

John, a professional hacker, performs a network attack on a renowned organization and gains unauthorized access to the target network. He remains in the network without being detected for a long time and obtains sensitive information without sabotaging the organization. Which of the following attack techniques is used by John?

- A. Advanced persistent theft
- B. threat Diversion theft
- C. Spear-phishing sites
- D. insider threat

Answer: A

Explanation:

An advanced persistent threat (APT) may be a broad term wont to describe AN attack campaign within which an intruder, or team of intruders, establishes a bootleg, long presence on a network so as to mine sensitive knowledge.

The targets of those assaults, that square measure terribly fastidiously chosen and researched, usually embrace massive enterprises or governmental networks. the implications of such intrusions square measure huge, and include:

- Intellectual property thieving (e.g., trade secrets or patents)
- Compromised sensitive info (e.g., worker and user personal data)
- The sabotaging of essential structure infrastructures (e.g., information deletion)
- Total website takeovers

Executing an APT assault needs additional resources than a regular internet application attack. The perpetrators square measure typically groups of intimate cybercriminals having substantial resource. Some APT attacks square measure government-funded and used as cyber warfare weapons.

APT attacks dissent from ancient internet application threats, in that:

- They're considerably additional advanced.
- They're not hit and run attacks—once a network is infiltrated, the culprit remains so as to realize the maximum amount info as potential.
- They're manually dead (not automated) against a selected mark and indiscriminately launched against an outsized pool of targets.
- They typically aim to infiltrate a complete network, as opposition one specific half.

More common attacks, like remote file inclusion (RFI), SQL injection and cross-site scripting (XSS), square measure oftentimes employed by perpetrators to ascertain a footing in a very targeted network. Next, Trojans and backdoor shells square measure typically wont to expand that foothold and make a persistent presence inside the targeted perimeter.

NEW QUESTION 299

An attacker can employ many methods to perform social engineering against unsuspecting employees, including scareware. What is the best example of a scareware attack?

- A. A pop-up appears to a user stating, "You have won a free cruise! Click here to claim your prize!"
- B. A banner appears to a user stating, "Your account has been locke
- C. Click here to reset your password and unlock your account."
- D. A banner appears to a user stating, "Your Amazon order has been delaye
- E. Click here to find out your new delivery date."
- F. A pop-up appears to a user stating, "Your computer may have been infected with spywar
- G. Click here to install an anti-spyware tool to resolve this issue."

Answer: D

NEW QUESTION 301

Security administrator John Smith has noticed abnormal amounts of traffic coming from local computers at night. Upon reviewing, he finds that user data have been exfiltrated by an attacker. AV tools are unable to find any malicious software, and the IDS/IPS has not reported on any non-whitelisted programs, what type of malware did the attacker use to bypass the company's application whitelisting?

- A. Phishing malware
- B. Zero-day malware
- C. File-less malware
- D. Logic bomb malware

Answer: C

Explanation:

<https://www.mcafee.com/enterprise/en-us/security-awareness/ransomware/what-is-fileless-malware.html>

NEW QUESTION 306

CyberTech Inc. recently experienced SQL injection attacks on its official website. The company appointed Bob, a security professional, to build and incorporate defensive strategies against such attacks. Bob adopted a practice whereby only a list of entities such as the data type, range, size, and value, which have been approved for secured access, is accepted. What is the defensive technique employed by Bob in the above scenario?

- A. Output encoding
- B. Enforce least privileges
- C. Whitelist validation
- D. Blacklist validation

Answer: C

NEW QUESTION 309

Which of the following is a passive wireless packet analyzer that works on Linux-based systems?

- A. Burp Suite
- B. OpenVAS
- C. tshark
- D. Kismet

Answer: C

NEW QUESTION 314

The Heartbleed bug was discovered in 2014 and is widely referred to under MITRE's Common Vulnerabilities and Exposures (CVE) as CVE-2014-0160. This bug affects the OpenSSL implementation of the Transport Layer Security (TLS) protocols defined in RFC6520.

What type of key does this bug leave exposed to the Internet making exploitation of any compromised system very easy?

- A. Public
- B. Private
- C. Shared
- D. Root

Answer: B

NEW QUESTION 315

What is the known plaintext attack used against DES which gives the result that encrypting plaintext with one DES key followed by encrypting it with a second DES key is no more secure than using a single key?

- A. Man-in-the-middle attack
- B. Meet-in-the-middle attack
- C. Replay attack
- D. Traffic analysis attack

Answer: B

NEW QUESTION 320

Peter extracts the SIDs list from Windows 2000 Server machine using the hacking tool "SIDExtractor". Here is the output of the SIDs:

```
s-1-5-21-1125394485-807628933-54978560-100Johns
s-1-5-21-1125394485-807628933-54978560-652Rebecca
s-1-5-21-1125394485-807628933-54978560-412Sheela
s-1-5-21-1125394485-807628933-54978560-999Shawn
s-1-5-21-1125394485-807628933-54978560-777Somia
s-1-5-21-1125394485-807628933-54978560-500chang
s-1-5-21-1125394485-807628933-54978560-555Micah
```

From the above list identify the user account with System Administrator privileges.

- A. John
- B. Rebecca
- C. Sheela
- D. Shawn
- E. Somia
- F. Chang
- G. Micah

Answer: F

NEW QUESTION 322

Jim, a professional hacker, targeted an organization that is operating critical Industrial Infrastructure. Jim used Nmap to scan open ports and running services on systems connected to the organization's OT network. He used an Nmap command to identify Ethernet/IP devices connected to the Internet and further gathered Information such as the vendor name, product code and name, device name, and IP address. Which of the following Nmap commands helped Jim retrieve the required information?

- A. nmap -Pn -sT --scan-delay 1s --max-parallelism 1 -p < Port List > < Target IP >
- B. nmap -Pn -sU -p 44818 --script enip-info < Target IP >

- C. nmap -Pn -sT -p 46824 < Target IP >
D. nmap -Pn -sT -p 102 --script s7-info < Target IP >

Answer: B

NEW QUESTION 327

Which address translation scheme would allow a single public IP address to always correspond to a single machine on an internal network, allowing "server publishing"?

- A. Overloading Port Address Translation
B. Dynamic Port Address Translation
C. Dynamic Network Address Translation
D. Static Network Address Translation

Answer: D

NEW QUESTION 330

Steve, an attacker, created a fake profile on a social media website and sent a request to Stella. Stella was enthralled by Steve's profile picture and the description given for his profile, and she initiated a conversation with him soon after accepting the request. After a few days, Steve started asking about her company details and eventually gathered all the essential information regarding her company. What is the social engineering technique Steve employed in the above scenario?

- A. Diversion theft
B. Baiting
C. Honey trap
D. Piggybacking

Answer: C

Explanation:

The honey trap is a technique where an attacker targets a person online by pretending to be an attractive person and then begins a fake online relationship to obtain confidential information about the target company. In this technique, the victim is an insider who possesses critical information about the target organization.

Baiting is a technique in which attackers offer end users something alluring in exchange for important information such as login details and other sensitive data. This technique relies on the curiosity and greed of the end-users. Attackers perform this technique by leaving a physical device such as a USB flash drive containing malicious files in locations where people can easily find them, such as parking lots, elevators, and bathrooms. This physical device is labeled with a legitimate company's logo, thereby tricking end-users into trusting it and opening it on their systems. Once the victim connects and opens the device, a malicious file downloads. It infects the system and allows the attacker to take control.

For example, an attacker leaves some bait in the form of a USB drive in the elevator with the label "Employee Salary Information 2019" and a legitimate company's logo. Out of curiosity and greed, the victim picks up the device and opens it up on their system, which downloads the bait. Once the bait is downloaded, a piece of malicious software installs on the victim's system, giving the attacker access.

NEW QUESTION 335

Bob wants to ensure that Alice can check whether his message has been tampered with. He creates a checksum of the message and encrypts it using asymmetric cryptography. What key does Bob use to encrypt the checksum for accomplishing this goal?

- A. Alice's private key
B. Alice's public key
C. His own private key
D. His own public key

Answer: B

NEW QUESTION 337

During the enumeration phase, Lawrence performs banner grabbing to obtain information such as OS details and versions of services running. The service that he enumerated runs directly on TCP port 445.

Which of the following services is enumerated by Lawrence in this scenario?

- A. Server Message Block (SMB)
B. Network File System (NFS)
C. Remote procedure call (RPC)
D. Telnet

Answer: A

Explanation:

Worker Message Block (SMB) is an organization document sharing and information texture convention. SMB is utilized by billions of gadgets in a different arrangement of working frameworks, including Windows, MacOS, iOS, Linux, and Android. Customers use SMB to get to information on workers. This permits sharing of records, unified information the board, and brought down capacity limit needs for cell phones. Workers additionally use SMB as a feature of the Software-characterized Data Center for outstanding burdens like grouping and replication.

Since SMB is a far off record framework, it requires security from assaults where a Windows PC may be fooled into reaching a pernicious worker running inside a confided in organization or to a far off worker outside the organization edge. Firewall best practices and arrangements can upgrade security keeping malevolent traffic from leaving the PC or its organization.

For Windows customers and workers that don't have SMB shares, you can obstruct all inbound SMB traffic utilizing the Windows Defender Firewall to keep far off associations from malignant or bargained gadgets. In the Windows Defender Firewall, this incorporates the accompanying inbound principles.

| Name | Profile | Enabled |
|-------------------------------------|---------|---------|
| File and Printer Sharing (SMB-In) | All | No |
| Netlogon Service (NP-In) | All | No |
| Remote Event Log Management (NP-In) | All | No |
| Remote Service Management (NP-In) | All | No |

You should also create a new blocking rule to override any other inbound firewall rules. Use the following suggested settings for any Windows clients or servers that do not host SMB Shares:

- > Name: Block all inbound SMB 445
- > Description: Blocks all inbound SMB TCP 445 traffic. Not to be applied to domain controllers or computers that host SMB shares.
- > Action: Block the connection
- > Programs: All
- > Remote Computers: Any
- > Protocol Type: TCP
- > Local Port: 445
- > Remote Port: Any
- > Profiles: All
- > Scope (Local IP Address): Any
- > Scope (Remote IP Address): Any
- > Edge Traversal: Block edge traversal

You must not globally block inbound SMB traffic to domain controllers or file servers. However, you can restrict access to them from trusted IP ranges and devices to lower their attack surface. They should also be restricted to Domain or Private firewall profiles and not allow Guest/Public traffic.

NEW QUESTION 342

Which of the following tools performs comprehensive tests against web servers, including dangerous files and CGIs?

- A. Nikto
- B. John the Ripper
- C. Dsniff
- D. Snort

Answer: A

NEW QUESTION 346

Mr. Omkar performed tool-based vulnerability assessment and found two vulnerabilities. During analysis, he found that these issues are not true vulnerabilities. What will you call these issues?

- A. False positives
- B. True negatives
- C. True positives
- D. False negatives

Answer: A

NEW QUESTION 351

In an attempt to damage the reputation of a competitor organization, Hailey, a professional hacker, gathers a list of employee and client email addresses and other related information by using various search engines, social networking sites, and web spidering tools. In this process, she also uses an automated tool to gather a list of words from the target website to further perform a brute-force attack on the previously gathered email addresses.

What is the tool used by Hailey for gathering a list of words from the target website?

- A. Shadowsocks
- B. CeWL
- C. Psiphon
- D. Orbot

Answer: B

NEW QUESTION 353

Within the context of Computer Security, which of the following statements describes Social Engineering best?

- A. Social Engineering is the act of publicly disclosing information
- B. Social Engineering is the means put in place by human resource to perform time accounting
- C. Social Engineering is the act of getting needed information from a person rather than breaking into a system
- D. Social Engineering is a training program within sociology studies

Answer: C

NEW QUESTION 354

Matthew, a black hat, has managed to open a meterpreter session to one of the kiosk machines in Evil Corp's lobby. He checks his current SID, which is S-1-5-21-1223352397-1872883824-861252104-501. What needs to happen before Matthew has full administrator access?

- A. He must perform privilege escalation.
- B. He needs to disable antivirus protection.

- C. He needs to gain physical access.
- D. He already has admin privileges, as shown by the “501” at the end of the SID.

Answer: A

NEW QUESTION 359

What is the least important information when you analyze a public IP address in a security alert?

- A. DNS
- B. Whois
- C. Geolocation
- D. ARP

Answer: D

NEW QUESTION 363

```
env x='(){ :};echo exploit' bash -c 'cat/etc/passwd'
```

What is the Shellshock bash vulnerability attempting to do on a vulnerable Linux host?

- A. Removes the passwd file
- B. Changes all passwords in passwd
- C. Add new user to the passwd file
- D. Display passwd content to prompt

Answer: D

NEW QUESTION 366

Which tool can be used to silently copy files from USB devices?

- A. USB Grabber
- B. USB Snoopy
- C. USB Sniffer
- D. Use Dumper

Answer: D

NEW QUESTION 369

Take a look at the following attack on a Web Server using obstructed URL:

```
http://www.certifiedhacker.com/script.ext?
template=%2e%2e%2f%2e%2e%2f%2e%2e%2f%65%74%63%2f%70%61%73%73%77%64
This request is made up of:
%2e%2e%2f%2e%2e%2f = ../ ../ ../
%65%74%63 = etc
%2f = /
%70%61%73%73%77%64 = passwd
```

How would you protect from these attacks?

- A. Configure the Web Server to deny requests involving "hex encoded" characters
- B. Create rules in IDS to alert on strange Unicode requests
- C. Use SSL authentication on Web Servers
- D. Enable Active Scripts Detection at the firewall and routers

Answer: B

NEW QUESTION 370

Which of the following are well known password-cracking programs?

- A. L0phtcrack
- B. NetCat
- C. Jack the Ripper
- D. Netbus
- E. John the Ripper

Answer: AE

NEW QUESTION 375

Which mode of IPSec should you use to assure security and confidentiality of data within the same LAN?

- A. ESP transport mode
- B. ESP confidential
- C. AH permiscuous
- D. AH Tunnel mode

Answer: A

NEW QUESTION 377

Kate dropped her phone and subsequently encountered an issue with the phone's internal speaker. Thus, she is using the phone's loudspeaker for phone calls and other activities. Bob, an attacker, takes advantage of this vulnerability and secretly exploits the hardware of Kate's phone so that he can monitor the loudspeaker's output from data sources such as voice assistants, multimedia messages, and audio files by using a malicious app to breach speech privacy. What is the type of attack Bob performed on Kate in the above scenario?

- A. Man-in-the-disk attack
- B. aLTER attack
- C. SIM card attack
- D. Spearphone attack

Answer: D

NEW QUESTION 381

A zone file consists of which of the following Resource Records (RRs)?

- A. DNS, NS, AXFR, and MX records
- B. DNS, NS, PTR, and MX records
- C. SOA, NS, AXFR, and MX records
- D. SOA, NS, A, and MX records

Answer: D

NEW QUESTION 386

SQL injection (SQLi) attacks attempt to inject SQL syntax into web requests, which may Bypass authentication and allow attackers to access and/or modify data attached to a web application.

Which of the following SQLi types leverages a database server's ability to make DNS requests to pass data to an attacker?

- A. Union-based SQLi
- B. Out-of-band SQLi
- C. In-band SQLi
- D. Time-based blind SQLi

Answer: B

Explanation:

Out-of-band SQL injection occurs when an attacker is unable to use an equivalent channel to launch the attack and gather results. ... Out-of-band SQLi techniques would believe the database server's ability to form DNS or HTTP requests to deliver data to an attacker. Out-of-band SQL injection is not very common, mostly because it depends on features being enabled on the database server being used by the web application.

Out-of-band SQL injection occurs when an attacker is unable to use the same channel to launch the attack and gather results.

Out-of-band techniques, offer an attacker an alternative to inferential time-based techniques, especially if the server responses are not very stable (making an inferential time-based attack unreliable).

Out-of-band SQLi techniques would rely on the database server's ability to make DNS or HTTP requests to deliver data to an attacker. Such is the case with Microsoft SQL Server's xp_dirtree command, which can be used to make DNS requests to a server an attacker controls; as well as Oracle Database's UTL_HTTP

package, which can be used to send HTTP requests from SQL and PL/SQL to a server an attacker controls.

NEW QUESTION 391

Your organization has signed an agreement with a web hosting provider that requires you to take full responsibility of the maintenance of the cloud-based resources. Which of the following models covers this?

- A. Platform as a service
- B. Software as a service
- C. Functions as a
- D. service Infrastructure as a service

Answer: C

NEW QUESTION 394

During an Xmas scan what indicates a port is closed?

- A. No return response
- B. RST
- C. ACK
- D. SYN

Answer: B

NEW QUESTION 398

Which of the following is the best countermeasure to encrypting ransomwares?

- A. Use multiple antivirus softwares
- B. Pay a ransom
- C. Keep some generation of off-line backup
- D. Analyze the ransomware to get decryption key of encrypted data

Answer: C

NEW QUESTION 400

A penetration tester is conducting a port scan on a specific host. The tester found several ports opened that were confusing in concluding the Operating System (OS) version installed. Considering that NMAP result below, which of the following is likely to be installed on the target machine by the OS? Starting NMAP 5.21 at 2011-03-15 11:06 NMAP scan report for 172.16.40.65 Host is up (1.00s latency). Not shown: 993 closed ports PORT STATE SERVICE 21/tcp open ftp 23/tcp open telnet 80/tcp open http 139/tcp open netbios-ssn 515/tcp open 631/tcp open ipp 9100/tcp open MAC Address: 00:00:48:0D:EE:8

- A. The host is likely a Linux machine.
- B. The host is likely a printer.
- C. The host is likely a router.
- D. The host is likely a Windows machine.

Answer: B

NEW QUESTION 403

At what stage of the cyber kill chain theory model does data exfiltration occur?

- A. Actions on objectives
- B. Weaponization
- C. installation
- D. Command and control

Answer: A

Explanation:

The longer an adversary has this level of access, the greater the impact. Defenders must detect this stage as quickly as possible and deploy tools which can enable them to gather forensic evidence. One example would come with network packet captures, for damage assessment. Only now, after progressing through the primary six phases, can intruders take actions to realize their original objectives. Typically, the target of knowledge exfiltration involves collecting, encrypting and extracting information from the victim(s) environment; violations of knowledge integrity or availability are potential objectives also . Alternatively, and most ordinarily , the intruder may only desire access to the initial victim box to be used as a hop point to compromise additional systems and move laterally inside the network. Once this stage is identified within an environment, the implementation of prepared reaction plans must be initiated. At a minimum, the plan should include a comprehensive communication plan, detailed evidence must be elevated to the very best ranking official or board , the deployment of end-point security tools to dam data loss and preparation for briefing a CIRT Team. Having these resources well established beforehand may be a “MUST” in today’s quickly evolving landscape of cybersecurity threats

NEW QUESTION 404

Becky has been hired by a client from Dubai to perform a penetration test against one of their remote offices. Working from her location in Columbus, Ohio, Becky runs her usual reconnaissance scans to obtain basic information about their network. When analyzing the results of her Whois search, Becky notices that the IP was allocated to a location in Le Havre, France. Which regional Internet registry should Becky go to for detailed information?

- A. ARIN
- B. APNIC
- C. RIPE
- D. LACNIC

Answer: C

Explanation:

Regional Internet Registries (RIRs):

ARIN (American Registry for Internet Numbers) AFRINIC (African Network Information Center) APNIC (Asia Pacific Network Information Center)

RIPE (Réseaux IP Européens Network Coordination Centre)

LACNIC (Latin American and Caribbean Network Information Center)

NEW QUESTION 405

Kevin, a professional hacker, wants to penetrate CyberTech Inc.’s network. He employed a technique, using which he encoded packets with Unicode characters. The company’s IDS cannot recognize the packet, but the target web server can decode them.

What is the technique used by Kevin to evade the IDS system?

- A. Desynchronization
- B. Obfuscating
- C. Session splicing
- D. Urgency flag

Answer: B

Explanation:

Adversaries could decide to build an possible or file difficult to find or analyze by encrypting, encoding, or otherwise obfuscating its contents on the system or in transit. this is often common behavior which will be used across totally different platforms and therefore the network to evade defenses.

Payloads may be compressed, archived, or encrypted so as to avoid detection. These payloads may be used throughout Initial Access or later to mitigate detection. typically a user’s action could also be needed to open and Deobfuscate/Decode Files or info for User Execution. The user can also be needed to input a parole to open a parole protected compressed/encrypted file that was provided by the mortal. Adversaries can also used compressed or archived scripts, like JavaScript.

Portions of files can even be encoded to cover the plain-text strings that will otherwise facilitate defenders with discovery. Payloads can also be split into separate, ostensibly benign files that solely reveal malicious practicality once reassembled.

Adversaries can also modify commands dead from payloads or directly via a Command and Scripting Interpreter. surroundings variables, aliases, characters, and different platform/language specific linguistics may be wont to evade signature based mostly detections and application management mechanisms.

NEW QUESTION 408

Peter is surfing the internet looking for information about DX Company. Which hacking process is Peter doing?

- A. Scanning
- B. Footprinting
- C. Enumeration
- D. System Hacking

Answer: B

NEW QUESTION 413

What is one of the advantages of using both symmetric and asymmetric cryptography in SSL/TLS?

- A. Symmetric algorithms such as AES provide a failsafe when asymmetric methods fail.
- B. Asymmetric cryptography is computationally expensive in compariso
- C. However, it is well-suited to securely negotiate keys for use with symmetric cryptography.
- D. Symmetric encryption allows the server to securely transmit the session keys out-of-band.
- E. Supporting both types of algorithms allows less-powerful devices such as mobile phones to use symmetric encryption instead.

Answer: D

NEW QUESTION 418

Elliot is in the process of exploiting a web application that uses SQL as a back-end database. He's determined that the application is vulnerable to SQL injection, and has introduced conditional timing delays into injected queries to determine whether they are successful. What type of SQL injection is Elliot most likely performing?

- A. Error-based SQL injection
- B. Blind SQL injection
- C. Union-based SQL injection
- D. NoSQL injection

Answer: B

NEW QUESTION 421

Jim's company regularly performs backups of their critical servers. But the company cannot afford to send backup tapes to an off-site vendor for long-term storage and archiving. Instead, Jim's company keeps the backup tapes in a safe in the office. Jim's company is audited each year, and the results from this year's audit show a risk because backup tapes are not stored off-site. The Manager of Information Technology has a plan to take the backup tapes home with him and wants to know what two things he can do to secure the backup tapes while in transit?

- A. Encrypt the backup tapes and transport them in a lock box.
- B. Degauss the backup tapes and transport them in a lock box.
- C. Hash the backup tapes and transport them in a lock box.
- D. Encrypt the backup tapes and use a courier to transport them.

Answer: A

NEW QUESTION 425

What did the following commands determine?

```
C: user2sid \earth guest
s-1-5-21-343818398-789336058-1343024091-501
C:sid2user 5 21 343818398 789336058 1343024091 500
Name is Joe
Domain is EARTH
```

- A. That the Joe account has a SID of 500
- B. These commands demonstrate that the guest account has NOT been disabled
- C. These commands demonstrate that the guest account has been disabled
- D. That the true administrator is Joe
- E. Issued alone, these commands prove nothing

Answer: D

NEW QUESTION 428

When a security analyst prepares for the formal security assessment - what of the following should be done in order to determine inconsistencies in the secure assets database and verify that system is compliant to the minimum security baseline?

- A. Data items and vulnerability scanning
- B. Interviewing employees and network engineers
- C. Reviewing the firewalls configuration
- D. Source code review

Answer: A

NEW QUESTION 431

George is a security professional working for iTech Solutions. He was tasked with securely transferring sensitive data of the organization between industrial systems. In this process, he used a short-range communication protocol based on the IEEE 203.15.4 standard. This protocol is used in devices that transfer data infrequently at a low rate in a restricted area, within a range of 10-100 m. What is the short-range wireless communication technology George employed in the above scenario?

- A. MQTT
- B. LPWAN
- C. Zigbee
- D. NB-IoT

Answer: C

Explanation:

Zigbee could be a wireless technology developed as associate open international normal to deal with the unique desires of affordable, low-power wireless IoT networks. The Zigbee normal operates on the IEEE 802.15.4 physical radio specification and operates in unauthorised bands as well as a pair of 4 GHz, 900 MHz and 868 MHz.

The 802.15.4 specification upon that the Zigbee stack operates gained confirmation by the Institute of Electrical and physical science Engineers (IEEE) in 2003.

The specification could be a packet-based radio protocol supposed for affordable, battery-operated devices. The protocol permits devices to speak in an exceedingly kind of network topologies and may have battery life lasting many years.

The Zigbee three.0 Protocol

The Zigbee protocol has been created and ratified by member corporations of the Zigbee Alliance. Over three hundred leading semiconductor makers, technology corporations, OEMs and repair corporations comprise the Zigbee Alliance membership. The Zigbee protocol was designed to supply associate easy-to-use wireless information answer characterised by secure, reliable wireless network architectures.

THE ZIGBEE ADVANTAGE

The Zigbee 3.0 protocol is intended to speak information through rip-roaring RF environments that area unit common in business and industrial applications.

Version 3.0 builds on the prevailing Zigbee normal however unifies the market-specific application profiles to permit all devices to be wirelessly connected within the same network, no matter their market designation and performance. what is more, a Zigbee 3.0 certification theme ensures the ability of product from completely different makers. Connecting Zigbee three.0 networks to the information science domain unveil observance and management from devices like smartphones and tablets on a local area network or WAN, as well as the web, and brings verity net of Things to fruition.

Zigbee protocol options include:

- Support for multiple network topologies like point-to-point, point-to-multipoint and mesh networks
- Low duty cycle – provides long battery life
- Low latency
- Direct Sequence unfold Spectrum (DSSS)
- Up to 65,000 nodes per network
- 128-bit AES encryption for secure information connections
- Collision avoidance, retries and acknowledgements

This is another short-range communication protocol based on the IEEE 802.15.4 standard. Zig-Bee is used in devices that transfer data infrequently at a low rate in a restricted area and within a range of 10–100 m.

NEW QUESTION 435

You have successfully comprised a server having an IP address of 10.10.0.5. You would like to enumerate all machines in the same network quickly.

What is the best Nmap command you will use?

- A. nmap -T4 -q 10.10.0.0/24
- B. nmap -T4 -F 10.10.0.0/24
- C. nmap -T4 -r 10.10.1.0/24
- D. nmap -T4 -O 10.10.0.0/24

Answer: B

NEW QUESTION 437

Morris, an attacker, wanted to check whether the target AP is in a locked state. He attempted using different utilities to identify WPS-enabled APs in the target wireless network. Ultimately, he succeeded with one special command-line utility. Which of the following command-line utilities allowed Morris to discover the WPS-enabled APs?

- A. wash
- B. ntptrace
- C. macof
- D. net View

Answer: A

NEW QUESTION 442

Which of the following commands checks for valid users on an SMTP server?

- A. RCPT
- B. CHK
- C. VRFY
- D. EXPN

Answer: C

Explanation:

The VRFY commands enables SMTP clients to send an invitation to an SMTP server to verify that mail for a selected user name resides on the server. The VRFY command is defined in RFC 821. The server sends a response indicating whether the user is local or not, whether mail are going to be forwarded, and so on. A response of 250 indicates that the user name is local; a response of 251 indicates that the user name isn't local, but the server can forward the message. The server response includes the mailbox name.

NEW QUESTION 446

in an attempt to increase the security of your network, you Implement a solution that will help keep your wireless network undiscoverable and accessible only to

those that know it. How do you accomplish this?

- A. Delete the wireless network
- B. Remove all passwords
- C. Lock all users
- D. Disable SSID broadcasting

Answer: D

NEW QUESTION 450

A Security Engineer at a medium-sized accounting firm has been tasked with discovering how much information can be obtained from the firm's public facing web servers. The engineer decides to start by using netcat to port 80.

The engineer receives this output: HTTP/1.1 200 OK

Server: Microsoft-IIS/6

Expires: Tue, 17 Jan 2011 01:41:33 GMT

Date: Mon, 16 Jan 2011 01:41:33 GMT

Content-Type: text/html Accept-Ranges: bytes

Last Modified: Wed, 28 Dec 2010 15:32:21 GMT

ETag: "b0aac0542e25c31:89d" Content-Length: 7369

Which of the following is an example of what the engineer performed?

- A. Banner grabbing
- B. SQL injection
- C. Whois database query
- D. Cross-site scripting

Answer: A

NEW QUESTION 455

You are a security officer of a company. You had an alert from IDS that indicates that one PC on your Intranet is connected to a blacklisted IP address (C2 Server) on the Internet. The IP address was blacklisted just before the alert. You are starting an investigation to roughly analyze the severity of the situation. Which of the following is appropriate to analyze?

- A. IDS log
- B. Event logs on domain controller
- C. Internet Firewall/Proxy log.
- D. Event logs on the PC

Answer: C

NEW QUESTION 458

These hackers have limited or no training and know how to use only basic techniques or tools. What kind of hackers are we talking about?

- A. Black-Hat Hackers A
- B. Script Kiddies
- C. White-Hat Hackers
- D. Gray-Hat Hacker

Answer: B

Explanation:

Script Kiddies: These hackers have limited or no training and know how to use only basic techniques or tools. Even then they may not understand any or all of what they are doing.

NEW QUESTION 460

Suppose that you test an application for the SQL injection vulnerability. You know that the backend database is based on Microsoft SQL Server. In the login/password form, you enter the following credentials: Username: attack' or 1=1 Password: 123456

Based on the above credentials, which of the following SQL commands are you expecting to be executed by the server, if there is indeed an SQL injection vulnerability?

- A. select * from Users where UserName = 'attack' ' or 1=1 -- and UserPassword = '123456'
- B. select * from Users where UserName = 'attack' or 1=1 -- and UserPassword = '123456'
- C. select * from Users where UserName = 'attack or 1=1 -- and UserPassword = '123456'
- D. select * from Users where UserName = 'attack' or 1=1 --' and UserPassword = '123456'

Answer: A

NEW QUESTION 461

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

312-50v11 Practice Exam Features:

- * 312-50v11 Questions and Answers Updated Frequently
- * 312-50v11 Practice Questions Verified by Expert Senior Certified Staff
- * 312-50v11 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 312-50v11 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 312-50v11 Practice Test Here](#)