

Exam Questions NSE5_FAZ-7.0

Fortinet NSE 5 - FortiAnalyzer 7.0

https://www.2passeasy.com/dumps/NSE5_FAZ-7.0/



NEW QUESTION 1


What FortiView tool can you use to automatically build a dataset and chart based on a filtered search result?

- A. Chart Builder
- B. Export to Report Chart
- C. Dataset Library
- D. Custom View

Answer: B

NEW QUESTION 2

Refer to the exhibit.

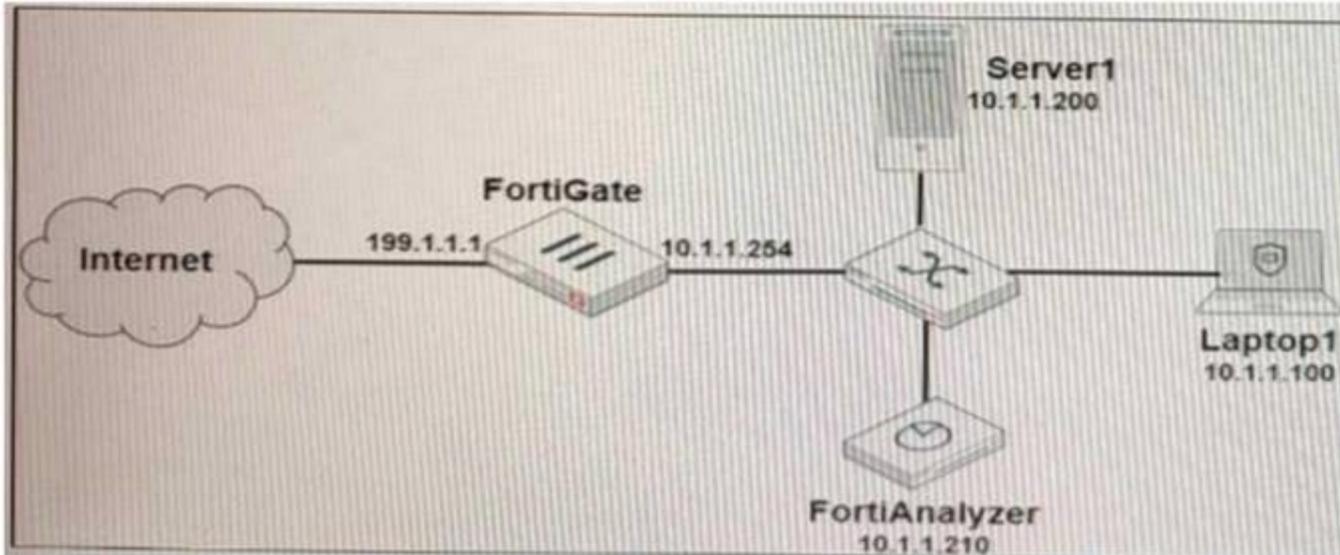

Laptop1 is used by several administrators to manage FortiAnalyzer. You want to configure a generic text filter that matches all login attempts to the web interface generated by any user other than "admin" and coming from Laptop1:
 Which filter will achieve the desired result?

- A. operation-login & performed_on=="GUI(10.1.1.100)" & user!=admin
- B. operation-login & srcip==10.1.1.100 & dstip==10.1.1.210 & user==admin
- C. operation-login & dstip==10.1.1.210 & user!=admin
- D. operation-login & performed_on=="GUI(10.1.1.210)" & user!=admin

Answer: A

Explanation:

On there the task was to create a filter for failed logins from any other location but the local computer: "Add the text performed_on!~10.0.1.10. This includes any attempts coming from devices with an IP address that is not the one configured on the Local-Client computer."

NEW QUESTION 3

What are two of the key features of FortiAnalyzer? (Choose two.)

- A. Centralized log repository
- B. Cloud-based management
- C. Reports
- D. Virtual domains (VDOMs)

Answer: AC

NEW QUESTION 4

What is the purpose of using prefilters when configuring event handlers?

- A. They limit which logs are checked for matches by the other filters.
- B. They can filter the logs before they are processed by FortiAnalyzer
- C. They download new filters to be used in event handlers.
- D. They are common filters applied simultaneously to all event handlers.

Answer: A

NEW QUESTION 5

What are offline logs on FortiAnalyzer?

- A. Compressed logs, which are also known as archive logs, are considered to be offline logs.
- B. When you restart FortiAnalyzer
- C. all stored logs are considered to be offline logs.
- D. Logs that are indexed and stored in the SQL database.
- E. Logs that are collected from offline devices after they boot up.

Answer: A

NEW QUESTION 6

Which item must you configure on FortiAnalyzer to email generated reports automatically?

- A. Output profile
- B. Report scheduling
- C. SFTP server
- D. SNMP server

Answer: A

NEW QUESTION 7

FortiAnalyzer centralizes which functions? (Choose three)

- A. Network analysis
- B. Graphical reporting
- C. Content archiving / data mining
- D. Vulnerability assessment
- E. Security log analysis / forensics

Answer: BCE

NEW QUESTION 8

Which log type does the FortiAnalyzer indicators of compromise feature use to identify infected hosts?

- A. Antivirus logs
- B. Web filter logs
- C. IPS logs
- D. Application control logs

Answer: B

NEW QUESTION 9

How can you configure FortiAnalyzer to permit administrator logins from only specific locations?

- A. Use static routes
- B. Use administrative profiles
- C. Use trusted hosts
- D. Use secure protocols

Answer: C

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/186508/trusted-hosts>

NEW QUESTION 10

Which statement about sending notifications with incident updates is true?

- A. Notifications can be sent only when an incident is created or deleted.
- B. You must configure an output profile to send notifications by email.
- C. Each incident can send notifications to a single external platform.
- D. Each connector used can have different notification settings.

Answer: D

NEW QUESTION 10

Which clause is considered mandatory in SELECT statements used by the FortiAnalyzer to generate reports?

- A. FROM
- B. LIMIT
- C. WHERE
- D. ORDER BY

Answer: A

NEW QUESTION 14

For which two SAML roles can the FortiAnalyzer be configured? (Choose two.)

- A. Principal
- B. Service provider
- C. Identity collector
- D. Identity provider

Answer: BD

NEW QUESTION 17

What happens when a log file saved on FortiAnalyzer disks reaches the size specified in the device log settings?

- A. The log file is stored as a raw log and is available for analytic support.
- B. The log file rolls over and is archived.
- C. The log file is purged from the database.
- D. The log file is overwritten.

Answer: B

NEW QUESTION 21

Which two statements are true regarding FortiAnalyzer log forwarding? (Choose two.)

- A. Both modes, forwarding and aggregation, support encryption of logs between devices.
- B. In aggregation mode, you can forward logs to syslog and CEF servers as well.
- C. Aggregation mode stores logs and content files and uploads them to another FortiAnalyzer device at a scheduled time.
- D. Forwarding mode forwards logs in real time only to other FortiAnalyzer devices.

Answer: AC

Explanation:

- A) FortiAnalyzer_7.0_Study_Guide-Online.pdf page 148: The log communication between devices can be protected by encryption, with the desired encryption level, using the commands shown on the slide. (You need to interpret this. "Real time" and "aggregation" is about the "moment" when Fortigate sends the logs. However, no matter the moment, Fortigate will upload logs encrypted or unencrypted based on previous / different config).
- C) FortiAnalyzer_7.0_Study_Guide-Online.pdf page 147: Aggregation: Logs and content files stored and uploaded at scheduled time.

NEW QUESTION 23

In the FortiAnalyzer FortiView, source and destination IP addresses from FortiGate devices are not resolving to a hostname. How can you resolve the source and destination IP addresses, without introducing any additional performance impact to FortiAnalyzer?

- A. Resolve IP addresses on a per-ADOM basis to reduce delay on FortiView while IPs resolve
- B. Configure # set resolve-ip enable in the system FortiView settings
- C. Configure local DNS servers on FortiAnalyzer
- D. Resolve IP addresses on FortiGate

Answer: D

Explanation:

<https://packetplant.com/fortigate-and-fortianalyzer-resolve-source-and-destination-ip/>

"As a best practice, it is recommended to resolve IPs on the FortiGate end. This is because you get both source and destination, and it offloads the work from FortiAnalyzer. On FortiAnalyzer, this IP resolution does destination IPs only"

NEW QUESTION 25

What is the best approach to handle a hard disk failure on a FortiAnalyzer that supports hardware RAID?

- A. Hot swap the disk.
- B. There is no need to do anything because the disk will self-recover.
- C. Run execute format disk to format and restart the FortiAnalyzer device.
- D. Shut down FortiAnalyzer and replace the disk

Answer: A

Explanation:

https://help.fortinet.com/fa/faz50hlp/56/5-6-2/FMG-FAZ/0700_RAID/0800_Swapping%20Disks.htm#:~:text=If

NEW QUESTION 28

You need to upgrade your FortiAnalyzer firmware.

What happens to the logs being sent to FortiAnalyzer from FortiGate during the time FortiAnalyzer is temporarily unavailable?

- A. FortiAnalyzer uses log fetching to retrieve the logs when back online
- B. FortiGate uses the miglogd process to cache the logs
- C. The logfiled process stores logs in offline mode
- D. Logs are dropped

Answer: B

Explanation:

If FortiAnalyzer becomes unavailable to FortiGate for any reason, FortiGate uses its *miglogd* process to cache the logs. There is a maximum value to the cache size, and the *miglogd* process will drop cached logs. When the connection between the two devices is restored, the *miglogd* process begins to send the cached logs to FortiAnalyzer. Therefore, the FortiGate buffer will keep logs long enough to sustain a reboot of your FortiAnalyzer (if you are upgrading the firmware, for example). But it is not intended for a lengthy FortiAnalyzer outage.

NEW QUESTION 31

Which two statements are true regarding ADOM modes? (Choose two.)

- A. You can only change ADOM modes through CLI.

- B. In normal mode, the disk quota of the ADOM is fixed and cannot be modified, but in advance mode, the disk quota of the ADOM is flexible because new devices are added to the ADOM.
- C. In an advanced mode ADO
- D. you can assign FortiGate VDOMs from a single FortiGate device to multiple FortiAnalyzer ADOMs.
- E. Normal mode is the default ADOM mode.

Answer: CD

NEW QUESTION 34

What can the CLI command # diagnose test application oftpd 3 help you to determine?

- A. What devices and IP addresses are connecting to FortiAnalyzer
- B. What logs, if any, are reaching FortiAnalyzer
- C. What ADOMs are enabled and configured
- D. What devices are registered and unregistered

Answer: A

Explanation:

https://docs.fortinet.com/document/fortianalyzer/6.2.5/cli-reference/395556/test#test_application

NEW QUESTION 38

Which two statements are true regarding FortiAnalyzer operating modes? (Choose two.)

- A. When in collector mode, FortiAnalyzer collects logs from multiple devices and forwards these logs in the original binary format.
- B. Collector mode is the default operating mode.
- C. When in collector mod
- D. FortiAnalyzer supports event management and reporting features.
- E. By deploying different FortiAnalyzer devices with collector and analyzer mode in a network, you can improve the overall performance of log receiving, analysis, and reporting

Answer: AD

NEW QUESTION 43

Which tabs do not appear when FortiAnalyzer is operating in Collector mode?

- A. FortiView
- B. Event Management
- C. Device Manger
- D. Reporting

Answer: B

NEW QUESTION 45


Which two statements are true regarding high availability (HA) on FortiAnalyzer? (Choose two.)

- A. FortiAnalyzer HA can function without VRR
- B. and VRRP is required only if you have more than two FortiAnalyzer devices in a cluster.
- C. FortiAnalyzer HA supports synchronization of logs as well as some system and configuration settings.
- D. All devices in a FortiAnalyzer HA cluster must run in the same operation mode: analyzer or collector.
- E. FortiAnalyzer HA implementation is supported by many public cloud infrastructures such as AWS, Microsoft Azure, and Google Cloud.

Answer: BC

NEW QUESTION 48

Refer to the exhibit.

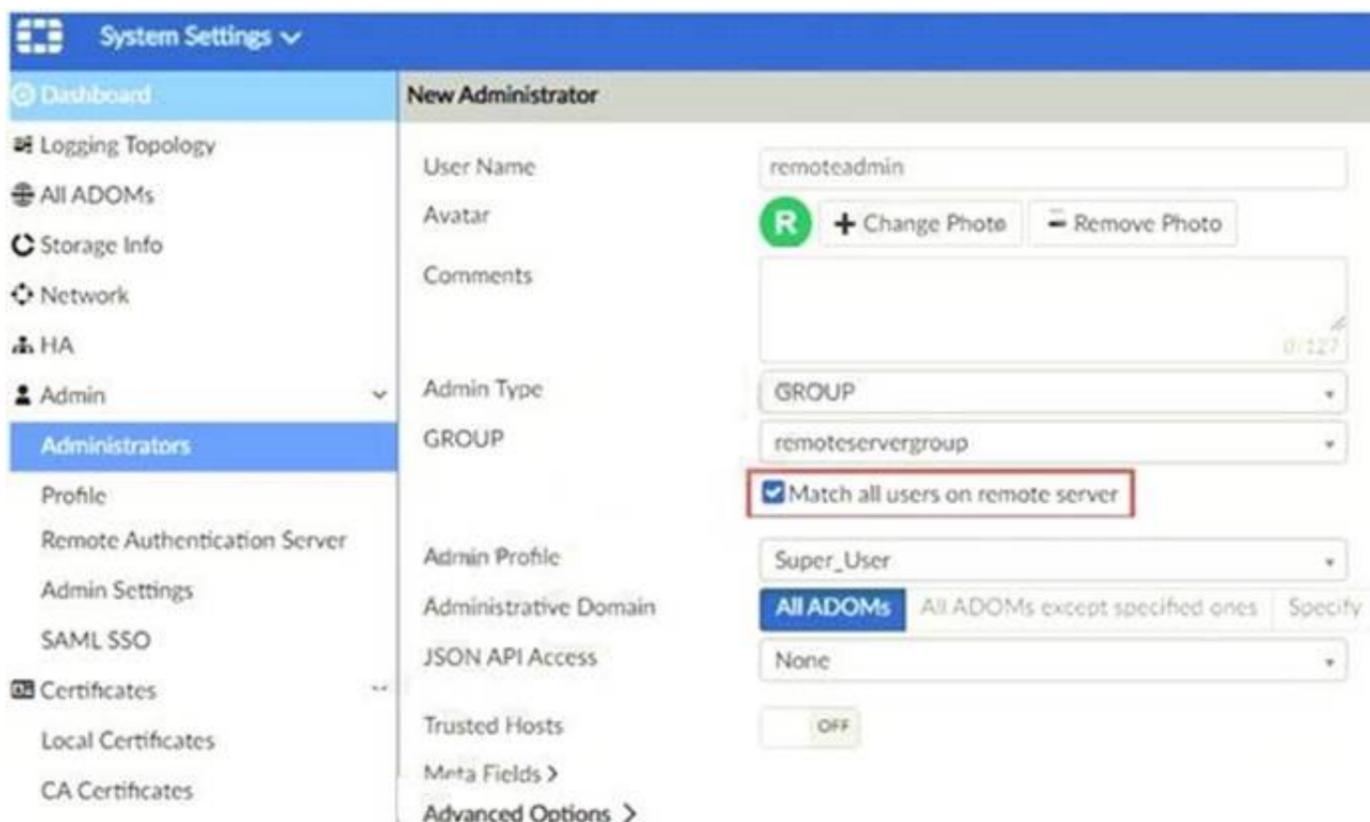

The exhibit shows “remoteservergroup” is an authentication server group with LDAP and RADIUS servers. Which two statements express the significance of enabling “Match all users on remote server” when configuring a new administrator? (Choose two.)

- A. It creates a wildcard administrator using LDAP and RADIUS servers.
- B. Administrator can log in to FortiAnalyzer using their credentials on remote servers LDAP and RADIUS.
- C. Use remoteadmin from LDAP and RADIUS servers will be able to log in to FortiAnalyzer at anytime.
- D. It allows administrators to use two-factor authentication.

Answer: AB

NEW QUESTION 53

Which two actions should an administrator take to view Compromised Hosts on FortiAnalyzer? (Choose two.)

- A. Enable web filtering in firewall policies on FortiGate devices, and make sure these logs are sent to FortiAnalyzer.
- B. Make sure all endpoints are reachable by FortiAnalyzer.
- C. Enable device detection on an interface on the FortiGate devices that are connected to the FortiAnalyzer device.
- D. Subscribe FortiAnalyzer to FortiGuard to keep its local threat database up to date.

Answer: AD

Explanation:

In order to configure IOC, you require the following:

- A one-year subscription to IOC. Note that FortiAnalyzer does include an evaluation license, but it is restrictive and only meant to give you an idea of how the feature works.
 - A web filter services subscription on FortiGate device(s)
 - Web filter policies on FortiGate device(s) that send traffic to FortiAnalyzer Compromised Hosts or Indicators of Compromise service (IOC) is a licensed feature.
- To view Compromised Hosts, you must turn on the UTM web filter of FortiGate devices and subscribe your FortiAnalyzer unit to FortiGuard to keep its local threat database synchronized with the FortiGuard threat database. See [Subscribing FortiAnalyzer to FortiGuard](#).

Ref : <https://docs.fortinet.com/document/fortianalyzer/6.4.0/administration-guide/137635/viewing-compromised-host>

NEW QUESTION 55

How can you attach a report to an incident?

- A. By attaching it to an event handler alert
- B. By editing the settings of the desired report
- C. From the properties of an existing incident
- D. Saving it in JSON format, and then importing it

Answer: C

NEW QUESTION 58

What is the purpose of trigger variables?

- A. To display statistics about the playbook runtime
- B. To use information from the trigger to filter the action in a task
- C. To provide the trigger information to make the playbook start running
- D. To store the start times of playbooks with On_Schedule triggers

Answer: B

NEW QUESTION 63

Logs are being deleted from one of the ADOMs earlier than the configured setting for archiving in the data policy. What is the most likely problem?

- A. CPU resources are too high
- B. Logs in that ADOM are being forwarded, in real-time, to another FortiAnalyzer device
- C. The total disk space is insufficient and you need to add other disk
- D. The ADOM disk quota is set too low, based on log rates

Answer: D

NEW QUESTION 68

Which statement is true about sending notifications with incident updates?

- A. Notifications can be sent only when an incident is updated or deleted.
- B. If you use multiple fabric connectors, all connectors must have the same notification settings
- C. Notifications can be sent only by email.
- D. You can send notifications to multiple external platforms

Answer: D

Explanation:

You can add more than one fabric connector, each with the same or different notification settings. The receiving side of the connector must be configured for the notifications to be sent successfully.

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 34: Fabric connectors also enable FortiAnalyzer to send notifications to ITSM platforms when a new incident is created or for any subsequent updates.

NEW QUESTION 72

What happens when the IOC breach detection engine on FortiAnalyzer finds web logs that match a blocklisted IP address?

- A. The endpoint is marked as Compromised and optionally, can be put in quarantine.
- B. FortiAnalyzer flags the associated host for further analysis.
- C. A new Infected entry is added for the corresponding endpoint.
- D. The detection engine classifies those logs as Suspicious

Answer: A

NEW QUESTION 75

What is the purpose of employing RAID with FortiAnalyzer?

- A. To introduce redundancy to your log data
- B. To provide data separation between ADOMs
- C. To separate analytical and archive data
- D. To back up your logs

Answer: A

Explanation:

[https://en.wikipedia.org/wiki/RAID#:~:text=RAID%20\(%22Redundant%20Array%20of%20Inexpensive,%2C%](https://en.wikipedia.org/wiki/RAID#:~:text=RAID%20(%22Redundant%20Array%20of%20Inexpensive,%2C%)

NEW QUESTION 76

How does FortiAnalyzer retrieve specific log data from the database?

- A. SQL FROM statement
- B. SQL GET statement
- C. SQL SELECT statement
- D. SQL EXTRACT statement


Answer: A

Explanation:

<https://fortinetweb.s3.amazonaws.com/docs.fortinet.com/v2/attachments/137bb60e-ff37-11e8-8524-f8bc1258b8>

NEW QUESTION 79

Refer to the exhibit.

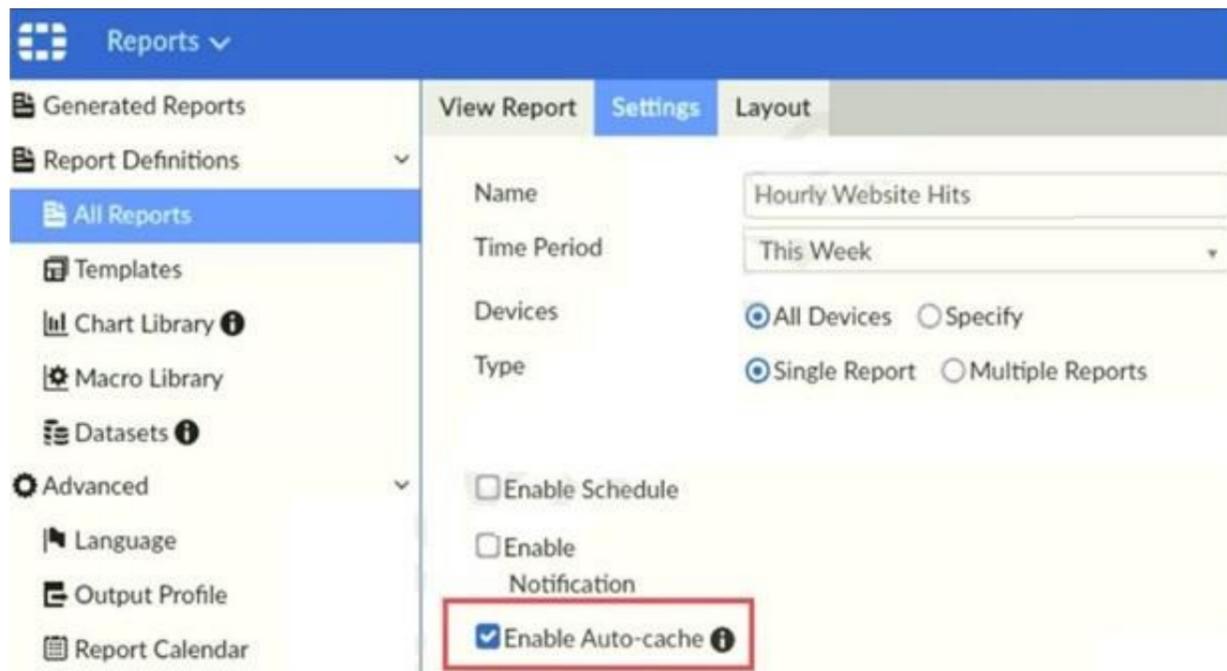

Which two statements are true regarding enabling auto-cache on FortiAnalyzer? (Choose two.)

- A. Report size will be optimized to conserve disk space on FortiAnalyzer.
- B. Reports will be cached in the memory.
- C. This feature is automatically enabled for scheduled reports.
- D. Enabling auto-cache reduces report generation time for reports that require a long time to assemble datasets.

Answer: CD

Explanation:

"Enable auto-cache in the report settings to boost the reporting performance and reduce report generation time. Scheduled reports have auto-cache enabled already."

FortiAnalyzer_7.0_Study_Guide-Online page 306

NEW QUESTION 82

You are using RAID with a FortiAnalyzer that supports software RAID, and one of the hard disks on FortiAnalyzer has failed. What is the recommended method to replace the disk?

- A. Shut down FortiAnalyzer and then replace the disk
- B. Downgrade your RAID level, replace the disk, and then upgrade your RAID level
- C. Clear all RAID alarms and replace the disk while FortiAnalyzer is still running
- D. Perform a hot swap

Answer: A

Explanation:

supports hot swapping on hardware RAID only, so it is recommended that on FortiAnalyzer devices with software RAID you should shutdown FortiAnalyzer prior to exchanging the hard disk.

<https://community.fortinet.com/t5/FortiAnalyzer/Technical-Note-How-to-swap-Hard-Disk-on-FortiAnalyzer/ta->

NEW QUESTION 85

Why should you use an NTP server on FortiAnalyzer and all registered devices that log into FortiAnalyzer?

- A. To properly correlate logs
- B. To use real-time forwarding
- C. To resolve host names
- D. To improve DNS response times

Answer: A

Explanation:

- Synchronize the time on FortiAnalyzer and all registered devices with an NTP server for proper log correlation

NEW QUESTION 86

Which statement correctly describes the management extensions available on FortiAnalyzer?

- A. Management extensions do not require additional licenses.
- B. Management extensions allow FortiAnalyzer to act as a ForbSIEM supervisor.
- C. Management extensions require a dedicated VM for best performance.
- D. Management extensions may require a minimum number of CPU cores to run.

Answer: D

Explanation:

Events in FortiAnalyzer will be in one of four statuses. The current status will determine if more actions need to be taken by the security team or not. The possible statuses are:
 Unhandled: The security event risk is not mitigated or contained, so it is considered open. Contained: The risk source is isolated.
 Mitigated: The security risk is mitigated by being blocked or dropped. (Blank): Other scenarios.
 FortiAnalyzer_7.0_Study_Guide-Online pag. 189.
 FortiAnalyzer_7.0_Study_Guide-Online.pdf page 189: Review the hardware requirements before you enable a management extension application. Some of them require a minimum amount of memory or a minimum number of CPU cores.

NEW QUESTION 91

On the RAID management page, the disk status is listed as Initializing.
 What does the status Initializing indicate about what the FortiAnalyzer is currently doing?

- A. FortiAnalyzer is ensuring that the parity data of a redundant drive is valid
- B. FortiAnalyzer is writing data to a newly added hard drive to restore it to an optimal state
- C. FortiAnalyzer is writing to all of its hard drives to make the array fault tolerant
- D. FortiAnalyzer is functioning normally

Answer: C

NEW QUESTION 93

Which two settings must you configure on FortiAnalyzer to allow non-local administrators to authenticate to FortiAnalyzer with any user account in a single LDAP group? (Choose two.)

- A. A local wildcard administrator account
- B. A remote LDAP server
- C. A trusted host profile that restricts access to the LDAP group
- D. An administrator group

Answer: AB

NEW QUESTION 95


What is the main purpose of using an NTP server on FortiAnalyzer and all of its registered devices?

- A. Log correlation
- B. Host name resolution
- C. Log collection
- D. Real-time forwarding

Answer: A

NEW QUESTION 100

Refer to the exhibit.

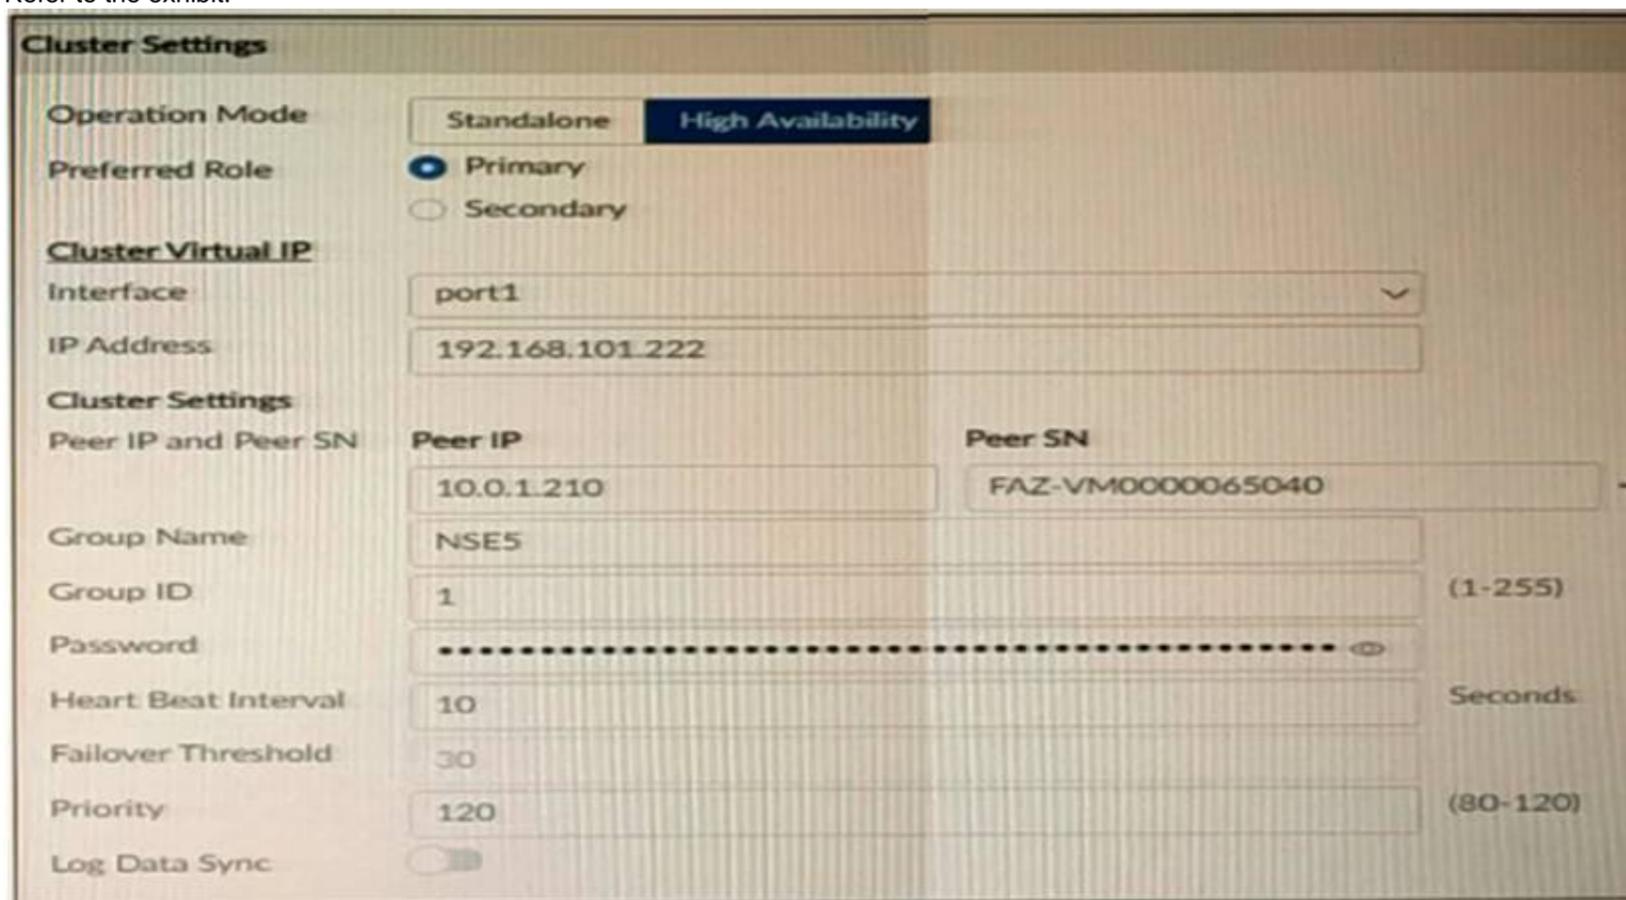

The image displays the configuration of a FortiAnalyzer the administrator wants to join to an existing HA cluster.
 What can you conclude from the configuration displayed?

- A. This FortiAnalyzer will join to the existing HA cluster as the primary.
- B. This FortiAnalyzer is configured to receive logs in its port1.
- C. This FortiAnalyzer will trigger a failover after losing communication with its peers for 10 seconds.
- D. After joining to the cluster, this FortiAnalyzer will keep an updated log database.

Answer: B

Explanation:

"If the preferred role is Primary, then this unit becomes the primary unit if it is configured first in a new HA cluster. If there is an existing primary unit, then this unit becomes a secondary unit." (<https://docs.fortinet.com/document/fortianalyzer/7.0.5/administration-guide/275104>)

NEW QUESTION 104

You crested a playbook on FortiAnalyzer that uses a FortiOS connector

When configuring the FortiGate side, which type of trigger must be used so that the actions in an automation stitch are available in the FortiOS connector?

- A. FortiAnalyzer Event Handler
- B. Incoming webhook
- C. FortiOS Event Log
- D. Fabric Connector event

Answer: B

Explanation:

"One possible scenario is shown on the slide:

- * 1. Traffic flows through the FortiGate
- * 2. FortiGate sends logs to FortiAnalyzer
- * 3. FortiAnalyzer detects some suspicious traffic and generates an event
- * 4. The event triggers the execution of a playbook in FortiAnalyzer, which sends a webhook call to FortiGate so that it runs an automation stitch
- * 5. FortiGate runs the automation stitch with the corrective or preventive actions" FortiAnalyzer_7.0_Study_Guide-Online page 228

In order to see the actions related to the FOS connector, you must enable an automation rule using the Incoming Webhook Call trigger on the FortiGate side. FortiAnalyzer_7.0_Study Guide page no 233

NEW QUESTION 105

Refer to the exhibit.

<pre>FortiAnalyzer1# get system status Platform Type : FAZVM64-KVM Platform Full Name : FortiAnalyzer-VM64-KVM Version : v7.2.1-build1215 220809 (GA) Serial Number : FAZ-VM0000065040 BIOS version : 04000002 Hostname : FortiAnalyzer1 Max Number of Admin Domains : 5 Admin Domain Configuration : Enabled FIPS Mode : Disabled HA Mode : Stand Alone Branch Point : 1215 Release Version Information : GA Time Zone : (GMT-8:00) Pacific Time (US & Canada) Disk Usage : Free 43.60GB, Total 58.80GB File System : Ext4 License Status : Valid FortiAnalyzer1# get system global adom-mode : normal adom-select : enable adom-status : enable console-output : standard country-flag : enable enc-algorithm : high ha-member-auto-grouping : enable hostname : FortiAnalyzer2 log-checksum : md5 log-forward-cache-size : 5 log-mode : analyzer longitude : (null) max-aggregation-tasks : 0 max-running-reports : 1 oftp-ssl-protocol : tlsv1.2 ssl-low-encryption : disable ssl-protocol : tlsv1.3 tlsv1.2 task-list-size : 2000 webservice-proto : tlsv1.3 tlsv1.2</pre>	<pre>FortiAnalyzer3# get system status Platform Type : FAZVM64-KVM Platform Full Name : FortiAnalyzer-VM64-KVM Version : v7.2.1-build1215 220809 (GA) Serial Number : FAZ-VM0000065042 BIOS version : 04000002 Hostname : FortiAnalyzer3 Max Number of Admin Domains : 5 Admin Domain Configuration : Enabled FIPS Mode : Disabled HA Mode : Stand Alone Branch Point : 1215 Release Version Information : GA Time Zone : (GMT-8:00) Pacific Time (US & Canada) Disk Usage : Free 12.98GB, Total 79.80GB File System : Ext4 License Status : Valid FortiAnalyzer3# get system global adom-mode : normal adom-select : enable adom-status : enable console-output : standard country-flag : enable enc-algorithm : high ha-member-auto-grouping : enable hostname : FortiAnalyzer3 log-checksum : md5 log-forward-cache-size : 5 log-mode : analyzer longitude : (null) max-aggregation-tasks : 0 max-running-reports : 5 oftp-ssl-protocol : tlsv1.2 ssl-low-encryption : disable ssl-protocol : tlsv1.3 tlsv1.2 task-list-size : 2000 webservice-proto : tlsv1.3 tlsv1.2</pre>
--	--

Based on the partial outputs displayed, which devices can be members of a FortiAnalyzer Fabric?

- A. FortiAnalyzer1 and FortiAnalyzer3
- B. FortiAnalyzer1 and FortiAnalyzer2
- C. All devices listed can be members
- D. FortiAnalyzer2 and FortiAnalyzer3

Answer: C

NEW QUESTION 110

How are logs forwarded when FortiAnalyzer is using aggregation mode?

- A. Logs are forwarded as they are received and content files are uploaded at a scheduled time.
- B. Logs and content files are stored and uploaded at a scheduled time.
- C. Logs are forwarded as they are received.
- D. Logs and content files are forwarded as they are received.

Answer: B

Explanation:

<https://www.fortinetguru.com/2020/07/log-forwarding-fortianalyzer-fortios-6-2-3/> <https://docs.fortinet.com/document/fortianalyzer/6.2.0/administration-guide/420493/modes>

NEW QUESTION 114

How do you restrict an administrator's access to a subset of your organization's ADOMs?

- A. Set the ADOM mode to Advanced
- B. Assign the ADOMs to the administrator's account
- C. Configure trusted hosts
- D. Assign the default Super_User administrator profile

Answer: B

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/717578/assigning-administrators-to>

NEW QUESTION 115

An administrator has moved FortiGate A from the root ADOM to ADOM1. However, the administrator is not able to generate reports for FortiGate A in ADOM1. What should the administrator do to solve this issue?

- A. Use the execute sql-local rebuild-db command to rebuild all ADOM databases.
- B. Use the execute sql-local rebuild-adom ADOM1 command to rebuild the ADOM database.
- C. Use the execute sql-report run ADOM1 command to run a report.
- D. Use the execute sql-local rebuild-adom root command to rebuild the ADOM database.

Answer: B

NEW QUESTION 119

What statements are true regarding FortiAnalyzer 's treatment of high availability (HA) dusters? (Choose two)

- A. FortiAnalyzer distinguishes different devices by their serial number.
- B. FortiAnalyzer receives logs from d devices in a duster.
- C. FortiAnalyzer receives bgs only from the primary device in the cluster.
- D. FortiAnalyzer only needs to know (he serial number of the primary device in the cluster-it automaticaly discovers the other devices.

Answer: AB

NEW QUESTION 120

You have recently grouped multiple FortiGate devices into a single ADOM. System Settings > Storage Info shows the quota used. What does the disk quota refer to?

- A. The maximum disk utilization for each device in the ADOM
- B. The maximum disk utilization for the FortiAnalyzer model
- C. The maximum disk utilization for the ADOM type
- D. The maximum disk utilization for all devices in the ADOM

Answer: D

NEW QUESTION 124

What is the recommended method of expanding disk space on a FortiAnalyzer VM?

- A. From the VM host manager, add an additional virtual disk and use the #execute lvm extend <disk number> command to expand the storage
- B. From the VM host manager, expand the size of the existing virtual disk
- C. From the VM host manager, expand the size of the existing virtual disk and use the # execute format disk command to reformat the disk
- D. From the VM host manager, add an additional virtual disk and rebuild your RAID array

Answer: A

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD40848>

NEW QUESTION 125

Which daemon is responsible for enforcing the log file size?

- A. sqlplugind
- B. logfiled
- C. miglogd
- D. ofrpd

Answer: B

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 121: The logfiled process enforces the log file size and is also responsible for disk quota enforcement by monitoring the other processes.

NEW QUESTION 130

Which statements are correct regarding FortiAnalyzer reports? (Choose two)

- A. FortiAnalyzer provides the ability to create custom reports.
- B. FortiAnalyzer allows you to schedule reports to run.
- C. FortiAnalyzer includes pre-defined reports only.
- D. FortiAnalyzer allows reporting for FortiGate devices only.

Answer: AB

NEW QUESTION 133

Refer to the exhibit.



What does the data point at 12:20 indicate?

- A. The performance of FortiAnalyzer is below the baseline.
- B. FortiAnalyzer is using its cache to avoid dropping logs.
- C. The log insert lag time is increasing.
- D. The sqlplugind service is caught up with new logs.

Answer: C

NEW QUESTION 135

Which two statements are correct regarding the export and import of playbooks? (Choose two.)

- A. You can export only one playbook at a time.
- B. You can import a playbook even if there is another one with the same name in the destination.
- C. Playbooks can be exported and imported only within the same FortiAnalyzer.
- D. A playbook that was disabled when it was exported, will be disabled when it is imported.


Answer: BD

Explanation:

If the imported playbook has the same name as an existing one, FortiAnalyzer will create a new name that includes a timestamp to avoid conflicts. Playbooks are imported with the same status they had (enabled or disabled) when they were exported. Playbooks set to run automatically should be exported while they are disabled to avoid unintended runs on the destination.

NEW QUESTION 139

Refer to the exhibit.

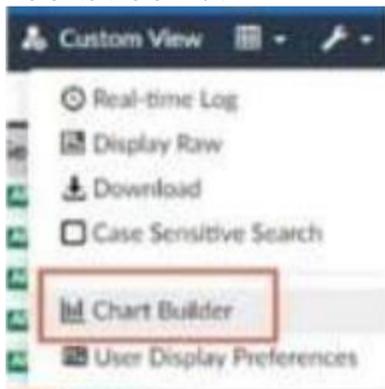

What is the purpose of using the Chart Builder feature on FortiAnalyzer?

- A. In Log View, this feature allows you to build a dataset and chart automatically, based on the filtered search results.
- B. In Log View, this feature allows you to build a chart and chart automatically, on the top 100 log entries.
- C. This feature allows you to build a chart under FortiView.
- D. You can add charts to generated reports using this feature.

Answer: A

NEW QUESTION 143

Which two statements express the advantages of grouping similar reports? (Choose two.)

- A. Improve report completion time.
- B. Conserve disk space on FortiAnalyzer by grouping multiple similar reports.
- C. Reduce the number of hcache tables and improve auto-hcache completion time.
- D. Provides a better summary of reports.

Answer: AC

NEW QUESTION 145

FortiAnalyzer reports are dropping analytical data from 15 days ago, even though the data policy setting for analytics logs is 60 days. What is the most likely problem?


- A. Quota enforcement is acting on analytical data before a report is complete
- B. Logs are rolling before the report is run
- C. CPU resources are too high
- D. Disk utilization for archive logs is set for 15 days

Answer: B

NEW QUESTION 148

Refer to the exhibits.

Event	Event Status	Event Type	Count	Severity	First Occurrence	Last Update	Handler	Tags
> MS.IIS.bdir.HTR.Information.Disclosure (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> PHPURL.Code.Injection (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> 91.189.92.18 (1)	Mitigated	SSL	5	Low	2 hours ago	2 hours ago	Default-Risky-Destination-Detection-By-Threat	Risky SSL
> HTTP.Request.LURI.Directory.Traversal (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> Apache.Expect.Header.XSS (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
< 10.0.1.10 (7)							Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion MS.IIS.bdir.HTR.Informati...	Mitigated	IPS	2	Medium	2021-12-01 21:32:31	2021-12-01 21:32:41	Default-Risky-Destination-Detection-By-Endpoint	Risky SSL
Internal intrusion PHPURL.Code.Injection bl...	Mitigated	IPS	2	Medium	2021-12-01 21:32:11	2021-12-01 21:32:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Insecure SSL connection blocked	Mitigated	SSL	5	Low	2021-12-01 21:32:01	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.Request.LURI Direct...	Mitigated	IPS	2	Medium	2021-12-01 21:31:51	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Apache.Expect.Header.XS...	Mitigated	IPS	2	Medium	2021-12-01 21:31:31	2021-12-01 21:31:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
< 10.200.1.254 (6)							Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion MS.IIS.bdir.HTR.Informati...	Mitigated	IPS	2	Medium	2021-12-01 21:32:31	2021-12-01 21:32:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion PHPURL.Code.Injection bl...	Mitigated	IPS	2	Medium	2021-12-01 21:32:11	2021-12-01 21:32:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.Request.LURI Direct...	Mitigated	IPS	2	Medium	2021-12-01 21:31:51	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Apache.Expect.Header.XS...	Mitigated	IPS	2	Medium	2021-12-01 21:31:31	2021-12-01 21:31:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTPasswd.Access blocked	Mitigated	IPS	2	Medium	2021-12-01 21:31:11	2021-12-01 21:31:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Nikto.Web.Scanner detect...	Unmitigated	IPS	21	High	2021-12-01 21:31:11	2021-12-01 21:32:36	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature

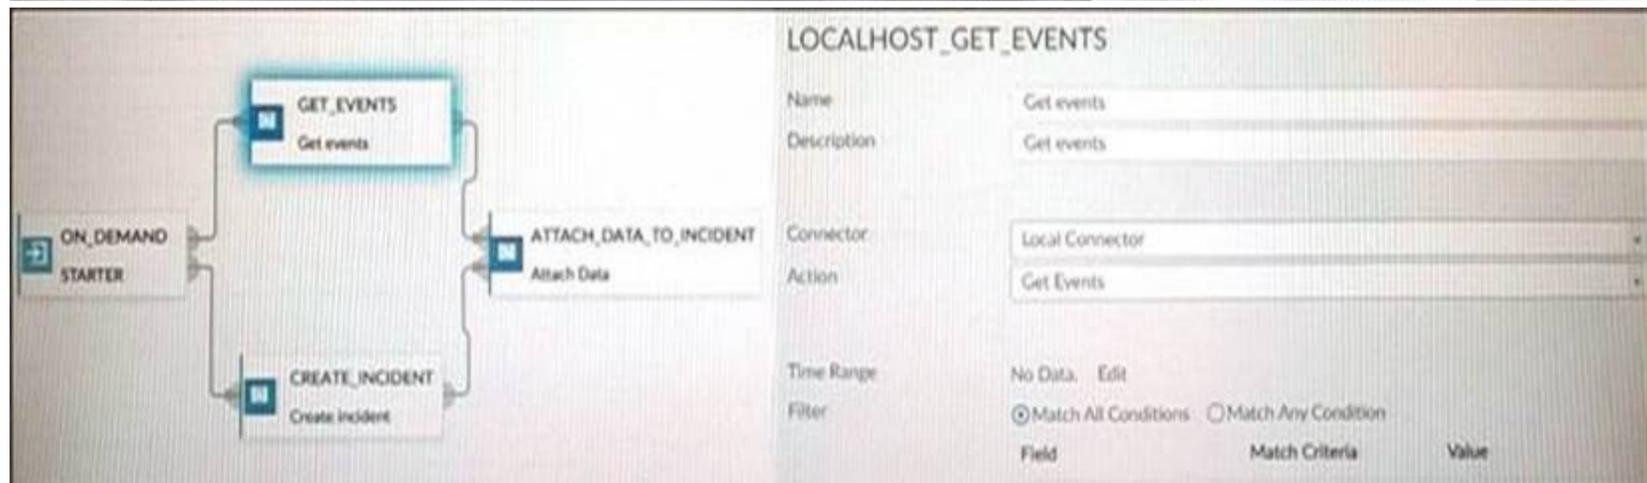

How many events will be added to the incident created after running this playbook?

- A. Ten events will be added.
- B. No events will be added.
- C. Five events will be added.
- D. Thirteen events will be added.

Answer: A

NEW QUESTION 152

Which FortiAnalyzer feature allows you to use a proactive approach when managing your network security?

- A. Incidents dashboards
- B. Threat hunting
- C. FortiView Monitor
- D. Outbreak alert services

Answer: B

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 217: Threat hunting consists in proactively searching for suspicious or potentially risky network activity in your environment. The proactive approach will help administrator find any threats that might have eluded detection by the current security solutions or configurations.

NEW QUESTION 153

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual NSE5_FAZ-7.0 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the NSE5_FAZ-7.0 Product From:

https://www.2passeasy.com/dumps/NSE5_FAZ-7.0/

Money Back Guarantee

NSE5_FAZ-7.0 Practice Exam Features:

- * NSE5_FAZ-7.0 Questions and Answers Updated Frequently
- * NSE5_FAZ-7.0 Practice Questions Verified by Expert Senior Certified Staff
- * NSE5_FAZ-7.0 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * NSE5_FAZ-7.0 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year