

## Exam Questions NSE7\_SDW-7.0

Fortinet NSE 7 - SD-WAN 7.0

[https://www.2passeasy.com/dumps/NSE7\\_SDW-7.0/](https://www.2passeasy.com/dumps/NSE7_SDW-7.0/)



**NEW QUESTION 1**

Which diagnostic command can you use to show the member utilization statistics measured by performance SLAs for the last 10 minutes?

- A. diagnose sys sdwan intf-sla-log
- B. diagnose sys sdwan health-check
- C. diagnose sys sdwan log
- D. diagnose sys sdwan sla-log

**Answer:** D

**Explanation:**

SD-WAN 7.2 Study Guide page 321 You can view the stored member metrics by running the diagnose sys sdwan sla-log command. Note that you must include the name of the performance SLA followed by the member configuration index number. To display the SLA logs per interface, you run the diagnose sys sdwan intf-sla-log command.

**NEW QUESTION 2**

Refer to the exhibit.

```
# diagnose firewall shaper per-ip-shaper list
name FTP_5M
maximum-bandwidth 625 KB/sec
maximum-concurrent-session 5
tos ff/ff
packets dropped 65
bytes dropped 81040
      addr=10.1.0.1 status: bps=0 ses=1
      addr=10.1.0.100 status: bps=0 ses=1
      addr=10.1.10.1 status: bps=1656 ses=3
```

Which are two expected behaviors of the traffic that matches the traffic shaper? (Choose two.)

- A. The number of simultaneous connections among all source IP addresses cannot exceed five connections.
- B. The traffic shaper limits the combined bandwidth of all connections to a maximum of 5 MB/sec.
- C. The number of simultaneous connections allowed for each source IP address cannot exceed five connections.
- D. The traffic shaper limits the bandwidth of each source IP address to a maximum of 625 KB/sec.

**Answer:** CD

**NEW QUESTION 3**

Which two statements describe how IPsec phase 1 main mode is different from aggressive mode when performing IKE negotiation? (Choose two )

- A. A peer ID is included in the first packet from the initiator, along with suggested security policies.
- B. XAuth is enabled as an additional level of authentication, which requires a username and password.
- C. A total of six packets are exchanged between an initiator and a responder instead of three packets.
- D. The use of Diffie Hellman keys is limited by the responder and needs initiator acceptance.

**Answer:** BC

**NEW QUESTION 4**

Which two statements about SLA targets and SD-WAN rules are true? (Choose two.)

- A. When configuring an SD-WAN rule, you can select multiple SLA targets of the same performance SLA.
- B. SD-WAN rules use SLA targets to check if the preferred members meet the SLA requirements.
- C. SLA targets are used only by SD-WAN rules that are configured with Lowest Cost (SLA) or Maximize Bandwidth (SLA) as strategy.
- D. Member metrics are measured only if an SLA target is configured.

**Answer:** BC

**NEW QUESTION 5**

Which are three key routing principles in SD-WAN? (Choose three.)

- A. FortiGate performs route lookups for new sessions only.
- B. Regular policy routes have precedence over SD-WAN rules.
- C. SD-WAN rules have precedence over ISDB routes.
- D. By default, SD-WAN members are skipped if they do not have a valid route to the destination.
- E. By default, SD-WAN rules are skipped if the best route to the destination is not an SD-WAN member.

**Answer:** BDE

**NEW QUESTION 6**

In the default SD-WAN minimum configuration, which two statements are correct when traffic matches the default implicit SD-WAN rule? (Choose two )

- A. Traffic has matched none of the FortiGate policy routes.
- B. Matched traffic failed RPF and was caught by the rule.
- C. The FIB lookup resolved interface was the SD-WAN interface.
- D. An absolute SD-WAN rule was defined and matched traffic.

Answer: AC

**NEW QUESTION 7**

Which two statements are correct when traffic matches the implicit SD-WAN rule? (Choose two.)

- A. The sdwan\_service\_id flag in the session information is 0.
- B. All SD-WAN rules have the default setting enabled.
- C. Traffic does not match any of the entries in the policy route table.
- D. Traffic is load balanced using the algorithm set for the v4-ecmp-mode setting.

Answer: AC

**Explanation:**

sdwan\_service\_id is 0 = match SD-WAN implicit rule, study guide 7.0 page 120, 7.2 page 149 SD-WAN rules internally are interpreted as a Policy route, so when the traffic doesn't match with any policy route, it will be flowing by implicit policy.

**NEW QUESTION 8**

Exhibit A –

#	Name	Type	Normalized Interface	Addressing Mode	IP/Netmask	Access
<b>Physical (10)</b>						
1	port1	Physical	port1	Manual	203.0.113.1/255.255.255.2	PING
2	port2	Physical	port2	Manual	203.0.113.9/255.255.255.2	PING
3	port3	Physical	port3	Manual	0.0.0.0/0.0.0.0	
4	port4	Physical	port4	Manual	172.16.0.9/255.255.255.24	PING
5	port5	Physical	port5	Manual	10.0.2.254/255.255.255.0	PING
6	port6	Physical	port6	Manual	0.0.0.0/0.0.0.0	
7	port7	Physical	port7	Manual	0.0.0.0/0.0.0.0	
8	port8	Physical	port8	Manual	0.0.0.0/0.0.0.0	
9	port9	Physical	port9	Manual	0.0.0.0/0.0.0.0	
10	port10	Physical	port10	Manual	192.168.0.32/255.255.255.	HTTPS, PING, SSH, HT
<b>Aggregate (1)</b>						
11	fortilink	Aggregate		Manual	169.254.1.1/255.255.255.0	PING, Security Fabric C
<b>Tunnel (3)</b>						
12	ra.root	Tunnel		Manual	0.0.0.0/0.0.0.0	
13	l2t.root	Tunnel		Manual	0.0.0.0/0.0.0.0	
14	ssl.root (SSL VPN interf	Tunnel		Manual	0.0.0.0/0.0.0.0	
<b>EMAC VLAN (1)</b>						
15	vl_lan_ts	EMAC VLAN		Manual	10.0.102.1/255.255.255.0	PING
<b>SD-WAN Zone (2)</b>						
16	virtual-wan-link	SD-WAN Zone				
17	SASE	SD-WAN Zone	SASE			

#	ID	Destination	Gateway	Interface	Distance	Priority	Status	Description
<b>Static Route (2)</b>								
1	1	0.0.0.0/0.0.0.0	203.0.113.2	port1	10	0	Enable	
2	2	0.0.0.0/0.0.0.0	203.0.113.10	port2	10	0	Enable	

Exhibit B –

#	Name	From	To	Source	Destination	Schedule	Service
1	Internet_Access	port5	port1	all	all	always	ALL
<b>Implicit (2-2 / Total: 1)</b>							
2	Implicit Deny	any	any	all	all	always	ALL

Exhibit A shows the system interface with the static routes and exhibit B shows the firewall policies on the managed FortiGate. Based on the FortiGate configuration shown in the exhibits, what issue might you encounter when creating an SD-WAN zone for port1 and port2?

- A. port1 is assigned a manual IP address.
- B. port1 is referenced in a firewall policy.
- C. port2 is referenced in a static route.
- D. port1 and port2 are not administratively down.

Answer: B

**NEW QUESTION 9**

Which two settings can you configure to speed up routing convergence in BGP? (Choose two.)

- A. update-source
- B. set-route-tag
- C. holdtime-timer
- D. link-down-failover

Answer: CD

**NEW QUESTION 10**

Which components make up the secure SD-WAN solution?

- A. Application, antivirus, and URL, and SSL inspection
- B. Datacenter, branch offices, and public cloud
- C. FortiGate, FortiManager, FortiAnalyzer, and FortiDeploy
- D. Telephone, ISDN, and telecom network.

Answer: C

**NEW QUESTION 10**

Which two conclusions for traffic that matches the traffic shaper are true? (Choose two.)


```
# diagnose firewall shaper traffic-shaper list name VoIP_Shaper
name VoIP_Shaper
maximum-bandwidth 6250 KB/sec
guaranteed-bandwidth 2500 KB/sec
current-bandwidth 93 KB/sec
priority 2
overhead 0
tos ff
packets dropped 0
bytes dropped 0
```

- A. The traffic shaper drops packets if the bandwidth is less than 2500 KBps.
- B. The measured bandwidth is less than 100 KBps.
- C. The traffic shaper drops packets if the bandwidth exceeds 6250 KBps.
- D. The traffic shaper limits the bandwidth of each source IP to a maximum of 6250 KBps.

Answer: BC

**NEW QUESTION 11**

Two hub-and-spoke groups are connected through a site-to-site IPsec VPN between Hub 1 and Hub 2. The administrator configured ADVPN on both hub-and-spoke groups.

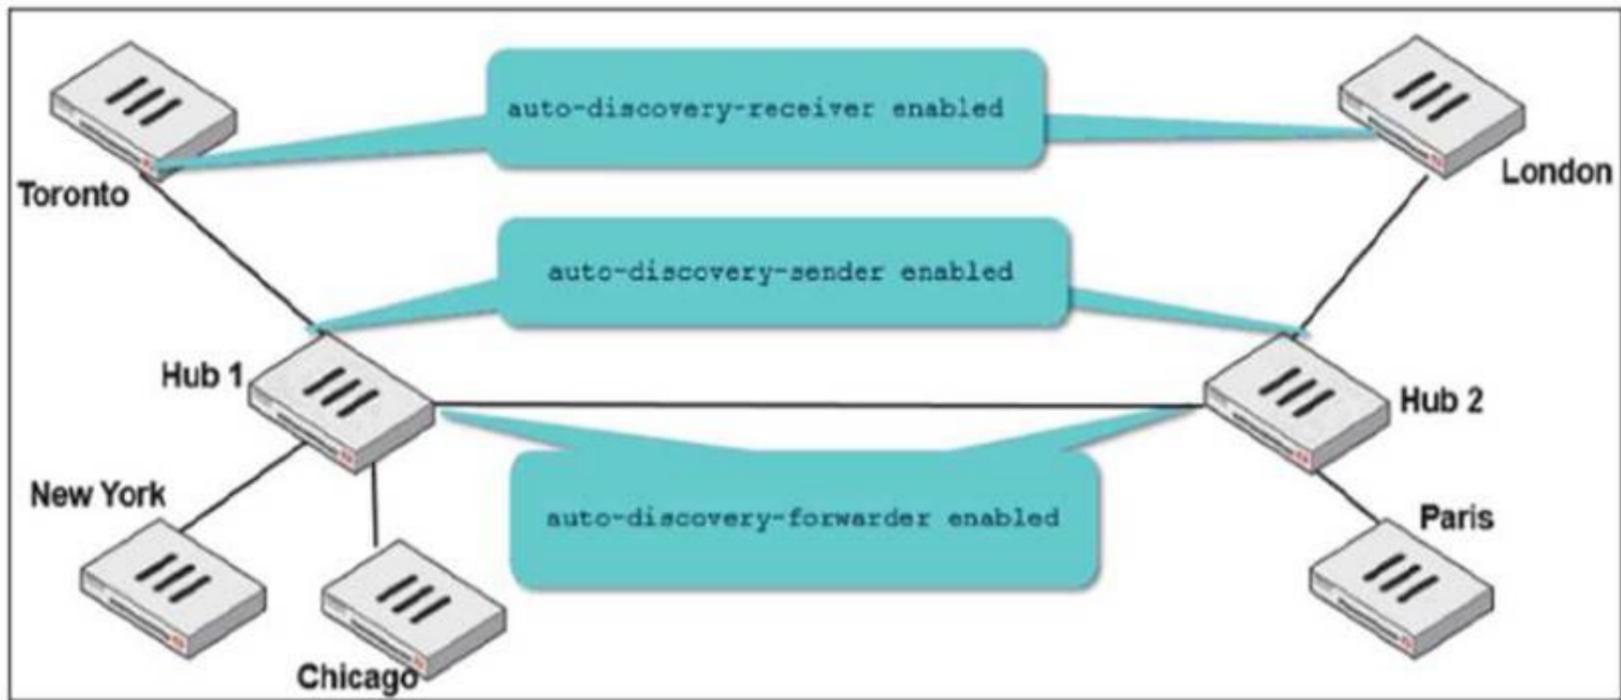

Which two outcomes are expected if a user in Toronto sends traffic to London? (Choose two.)

- A. London generates an IKE information message that contains the Toronto public IP address.
- B. Traffic from Toronto to London triggers the dynamic negotiation of a direct site-to-site VPN.
- C. Toronto needs to establish a site-to-site tunnel with Hub 2 to bypass Hub 1.
- D. The first packets from Toronto to London are routed through Hub 1 then to Hub 2.

Answer: BD

**NEW QUESTION 16**

Which CLI command do you use to perform real-time troubleshooting for ADVPN negotiation?

- A. get router info routing-table all
- B. diagnose debug application ike
- C. diagnose vpn tunnel list
- D. get ipsec tunnel list

Answer: B

**Explanation:**

IKE real-time debug - useful when debugging ADVPN shortcut messages and spoke-to-spoke negotiations.

- diagnose debug console timestamp enable
- diagnose vpn ike log filter clear
- diagnose vpn ike log filter mdst-addr4 <ip.of.hub> <ip.of.spoke>
- diagnose debug application ike -1
- diagnose debug enable

**NEW QUESTION 19**

Which three matching traffic criteria are available in SD-WAN rules? (Choose three.)

- A. Type of physical link connection
- B. Internet service database (ISDB) address object
- C. Source and destination IP address
- D. URL categories
- E. Application signatures

Answer: BCE

**NEW QUESTION 24**

Refer to the exhibits. Exhibit A

```
branch1_fgt (3) # show
config service
  edit 3
    set name "Corp"
    set mode sla
    set dst "Corp-net"
    set src "LAN-net"
    config sla
      edit "VPN_PING"
        set id 1
      next
      edit "VPN_HTTP"
        set id 1
      next
    end
    set priority-members 3 4 5
    set gateway enable
  next
end
```

Exhibit B

```
branch1_fgt # diagnose sys sdwan service 3

Service(3): Address Mode(IPV4) flags=0x200 use-shortcut-sla
Gen(1), TOS(0x0/0x0), Protocol(0: 1->65535), Mode(sla), sla-compare-order
Members(2):
  1: Seq_num(5 T_MPLS_0), alive, sla(0x3), gid(0), cfg_order(2), cost(0), selected
  2: Seq_num(4 T_INET_1_0), alive, sla(0x1), gid(0), cfg_order(1), cost(0), selected
  3: Seq_num(3 T_INET_0_0), alive, sla(0x0), gid(0), cfg_order(0), cost(0), selected
Src address(1):
  10.0.1.0-10.0.1.255

Dst address(1):
  10.0.0.0-10.255.255.255

branch1_fgt # get router info routing-table all | grep T_
S      10.0.0.0/8 [1/0] via T_INET_0_0 tunnel 100.64.1.1
        [1/0] via T_INET_1_0 tunnel 100.64.1.9
S      10.201.1.254/32 [15/0] via T_INET_0_0 tunnel 100.64.1.1
S      10.202.1.254/32 [15/0] via T_INET_1_0 tunnel 100.64.1.9
S      10.203.1.254/32 [15/0] via T_MPLS_0 tunnel 172.16.1.5

branch1_fgt # diagnose sys sdwan member | grep T_
Member(3): interface: T_INET_0_0, flags=0x4, gateway: 100.64.1.1, peer: 10.201.1.254,
priority: 0 1024, weight: 0
Member(4): interface: T_INET_1_0, flags=0x4, gateway: 100.64.1.9, peer: 10.202.1.254,
priority: 0 1024, weight: 0
Member(5): interface: T_MPLS_0, flags=0x4, gateway: 172.16.1.5, peer: 10.203.1.254,
priority: 0 1024, weight: 0
```

Exhibit A shows the configuration for an SD-WAN rule and exhibit B shows the respective rule status, the routing table, and the member status. The administrator wants to understand the expected behavior for traffic matching the SD-WAN rule. Based on the exhibits, what can the administrator expect for traffic matching the SD-WAN rule?

- A. The traffic will be load balanced across all three overlays.
- B. The traffic will be routed over T\_INET\_0\_0.
- C. The traffic will be routed over T\_MPLS\_0.
- D. The traffic will be routed over T\_INET\_1\_0.

Answer: D

**NEW QUESTION 27**

Refer to the exhibits.

```

dcl_fgt # show vpn ipsec phase1-interface T_INET_1_0
config vpn ipsec phase1-interface
  edit "T_INET_1_0"
    set type dynamic
    set interface "port2"
    set ike-version 2
    set keylife 28800
    set peertype any
    set net-device disable
    set proposal aes128-sha256
    set add-route disable
    set psksecret ENC
GayzHJ/UhxCc9FYtwas5o4rkNCMjjNUEj4Q4f2NS6I65RIVF9zum6sJALsU9Cg+1jsXz3ZtIM+WNkHLsXkHqydgS
G/Zx8Vp9Rcht6zKHPEctOcFVbaG+UeO3Rw41pmGP/Z3rIz3tdXJxfYSzKjRqggqahsmDovkrKRHTVFUlzA07Zt6W
iPL9co/Zf3cX+Qpnm38MQ==
  next
end
    
```

```

dcl_fgt # diagnose vpn tunnel list name T_INET_1_0_0
list ipsec tunnel by names in vd 0
-----
name=T_INET_1_0_0 ver=2 serial=7 100.64.1.9:0->192.2.0.9:0 tun_id=192.2.0.9 dst_mtu=0
dpd-link=on weight=1
bound_if=4 lgwy=static/1 tun=tunnel/255 mode=dial_inst/3 encap=none/8832
options[2280]=rgwy-chg frag-rfc run_state=0 accept_traffic=1 overlay_id=0
parent=T_INET_1_0 index=0
proxyid_num=1 child_num=0 refcnt=6 ilast=17 olast=23464 ad=/0
stat: rxp=0 txp=0 rxb=0 txb=0
dpd: mode=on-demand on=1 idle=20000ms retry=3 count=0 seqno=1
natt: mode=none draft=0 interval=0 remote_port=0
proxyid=T_INET_1_0_0 proto=0 sa=1 ref=2 serial=1 add-route
  src: 0:0.0.0.0-255.255.255.255:0
  dst: 0:10.0.1.0-10.0.1.255:0
  SA: ref=3 options=20683 type=00 soft=0 mtu=1280 expire=972/0B replaywin=2048
    seqno=1 esn=0 replaywin_lastseq=00000000 itn=0 qat=0 hash_search_len=1
  life: type=01 bytes=0/0 timeout=1790/1800
  dec: spi=02f9844e esp=aes key=16 7fb5011247248d3a45ac3d802d8c8d64
    ah=sha1 key=20 bb217ce87ae060f27823b005005233811993a303
  enc: spi=ffc6576a esp=aes key=16 825bddbc5c995feb70411a773867c2d0
    ah=sha1 key=20 02db4176f7f21fae7d141526099a707f639893f1
  dec:pkts/bytes=0/0, enc:pkts/bytes=0/0
    
```

Which two statements about the IPsec VPN configuration and the status of the IPsec VPN tunnel are true? (Choose two.)

- A. FortiGate does not install IPsec static routes for remote protected networks in the routing table.
- B. The phase 1 configuration supports the network-overlay setting.
- C. FortiGate facilitated the negotiation of the T\_INET\_1\_0\_0 ADVPN shortcut over T\_INET\_1\_0.
- D. Dead peer detection is disabled.

Answer: AB

**NEW QUESTION 30**

Refer to the exhibit.

```

# get router info routing-table all
...
B      10.0.2.0/24 [200/0] via 10.201.1.2 [3] (recursive via VPN0 tunnel 100.64.1.1), 00:00:54
      [200/0] via 10.202.1.2 [3] (recursive via VPN1 tunnel 100.64.1.9), 00:00:54
      [200/0] via 10.203.1.1 [3] (recursive via VPN2 tunnel 172.16.1.5), 00:00:54
...
    
```

The device exchanges routes using IBGP.

Which two statements are correct about the IBGP configuration and routing information on the device? (Choose two.)

- A. Each BGP route is three hops away from the destination.
- B. ibgp-multipath is disabled.
- C. additional-path is enabled.
- D. You can run the get router info routing-table database command to display the additional paths.

Answer: CD

**NEW QUESTION 33**

Which two interfaces are considered overlay links? (Choose two.)

- A. LAG
- B. IPsec
- C. Physical
- D. GRE

**Answer:** BD

**NEW QUESTION 34**

.....

## THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual NSE7\_SDW-7.0 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the NSE7\_SDW-7.0 Product From:

[https://www.2passeasy.com/dumps/NSE7\\_SDW-7.0/](https://www.2passeasy.com/dumps/NSE7_SDW-7.0/)

## Money Back Guarantee

### **NSE7\_SDW-7.0 Practice Exam Features:**

- \* NSE7\_SDW-7.0 Questions and Answers Updated Frequently
- \* NSE7\_SDW-7.0 Practice Questions Verified by Expert Senior Certified Staff
- \* NSE7\_SDW-7.0 Most Realistic Questions that Guarantee you a Pass on Your First Try
- \* NSE7\_SDW-7.0 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year